

SECTION 5 EXPLODED VIEWS


NOTE :

- Non-serviceable items with no part number and no description are not stocked because they are not required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remarks column.
- Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

Note : Les composants indentifiés par une trame et par une marque Δ sont d'une importance critique pour la securite. Ne les remplacer que par des pieces du numero specifique.

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

5-1. CHASSIS

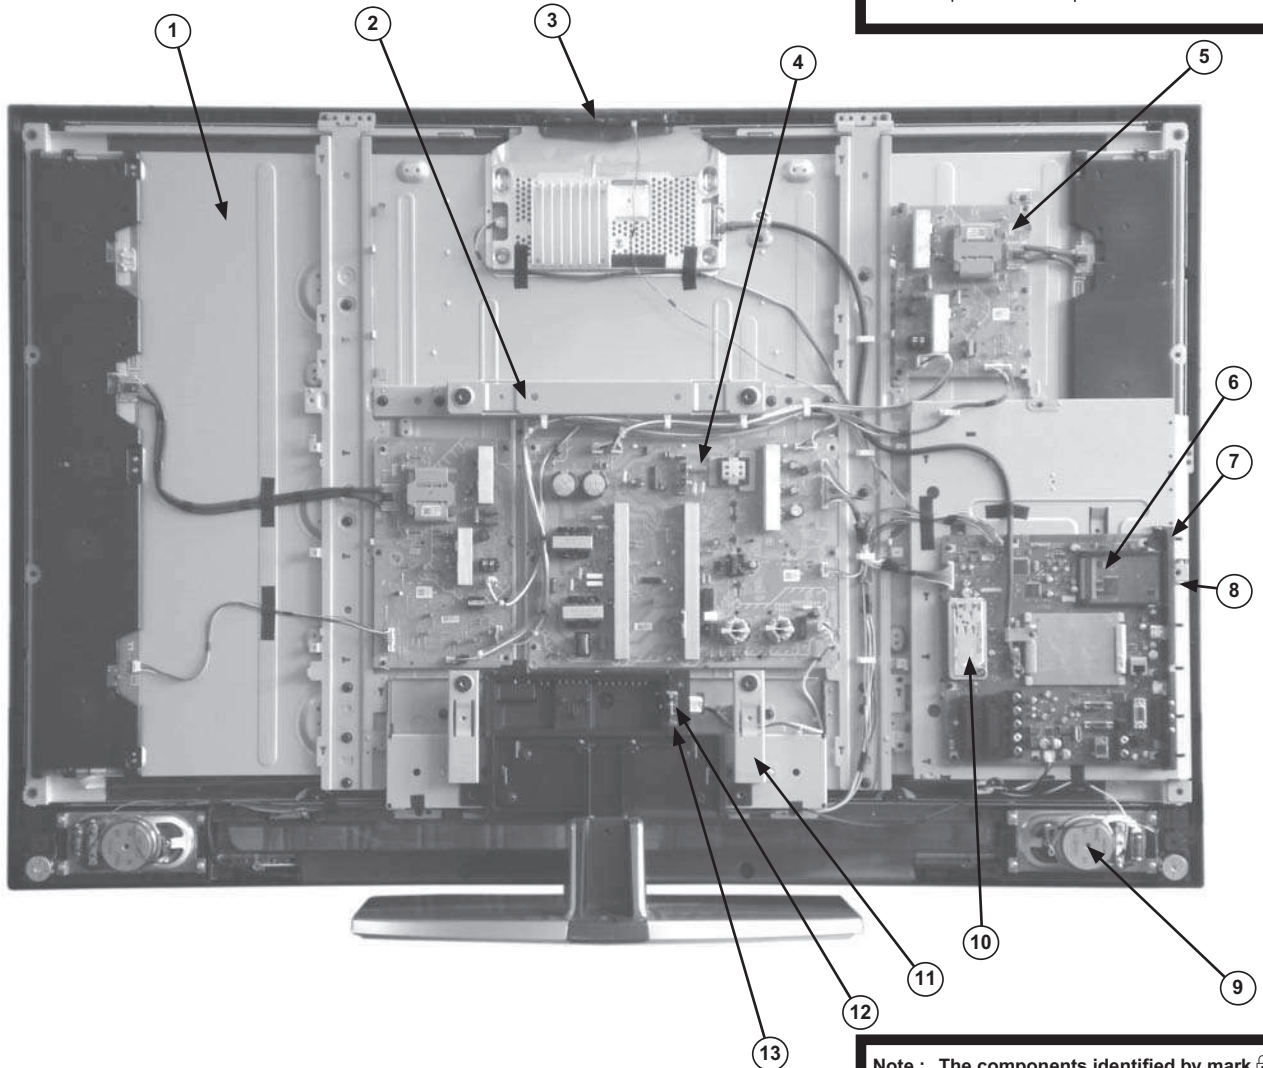


Note : The components identified by mark contain confidential information. Strictly follow the instructions when ever the components are repaired and/or replaced.

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
1	Δ 1-802-778-11	LCD PANEL (40 INCH FHD TFT) 40 inches		6	*A-1557-327-A	BGE BOARD, COMPLETE	
	Δ 1-802-777-11	LCD PANEL (46 INCH FHD TFT) 46 inches		7	X-2189-647-1	SIDE JACK BRACKET ASSY (AEP)	
	Δ 1-802-776-11	LCD PANEL (52 INCH FHD TFT) 52 inches		8	*4-101-356-02	CARD, DUMMY	
2	3-284-384-01	FRAME, VESA (TOP) 40 inches		9	1-858-041-11	LOUDSPEAKER (3,5.8X12.6CM) 40 inches	
	3-298-053-03	FRAME, VESA (TOP) 46/52 inches			1-826-921-12	LOUDSPEAKER (3,6.5X15CM) 46/52 inches	
3	Δ 1-480-708-11	SWITCH UNIT		10	8-597-641-00	TUNER UNIT, DIGITAL BTD-HF411T	
4	*A-1557-556-A	IP5 BOARD, COMPLETE 40 inches		11	3-298-056-01	FRAME, VESA (BOTTOM)	
	*A-1557-559-A	IP5 BOARD, COMPLETE 46 inches		12	Δ 1-822-097-11	AC INLET	
	*A-1558-703-A	G5 BOARD, COMPLETE 52 inches		13	Δ 3-298-060-01	BRACKET, AC INLET	
5	*A-1553-197-A	D5 BOARD, COMPLETE 52 inches					

5-1. CHASSIS Cont.

Note : Les composants indentifiés par une trame et par une marque Δ sont d'une importance critique pour la securite. Ne les remplacer que par des pieces du numero specifie.

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

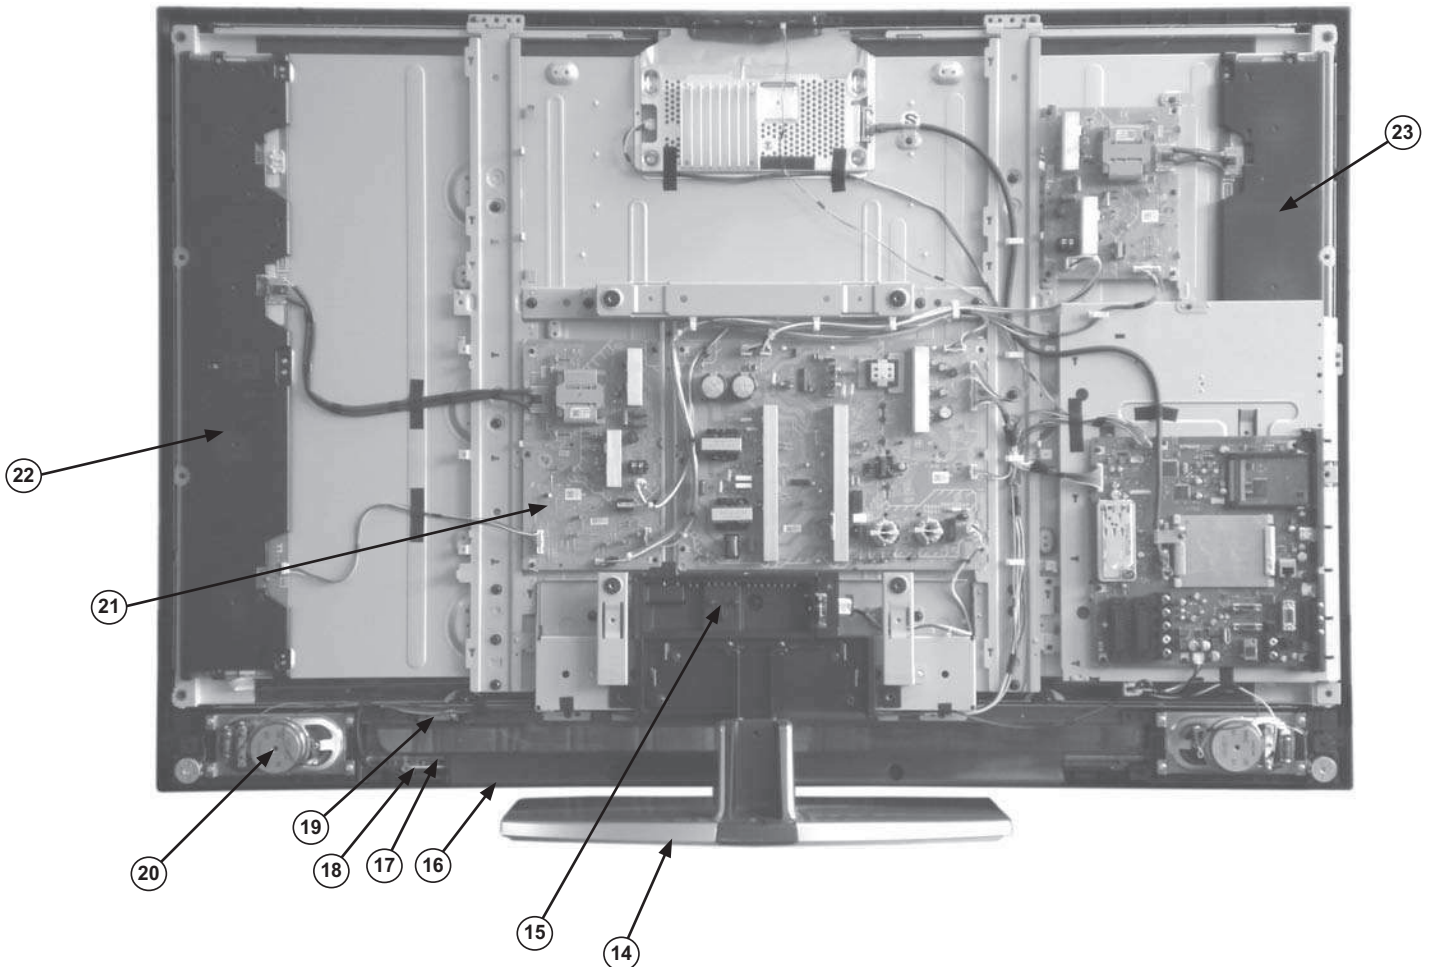

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
14	X-2189-410-2	STAND (ML) ASSY 40 inches		20	1-858-041-21	LOUDSPEAKER (3,5.8X12.6CM) 40 inches	
	X-2189-411-2	STAND (L) ASSY 46 inches			1-826-921-22	LOUDSPEAKER (3,6.5X15CM) 46/52 inches	
	X-2190-786-4	STAND (LL) ASSY 52 inches		21	*A-1553-195-A	D4 BOARD, COMPLETE 52 inches	
15	3-298-014-01	COVER, UNDER (L2) 40/46 inches		22	1-857-046-12	ETC-INVERTER MT BOARD 40 inches	
	3-298-229-01	COVER, UNDER (LL) 52 inches			1-857-047-12	ETC-INVERTER MT BOARD 46 inches	
16	3-298-013-01	BAR, UNDER (ML) 40 inches			1-857-111-12	ETC-INVERTER MT BOARD (LU) 52 inches	
	3-298-029-01	BAR, UNDER (L) 46/52 inches			1-857-112-12	ETC-INVERTER MT BOARD (LL) 52 inches	
17	3-876-467-01	GUIDE, LIGHT(H)		23	1-857-113-12	ETC-INVERTER MT BOARD (RU) 52 inches	
18	*A-1510-350-A	H3E BOARD, COMPLETE			1-857-114-12	ETC-INVERTER MT BOARD (RL) 52 inches	
19	*A-1510-351-A	H4 BOARD, COMPLETE					

5-2. BEZEL

Note : Les composants indentifiés par une trame et par une marque Δ sont d'une importance critique pour la sécurité. Ne les remplacer que par des pièces du numéro spécifié.

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.





REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
51	X-2319-211-1	BEZEL (40) ASSY	40 inches	53	X-2319-362-1	CLEAR PANEL (40EH) PRINTED	40 inches
	X-2319-212-1	BEZEL (46) ASSY	46 inches		X-2319-363-1	CLEAR PANEL (46EH) PRINTED	46 inches
	X-2319-213-1	BEZEL (52) ASSY	52 inches		X-2319-364-1	CLEAR PANEL (52EH) PRINTED	52 inches
52	1-480-680-11	ILLUMINATION MODULE					

5-3. REAR COVER & POWER SUPPLY CORDS

Note : Les composants identifiés par une trame et par une marque Δ sont d'une importance critique pour la sécurité. Ne les remplacer que par des pièces du numéro spécifié.

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

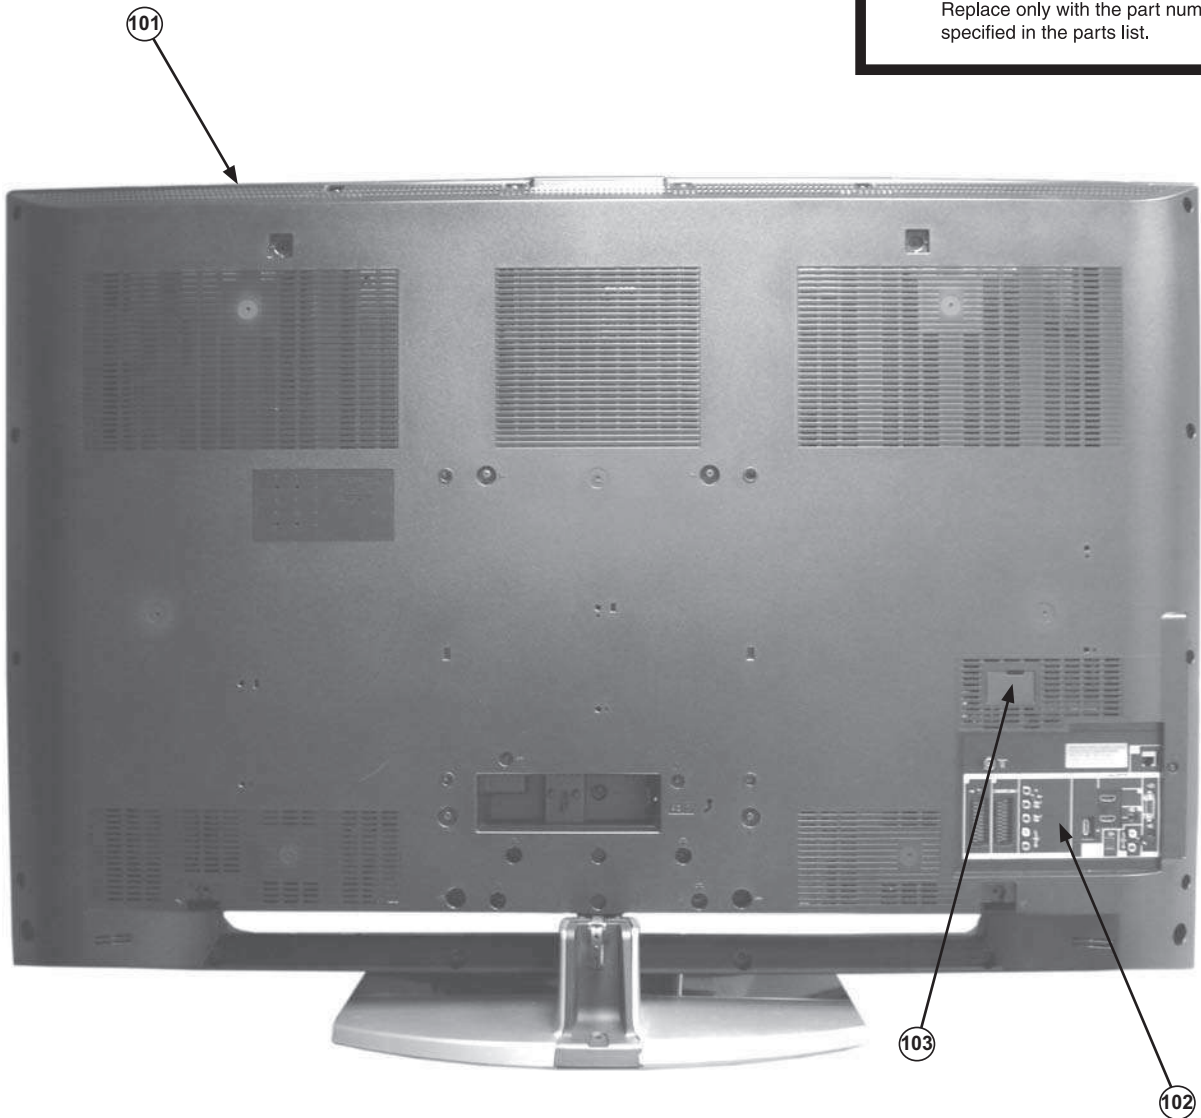

REF.NO.	PART.NO	DESCRIPTION	REMARK
101	3-293-589-01	REAR COVER (40)	40 inches
	3-293-584-01	REAR COVER (46)	46 inches
	3-293-622-01	REAR COVER (52)	52 inches
102	*4-114-194-01	LABEL, REAR TERMINAL	

REF.NO.	PART.NO	DESCRIPTION	REMARK
103	3-106-546-21	COVER, ECS	
104	Δ 1-835-200-11	POWER SUPPLY CORD (AEP)	
105	Δ 1-835-165-11	POWER SUPPLY CORD (UK)	

NOTE :

If ordering item 101 (Rear cover) please order item 102 (Label, rear terminal) as well.


SECTION 6 ELECTRICAL PARTS LIST

PARTS LISTING TABLE OF CONTENTS


	<u>Page</u>
BGE BOARD COMPLETE Parts List :	54
H3E BOARD COMPLETE Parts List :	73
H4 BOARD COMPLETE Parts List :	73
ACCESSORIES AND CONNECTORS :	74
REMOTE COMMANDER :	74

Note: To ensure safety and reliability it is Sony policy that power supply boards should not be repaired at component level in the field as a result... The D4, D5, G5 and IP5 boards are regarded as non service items for exchange only and are not indicated in the parts list of this service manual

Note : Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

Note : The components identified by mark  contain confidential information. Strictly follow the instructions when ever the components are repaired and/or replaced.



REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
 * A-1557-327-A BGE Board, Complete				C2215	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C1000	1-112-780-11	CERAMIC CHIP 0.47UF	10% 16V	C2216	1-114-332-11	CERAMIC CHIP 22UF	10% 6.3V
C1001	1-112-780-11	CERAMIC CHIP 0.47UF	10% 16V	C2217	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C1002	1-112-780-11	CERAMIC CHIP 0.47UF	10% 16V	C2218	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C1003	1-112-780-11	CERAMIC CHIP 0.47UF	10% 16V	C2219	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C1004	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C2220	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C1006	1-114-399-21	ELECT CHIP 47UF	20% 6.3V	C2223	1-135-366-11	ELECT CHIP 100UF	20% 16V
C1009	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C2225	1-135-366-11	ELECT CHIP 100UF	20% 16V
C1010	1-112-778-11	CERAMIC CHIP 0.022UF	10% 25V	C2226	1-164-852-11	CERAMIC CHIP 12PF	5.00% 50V
C1011	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C2227	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C1012	1-112-778-11	CERAMIC CHIP 0.022UF	10% 25V	C2228	1-135-366-11	ELECT CHIP 100UF	20% 16V
C1017	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	C2229	1-164-852-11	CERAMIC CHIP 12PF	5.00% 50V
C1018	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	C2230	1-135-366-11	ELECT CHIP 100UF	20% 16V
C1019	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C2231	1-112-776-11	CERAMIC CHIP 0.0047UF	10% 50V
C1020	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C2236	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C1021	1-100-765-21	ELECT CHIP 10UF	20% 16V	C2237	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C1022	1-100-765-21	ELECT CHIP 10UF	20% 16V	C2238	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C1025	1-112-778-11	CERAMIC CHIP 0.022UF	10% 25V	C2239	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C1026	1-112-778-11	CERAMIC CHIP 0.022UF	10% 25V	C2240	1-100-904-11	CERAMIC CHIP 330PF	10% 50V
C1027	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C2244	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C1028	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C2245	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V
C1029	1-112-781-11	CERAMIC CHIP 1UF	10% 10V	C2246	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C1030	1-112-781-11	CERAMIC CHIP 1UF	10% 10V	C2247	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V
C1031	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	C2249	1-112-161-21	ELECT CHIP 1000UF	20% 6.3V
C1036	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	C2250	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C1037	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C2251	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C1038	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C2254	1-114-407-21	ELECT CHIP 4.7UF	20% 50V
C1039	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C2255	1-112-780-11	CERAMIC CHIP 0.47UF	10% 16V
C1040	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C2256	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C1232	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C2257	1-114-817-11	CERAMIC CHIP 2.2UF	10% 50V
C1233	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C2258	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C1234	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C2259	1-114-868-11	CERAMIC CHIP 0.1UF	10% 50V
C1235	1-112-776-11	CERAMIC CHIP 0.0047UF	10% 50V	C2260	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V
C1236	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C2261	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V
C1237	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C2268	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C1238	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C2269	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C1239	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C2270	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C1240	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C2272	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C1241	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C2275	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C1242	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3014	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C2200	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3026	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C2201	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C3027	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C2202	1-112-001-81	CERAMIC CHIP 270PF	5% 50V	C3028	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C2205	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C3029	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C2206	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3030	1-114-813-11	CERAMIC CHIP 1UF	10% 16V
C2208	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V	C3031	1-114-813-11	CERAMIC CHIP 1UF	10% 16V
C2210	1-114-332-11	CERAMIC CHIP 22UF	10% 6.3V	C3032	1-114-813-11	CERAMIC CHIP 1UF	10% 16V
C2211	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3033	1-114-813-11	CERAMIC CHIP 1UF	10% 16V
C2212	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3046	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
				C3047	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C3048	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C3240	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C3049	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C3241	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C3060	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	C3242	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C3061	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	C3243	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C3062	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	C3245	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V
C3063	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	C3246	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V
C3072	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C3250	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C3073	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C3251	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C3075	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C3406	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V
C3076	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C3407	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V
C3077	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3417	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C3078	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	C3418	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C3079	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	C3419	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C3080	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3420	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C3081	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C3426	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C3082	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C3427	1-114-407-21	ELECT CHIP 4.7UF	20% 50V
C3083	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3428	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C3084	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C3429	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V
C3202	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3430	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C3203	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3431	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C3204	1-114-332-11	CERAMIC CHIP 22UF	10% 6.3V	C3442	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C3205	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3443	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C3206	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C3446	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C3207	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3447	1-114-193-11	ELECT CHIP 470UF	20% 25V
C3208	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3448	1-114-193-11	ELECT CHIP 470UF	20% 25V
C3209	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C3449	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V
C3210	1-114-354-11	CAP, CERAMIC 0.1MF X7R (1410)		C3450	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C3211	1-114-354-11	CAP, CERAMIC 0.1MF X7R (1410)		C3451	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C3212	1-114-354-11	CAP, CERAMIC 0.1MF X7R (1410)		C3452	1-114-193-11	ELECT CHIP 470UF	20% 25V
C3213	1-114-332-11	CERAMIC CHIP 22UF	10% 6.3V	C3453	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V
C3214	1-114-354-11	CAP, CERAMIC 0.1MF X7R (1410)		C3458	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C3215	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3459	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C3216	1-114-354-11	CAP, CERAMIC 0.1MF X7R (1410)		C3464	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C3217	1-114-354-11	CAP, CERAMIC 0.1MF X7R (1410)		C3465	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C3218	1-114-354-11	CAP, CERAMIC 0.1MF X7R (1410)		C3466	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C3220	1-114-354-11	CAP, CERAMIC 0.1MF X7R (1410)		C3467	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V
C3221	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3469	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C3222	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3470	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C3223	1-114-354-11	CAP, CERAMIC 0.1MF X7R (1410)		C3480	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C3225	1-114-354-11	CAP, CERAMIC 0.1MF X7R (1410)		C3482	1-100-767-21	ELECT CHIP 220UF	20% 16V
C3226	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3484	1-112-065-11	CERAMIC CHIP 4.7UF	10% 16V
C3227	1-112-781-11	CERAMIC CHIP 1UF	10% 10V	C4003	1-135-366-11	ELECT CHIP 100UF	20% 16V
C3229	1-112-781-11	CERAMIC CHIP 1UF	10% 10V	C4006	1-135-366-11	ELECT CHIP 100UF	20% 16V
C3230	1-114-354-11	CAP, CERAMIC 0.1MF X7R (1410)		C4007	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C3231	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C4009	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C3233	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4012	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C3234	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C4013	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C3235	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4014	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C3238	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C4016	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C3239	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4017	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C5018	1-112-774-11	CERAMIC CHIP 470PF	10% 50V	C5089	1-114-172-91	CERAMIC CHIP 2.2UF	20% 4V
C5019	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5091	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5020	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5092	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5021	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5093	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5023	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5094	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5024	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5095	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5026	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5096	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5027	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C5097	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5028	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C5098	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5029	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5099	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5030	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C5100	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5031	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5101	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5032	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5102	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5033	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5103	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V
C5034	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5104	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5035	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5500	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V
C5036	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5501	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5038	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5502	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C5039	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5503	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5040	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5504	1-112-778-11	CERAMIC CHIP 0.022UF	10% 25V
C5041	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5505	1-164-842-11	CERAMIC CHIP 2PF	0.25PF 50V
C5043	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5506	1-164-843-11	CERAMIC CHIP 3PF	0.25PF 50V
C5044	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5507	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5045	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5508	1-114-399-21	ELECT CHIP 47UF	20% 6.3V
C5046	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5509	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5047	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5510	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V
C5049	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5511	1-104-905-11	DOUBLE LAYER 0.22F	5.5V
C5050	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5512	1-164-862-11	CERAMIC CHIP 33PF	5.00% 50V
C5051	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5513	1-164-862-11	CERAMIC CHIP 33PF	5.00% 50V
C5052	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5514	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5058	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5515	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5060	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5516	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5062	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5517	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5064	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C5519	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5065	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5520	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C5067	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C5523	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5068	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5527	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C5069	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5528	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5070	1-114-172-91	CERAMIC CHIP 2.2UF	20% 4V	C5532	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V
C5073	1-114-172-91	CERAMIC CHIP 2.2UF	20% 4V	C5540	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5074	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C5543	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5075	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C5544	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V
C5076	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5546	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5078	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C6400	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C5079	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C6401	1-114-813-11	CERAMIC CHIP 1UF	10% 16V
C5082	1-114-172-91	CERAMIC CHIP 2.2UF	20% 4V	C6402	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C5084	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C6403	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C5086	1-114-172-91	CERAMIC CHIP 2.2UF	20% 4V	C6404	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V
C5087	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C6405	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V
C5088	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C6406	1-114-353-11	CAP, CERAMIC 0.01MF X7R (1410)	

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C6407	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C6483	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C6408	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C6488	1-135-366-11	ELECT CHIP 100UF	20% 16V
C6409	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	C6489	1-135-366-11	ELECT CHIP 100UF	20% 16V
C6410	1-135-366-11	ELECT CHIP 100UF	20% 16V	C6494	1-100-963-21	ELECT CHIP 330UF	20% 4V
C6411	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C6499	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C6412	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C6502	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C6413	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C6503	1-112-065-11	CERAMIC CHIP 4.7UF	10% 16V
C6414	1-135-366-11	ELECT CHIP 100UF	20% 16V	C6505	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V
C6415	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C6514	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V
C6416	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C6516	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V
C6417	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C6517	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V
C6418	1-114-802-11	CERAMIC CHIP 0.0033UF	10% 50V	C6519	1-112-774-11	CERAMIC CHIP 470PF	10% 50V
C6421	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C6522	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C6422	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C6525	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V
C6423	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C6530	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C6424	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C6531	1-112-065-11	CERAMIC CHIP 4.7UF	10% 16V
C6426	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C6532	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C6427	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C6535	1-100-963-21	ELECT CHIP 330UF	20% 4V
C6428	1-114-807-11	CERAMIC CHIP 0.015UF	10% 25V	C6536	1-100-912-11	CERAMIC CHIP 1UF	10% 25V
C6429	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C6537	1-114-415-21	ELECT CHIP 100UF	20% 6.3V
C6430	1-112-780-11	CERAMIC CHIP 0.47UF	10% 16V	C6543	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C6431	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V	C6545	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C6432	1-114-326-11	CERAMIC CHIP 0.22UF	10% 25V	C6570	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C6434	1-100-912-11	CERAMIC CHIP 1UF	10% 25V	C6571	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C6435	1-135-366-11	ELECT CHIP 100UF	20% 16V	C6572	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C6436	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C6573	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C6437	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C6574	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C6438	1-114-807-11	CERAMIC CHIP 0.015UF	10% 25V	C6575	1-114-808-11	CERAMIC CHIP 0.033UF	10% 16V
C6439	1-114-415-21	ELECT CHIP 100UF	20% 6.3V	C6576	1-164-882-11	CERAMIC CHIP 220PF	5.00% 16V
C6440	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C6577	1-114-802-11	CERAMIC CHIP 0.0033UF	10% 50V
C6441	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C6578	1-114-813-11	CERAMIC CHIP 1UF	10% 16V
C6442	1-114-415-21	ELECT CHIP 100UF	20% 6.3V	C6579	1-112-786-11	ELECT CHIP 330UF	20% 4V
C6445	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C6580	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C6447	1-114-808-11	CERAMIC CHIP 0.033UF	10% 16V	C6581	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C6448	1-112-774-11	CERAMIC CHIP 470PF	10% 50V	C6582	1-100-911-11	CERAMIC CHIP 4.7UF	10% 25V
C6449	1-114-807-11	CERAMIC CHIP 0.015UF	10% 25V	C6584	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C6450	1-112-775-11	CERAMIC CHIP 0.0022UF	10% 50V	C6585	1-114-807-11	CERAMIC CHIP 0.015UF	10% 25V
C6451	1-112-781-11	CERAMIC CHIP 1UF	10% 10V	C6586	1-114-320-11	CERAMIC CHIP 0.22UF	10% 6.3V
C6452	1-112-774-11	CERAMIC CHIP 470PF	10% 50V	C6587	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C6454	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C6588	1-114-410-21	CERAMIC CHIP 680PF	2% 50V
C6455	1-218-949-11	METAL CHIP 470 5%	1/16W	C6591	1-114-410-21	CERAMIC CHIP 680PF	2% 50V
C6456	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C6593	1-114-410-21	CERAMIC CHIP 680PF	2% 50V
C6457	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C6594	1-114-410-21	CERAMIC CHIP 680PF	2% 50V
C6460	1-114-415-21	ELECT CHIP 100UF	20% 6.3V	C6596	1-114-410-21	CERAMIC CHIP 680PF	2% 50V
C6470	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C6597	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C6471	1-112-774-11	CERAMIC CHIP 470PF	10% 50V	C6598	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C6472	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C6599	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C6474	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C6608	1-114-410-21	CERAMIC CHIP 680PF	2% 50V
C6476	1-112-774-11	CERAMIC CHIP 470PF	10% 50V	C6613	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C6479	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C6614	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
C6615	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7105	1-164-849-11	CERAMIC CHIP 9PF	0.50PF 50V
C6616	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7106	1-164-856-81	CERAMIC CHIP 18PF	5.00% 50V
C6617	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7107	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C6618	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7108	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C6619	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7109	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C6620	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7110	1-164-854-11	CERAMIC CHIP 15PF	5.00% 50V
C7000	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C7111	1-114-296-11	ELECT CHIP 820UF	20% 6.3V
C7001	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C7112	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7002	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7113	1-100-767-21	ELECT CHIP 220UF	20% 16V
C7003	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7114	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7004	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7115	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V
C7005	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7200	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V
C7006	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7201	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V
C7007	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7202	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7008	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7203	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7009	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7204	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7010	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7205	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7011	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7206	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7013	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7207	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7014	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7208	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7015	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7210	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7017	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7211	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7018	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7212	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7019	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7213	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7020	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7214	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7021	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7215	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7022	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7216	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7023	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7217	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V
C7024	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7218	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7026	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7219	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7027	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7220	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7028	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7221	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7029	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7222	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7030	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7223	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7034	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7224	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7035	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7225	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7036	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7226	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7037	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7227	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7038	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7228	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7039	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7229	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7040	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7230	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7041	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7231	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7043	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7232	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V
C7044	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C7233	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7045	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C7234	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7100	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C7235	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7101	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7236	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7102	1-112-780-11	CERAMIC CHIP 0.47UF	10% 16V	C7237	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7103	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7238	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V
C7104	1-164-849-11	CERAMIC CHIP 9PF	0.50PF 50V	C7239	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
CN5503	1-779-936-51	CONNECTOR, FFC/FPC 18P		D5503	6-501-818-01	DIODE MA2J1130GLS0	
CN5505	1-820-235-11	HEADER ASSEMBLY 30P		D5504	8-719-060-48	DIODE RB751V-40TE-17	
CN6401	1-819-797-11	HEADER ASSEMBLY FOR PWB 13P		D5505	6-501-817-01	DIODE MA2J1110GLS0	
CN7100	1-817-109-11	CONNECTOR, USB (A)		D5506	6-501-817-01	DIODE MA2J1110GLS0	
CN7501	1-822-033-11	MEMORY STICK CONNECTOR		D5507	6-502-318-01	DI MA4J1130GLS0	
CN7600	1-821-868-11	ETHERNET CONNECTOR (8P)		D5508	6-502-318-01	DI MA4J1130GLS0	
CN7700	1-793-769-22	CONNECTOR, CARD (PCMCIA CARD)		D5510	6-502-172-01	DI UMZ5.6KTL	
CN8000	1-819-784-21	PIN, CONNECTOR 50P		D5520	6-501-614-01	DIODE PZU5.6B2	
< DIODE >				D5521	6-502-318-01	DI MA4J1130GLS0	
D1000	8-719-058-24	DIODE RB501V-40TE-17		D5522	6-502-318-01	DI MA4J1130GLS0	
D1001	6-502-177-01	DI UMZ9.1KTL		D5523	8-719-058-24	DIODE RB501V-40TE-17	
D1002	6-502-177-01	DI UMZ9.1KTL		D5524	8-719-058-24	DIODE RB501V-40TE-17	
D1003	6-502-177-01	DI UMZ9.1KTL		D5525	8-719-058-24	DIODE RB501V-40TE-17	
D1004	6-501-623-01	DIODE PZU13B2		D5526	8-719-058-24	DIODE RB501V-40TE-17	
D1005	6-502-180-01	DI UMZ12KTL		D6401	6-501-614-01	DIODE PZU5.6B2	
D1006	6-502-177-01	DI UMZ9.1KTL		D6404	6-502-318-01	DI MA4J1130GLS0	
D1007	6-502-177-01	DI UMZ9.1KTL		D6406	6-501-528-01	DIODE 1SMA5915BT3G	
D1008	6-502-177-01	DI UMZ9.1KTL		D6407	6-501-528-01	DIODE 1SMA5915BT3G	
D1009	6-502-177-01	DI UMZ9.1KTL		D6408	6-501-817-01	DIODE MA2J1110GLS0	
D1010	6-501-623-01	DIODE PZU13B2		D6409	6-500-295-01	DIODE PTZ-TE25-5.6B	
D1012	6-501-619-01	DIODE PZU9.1B2		D6412	6-501-528-01	DIODE 1SMA5915BT3G	
D1013	6-502-180-01	DI UMZ12KTL		D6414	6-501-614-01	DIODE PZU5.6B2	
D1014	6-502-180-01	DI UMZ12KTL		D6418	6-502-318-01	DI MA4J1130GLS0	
D1210	6-501-817-01	DIODE MA2J1110GLS0		D6431	6-501-528-01	DIODE 1SMA5915BT3G	
D3000	6-502-180-01	DI UMZ12KTL		D6432	6-502-318-01	DI MA4J1130GLS0	
D3002	6-502-180-01	DI UMZ12KTL		D6433	6-502-318-01	DI MA4J1130GLS0	
D3011	6-501-614-01	DIODE PZU5.6B2		D7100	6-502-318-01	DI MA4J1130GLS0	
D3014	6-502-318-01	DI MA4J1130GLS0		D7101	6-500-701-01	DIODE PGB1010603NR	
D3027	6-502-180-01	DI UMZ12KTL		D7102	6-500-701-01	DIODE PGB1010603NR	
D3029	6-502-180-01	DI UMZ12KTL		D7604	8-719-053-07	DIODE SML-310MTT86	
D3031	6-501-619-01	DIODE PZU9.1B2		D7605	8-719-053-07	DIODE SML-310MTT86	
D3049	6-502-180-01	DI UMZ12KTL		D8202	6-502-318-01	DI MA4J1130GLS0	
D3050	6-502-180-01	DI UMZ12KTL		D8210	6-502-177-01	DI UMZ9.1KTL	
D3055	6-501-620-01	DIODE PZU10B2		D8212	6-502-177-01	DI UMZ9.1KTL	
D3056	6-502-180-01	DI UMZ12KTL		D8213	6-502-177-01	DI UMZ9.1KTL	
D3057	6-502-177-01	DI UMZ9.1KTL		ET2201	1-780-482-11	EARTH TERMINAL	
D3058	6-502-180-01	DI UMZ12KTL		ET2211	1-780-434-11	TERMINAL, GROUND (ON BOARD CON	
D3059	6-502-180-01	DI UMZ12KTL		ET2212	1-780-434-11	TERMINAL, GROUND (ON BOARD CON	
D3400	6-501-732-01	DIODE MAZ8056G0LS0		ET5001	1-780-638-21	CONTACT TERMINAL	
D3401	6-501-732-01	DIODE MAZ8056G0LS0		ET5002	1-780-638-21	CONTACT TERMINAL	
D3403	6-502-318-01	DI MA4J1130GLS0		ET5003	1-780-638-21	CONTACT TERMINAL	
D3404	6-501-817-01	DIODE MA2J1110GLS0		ET5004	1-780-638-21	CONTACT TERMINAL	
D3405	6-501-817-01	DIODE MA2J1110GLS0		ET5006	1-780-638-21	CONTACT TERMINAL	
D3406	6-501-619-01	DIODE PZU9.1B2		ET6400	1-780-482-11	EARTH TERMINAL	
D3407	6-502-172-01	DI UMZ5.6KTL		ET6401	1-780-482-11	EARTH TERMINAL	
D4502	6-500-335-01	DIODE MC2838-T112-1		ET6402	1-780-482-11	EARTH TERMINAL	
D4505	6-500-335-01	DIODE MC2838-T112-1		ET6403	1-780-482-11	EARTH TERMINAL	
D4506	6-500-335-01	DIODE MC2838-T112-1		ET6404	1-780-482-11	EARTH TERMINAL	
D5501	6-501-817-01	DIODE MA2J1110GLS0		ET6405	1-780-482-11	EARTH TERMINAL	

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.



REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
ET6406	1-780-482-11	EARTH TERMINAL		FB5511	1-400-834-11	FERRITE	OUH
	< FUSE >			FB5513	1-400-834-11	FERRITE	OUH
F3000	Δ 1-576-646-11	FUSE	0.5A 50V	FB6400	1-400-915-21	FERRITE	OUH
F3200	Δ 1-576-913-11	FUSE	1.6A 36V	FB6401	1-400-089-21	FERRITE	OUH
F3401	Δ 1-576-933-21	FUSE	5A 24V	FB6402	1-400-834-11	FERRITE	OUH
	< FERRITE BEAD >			FB6403	1-400-089-21	FERRITE	OUH
FB2200	1-469-869-21	FERRITE	OUH	FB6404	1-400-834-11	FERRITE	OUH
FB2201	1-400-834-11	FERRITE	OUH	FB6405	1-400-834-11	FERRITE	OUH
FB2202	1-400-834-11	FERRITE	OUH	FB6406	1-400-089-21	FERRITE	OUH
FB2203	1-400-834-11	FERRITE	OUH	FB6407	1-400-834-11	FERRITE	OUH
FB2204	1-400-834-11	FERRITE	OUH	FB6409	1-400-089-21	FERRITE	OUH
FB2205	1-400-834-11	FERRITE	OUH	FB6410	1-400-915-21	FERRITE	OUH
FB2206	1-400-834-11	FERRITE	OUH	FB6411	1-400-915-21	FERRITE	OUH
FB2207	1-400-834-11	FERRITE	OUH	FB6413	1-400-089-21	FERRITE	OUH
FB2208	1-400-834-11	FERRITE	OUH	FB6414	1-400-915-21	FERRITE	OUH
FB2209	1-400-834-11	FERRITE	OUH	FB6415	1-400-915-21	FERRITE	OUH
FB2210	1-400-834-11	FERRITE	OUH	FB6417	1-400-089-21	FERRITE	OUH
FB2211	1-400-834-11	FERRITE	OUH	FB6418	1-400-915-21	FERRITE	OUH
FB2214	1-400-591-22	FERRITE	OUH	FB6419	1-400-915-21	FERRITE	OUH
FB2215	1-400-834-11	FERRITE	OUH	FB6420	1-400-915-21	FERRITE	OUH
FB2216	1-400-462-21	FERRITE	OUH	FB6421	1-400-915-21	FERRITE	OUH
FB2218	1-400-462-21	FERRITE	OUH	FB6423	1-400-915-21	FERRITE	OUH
FB2219	1-400-834-11	FERRITE	OUH	FB6424	1-400-915-21	FERRITE	OUH
FB2220	1-400-834-11	FERRITE	OUH	FB6425	1-400-915-21	FERRITE	OUH
FB2221	1-400-834-11	FERRITE	OUH	FB6426	1-400-915-21	FERRITE	OUH
FB3004	1-400-141-22	FERRITE	OUH	FB6427	1-400-915-21	FERRITE	OUH
FB3006	1-400-834-11	FERRITE	OUH	FB6428	1-400-915-21	FERRITE	OUH
FB3007	1-400-244-11	FERRITE	OUH	FB7100	1-400-382-11	FERRITE	OUH
FB3080	1-469-869-21	FERRITE	OUH	FB7101	1-400-382-11	FERRITE	OUH
FB3406	1-400-089-21	FERRITE	OUH	FB7102	1-400-382-11	FERRITE	OUH
FB3407	1-400-089-21	FERRITE	OUH	FB7500	1-400-807-21	FERRITE	OUH
FB3408	1-400-089-21	FERRITE	OUH	FB7501	1-400-832-21	FERRITE	OUH
FB3409	1-400-089-21	FERRITE	OUH	FB7600	1-400-382-11	FERRITE	OUH
FB4000	1-400-244-11	FERRITE	OUH	FB7601	1-400-382-11	FERRITE	OUH
FB4001	1-400-244-11	FERRITE	OUH	FB7602	1-400-382-11	FERRITE	OUH
FB4500	1-400-693-21	FERRITE	OUH	FB7603	1-400-382-11	FERRITE	OUH
FB4502	1-400-693-21	FERRITE	OUH	FB7709	1-469-869-21	FERRITE	OUH
FB4503	1-400-693-21	FERRITE	OUH	FB8200	1-469-084-21	FERRITE	OMH
FB4504	1-400-141-22	FERRITE	OUH		< FILTER >		
FB5500	1-400-834-11	FERRITE	OUH	FL5000	1-234-939-21	FILTER, EMI REMOVAL (SMD)	
FB5501	1-400-834-11	FERRITE	OUH	FL5001	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
FB5502	1-400-834-11	FERRITE	OUH	FL5002	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
FB5503	1-400-834-11	FERRITE	OUH	FL5003	1-234-939-21	FILTER, EMI REMOVAL (SMD)	
FB5504	1-400-834-11	FERRITE	OUH	FL5004	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
FB5505	1-400-834-11	FERRITE	OUH	FL5007	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
FB5507	1-400-834-11	FERRITE	OUH	FL5008	1-234-939-21	FILTER, EMI REMOVAL (SMD)	
FB5510	1-400-834-11	FERRITE	OUH	FL5009	1-234-494-21	FILTER, EMI REMOVAL (SMD)	
				FL5010	1-234-939-21	FILTER, EMI REMOVAL (SMD)	
				FL5011	1-234-939-21	FILTER, EMI REMOVAL (SMD)	

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
FL5012	1-234-939-21	FILTER, EMI REMOVAL (SMD)		IC6402	6-710-922-01	IC BD9853AFV-E2	
FL5013	1-234-939-21	FILTER, EMI REMOVAL (SMD)		IC6403	6-710-922-01	IC BD9853AFV-E2	
FL5015	1-234-939-21	FILTER, EMI REMOVAL (SMD)		IC6405	6-711-145-01	IC TPS51124RGER	
FL5016	1-234-939-21	FILTER, EMI REMOVAL (SMD)		IC6570	6-712-749-01	IC MM1701YHBE	
FL5018	1-234-494-21	FILTER, EMI REMOVAL (SMD)		IC6571	6-710-949-01	IC SN0608006PWPR	
FL5019	1-234-939-21	FILTER, EMI REMOVAL (SMD)		IC6572	6-712-787-01	IC MM1701VHBE	
FL5020	1-234-494-21	FILTER, EMI REMOVAL (SMD)		IC6573	6-706-419-01	IC LM393DT (A)	
FL5021	1-234-494-21	FILTER, EMI REMOVAL (SMD)		IC7000	6-713-132-01	IC UPD61300F1-230-LU2-A	
FL5022	1-234-494-21	FILTER, EMI REMOVAL (SMD)		IC7100	6-703-175-01	IC PST3629UL	
FL5023	1-234-939-21	FILTER, EMI REMOVAL (SMD)		IC7101	6-711-288-01	IC MIC2005-0.5YM6TR	
FL5024	1-234-939-21	FILTER, EMI REMOVAL (SMD)		IC7200	6-712-189-01	IC EDE5116AJBG-6E-E	
FL5025	1-234-494-21	FILTER, EMI REMOVAL (SMD)		IC7201	6-712-189-01	IC EDE5116AJBG-6E-E	
FL5026	1-234-494-21	FILTER, EMI REMOVAL (SMD)		IC7300	6-711-242-01	IC K9F1208U0C-PCBOT	
FL6400	1-234-494-21	FILTER, EMI REMOVAL (SMD)		IC7600	6-712-775-11	IC KSZ8041TLTR	
FL6401	1-234-494-21	FILTER, EMI REMOVAL (SMD)		IC7701	6-707-850-01	IC TC74LCX245FT (EKJ)	
FL6402	1-234-494-21	FILTER, EMI REMOVAL (SMD)		IC7704	6-707-853-01	IC TC74LCX541FT (EKJ)	
FL6403	1-234-494-21	FILTER, EMI REMOVAL (SMD)		IC7705	6-707-853-01	IC TC74LCX541FT (EKJ)	
		< IC >		IC7706	6-707-853-01	IC TC74LCX541FT (EKJ)	
IC1000	6-701-173-01	IC MC74LVXT4053DTR2		IC7707	6-707-853-01	IC TC74LCX541FT (EKJ)	
IC1210	6-707-864-01	IC TC74VHC123AFT (EKJ)		IC7708	6-707-853-01	IC TC74LCX541FT (EKJ)	
IC1211	6-708-360-01	IC NJU7040F		IC7709	6-707-853-01	IC TC74LCX541FT (EKJ)	
IC1212	6-710-374-01	IC 74LVC1G157GW-125		IC7710	6-711-288-01	IC MIC2005-0.5YM6TR	
IC2200	6-709-257-01	IC 74LVC4066PW		IC8200	8-753-299-00	IC CXA3767R-T6	
IC2202	6-709-932-01	IC MM3141CNRE				< SOCKET >	
IC2203	6-709-607-01	IC LA5795T-TLM-E		J1000	1-821-055-12	PHONO JACK 5P	
IC3000	6-704-600-01	IC M24C02-WMN6T (B)		J3000	1-820-765-11	PHONO JACK 2P	
IC3001	6-712-789-01	IC 74AUP1T45GW		J3001	1-821-899-11	JACK (SMALL TYPE)	
IC3002	6-712-789-01	IC 74AUP1T45GW		J3002	1-821-899-11	JACK (SMALL TYPE)	
IC3004	8-759-242-64	IC TC4W53F		J3005	1-821-115-11	PHONO JACK (RIGHT ANGLE) 3P	
IC3080	6-712-525-01	IC MIC2005-0.8YM6TR		J8200	1-815-325-11	JACK	
IC3201	6-712-974-01	IC CXD9926ATQ				< COIL >	
IC3400	6-710-904-01	IC TPA3100D2PHPR		L2200	1-412-058-11	INDUCTOR	10UH
IC4001	6-711-262-01	IC HYB18TC256160BF-3S		L2201	1-469-549-21	INDUCTOR	1UH
IC4002	6-711-262-01	IC HYB18TC256160BF-3S		L2202	1-412-058-11	INDUCTOR	10UH
IC4500	6-704-600-01	IC M24C02-WMN6T (B)		L2203	1-412-058-11	INDUCTOR	10UH
IC4504	6-704-600-01	IC M24C02-WMN6T (B)		L2204	1-412-058-11	INDUCTOR	10UH
IC4505	6-704-600-01	IC M24C02-WMN6T (B)		L2206	1-412-058-11	INDUCTOR	10UH
IC4508	8-753-282-08	IC CXB1444R-T6		L2207	1-412-058-11	INDUCTOR	10UH
IC4509	6-711-332-01	IC TC7SG17FU (TE85R,F)		L2208	1-412-058-11	INDUCTOR	10UH
IC5004	6-712-787-01	IC MM1701VHBE		L2209	1-469-549-21	INDUCTOR	1UH
IC5500	6-704-573-01	IC M24C32-WMN6T (B)		L2210	1-469-549-21	INDUCTOR	1UH
IC5501	6-710-443-01	IC LM75AD		L2211	1-469-549-21	INDUCTOR	1UH
IC5502	6-712-337-01	IC PCA8563T/4		L2212	1-469-555-21	INDUCTOR	10UH
IC5503	6-702-688-01	IC M24C64-WMN6T (B)		L3200	1-400-179-21	FERRITE	0UH
IC5504	6-703-175-01	IC PST3629UL		L3201	1-400-179-21	FERRITE	0UH
IC5505	6-804-648-01	IC MB90F334APMC-GE1		L3202	1-469-555-21	INDUCTOR	10UH
IC5507	6-712-527-01	IC MM3154XURE		L3401	1-457-429-11	INDUCTOR	22UH
IC6401	6-712-744-01	IC TK11190CSCL-G					

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.



REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
L3402	1-457-429-11	INDUCTOR	22UH	Q2207	6-550-871-01	TRANSISTOR 2SA2048TL QR	
L3403	1-457-429-11	INDUCTOR	22UH	Q2208	6-550-871-01	TRANSISTOR 2SA2048TL QR	
L3406	1-457-429-11	INDUCTOR	22UH	Q2209	6-551-825-01	TR UNR52A5G0LS0	
L5503	1-400-179-21	FERRITE	0UH	Q2212	8-729-620-13	TRANSISTOR 2SC4154TP-1EF	
L5505	1-400-179-21	FERRITE	0UH	Q3400	6-551-699-01	TRANSISTOR ISA1602AM1TP-1EF	
L5506	1-400-179-21	FERRITE	0UH	Q3401	6-551-817-01	TR UNR52A3G0LS0	
L6403	1-457-439-11	INDUCTOR	4.7UH	Q4500	6-551-904-01	TR RT3S03M-T111-1	
L6404	1-457-439-11	INDUCTOR	4.7UH	Q4501	6-551-701-01	TRANSISTOR INK0003AC1-T112A-1	
L6405	1-457-439-11	INDUCTOR	4.7UH	Q4502	6-551-701-01	TRANSISTOR INK0003AC1-T112A-1	
L6407	1-457-439-11	INDUCTOR	4.7UH	Q4503	6-551-701-01	TRANSISTOR INK0003AC1-T112A-1	
L6411	1-457-455-11	INDUCTOR	10UH	Q4700	8-729-028-28	TRANSISTOR 2SK2036 (TE85L)	
L6412	1-400-692-11	INDUCTOR	10UH	Q4701	8-729-028-28	TRANSISTOR 2SK2036 (TE85L)	
L6413	1-457-439-11	INDUCTOR	4.7UH	Q4702	8-729-028-96	TRANSISTOR DTC114EUA-T106	
L6418	1-457-497-11	INDUCTOR	4.7UH	Q4703	8-729-028-86	TRANSISTOR DTA143EUA-T106	
L6419	1-457-439-11	INDUCTOR	4.7UH	Q5500	6-551-699-01	TRANSISTOR ISA1602AM1TP-1EF	
L7100	1-457-374-21	INDUCTOR	0UH	Q5501	8-729-028-73	TRANSISTOR DTA114EUA-T106	
L7400	1-412-058-11	INDUCTOR	10UH	Q5503	8-729-028-28	TRANSISTOR 2SK2036 (TE85L)	
L8000	1-457-539-11	INDUCTOR	0UH	Q5504	8-729-028-28	TRANSISTOR 2SK2036 (TE85L)	
L8001	1-457-539-11	INDUCTOR	0UH	Q5506	8-729-029-14	TRANSISTOR DTC144EUA-T106	
L8002	1-457-539-11	INDUCTOR	0UH	Q5508	8-729-029-14	TRANSISTOR DTC144EUA-T106	
L8003	1-457-539-11	INDUCTOR	0UH	Q5510	8-729-029-14	TRANSISTOR DTC144EUA-T106	
L8004	1-457-539-11	INDUCTOR	0UH	Q5511	6-551-776-01	TR 2SC5950G0LS0	
L8005	1-457-539-11	INDUCTOR	0UH	Q5512	6-551-776-01	TR 2SC5950G0LS0	
L8200	1-412-058-11	INDUCTOR	10UH	Q6400	8-729-028-73	TRANSISTOR DTA114EUA-T106	
L8203	1-412-058-11	INDUCTOR	10UH	Q6401	6-551-986-01	TR RT3DL1M-T111A-1F	
L8204	1-412-058-11	INDUCTOR	10UH	Q6403	6-551-986-01	TR RT3DL1M-T111A-1F	
L8205	1-412-058-11	INDUCTOR	10UH	Q6404	6-551-986-01	TR RT3DL1M-T111A-1F	
L8206	1-412-058-11	INDUCTOR	10UH	Q6407	6-551-382-01	TRANSISTOR RSS040P03FD5TB	
				Q6408	6-551-456-01	TRANSISTOR RTR020P02TL	
				Q6409	6-551-123-01	TRANSISTOR RSS065N03FU7TB	
< PROTECTOR MODULE >							
PS6400	Δ 1-576-736-41	IC LINK	3.15A 24V	Q6410	6-550-718-01	TRANSISTOR RSR025N03TL	
PS6401	Δ 1-576-736-41	IC LINK	3.15A 24V	Q6411	6-551-382-01	TRANSISTOR RSS040P03FD5TB	
PS6402	Δ 1-576-736-41	IC LINK	3.15A 24V	Q6412	6-551-123-01	TRANSISTOR RSS065N03FU7TB	
PS6403	Δ 1-576-736-41	IC LINK	3.15A 24V	Q6413	6-551-456-01	TRANSISTOR RTR020P02TL	
PS6404	Δ 1-576-736-41	IC LINK	3.15A 24V	Q6414	8-729-620-13	TRANSISTOR 2SC4154TP-1EF	
< TRANSISTOR >							
Q1000	8-729-028-28	TRANSISTOR 2SK2036 (TE85L)		Q6415	6-550-718-01	TRANSISTOR RSR025N03TL	
Q1001	8-729-029-14	TRANSISTOR DTC144EUA-T106		Q6416	8-729-028-28	TRANSISTOR 2SK2036 (TE85L)	
Q1002	6-551-775-01	TR 2SA2122G0LS0		Q6417	6-551-775-01	TR 2SA2122G0LS0	
Q1003	6-551-776-01	TR 2SC5950G0LS0		Q6418	6-551-986-01	TR RT3DL1M-T111A-1F	
Q1006	6-551-943-01	TR RT3XBBM-T111-1		Q6419	8-729-028-96	TRANSISTOR DTC114EUA-T106	
Q1007	6-551-775-01	TR 2SA2122G0LS0		Q6421	6-551-690-01	TRANSISTOR RT3N11M-TP-1	
Q1008	6-551-776-01	TR 2SC5950G0LS0		Q6430	6-550-663-01	TRANSISTOR RSS100N03FD5TB	
Q1210	6-551-775-01	TR 2SA2122G0LS0		Q6431	6-550-663-01	TRANSISTOR RSS100N03FD5TB	
Q2201	6-551-696-01	TRANSISTOR ISA1235AC1TP-1EF		Q6434	6-551-986-01	TR RT3DL1M-T111A-1F	
Q2202	6-551-904-01	TR RT3S03M-T111-1		Q6436	6-551-986-01	TR RT3DL1M-T111A-1F	
Q2203	6-551-904-01	TR RT3S03M-T111-1		Q6437	6-551-986-01	TR RT3DL1M-T111A-1F	
Q2204	6-551-904-01	TR RT3S03M-T111-1		Q6440	6-550-663-01	TRANSISTOR RSS100N03FD5TB	
Q2205	6-551-817-01	TR UNR52A3G0LS0		Q6441	6-550-663-01	TRANSISTOR RSS100N03FD5TB	
				Q6443	6-551-986-01	TR RT3DL1M-T111A-1F	
				Q6446	6-551-639-01	TRANSISTOR RTR040N03TL	

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
Q6447	6-551-639-01	TRANSISTOR RTR040N03TL		R1057	1-218-972-11	METAL CHIP 39K 5%	1/16W
Q7100	6-551-690-01	TRANSISTOR RT3N11M-TP-1		R1058	1-218-971-11	METAL CHIP 33K 5%	1/16W
Q7101	6-551-690-01	TRANSISTOR RT3N11M-TP-1		R1059	1-218-965-11	METAL CHIP 10K 5%	1/16W
Q8000	8-729-028-96	TRANSISTOR DTC114EUA-T106		R1060	1-218-963-11	METAL CHIP 6.8K 5%	1/16W
Q8200	6-551-943-01	TR RT3XBMM-T111-1		R1061	1-218-957-11	METAL CHIP 2.2K 5%	1/16W
Q8210	6-551-943-01	TR RT3XBMM-T111-1		R1062	1-218-963-11	METAL CHIP 6.8K 5%	1/16W
Q8212	6-551-943-01	TR RT3XBMM-T111-1		R1063	1-218-957-11	METAL CHIP 2.2K 5%	1/16W
< RESISTOR >				R1064	1-208-860-81	METAL CHIP 75 0.5%	1/16W
R1000	1-218-957-11	METAL CHIP 2.2K 5%	1/16W	R1066	1-208-860-81	METAL CHIP 75 0.5%	1/16W
R1001	1-218-965-11	METAL CHIP 10K 5%	1/16W	R1068	1-208-860-81	METAL CHIP 75 0.5%	1/16W
R1002	1-218-965-11	METAL CHIP 10K 5%	1/16W	R1070	1-208-860-81	METAL CHIP 75 0.5%	1/16W
R1015	1-216-864-11	SHORT CHIP 0		R1073	1-208-860-81	METAL CHIP 75 0.5%	1/16W
R1016	1-218-971-11	METAL CHIP 33K 5%	1/16W	R1074	1-208-860-81	METAL CHIP 75 0.5%	1/16W
R1017	1-218-971-11	METAL CHIP 33K 5%	1/16W	R1076	1-208-860-81	METAL CHIP 75 0.5%	1/16W
R1018	1-208-860-81	METAL CHIP 75 0.5%	1/16W	R1078	1-208-860-81	METAL CHIP 75 0.5%	1/16W
R1020	1-211-990-11	METAL CHIP 75 0.5%	1/10W	R1081	1-208-860-81	METAL CHIP 75 0.5%	1/16W
R1021	1-218-941-81	METAL CHIP 100 5%	1/16W	R1083	1-208-860-81	METAL CHIP 75 0.5%	1/16W
R1022	1-216-813-11	METAL CHIP 220 5%	1/10W	R1085	1-208-860-81	METAL CHIP 75 0.5%	1/16W
R1023	1-216-853-11	METAL CHIP 470K 5%	1/10W	R1220	1-218-990-81	SHORT CHIP 0	
R1024	1-218-989-11	METAL CHIP 1M 5%	1/16W	R1221	1-218-937-11	METAL CHIP 47 5%	1/16W
R1025	1-218-989-11	METAL CHIP 1M 5%	1/16W	R1222	1-218-973-11	METAL CHIP 47K 5%	1/16W
R1026	1-216-811-11	METAL CHIP 150 5%	1/10W	R1223	1-208-923-11	METAL CHIP 33K 0.5%	1/16W
R1027	1-216-853-11	METAL CHIP 470K 5%	1/10W	R1224	1-218-937-11	METAL CHIP 47 5%	1/16W
R1028	1-218-949-11	METAL CHIP 470 5%	1/16W	R1225	1-208-927-11	METAL CHIP 47K 0.5%	1/16W
R1029	1-216-811-11	METAL CHIP 150 5%	1/10W	R1227	1-208-699-11	METAL CHIP 4.7K 0.5%	1/16W
R1030	1-218-971-11	METAL CHIP 33K 5%	1/16W	R1228	1-208-911-11	METAL CHIP 10K 0.5%	1/16W
R1031	1-218-965-11	METAL CHIP 10K 5%	1/16W	R1229	1-208-939-11	METAL CHIP 150K 0.5%	1/16W
R1032	1-216-864-11	SHORT CHIP 0		R1230	1-218-990-81	SHORT CHIP 0	
R1033	1-208-860-81	METAL CHIP 75 0.5%	1/16W	R1231	1-208-927-11	METAL CHIP 47K 0.5%	1/16W
R1036	1-218-972-11	METAL CHIP 39K 5%	1/16W	R1232	1-208-911-11	METAL CHIP 10K 0.5%	1/16W
R1037	1-218-972-11	METAL CHIP 39K 5%	1/16W	R1233	1-208-911-11	METAL CHIP 10K 0.5%	1/16W
R1038	1-211-990-11	METAL CHIP 75 0.5%	1/10W	R1234	1-208-911-11	METAL CHIP 10K 0.5%	1/16W
R1039	1-218-941-81	METAL CHIP 100 5%	1/16W	R1238	1-208-911-11	METAL CHIP 10K 0.5%	1/16W
R1040	1-218-941-81	METAL CHIP 100 5%	1/16W	R1239	1-208-927-11	METAL CHIP 47K 0.5%	1/16W
R1041	1-218-941-81	METAL CHIP 100 5%	1/16W	R1240	1-208-935-11	METAL CHIP 100K 0.5%	1/16W
R1042	1-218-941-81	METAL CHIP 100 5%	1/16W	R1241	1-218-965-11	METAL CHIP 10K 5%	1/16W
R1043	1-216-853-11	METAL CHIP 470K 5%	1/10W	R1242	1-218-937-11	METAL CHIP 47 5%	1/16W
R1044	1-216-813-11	METAL CHIP 220 5%	1/10W	R2204	1-218-949-11	METAL CHIP 470 5%	1/16W
R1045	1-218-989-11	METAL CHIP 1M 5%	1/16W	R2207	1-218-969-11	METAL CHIP 22K 5%	1/16W
R1046	1-218-989-11	METAL CHIP 1M 5%	1/16W	R2208	1-218-981-91	METAL CHIP 220K 5%	1/16W
R1047	1-216-853-11	METAL CHIP 470K 5%	1/10W	R2213	1-218-965-11	METAL CHIP 10K 5%	1/16W
R1048	1-218-989-11	METAL CHIP 1M 5%	1/16W	R2216	1-218-971-11	METAL CHIP 33K 5%	1/16W
R1049	1-216-811-11	METAL CHIP 150 5%	1/10W	R2218	1-218-971-11	METAL CHIP 33K 5%	1/16W
R1050	1-218-989-11	METAL CHIP 1M 5%	1/16W	R2219	1-218-965-11	METAL CHIP 10K 5%	1/16W
R1052	1-218-941-81	METAL CHIP 100 5%	1/16W	R2222	1-218-969-11	METAL CHIP 22K 5%	1/16W
R1054	1-218-949-11	METAL CHIP 470 5%	1/16W	R2225	1-218-965-11	METAL CHIP 10K 5%	1/16W
R1055	1-216-811-11	METAL CHIP 150 5%	1/10W	R2227	1-218-949-11	METAL CHIP 470 5%	1/16W
R1056	1-218-972-11	METAL CHIP 39K 5%	1/16W	R2229	1-218-949-11	METAL CHIP 470 5%	1/16W
				R2233	1-218-969-11	METAL CHIP 22K 5%	1/16W
				R2234	1-218-965-11	METAL CHIP 10K 5%	1/16W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R2242	1-218-937-11	METAL CHIP	47	5%	1/16W	R3218	1-218-989-11	METAL CHIP	1M	5%	1/16W
R2250	1-218-990-81	SHORT CHIP	0			R3219	1-218-990-81	SHORT CHIP	0		
R2251	1-218-941-81	METAL CHIP	100	5%	1/16W	R3220	1-218-990-81	SHORT CHIP	0		
R2253	1-216-864-11	SHORT CHIP	0			R3407	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W
R2255	1-218-990-81	SHORT CHIP	0			R3408	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W
R2257	1-218-990-81	SHORT CHIP	0			R3415	1-208-911-11	METAL CHIP	10K	0.5%	1/16W
R2258	1-218-990-81	SHORT CHIP	0			R3416	1-208-911-11	METAL CHIP	10K	0.5%	1/16W
R2259	1-218-965-11	METAL CHIP	10K	5%	1/16W	R3427	1-218-990-81	SHORT CHIP	0		
R2266	1-218-965-11	METAL CHIP	10K	5%	1/16W	R3431	1-218-990-81	SHORT CHIP	0		
R3002	1-216-864-11	SHORT CHIP	0			R3432	1-218-977-11	METAL CHIP	100K	5%	1/16W
R3010	1-218-990-81	SHORT CHIP	0			R3434	1-218-977-11	METAL CHIP	100K	5%	1/16W
R3011	1-218-990-81	SHORT CHIP	0			R3453	1-218-981-91	METAL CHIP	220K	5%	1/16W
R3012	1-218-990-81	SHORT CHIP	0			R3455	1-218-953-11	METAL CHIP	1K	5%	1/16W
R3019	1-218-953-11	METAL CHIP	1K	5%	1/16W	R3456	1-218-969-11	METAL CHIP	22K	5%	1/16W
R3029	1-218-953-11	METAL CHIP	1K	5%	1/16W	R3457	1-218-949-11	METAL CHIP	470	5%	1/16W
R3035	1-218-977-11	METAL CHIP	100K	5%	1/16W	R3458	1-218-973-11	METAL CHIP	47K	5%	1/16W
R3036	1-216-864-11	SHORT CHIP	0			R3459	1-218-941-81	METAL CHIP	100	5%	1/16W
R3040	1-218-989-11	METAL CHIP	1M	5%	1/16W	R3460	1-218-965-11	METAL CHIP	10K	5%	1/16W
R3041	1-218-989-11	METAL CHIP	1M	5%	1/16W	R4000	1-218-943-11	METAL CHIP	150	5%	1/16W
R3042	1-218-989-11	METAL CHIP	1M	5%	1/16W	R4003	1-218-943-11	METAL CHIP	150	5%	1/16W
R3043	1-218-989-11	METAL CHIP	1M	5%	1/16W	R4010	1-218-933-11	METAL CHIP	22	5%	1/16W
R3044	1-218-990-81	SHORT CHIP	0			R4011	1-218-933-11	METAL CHIP	22	5%	1/16W
R3045	1-211-990-11	METAL CHIP	75	0.5%	1/10W	R4012	1-218-933-11	METAL CHIP	22	5%	1/16W
R3048	1-218-965-11	METAL CHIP	10K	5%	1/16W	R4013	1-218-933-11	METAL CHIP	22	5%	1/16W
R3053	1-218-941-81	METAL CHIP	100	5%	1/16W	R4014	1-218-935-11	METAL CHIP	33	5%	1/16W
R3078	1-218-967-11	METAL CHIP	15K	5%	1/16W	R4015	1-218-935-11	METAL CHIP	33	5%	1/16W
R3079	1-218-967-11	METAL CHIP	15K	5%	1/16W	R4016	1-218-935-11	METAL CHIP	33	5%	1/16W
R3080	1-218-967-11	METAL CHIP	15K	5%	1/16W	R4017	1-218-935-11	METAL CHIP	33	5%	1/16W
R3081	1-218-967-11	METAL CHIP	15K	5%	1/16W	R4018	1-218-935-11	METAL CHIP	33	5%	1/16W
R3100	1-208-860-81	METAL CHIP	75	0.5%	1/16W	R4019	1-218-935-11	METAL CHIP	33	5%	1/16W
R3101	1-218-941-81	METAL CHIP	100	5%	1/16W	R4020	1-218-933-11	METAL CHIP	22	5%	1/16W
R3107	1-218-941-81	METAL CHIP	100	5%	1/16W	R4021	1-218-933-11	METAL CHIP	22	5%	1/16W
R3108	1-216-853-11	METAL CHIP	470K	5%	1/10W	R4022	1-218-933-11	METAL CHIP	22	5%	1/16W
R3109	1-216-853-11	METAL CHIP	470K	5%	1/10W	R4023	1-218-933-11	METAL CHIP	22	5%	1/16W
R3110	1-218-989-11	METAL CHIP	1M	5%	1/16W	R4028	1-218-933-11	METAL CHIP	22	5%	1/16W
R3111	1-218-989-11	METAL CHIP	1M	5%	1/16W	R4029	1-218-933-11	METAL CHIP	22	5%	1/16W
R3112	1-218-941-81	METAL CHIP	100	5%	1/16W	R4032	1-208-671-11	METAL CHIP	330	0.5%	1/16W
R3113	1-208-860-81	METAL CHIP	75	0.5%	1/16W	R4033	1-208-671-11	METAL CHIP	330	0.5%	1/16W
R3117	1-208-860-81	METAL CHIP	75	0.5%	1/16W	R4034	1-208-671-11	METAL CHIP	330	0.5%	1/16W
R3119	1-208-860-81	METAL CHIP	75	0.5%	1/16W	R4035	1-208-671-11	METAL CHIP	330	0.5%	1/16W
R3203	1-218-990-81	SHORT CHIP	0			R4500	1-218-953-11	METAL CHIP	1K	5%	1/16W
R3204	1-218-990-81	SHORT CHIP	0			R4502	1-218-967-11	METAL CHIP	15K	5%	1/16W
R3205	1-218-990-81	SHORT CHIP	0			R4512	1-218-953-11	METAL CHIP	1K	5%	1/16W
R3206	1-218-990-81	SHORT CHIP	0			R4513	1-218-953-11	METAL CHIP	1K	5%	1/16W
R3209	1-218-965-11	METAL CHIP	10K	5%	1/16W	R4514	1-218-967-11	METAL CHIP	15K	5%	1/16W
R3210	1-218-953-11	METAL CHIP	1K	5%	1/16W	R4515	1-218-967-11	METAL CHIP	15K	5%	1/16W
R3214	1-218-957-11	METAL CHIP	2.2K	5%	1/16W	R4517	1-218-965-11	METAL CHIP	10K	5%	1/16W
R3215	1-208-715-11	METAL CHIP	22K	0.5%	1/16W	R4519	1-218-965-11	METAL CHIP	10K	5%	1/16W
R3216	1-218-945-11	METAL CHIP	220	5%	1/16W	R4525	1-218-965-11	METAL CHIP	10K	5%	1/16W
R3217	1-218-945-11	METAL CHIP	220	5%	1/16W	R4528	1-218-977-11	METAL CHIP	100K	5%	1/16W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R4529	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W	R5572	1-218-933-11	METAL CHIP	22	5%	1/16W
R4533	1-218-941-81	METAL CHIP	100	5%	1/16W	R5574	1-218-965-11	METAL CHIP	10K	5%	1/16W
R4534	1-218-941-81	METAL CHIP	100	5%	1/16W	R5576	1-218-941-81	METAL CHIP	100	5%	1/16W
R4535	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5578	1-218-941-81	METAL CHIP	100	5%	1/16W
R4537	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5590	1-218-965-11	METAL CHIP	10K	5%	1/16W
R4538	1-218-981-91	METAL CHIP	220K	5%	1/16W	R5592	1-218-957-11	METAL CHIP	2.2K	5%	1/16W
R4540	1-218-981-91	METAL CHIP	220K	5%	1/16W	R5602	1-218-941-81	METAL CHIP	100	5%	1/16W
R4541	1-218-981-91	METAL CHIP	220K	5%	1/16W	R5604	1-218-965-11	METAL CHIP	10K	5%	1/16W
R4542	1-218-941-81	METAL CHIP	100	5%	1/16W	R5614	1-218-957-11	METAL CHIP	2.2K	5%	1/16W
R4708	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5616	1-218-941-81	METAL CHIP	100	5%	1/16W
R4709	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5617	1-218-963-11	METAL CHIP	6.8K	5%	1/16W
R4725	1-218-990-81	SHORT CHIP	0			R5621	1-218-941-81	METAL CHIP	100	5%	1/16W
R4728	1-218-990-81	SHORT CHIP	0			R5623	1-218-941-81	METAL CHIP	100	5%	1/16W
R4755	1-218-990-81	SHORT CHIP	0			R5629	1-218-941-81	METAL CHIP	100	5%	1/16W
R4756	1-208-671-11	METAL CHIP	330	0.5%	1/16W	R5630	1-218-963-11	METAL CHIP	6.8K	5%	1/16W
R4757	1-208-671-11	METAL CHIP	330	0.5%	1/16W	R5643	1-218-941-81	METAL CHIP	100	5%	1/16W
R4761	1-218-990-81	SHORT CHIP	0			R5644	1-218-965-11	METAL CHIP	10K	5%	1/16W
R5016	1-216-864-11	SHORT CHIP	0			R5646	1-218-941-81	METAL CHIP	100	5%	1/16W
R5020	1-216-864-11	SHORT CHIP	0			R5647	1-218-933-11	METAL CHIP	22	5%	1/16W
R5021	1-216-864-11	SHORT CHIP	0			R5648	1-218-933-11	METAL CHIP	22	5%	1/16W
R5022	1-208-635-11	METAL CHIP	10	0.5%	1/16W	R5649	1-218-941-81	METAL CHIP	100	5%	1/16W
R5024	1-208-635-11	METAL CHIP	10	0.5%	1/16W	R5650	1-218-933-11	METAL CHIP	22	5%	1/16W
R5501	1-216-864-11	SHORT CHIP	0			R5651	1-218-941-81	METAL CHIP	100	5%	1/16W
R5502	1-208-911-11	METAL CHIP	10K	0.5%	1/16W	R5652	1-218-933-11	METAL CHIP	22	5%	1/16W
R5503	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5655	1-218-965-11	METAL CHIP	10K	5%	1/16W
R5505	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5656	1-218-949-11	METAL CHIP	470	5%	1/16W
R5507	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5669	1-218-941-81	METAL CHIP	100	5%	1/16W
R5508	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5670	1-218-965-11	METAL CHIP	10K	5%	1/16W
R5509	1-218-941-81	METAL CHIP	100	5%	1/16W	R5671	1-218-965-11	METAL CHIP	10K	5%	1/16W
R5512	1-218-941-81	METAL CHIP	100	5%	1/16W	R5674	1-218-965-11	METAL CHIP	10K	5%	1/16W
R5513	1-218-977-11	METAL CHIP	100K	5%	1/16W	R5675	1-218-953-11	METAL CHIP	1K	5%	1/16W
R5515	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5676	1-218-953-11	METAL CHIP	1K	5%	1/16W
R5518	1-218-973-11	METAL CHIP	47K	5%	1/16W	R5677	1-218-941-81	METAL CHIP	100	5%	1/16W
R5519	1-218-977-11	METAL CHIP	100K	5%	1/16W	R5678	1-218-941-81	METAL CHIP	100	5%	1/16W
R5522	1-218-973-11	METAL CHIP	47K	5%	1/16W	R5684	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W
R5527	1-208-911-11	METAL CHIP	10K	0.5%	1/16W	R5685	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W
R5528	1-243-975-11	METAL CHIP	4.7M	5%	1/16W	R5686	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W
R5530	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5689	1-218-941-81	METAL CHIP	100	5%	1/16W
R5531	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5690	1-218-941-81	METAL CHIP	100	5%	1/16W
R5533	1-218-945-11	METAL CHIP	220	5%	1/16W	R5700	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W
R5541	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5702	1-218-965-11	METAL CHIP	10K	5%	1/16W
R5542	1-218-970-11	METAL CHIP	27K	5%	1/16W	R5709	1-218-990-81	SHORT CHIP	0		
R5544	1-218-990-81	SHORT CHIP	0			R5713	1-218-990-81	SHORT CHIP	0		
R5555	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5714	1-218-990-81	SHORT CHIP	0		
R5556	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5717	1-218-957-11	METAL CHIP	2.2K	5%	1/16W
R5563	1-218-961-11	METAL CHIP	4.7K	5%	1/16W	R5719	1-218-941-81	METAL CHIP	100	5%	1/16W
R5568	1-218-941-81	METAL CHIP	100	5%	1/16W	R5722	1-218-990-81	SHORT CHIP	0		
R5569	1-218-945-11	METAL CHIP	220	5%	1/16W	R5723	1-218-957-11	METAL CHIP	2.2K	5%	1/16W
R5570	1-218-941-81	METAL CHIP	100	5%	1/16W	R5725	1-218-941-81	METAL CHIP	100	5%	1/16W
R5571	1-218-941-81	METAL CHIP	100	5%	1/16W	R5726	1-218-965-11	METAL CHIP	10K	5%	1/16W

REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R5805	1-218-965-11	METAL CHIP	10K	5%	1/16W	R6491	1-218-965-11	METAL CHIP	10K	5%	1/16W
R6401	1-218-953-11	METAL CHIP	1K	5%	1/16W	R6495	1-218-965-11	METAL CHIP	10K	5%	1/16W
R6402	1-218-965-11	METAL CHIP	10K	5%	1/16W	R6496	1-218-965-11	METAL CHIP	10K	5%	1/16W
R6403	1-218-965-11	METAL CHIP	10K	5%	1/16W	R6497	1-218-941-81	METAL CHIP	100	5%	1/16W
R6405	1-218-953-11	METAL CHIP	1K	5%	1/16W	R6499	1-218-983-11	METAL CHIP	330K	5%	1/16W
R6408	1-218-941-81	METAL CHIP	100	5%	1/16W	R6500	1-218-973-11	METAL CHIP	47K	5%	1/16W
R6409	1-218-969-11	METAL CHIP	22K	5%	1/16W	R6524	1-218-961-11	METAL CHIP	4.7K	5%	1/16W
R6416	1-218-949-11	METAL CHIP	470	5%	1/16W	R6533	1-218-953-11	METAL CHIP	1K	5%	1/16W
R6417	1-218-965-11	METAL CHIP	10K	5%	1/16W	R6534	1-218-990-81	SHORT CHIP	0		
R6418	1-208-911-11	METAL CHIP	10K	0.5%	1/16W	R6535	1-218-990-81	SHORT CHIP	0		
R6419	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W	R6538	1-208-931-11	METAL CHIP	68K	0.5%	1/16W
R6420	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W	R6542	1-208-910-11	METAL CHIP	9.1K	0.5%	1/16W
R6421	1-208-911-11	METAL CHIP	10K	0.5%	1/16W	R6545	1-218-974-11	METAL CHIP	56K	5%	1/16W
R6423	1-218-965-11	METAL CHIP	10K	5%	1/16W	R6551	1-208-697-11	METAL CHIP	3.9K	0.5%	1/16W
R6424	1-218-943-11	METAL CHIP	150	5%	1/16W	R6553	1-216-791-11	METAL CHIP	3.3	5%	1/10W
R6426	1-208-703-11	METAL CHIP	6.8K	0.5%	1/16W	R6554	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W
R6427	1-218-941-11	METAL CHIP	100	5%	1/16W	R6555	1-208-721-11	METAL CHIP	39K	0.5%	1/16W
R6428	1-208-890-11	METAL CHIP	1.3K	0.5%	1/16W	R6556	1-218-937-11	METAL CHIP	47	5%	1/16W
R6430	1-218-965-11	METAL CHIP	10K	5%	1/16W	R6557	1-218-937-11	METAL CHIP	47	5%	1/16W
R6432	1-218-957-11	METAL CHIP	2.2K	5%	1/16W	R6558	1-218-990-81	SHORT CHIP	0		
R6433	1-218-990-81	SHORT CHIP	0			R6561	1-208-695-11	METAL CHIP	3.3K	0.5%	1/16W
R6435	1-218-990-81	SHORT CHIP	0			R6562	1-218-965-11	METAL CHIP	10K	5%	1/16W
R6436	1-218-990-81	SHORT CHIP	0			R6563	1-218-990-81	SHORT CHIP	0		
R6437	1-218-990-81	SHORT CHIP	0			R6564	1-218-990-81	SHORT CHIP	0		
R6438	1-218-990-81	SHORT CHIP	0			R6565	1-208-911-11	METAL CHIP	10K	0.5%	1/16W
R6439	1-218-967-11	METAL CHIP	15K	5%	1/16W	R6568	1-218-941-11	METAL CHIP	100	5%	1/16W
R6441	1-218-990-81	SHORT CHIP	0			R6583	1-218-965-11	METAL CHIP	10K	5%	1/16W
R6443	1-208-909-11	METAL CHIP	8.2K	0.5%	1/16W	R6585	1-218-982-11	METAL CHIP	270K	5%	1/16W
R6444	1-218-990-81	SHORT CHIP	0			R6603	1-218-953-11	METAL CHIP	1K	5%	1/16W
R6451	1-218-990-81	SHORT CHIP	0			R6609	1-218-967-11	METAL CHIP	15K	5%	1/16W
R6453	1-218-990-81	SHORT CHIP	0			R6610	1-218-953-11	METAL CHIP	1K	5%	1/16W
R6454	1-218-941-81	METAL CHIP	100	5%	1/16W	R6611	1-218-965-11	METAL CHIP	10K	5%	1/16W
R6455	1-218-965-11	METAL CHIP	10K	5%	1/16W	R6614	1-218-990-81	SHORT CHIP	0		
R6459	1-218-957-11	METAL CHIP	2.2K	5%	1/16W	R6615	1-216-864-11	SHORT CHIP	0		
R6461	1-208-911-11	METAL CHIP	10K	0.5%	1/16W	R6624	1-218-977-11	METAL CHIP	100K	5%	1/16W
R6462	1-218-941-11	METAL CHIP	100	5%	1/16W	R6625	1-218-941-81	METAL CHIP	100	5%	1/16W
R6463	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W	R6626	1-216-797-11	METAL CHIP	10	5%	1/10W
R6466	1-218-965-11	METAL CHIP	10K	5%	1/16W	R6629	1-216-797-11	METAL CHIP	10	5%	1/10W
R6467	1-208-671-11	METAL CHIP	330	0.5%	1/16W	R6630	1-216-797-11	METAL CHIP	10	5%	1/10W
R6468	1-208-883-81	METAL CHIP	680	0.5%	1/16W	R6631	1-208-931-11	METAL CHIP	68K	0.5%	1/16W
R6469	1-218-957-11	METAL CHIP	2.2K	5%	1/16W	R6632	1-208-683-11	METAL CHIP	1K	0.5%	1/16W
R6470	1-218-965-11	METAL CHIP	10K	5%	1/16W	R6633	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W
R6473	1-218-965-11	METAL CHIP	10K	5%	1/16W	R6634	1-218-941-81	METAL CHIP	100	5%	1/16W
R6474	1-208-683-11	METAL CHIP	1K	0.5%	1/16W	R6635	1-218-941-81	METAL CHIP	100	5%	1/16W
R6475	1-208-683-11	METAL CHIP	1K	0.5%	1/16W	R6636	1-216-295-91	SHORT CHIP	0		
R6476	1-208-905-11	METAL CHIP	5.6K	0.5%	1/16W	R7100	1-218-941-81	METAL CHIP	100	5%	1/16W
R6477	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7103	1-218-953-11	METAL CHIP	1K	5%	1/16W
R6479	1-218-939-11	METAL CHIP	68	5%	1/16W	R7104	1-218-941-81	METAL CHIP	100	5%	1/16W
R6489	1-218-961-11	METAL CHIP	4.7K	5%	1/16W	R7107	1-218-949-11	METAL CHIP	470	5%	1/16W
R6490	1-218-973-11	METAL CHIP	47K	5%	1/16W	R7108	1-218-937-11	METAL CHIP	47	5%	1/16W



REF.NO.	PART.NO	DESCRIPTION	REMARK			REF.NO.	PART.NO	DESCRIPTION	REMARK		
R7109	1-218-937-11	METAL CHIP	47	5%	1/16W	R7414	1-218-990-81	SHORT CHIP	0		
R7110	1-220-884-81	METAL CHIP	39	0.5%	1/16W	R7503	1-218-937-11	METAL CHIP	47	5%	1/16W
R7111	1-220-884-81	METAL CHIP	39	0.5%	1/16W	R7507	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7112	1-218-949-11	METAL CHIP	470	5%	1/16W	R7509	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7113	1-208-688-11	METAL CHIP	1.6K	0.5%	1/16W	R7510	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7114	1-218-967-11	METAL CHIP	15K	5%	1/16W	R7513	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7115	1-218-967-11	METAL CHIP	15K	5%	1/16W	R7516	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7122	1-218-990-81	SHORT CHIP	0			R7518	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7123	1-218-937-11	METAL CHIP	47	5%	1/16W	R7520	1-218-941-81	METAL CHIP	100	5%	1/16W
R7202	1-218-943-11	METAL CHIP	150	5%	1/16W	R7521	1-218-937-11	METAL CHIP	47	5%	1/16W
R7203	1-208-663-11	METAL CHIP	150	0.5%	1/16W	R7522	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7204	1-208-663-11	METAL CHIP	150	0.5%	1/16W	R7523	1-218-937-11	METAL CHIP	47	5%	1/16W
R7205	1-218-933-11	METAL CHIP	22	5%	1/16W	R7524	1-218-937-11	METAL CHIP	47	5%	1/16W
R7206	1-218-933-11	METAL CHIP	22	5%	1/16W	R7525	1-218-937-11	METAL CHIP	47	5%	1/16W
R7207	1-218-933-11	METAL CHIP	22	5%	1/16W	R7530	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7208	1-218-933-11	METAL CHIP	22	5%	1/16W	R7531	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7209	1-218-933-11	METAL CHIP	22	5%	1/16W	R7532	1-218-941-81	METAL CHIP	100	5%	1/16W
R7211	1-218-943-11	METAL CHIP	150	5%	1/16W	R7600	1-218-941-11	METAL CHIP	100	5%	1/16W
R7215	1-218-943-11	METAL CHIP	150	5%	1/16W	R7601	1-218-941-11	METAL CHIP	100	5%	1/16W
R7219	1-218-929-11	METAL CHIP	10	5%	1/16W	R7602	1-218-941-11	METAL CHIP	100	5%	1/16W
R7220	1-218-929-11	METAL CHIP	10	5%	1/16W	R7603	1-218-941-11	METAL CHIP	100	5%	1/16W
R7300	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7605	1-208-703-11	METAL CHIP	6.8K	0.5%	1/16W
R7302	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7606	1-218-990-81	SHORT CHIP	0		
R7305	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7607	1-218-937-11	METAL CHIP	47	5%	1/16W
R7306	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7608	1-218-978-11	METAL CHIP	120K	5%	1/16W
R7308	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7609	1-218-947-11	METAL CHIP	330	5%	1/16W
R7310	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7610	1-218-933-11	METAL CHIP	22	5%	1/16W
R7312	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7611	1-218-947-11	METAL CHIP	330	5%	1/16W
R7313	1-218-949-11	METAL CHIP	470	5%	1/16W	R7612	1-218-961-11	METAL CHIP	4.7K	5%	1/16W
R7315	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7613	1-218-961-11	METAL CHIP	4.7K	5%	1/16W
R7317	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7615	1-218-961-11	METAL CHIP	4.7K	5%	1/16W
R7319	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7618	1-218-953-11	METAL CHIP	1K	5%	1/16W
R7321	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7619	1-218-961-11	METAL CHIP	4.7K	5%	1/16W
R7324	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7622	1-218-953-11	METAL CHIP	1K	5%	1/16W
R7325	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7624	1-218-953-11	METAL CHIP	1K	5%	1/16W
R7328	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7625	1-218-961-11	METAL CHIP	4.7K	5%	1/16W
R7329	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7628	1-218-953-11	METAL CHIP	1K	5%	1/16W
R7330	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7630	1-218-953-11	METAL CHIP	1K	5%	1/16W
R7331	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7631	1-218-961-11	METAL CHIP	4.7K	5%	1/16W
R7333	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7635	1-218-941-11	METAL CHIP	100	5%	1/16W
R7334	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7636	1-218-941-11	METAL CHIP	100	5%	1/16W
R7337	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7637	1-218-941-11	METAL CHIP	100	5%	1/16W
R7338	1-218-949-11	METAL CHIP	470	5%	1/16W	R7638	1-218-941-11	METAL CHIP	100	5%	1/16W
R7339	1-218-965-11	METAL CHIP	10K	5%	1/16W	R7712	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7341	1-218-949-11	METAL CHIP	470	5%	1/16W	R7718	1-218-937-11	METAL CHIP	47	5%	1/16W
R7408	1-220-180-11	METAL CHIP	620	5%	1/16W	R7722	1-218-941-81	METAL CHIP	100	5%	1/16W
R7409	1-220-174-11	METAL CHIP	200	5%	1/16W	R7723	1-218-941-81	METAL CHIP	100	5%	1/16W
R7410	1-220-174-11	METAL CHIP	200	5%	1/16W	R7724	1-218-941-81	METAL CHIP	100	5%	1/16W
R7411	1-220-174-11	METAL CHIP	200	5%	1/16W	R7725	1-218-965-11	METAL CHIP	10K	5%	1/16W
R7412	1-208-866-11	METAL CHIP	130	0.5%	1/16W	R7726	1-218-965-11	METAL CHIP	10K	5%	1/16W

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
RB3025	1-239-698-11	RESISTOR, NETWORK 10K		RB5509	1-239-674-81	RESISTOR, NETWORK 100	
RB3028	1-239-698-11	RESISTOR, NETWORK 10K		RB5511	1-234-372-11	RES, NETWORK 100	(1005X4)
RB3080	1-239-698-11	RESISTOR, NETWORK 10K		RB5512	1-234-376-11	RES, NETWORK 2.2K	(1005X4)
RB3200	1-234-378-21	RES, NETWORK 10K	(1005X4)	RB5513	1-239-690-81	RESISTOR, NETWORK 2.2K	
RB3201	1-234-377-21	RES, NETWORK 4.7K	(1005X4)	RB5514	1-239-690-81	RESISTOR, NETWORK 2.2K	
RB3202	1-234-371-21	RES, NETWORK 47	(1005X4)	RB5515	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB3203	1-234-371-21	RES, NETWORK 47	(1005X4)	RB5516	1-239-674-81	RESISTOR, NETWORK 100	
RB3204	1-234-378-21	RES, NETWORK 10K	(1005X4)	RB5517	1-239-698-11	RESISTOR, NETWORK 10K	
RB3205	1-234-371-21	RES, NETWORK 47	(1005X4)	RB5518	1-239-674-81	RESISTOR, NETWORK 100	
RB3400	1-234-381-11	RES, NETWORK 100K	(1005X4)	RB5520	1-239-674-81	RESISTOR, NETWORK 100	
RB3401	1-234-382-21	RES, NETWORK 220K	(1005X4)	RB5521	1-239-690-81	RESISTOR, NETWORK 2.2K	
RB3402	1-239-674-81	RESISTOR, NETWORK 100		RB5522	1-234-372-11	RES, NETWORK 100	(1005X4)
RB4012	1-234-892-21	RES, CHIP NETWORK 33X8	(3816)	RB5525	1-239-674-81	RESISTOR, NETWORK 100	
RB4013	1-234-892-21	RES, CHIP NETWORK 33X8	(3816)	RB5526	1-234-372-11	RES, NETWORK 100	(1005X4)
RB4014	1-242-963-21	RES, NETWORK 33	(1005X4)	RB5527	1-234-372-11	RES, NETWORK 100	(1005X4)
RB4015	1-234-711-21	RES, CHIP NETWORK 22X8	(3816)	RB5528	1-234-372-11	RES, NETWORK 100	(1005X4)
RB4016	1-234-711-21	RES, CHIP NETWORK 22X8	(3816)	RB5529	1-239-674-81	RESISTOR, NETWORK 100	
RB4017	1-234-370-21	RES, NETWORK 22	(1005X4)	RB6403	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB4018	1-234-711-21	RES, CHIP NETWORK 22X8	(3816)	RB6404	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB4019	1-234-711-21	RES, CHIP NETWORK 22X8	(3816)	RB6405	1-239-698-11	RESISTOR, NETWORK 10K	
RB4020	1-234-370-21	RES, NETWORK 22	(1005X4)	RB6406	1-239-698-11	RESISTOR, NETWORK 10K	
RB4501	1-239-674-81	RESISTOR, NETWORK 100		RB7100	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB4502	1-239-700-81	RESISTOR, NETWORK 15K		RB7103	1-239-698-11	RESISTOR, NETWORK 10K	
RB4512	1-239-674-81	RESISTOR, NETWORK 100		RB7104	1-239-670-81	RESISTOR, NETWORK 47	
RB4513	1-239-674-81	RESISTOR, NETWORK 100		RB7105	1-234-371-21	RES, NETWORK 47	(1005X4)
RB4514	1-239-700-81	RESISTOR, NETWORK 15K		RB7200	1-234-370-21	RES, NETWORK 22	(1005X4)
RB4515	1-239-700-81	RESISTOR, NETWORK 15K		RB7201	1-234-702-11	RES, NETWORK 68	(1005X4)
RB4528	1-239-670-81	RESISTOR, NETWORK 47		RB7202	1-234-711-21	RES, CHIP NETWORK 22X8	(3816)
RB4529	1-239-686-11	RESISTOR, NETWORK 1K		RB7203	1-234-711-21	RES, CHIP NETWORK 22X8	(3816)
RB4702	1-239-674-81	RESISTOR, NETWORK 100		RB7300	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)
RB4703	1-239-674-81	RESISTOR, NETWORK 100		RB7301	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)
RB4704	1-239-698-11	RESISTOR, NETWORK 10K		RB7302	1-239-670-81	RESISTOR, NETWORK 47	
RB4705	1-239-698-11	RESISTOR, NETWORK 10K		RB7303	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)
RB4706	1-239-674-81	RESISTOR, NETWORK 100		RB7304	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)
RB4707	1-234-723-21	RES, NETWORK 75	(1005X4)	RB7305	1-234-371-21	RES, NETWORK 47	(1005X4)
RB4708	1-239-698-11	RESISTOR, NETWORK 10K		RB7306	1-234-371-21	RES, NETWORK 47	(1005X4)
RB4709	1-234-106-81	RES, NETWORK 0		RB7400	1-239-694-81	RESISTOR, NETWORK 4.7K	
RB4711	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)	RB7402	1-234-372-11	RES, NETWORK 100	(1005X4)
RB4712	1-234-371-21	RES, NETWORK 47	(1005X4)	RB7404	1-234-371-21	RES, NETWORK 47	(1005X4)
RB5000	1-239-674-81	RESISTOR, NETWORK 100		RB7500	1-234-371-21	RES, NETWORK 47	(1005X4)
RB5001	1-239-674-81	RESISTOR, NETWORK 100		RB7501	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)
RB5002	1-239-674-81	RESISTOR, NETWORK 100		RB7503	1-239-670-81	RESISTOR, NETWORK 47	
RB5003	1-239-674-81	RESISTOR, NETWORK 100		RB7504	1-234-371-21	RES, NETWORK 47	(1005X4)
RB5500	1-234-372-11	RES, NETWORK 100	(1005X4)	RB7505	1-234-371-21	RES, NETWORK 47	(1005X4)
RB5501	1-234-372-11	RES, NETWORK 100	(1005X4)	RB7506	1-234-371-21	RES, NETWORK 47	(1005X4)
RB5502	1-234-372-11	RES, NETWORK 100	(1005X4)	RB7508	1-234-371-21	RES, NETWORK 47	(1005X4)
RB5503	1-234-372-11	RES, NETWORK 100	(1005X4)	RB7509	1-239-670-81	RESISTOR, NETWORK 47	
RB5504	1-234-377-21	RES, NETWORK 4.7K	(1005X4)	RB7510	1-234-372-11	RES, NETWORK 100	(1005X4)
RB5506	1-239-690-81	RESISTOR, NETWORK 2.2K		RB7511	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)
RB5507	1-239-690-81	RESISTOR, NETWORK 2.2K		RB7513	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
RB7517	1-234-371-21	RES, NETWORK 47	(1005X4)			< TUNER >	
RB7518	1-234-799-21	RES, CHIP NETWORK 10KX8	(3816)				
RB7519	1-234-372-11	RES, NETWORK 100	(1005X4)	TU2200	8-597-641-00	TUNER UNIT, DIGITAL BTD-HF411T	
RB7520	1-239-670-81	RESISTOR, NETWORK 47				< VARISTOR >	
RB7521	1-239-670-81	RESISTOR, NETWORK 47					
RB7522	1-239-670-81	RESISTOR, NETWORK 47		VD1000	1-802-078-11	VARISTOR (SMD)	
RB7523	1-239-698-11	RESISTOR, NETWORK 10K		VD1001	1-802-078-11	VARISTOR (SMD)	
RB7524	1-234-378-21	RES, NETWORK 10K	(1005X4)	VD1002	1-802-078-11	VARISTOR (SMD)	
RB7600	1-234-372-11	RES, NETWORK 100	(1005X4)	VD1003	1-802-078-11	VARISTOR (SMD)	
RB7706	1-239-698-11	RESISTOR, NETWORK 10K		VD1004	1-802-078-11	VARISTOR (SMD)	
RB7707	1-234-371-21	RES, NETWORK 47	(1005X4)	VD1005	1-802-078-11	VARISTOR (SMD)	
RB7709	1-239-698-11	RESISTOR, NETWORK 10K		VD1006	1-802-078-11	VARISTOR (SMD)	
RB7712	1-234-378-21	RES, NETWORK 10K	(1005X4)	VD1007	1-802-078-11	VARISTOR (SMD)	
RB7713	1-234-799-21	RES, CHIP NETWORK 10KX8	(3816)	VD1008	1-802-078-11	VARISTOR (SMD)	
RB7714	1-234-799-21	RES, CHIP NETWORK 10KX8	(3816)	VD1009	1-802-078-11	VARISTOR (SMD)	
RB7715	1-234-378-21	RES, NETWORK 10K	(1005X4)	VD1010	1-802-078-11	VARISTOR (SMD)	
RB7716	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)	VD1011	1-802-078-11	VARISTOR (SMD)	
RB7717	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)	VD1012	1-802-078-11	VARISTOR (SMD)	
RB8005	1-239-674-81	RESISTOR, NETWORK 100		VD3001	1-802-078-11	VARISTOR (SMD)	
RB8006	1-239-674-81	RESISTOR, NETWORK 100		VD3002	1-802-078-11	VARISTOR (SMD)	
RB8007	1-239-674-81	RESISTOR, NETWORK 100		VD3003	1-802-078-11	VARISTOR (SMD)	
RB8008	1-239-674-81	RESISTOR, NETWORK 100		VD3004	1-802-078-11	VARISTOR (SMD)	
RB8009	1-234-372-11	RES, NETWORK 100	(1005X4)	VD3005	1-802-078-11	VARISTOR (SMD)	
RB8010	1-234-372-11	RES, NETWORK 100	(1005X4)	VD3006	1-802-078-11	VARISTOR (SMD)	
RB8011	1-239-674-81	RESISTOR, NETWORK 100		VD3007	1-802-493-21	VARISTOR, NETWORK (1005X2)	
RB8012	1-234-372-11	RES, NETWORK 100	(1005X4)	VD4500	1-802-078-11	VARISTOR (SMD)	
RB8014	1-239-674-81	RESISTOR, NETWORK 100		VD4501	1-802-078-11	VARISTOR (SMD)	
RB8015	1-234-372-11	RES, NETWORK 100	(1005X4)	VD4502	1-802-481-11	ESD SUPPRESSOR (4 ARRAY)	
RB8016	1-234-372-11	RES, NETWORK 100	(1005X4)	VD4503	1-802-481-11	ESD SUPPRESSOR (4 ARRAY)	
RB8017	1-239-674-81	RESISTOR, NETWORK 100		VD4504	1-802-481-11	ESD SUPPRESSOR (4 ARRAY)	
RB8018	1-239-690-81	RESISTOR, NETWORK 2.2K		VD4505	1-802-481-11	ESD SUPPRESSOR (4 ARRAY)	
RB8201	1-239-674-81	RESISTOR, NETWORK 100		VD4506	1-802-078-11	VARISTOR (SMD)	
RB8210	1-239-674-81	RESISTOR, NETWORK 100		VD4507	1-802-078-11	VARISTOR (SMD)	
RB8213	1-239-674-81	RESISTOR, NETWORK 100		VD4509	1-802-481-11	ESD SUPPRESSOR (4 ARRAY)	
RB8214	1-239-674-81	RESISTOR, NETWORK 100		VD4510	1-802-481-11	ESD SUPPRESSOR (4 ARRAY)	
RB8215	1-239-674-81	RESISTOR, NETWORK 100		VD4511	1-802-078-11	VARISTOR (SMD)	
RB8216	1-239-674-81	RESISTOR, NETWORK 100		VD4512	1-802-078-11	VARISTOR (SMD)	
RB8217	1-239-674-81	RESISTOR, NETWORK 100		VD7100	1-804-988-21	VARISTOR, CHIP	(1608)
RB8220	1-239-682-11	RESISTOR, NETWORK 470		VD8201	1-802-078-11	VARISTOR (SMD)	
RB8222	1-239-698-11	RESISTOR, NETWORK 10K		VD8202	1-802-078-11	VARISTOR (SMD)	
RB8223	1-234-372-11	RES, NETWORK 100	(1005X4)	VD8203	1-802-078-11	VARISTOR (SMD)	
RB8224	1-234-372-11	RES, NETWORK 100	(1005X4)	VDR001	1-802-078-11	VARISTOR (SMD)	
RB8225	1-234-372-11	RES, NETWORK 100	(1005X4)			< CRYSTAL >	
RB8226	1-234-372-11	RES, NETWORK 100	(1005X4)	X3200	1-814-130-11	QUARTZ CRYSTAL UNIT	
RB8227	1-234-372-11	RES, NETWORK 100	(1005X4)	X5500	1-813-784-21	VIBRATOR, CRYSTAL	
RB8228	1-234-372-11	RES, NETWORK 100	(1005X4)	X5501	1-795-537-21	VIBRATOR, CRYSTAL	
	< SWITCH >			X7100	1-814-145-11	QUARTS CRYSTAL UNIT	
S8000	1-572-921-11	SWITCH, KEY BOARD		X7101	1-813-990-11	QUARTS CRYSTAL 30MHZ	

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
ACCESSORIES AND CONNECTORS							
	*1-835-146-11	CONNECTOR ASSY, MDF61 (D4-BALANCER)	(52 inches)		*4-106-868-43	INSTRUCTION MANUAL (AEP)	DANISH/FINNISH/ NORWEGIAN/SWEDISH
	*1-835-147-11	CONNECTOR ASSY, MDF61 (INVERTER-BALANCER)	(40 inches)		*4-106-868-53	INSTRUCTION MANUAL (AEP)	ENGLISH/POLISH/ RUSSIAN
	*1-835-148-11	CONNECTOR ASSY, MDF61 (INVERTER-BALANCER)	(46 inches)		*4-106-868-63	INSTRUCTION MANUAL (AEP)	CZECH/HUNGARIAN/ SLOVAK/TURKISH
	*1-835-149-11	CONNECTOR ASSY, MDF61 (D5-BALANCER)	(52 inches)	REMOTE COMMANDER			
	*1-835-186-11	CONNECTOR ASSY (CN6600(D4)-CN6501(G5))	(52 inches)		1-480-778-11	REMOTE COMMANDER (RM-ED011)	
	*1-835-187-11	CONNECTOR ASSY (CN6500(G5)-CN6900(D5))	(52 inches)				
	*1-836-030-11	WIRE LEAD CONNECTOR (CON1-CN5000)	(40 inches)				
	*1-836-031-11	WIRE LEAD CONNECTOR (CON1-CN5000)	(46 inches)				
	*1-836-032-11	WIRE LEAD CONNECTOR (CON1-CN5000)	(52 inches)				
	*1-910-047-74	CONNECTOR ASSY 7P (CN6701-CN104)	(40 inches)				
	*1-910-047-78	CONNECTOR ASSY 9P (CN6706-CN11)	(52 inches)				
	*1-910-047-82	CONNECTOR ASSY 9P (CN6701-CN125)	(46 inches)				
	*1-910-050-28	MAIN HARNESS ASSY (CN5500-CN6154, CN101, CN301, CN401, LOGO, CN3400-SP)	(40 inches)				
	*1-910-050-29	MAIN HARNESS ASSY (CN5500-CN6154, CN101, CN301, CN401, LOGO, CN3400-SP)	(46 inches)				
	*1-910-050-30	MAIN HARNESS ASSY (CN5500-CN6154, CN101, CN301, CN401, LOGO, CN3400-SP)	(52 inches)				
	*1-910-050-32	CONNECTOR ASSY 13P (CN6401-CN6154)	(52 inches)				
	*1-910-050-34	XA CONNECTOR ASSY 4P (CON3-CN6151)	(40 inches)				
	*1-910-050-37	XA CONNECTOR ASSY 4P (CON3-CN6151)	(46 inches)				
	*1-910-050-38	XA CONNECTOR ASSY 4P (CON3-CN6151)	(52 inches)				
	*1-910-051-08	CONNECTOR ASSY 13P (CN6401-CN6150)	(40 inches)				
	*1-910-051-09	CONNECTOR ASSY 13P (CN6401-CN6150)	(46 inches)				
	*1-910-051-16	SUB HARNESS ASSY (CN6702-CN6153, CN6703- CN6950)	(52 inches)				
	*4-106-868-13	INSTRUCTION MANUAL (UK) ENGLISH					
	*4-106-868-23	INSTRUCTION MANUAL (AEP) GERMAN/FRENCH/ ITALIAN/DUTCH					
	*4-106-868-33	INSTRUCTION MANUAL (AEP) SPANISH/GREEK/PORTUGUESE					

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
ACCESSORIES AND CONNECTORS							
	*1-835-146-11	CONNECTOR ASSY, MDF61 (D4-BALANCER)	(52 inches)		*4-106-868-13	INSTRUCTION MANUAL (UK) ENGLISH	
	*1-835-147-11	CONNECTOR ASSY, MDF61 (INVERTER-BALANCER)	(40 inches)		*4-106-868-23	INSTRUCTION MANUAL (AEP) GERMAN/FRENCH/ ITALIAN/DUTCH	
	*1-835-148-11	CONNECTOR ASSY, MDF61 (INVERTER-BALANCER)	(46 inches)		*4-106-868-33	INSTRUCTION MANUAL (AEP) SPANISH/GREEK/PORTUGUESE	
	*1-835-149-11	CONNECTOR ASSY, MDF61 (D5-BALANCER)	(52 inches)		*4-106-868-43	INSTRUCTION MANUAL (AEP) DANISH/FINNISH/ NORWEGIAN/SWEDISH	
	*1-835-186-11	CONNECTOR ASSY (CN6600(D4)-CN6501(G5))	(52 inches)		*4-106-868-53	INSTRUCTION MANUAL (AEP) ENGLISH/POLISH/ RUSSIAN	
	*1-835-187-11	CONNECTOR ASSY (CN6500(G5)-CN6900(D5))	(52 inches)		*4-106-868-63	INSTRUCTION MANUAL (AEP) CZECH/HUNGARIAN/ SLOVAK/TURKISH	
	*1-836-030-11	WIRE LEAD CONNECTOR (CON1-CN8000(BGE))	(40 inches)	REMOTE COMMANDER			
	*1-836-031-11	WIRE LEAD CONNECTOR (CON1-CN8000(BGE))	(46 inches)		1-480-778-11	REMOTE COMMANDER (RM-ED011)	
	*1-836-032-11	WIRE LEAD CONNECTOR (CON1-CN8000(BGE))	(52 inches)				
	*1-910-047-74	CONNECTOR ASSY 7P (CN6701-CN104)	(40 inches)				
	*1-910-047-78	CONNECTOR ASSY 9P (CN6706-CN11)	(52 inches)				
	*1-910-047-82	CONNECTOR ASSY 9P (CN6701-CN125)	(46 inches)				
	*1-910-050-28	MAIN HARNESS ASSY (CN5500-CN6154- CN101(SWITCH UNIT)-CN301(H3E)-CN401(H4)-LOGO-CN3400(BGE)-SP)	(40 inches)				
	*1-910-050-29	MAIN HARNESS ASSY (CN5500-CN6154- CN101(SWITCH UNIT)-CN301(H3E)-CN401(H4)-LOGO-CN3400(BGE)-SP)	(46 inches)				
	*1-910-050-30	MAIN HARNESS ASSY (CN5500-CN6154- CN101(SWITCH UNIT)-CN301(H3E)-CN401(H4)-LOGO-CN3400(BGE)-SP)	(52 inches)				
	*1-910-050-32	CONNECTOR ASSY 13P (CN6401(BGE)-CN6150(G5))	(52 inches)				
	*1-910-050-34	XA CONNECTOR ASSY 4P (CON3-CN6151)	(40 inches)				
	*1-910-050-37	XA CONNECTOR ASSY 4P (CON3-CN6151)	(46 inches)				
	*1-910-050-38	XA CONNECTOR ASSY 4P (CON3-CN6151)	(52 inches)				
	*1-910-051-08	CONNECTOR ASSY 13P (CN6401(BGE)-CN6150)	(40 inches)				
	*1-910-051-09	CONNECTOR ASSY 13P (CN6401(BGE)-CN6150)	(46 inches)				
	*1-910-051-16	SUB HARNESS ASSY (CN6702(D4)-CN6153(G5), CN6703(D4)-CN6950(D5))	(52 inches)				

