

## SECTION 5 EXPLODED VIEWS


**NOTE :**

- Non-serviceable items with no part number and no description are not stocked because they are not required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remarks column.
- Items marked "\*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

**5-1. CHASSIS**

**Note :** Les composants identifiés par une trame et par une marque Δ sont d'une importance critique pour la sécurité. Ne les remplacer que par des pièces du numéro spécifié.

**Note :** The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

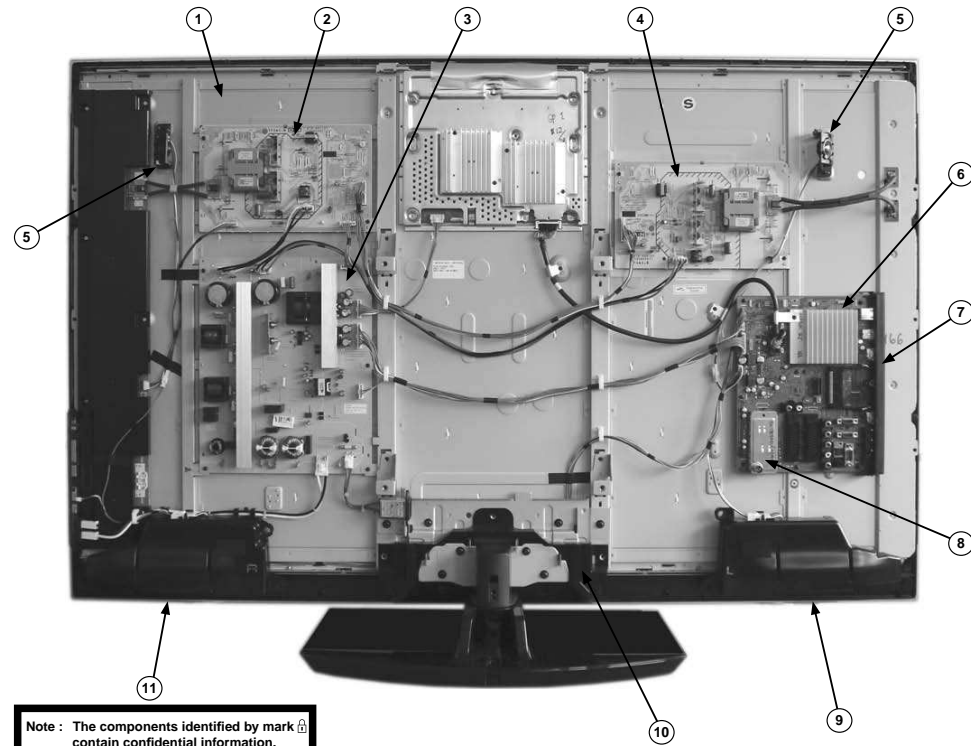


**Note :** The components identified by mark Δ contain confidential information. Strictly follow the instructions when ever the components are repaired and/or replaced.

REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
1	Δ 1-802-897-12	LCD PANEL (40INCH FHD 3TFT)	40 inches	5	1-858-224-11	LOUDSPEAKER (1.6CM)	
	Δ 1-802-896-13	LCD PANEL (46INCH FHD 3TFT)	46 inches	6	Δ A-1724-680-A	BA BOARD, COMPLETE	
	Δ 1-802-895-12	LCD PANEL (52INCH FHD 3TFT)	52 inches	7	X-2349-551-1	SIDE JACK ASSY	
2	A-1663-184-A	D1N BOARD, COMPLETE	40 inches	8	8-597-702-00	UNIVERSAL SIL-TU SUT-HE101T	
	A-1663-186-A	D1N BOARD, COMPLETE	46 inches	9	1-858-222-12	LOUDSPEAKER (4.5X12CM)	
	A-1663-192-A	D3N BOARD, COMPLETE	52 inches	10	4-146-929-11	UNDER, COVER (40/46)	40/46 inches
3	A-1709-327-A	G6NS BOARD, COMPLETE	40 inches		4-146-930-11	UNDER, COVER (52)	52 inches
	1-487-341-21	POWER UNIT (G7NS)	46/52 inches	11	1-858-222-22	LOUDSPEAKER (4.5X12CM)	
4	A-1663-188-A	D2N BOARD, COMPLETE	40 inches				
	A-1663-190-A	D2N BOARD, COMPLETE	46 inches				
	A-1663-194-A	D4N BOARD, COMPLETE	52 inches				

5-1. CHASSIS Cont.

**Note :** Les composants identifiés par un tambe et par une marque Δ sont d'une importance critique pour la sécurité. Ne les remplacez que par des pièces du numéro spécifique.

**Note :** The components identified by shape and marked Δ are critical for safety. Replace only with the part number specified in the parts list.

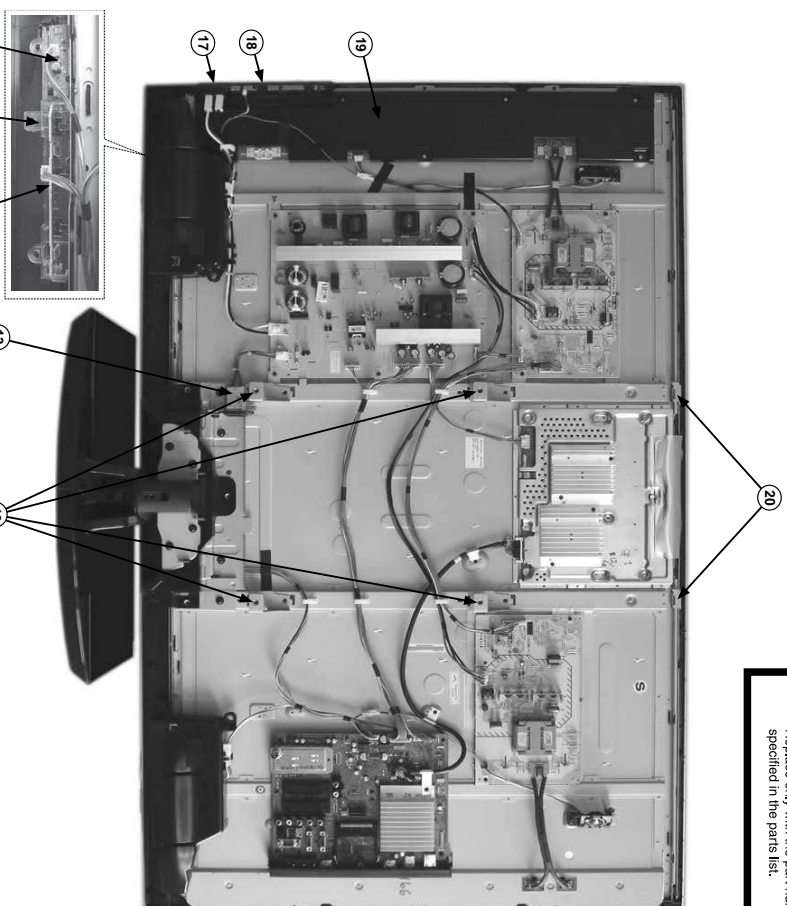


REF.NO.	PART NO	DESCRIPTION	REMARK	REF.NO.	PART NO	DESCRIPTION	REMARK
12	4-142-643-01	BRACKET, VESA		17	1-798-233-11	POWER SWITCH	
13	Δ 1-822-615-11	AC INLET FILTER		18	1-487-333-11	SWITCH UNIT	
14	A-1671-028-A	FLTA BOARD, COMPLETE		19	1-857-415-11	ETC-INVERTER MT BOARD	52 inches
15	4-121-957-01	GUIDE, LIGHT		20	4-121-954-02	SWAY TOP	
16	A-1671-630-A	HSN BOARD, COMPLETE					

## 5-2. FRONT CABINET ASSY & STAND ASSY

**Note :** Les composants identifiés par un  
 frame et par une marque Δ sont de  
 d'une importance critique pour la  
 sécurité. Ne les remplacer que par  
 des pièces du numéro spécifié.

**Note :** The components identified by sha  
 and marked Δ are critical for safe  
 Replace only with the part number  
 specified in the parts list.

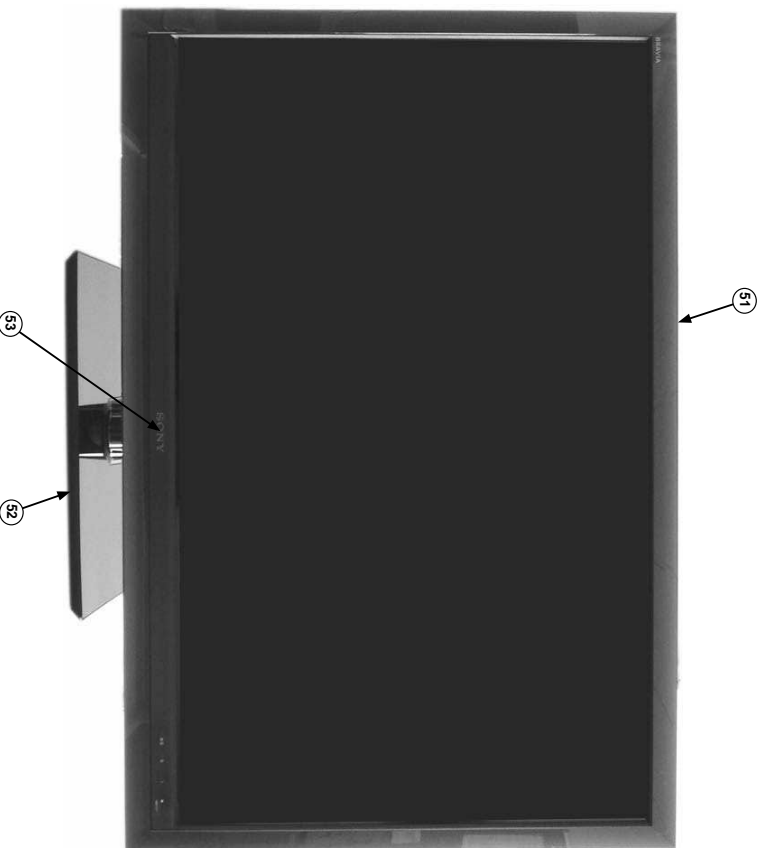


REF.NO.	PARTNO	DESCRIPTION	REMARK	REF.NO.	PARTNO	DESCRIPTION	REMARK
51	X-2349-549-1	FRONT CABINET (40) ASSY	40 inches	52	X-2349-562-1	STAND ASSY (ML3)	40 inches
	X-2349-565-1	FRONT CABINET (46) ASSY	46 inches		X-2349-564-1	STAND ASSY (L3A)	46 inches
	X-2349-572-1	FRONT CABINET (52) ASSY	52 inches	53	X-2349-570-1	STAND ASSY (LL3A)	52 inches
					1-487-239-11	ILLUMINATION MODULE	


### 5-3. REAR COVER & POWER SUPPLY CORDS

**Note :** Les composants identifiés par un triangle et par une marque  $\Delta$  sont d'une importance critique pour la sécurité. Ne les remplacez que par des pièces du numéro spécifié.

**Note :** The components identified by a triangle and marked  $\Delta$  are critical for safe. Replace only with the part number specified in the parts list.

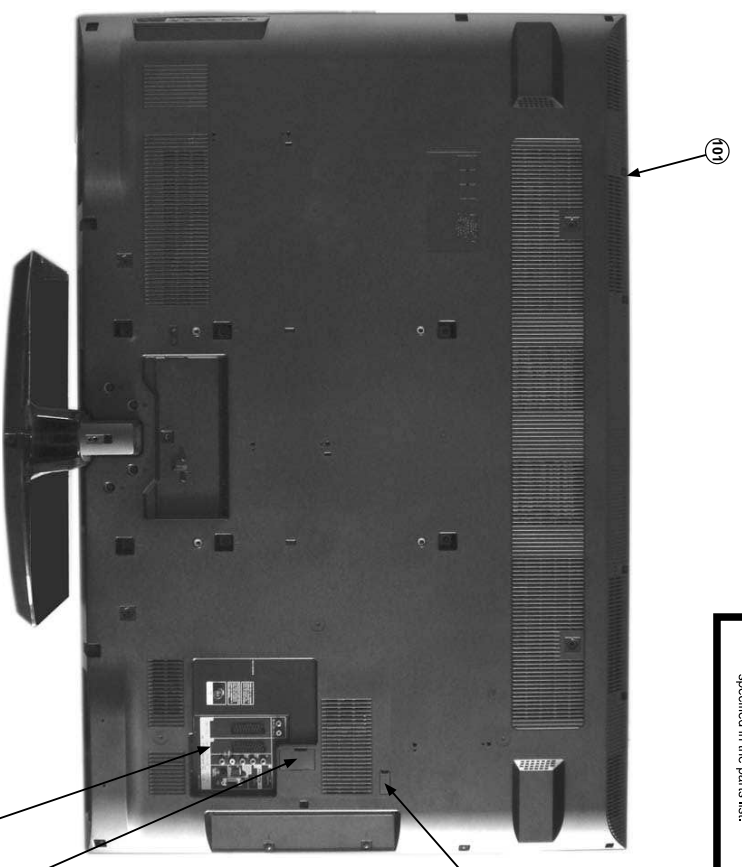

REF.NO.	PARTNO	DESCRIPTION	REMARK	REF.NO.	PARTNO	DESCRIPTION	REMARK
101	4-137-153-01	REAR COVER (40)	40 inches	103	3-299-466-11	ECS COVER	Memory slot
	4-137-136-01	REAR COVER (46)	46 inches	104	4-142-378-01	LABEL, REAR TERMINAL	
	4-137-126-01	REAR COVER (52)	52 inches	105 $\Delta$	1-835-200-11	POWER-SUPPLY CORD (AEP)	
102	4-122-617-01	COVER, ECS(S)	(TV 31q)	106 $\Delta$	1-835-165-11	POWER-SUPPLY CORD (UK)	



**NOTE :**  
If ordering item 101 (Rear Cover) please order item 104 (Label, Rear Terminal) as well.

## SECTION 6 ELECTRICAL PARTS LIST

### PARTS LISTING TABLE OF CONTENTS

BA BOARD COMPLETE Parts List :	Page
HL1A BOARD COMPLETE Parts List :	59
HSN BOARD COMPLETE Parts List :	73
ACCESSORIES AND CONNECTORS :	73
REMOTE COMMANDER :	74

**Note :** To ensure safety and reliability it is Sony policy that power supply boards should not be repaired at component level in the field as a result... The D1N, D2N, D3N, D4N, G6NS and G7NS boards are regarded as non service items for exchange only and are not indicated in the parts list of this service manual.

**Note :** Items marked "xxx" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

Note : The components identified by mark  contain confidential information. Strictly follow the instructions when ever the components are repaired and/or replaced.

REFNO.	PARTNO	DESCRIPTION	REMARK	REFNO.	PARTNO	DESCRIPTION	REMARK
<b>A-1724-680-A BA Board, Complete</b>							
< CAPACITOR >							
C1001	1-164-914-11	CERAMIC CHIP 100PF	5.0% 50V	C2018	1-112-777-11	CERAMIC CHIP 0.01UF	10% 2
C1002	1-112-781-11	CERAMIC CHIP 1UF	10% 10V	C2019	1-112-777-11	CERAMIC CHIP 0.01UF	10% 2
C1003	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C2020	1-112-777-11	CERAMIC CHIP 0.01UF	10% 2
C1004	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C2021	1-112-777-11	CERAMIC CHIP 0.01UF	10% 2
C1006	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C2022	1-112-777-11	CERAMIC CHIP 0.01UF	10% 2
C1007	1-114-553-11	CERAMIC CHIP 100F	10% 16V	C2027	1-112-777-11	CERAMIC CHIP 0.01UF	10% 2
C1008	1-114-553-11	CERAMIC CHIP 100F	10% 16V	C2028	1-112-777-11	CERAMIC CHIP 0.01UF	10% 2
C1010	1-165-972-21	ELECT CHIP 470F	20% 6.3V	C2029	1-112-777-11	CERAMIC CHIP 0.01UF	10% 2
C1011	1-114-532-21	ELECT CHIP 330UF	20% 4V	C2030	1-112-777-11	CERAMIC CHIP 0.01UF	10% 2
C1012	1-100-909-11	CERAMIC CHIP 100F	10% 6.3V	C2031	1-112-777-11	CERAMIC CHIP 0.01UF	10% 2
C1013	1-114-332-11	CERAMIC CHIP 22UF	10% 6.3V	C2033	1-112-777-11	CERAMIC CHIP 0.01UF	10% 2
C1014	1-100-909-11	CERAMIC CHIP 100F	10% 6.3V	C2034	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C1015	1-112-781-11	CERAMIC CHIP 1UF	10% 10V	C2035	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C1017	1-112-781-11	CERAMIC CHIP 1UF	10% 10V	C2036	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C1018	1-112-781-11	CERAMIC CHIP 1UF	10% 10V	C2037	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C1019	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C2500	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C1020	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C2501	1-100-909-11	CERAMIC CHIP 100F	10% 6
C1021	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C2502	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C1022	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C2503	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C1024	1-112-781-11	CERAMIC CHIP 1UF	10% 10V	C2505	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C1303	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C2506	1-114-999-21	ELECT CHIP 47UF	20% 6
C1304	1-114-553-11	CHIP, CERAMIC 0.01UF XTR (1410)	10% 25V	C3000	1-112-777-11	CERAMIC CHIP 0.01UF	10% 2
C1306	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3001	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C1321	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3002	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C1322	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C3003	1-112-064-11	CERAMIC CHIP 2.2UF	10% 1
C1324	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3004	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C1328	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3005	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C1380	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3006	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C1381	1-112-776-11	CERAMIC CHIP 0.0047UF	10% 50V	C3007	1-112-064-11	CERAMIC CHIP 2.2UF	10% 1
C1382	1-112-066-11	CERAMIC CHIP 220PF	10% 50V	C3008	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C1384	1-114-553-11	CERAMIC CHIP 100F	10% 16V	C3009	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C1385	1-114-325-11	CERAMIC CHIP 0.1UF	10% 16V	C3010	1-112-777-11	CERAMIC CHIP 0.01UF	10% 2
C1386	1-114-553-11	CERAMIC CHIP 100F	10% 16V	C3011	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C2000	1-164-946-11	CERAMIC CHIP 68F	0.50PF 50V	C3012	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C2001	1-164-946-11	CERAMIC CHIP 68F	0.50PF 50V	C3013	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C2007	1-100-909-11	CERAMIC CHIP 100F	10% 6.3V	C3014	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C2008	1-100-909-11	CERAMIC CHIP 100F	10% 6.3V	C3015	1-112-781-11	CERAMIC CHIP 1UF	10% 1
C2009	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3016	1-112-777-11	CERAMIC CHIP 0.01UF	10% 2
C2010	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3017	1-100-905-11	CERAMIC CHIP 0.001UF	10% 5
C2011	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3018	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C2012	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3019	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C2013	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3020	1-100-909-11	CERAMIC CHIP 100F	10% 6
C2014	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3021	1-100-909-11	CERAMIC CHIP 100F	10% 6
C2015	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3022	1-112-779-11	CERAMIC CHIP 0.047UF	10% 2
C2016	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3023	1-114-970-11	CERAMIC CHIP 4.7UF	10% 1
C2017	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3025	1-114-970-11	CERAMIC CHIP 4.7UF	10% 1

REFNO.	PARTNO.	DESCRIPTION	REMARK	REFNO.	PARTNO.	DESCRIPTION	REMARK
C3026	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C3086	1-100-909-11	CERAMIC CHIP 10UF	10% 6
C3027	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C3087	1-100-909-11	CERAMIC CHIP 10UF	10% 6
C3028	1-114-532-21	ELECT CHIP 330UF	20% 4V	C3088	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3030	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3089	1-100-906-11	CERAMIC CHIP 0.001UF	10% 5
C3031	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C3501	1-100-909-11	CERAMIC CHIP 10UF	10% 6
C3032	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3502	1-100-909-11	CERAMIC CHIP 10UF	10% 6
C3033	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3503	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3034	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3505	1-100-909-11	CERAMIC CHIP 10UF	10% 6
C3035	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3506	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3036	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3507	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3037	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3508	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3038	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3509	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3039	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3510	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3040	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3511	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3041	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3512	1-164-974-11	CERAMIC CHIP 100PF	5.00% 5
C3042	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3513	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3043	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3514	1-100-909-11	CERAMIC CHIP 10UF	10% 6
C3044	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3515	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3045	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3516	1-114-400-21	ELECT CHIP 100UF	20% 6
C3046	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3517	1-112-777-11	CERAMIC CHIP 0.01UF	10% 2
C3047	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3518	1-112-777-11	CERAMIC CHIP 0.01UF	10% 2
C3048	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3519	1-100-906-11	CERAMIC CHIP 0.001UF	10% 5
C3049	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3520	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3050	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3523	1-100-906-11	CERAMIC CHIP 0.001UF	10% 5
C3051	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3524	1-100-167-21	ELECT CHIP 220UF	20% 1
C3052	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3525	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3053	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3526	1-100-909-11	CERAMIC CHIP 10UF	10% 6
C3057	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3527	1-100-909-11	CERAMIC CHIP 10UF	10% 6
C3058	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3801	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3059	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3806	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3061	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3807	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3062	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3808	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3063	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3810	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3064	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C3811	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3065	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C3812	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3066	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C3813	1-100-906-11	CERAMIC CHIP 0.001UF	10% 5
C3067	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C3814	1-114-331-11	CERAMIC CHIP 4.7UF	10% 1
C3068	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C3815	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3069	1-112-064-11	CERAMIC CHIP 2.2UF	10% 10V	C4000	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3070	1-100-906-11	CERAMIC CHIP 0.001UF	10% 50V	C4001	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3077	1-100-904-11	CERAMIC CHIP 330PF	10% 50V	C4003	1-164-950-11	CERAMIC CHIP 10PF	0.50PF 5
C3078	1-100-906-11	CERAMIC CHIP 0.001UF	10% 50V	C4006	1-112-777-11	CERAMIC CHIP 0.1UF	10% 2
C3079	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4007	1-112-777-11	CERAMIC CHIP 0.01UF	10% 1
C3080	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4008	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3081	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C4009	1-112-777-11	CERAMIC CHIP 0.01UF	10% 2
C3082	1-100-906-11	CERAMIC CHIP 0.001UF	10% 50V	C4010	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3083	1-100-906-11	CERAMIC CHIP 0.001UF	10% 50V	C4011	1-112-777-11	CERAMIC CHIP 0.01UF	10% 2
C3084	1-100-906-11	CERAMIC CHIP 0.001UF	10% 50V	C4012	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C3085	1-100-909-11	CERAMIC CHIP 10UF	10% 6.3V	C4013	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1

REFNO.	PARTNO.	DESCRIPTION	REMARK	REFNO.	PARTNO.	DESCRIPTION	REMARK
C4014	1-100-916-11	CERAMIC CHIP 0.1UF	10%	C4423	1-112-777-11	CERAMIC CHIP 0.01UF	10%
C4015	1-100-916-11	CERAMIC CHIP 0.1UF	10%	C4424	1-112-777-11	CERAMIC CHIP 0.01UF	10%
C4016	1-112-779-11	CERAMIC CHIP 0.047UF	10%	C4425	1-112-777-11	CERAMIC CHIP 0.01UF	10%
C4017	1-164-974-11	CERAMIC CHIP 100PF	5.00%	C4427	1-112-777-11	CERAMIC CHIP 0.01UF	10%
C4018	1-164-978-11	CERAMIC CHIP 150PF	5%	C4428	1-112-777-11	CERAMIC CHIP 0.01UF	10%
C4019	1-100-916-11	CERAMIC CHIP 0.1UF	10%	C4429	1-112-777-11	CERAMIC CHIP 0.01UF	10%
C4020	1-100-916-11	CERAMIC CHIP 0.1UF	10%	C4430	1-112-777-11	CERAMIC CHIP 0.01UF	10%
C4021	1-100-916-11	CERAMIC CHIP 0.1UF	10%	C4431	1-112-777-11	CERAMIC CHIP 0.01UF	10%
C4022	1-100-909-11	CERAMIC CHIP 100PF	10%	C4432	1-112-777-11	CERAMIC CHIP 0.01UF	10%
C4027	1-100-909-11	CERAMIC CHIP 100PF	10%	C4433	1-112-777-11	CERAMIC CHIP 0.01UF	10%
C4028	1-100-909-11	CERAMIC CHIP 100PF	10%	C4434	1-112-777-11	CERAMIC CHIP 0.01UF	10%
C4029	1-100-909-11	CERAMIC CHIP 100PF	10%	C4502	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4030	1-100-909-11	CERAMIC CHIP 100PF	10%	C4503	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4031	1-100-909-11	CERAMIC CHIP 100PF	10%	C4504	1-100-909-11	CERAMIC CHIP 100PF	10%
C4032	1-100-909-11	CERAMIC CHIP 100PF	10%	C4506	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4033	1-100-909-11	CERAMIC CHIP 100PF	10%	C4507	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4034	1-100-909-11	CERAMIC CHIP 100PF	10%	C4508	1-114-889-11	CERAMIC CHIP 2.2UF	10%
C4035	1-100-909-11	CERAMIC CHIP 100PF	10%	C4509	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4036	1-100-909-11	CERAMIC CHIP 100PF	10%	C4510	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4037	1-100-909-11	CERAMIC CHIP 100PF	10%	C4511	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4038	1-100-909-11	CERAMIC CHIP 100PF	10%	C4512	1-112-777-11	CERAMIC CHIP 0.01UF	10%
C4039	1-100-909-11	CERAMIC CHIP 100PF	10%	C4513	1-112-777-11	CERAMIC CHIP 0.01UF	10%
C4056	1-114-354-11	CAP, CERAMIC 0.1UF XTR (4410)	6.3V	C4514	1-112-777-11	CERAMIC CHIP 0.01UF	10%
C4057	1-100-916-11	CERAMIC CHIP 0.1UF	10%	C4515	1-112-777-11	CERAMIC CHIP 0.01UF	10%
C4058	1-100-916-11	CERAMIC CHIP 0.1UF	10%	C4516	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4200	1-112-781-11	CERAMIC CHIP 1UF	10%	C4517	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4201	1-112-781-11	CERAMIC CHIP 1UF	10%	C5004	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4202	1-112-781-11	CERAMIC CHIP 1UF	10%	C5005	1-112-781-11	CERAMIC CHIP 1UF	10%
C4205	1-112-781-11	CERAMIC CHIP 1UF	10%	C5006	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4209	1-112-781-11	CERAMIC CHIP 1UF	10%	C5007	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4210	1-112-781-11	CERAMIC CHIP 1UF	10%	C5009	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4211	1-112-781-11	CERAMIC CHIP 1UF	10%	C5010	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4213	1-100-916-11	CERAMIC CHIP 0.1UF	10%	C5011	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4214	1-114-331-11	CERAMIC CHIP 4.7UF	10%	C5012	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4401	1-116-079-11	CERAMIC CHIP 100PF	10%	C5027	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4402	1-100-916-11	CERAMIC CHIP 0.1UF	10%	C5500	1-100-906-11	CERAMIC CHIP 0.001UF	10%
C4406	1-114-332-11	CERAMIC CHIP 22UF	6.3V	C5501	1-100-906-11	CERAMIC CHIP 0.001UF	10%
C4407	1-100-909-11	CERAMIC CHIP 100PF	10%	C5505	1-112-781-11	CERAMIC CHIP 1UF	10%
C4408	1-100-916-11	CERAMIC CHIP 0.1UF	10%	C5506	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4409	1-112-779-11	CERAMIC CHIP 0.047UF	10%	C5507	1-112-781-11	CERAMIC CHIP 1UF	10%
C4410	1-112-779-11	CERAMIC CHIP 0.047UF	10%	C5509	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4411	1-112-779-11	CERAMIC CHIP 0.047UF	10%	C5510	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4413	1-112-779-11	CERAMIC CHIP 0.047UF	10%	C5511	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4414	1-112-779-11	CERAMIC CHIP 0.047UF	10%	C5512	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4415	1-112-779-11	CERAMIC CHIP 0.047UF	10%	C5514	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4416	1-112-779-11	CERAMIC CHIP 0.047UF	10%	C5516	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4417	1-112-779-11	CERAMIC CHIP 0.047UF	10%	C5517	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4419	1-100-916-11	CERAMIC CHIP 0.1UF	10%	C5518	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4420	1-100-916-11	CERAMIC CHIP 0.1UF	10%	C5519	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C4421	1-100-916-11	CERAMIC CHIP 0.1UF	10%	C5522	1-100-916-11	CERAMIC CHIP 0.1UF	10%





REFNO.	PARTNO.	DESCRIPTION	REMARK	REFNO.	PARTNO.	DESCRIPTION	REMARK
C5323	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7039	1-114-354-11	CAP, CERAMIC 0.1MF XTR (1410)	10% 10% 1
C5325	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7040	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10% 1
C5328	1-100-906-11	CERAMIC CHIP 0.001UF	10% 50V	C7041	1-112-777-11	CERAMIC CHIP 0.01UF	10% 20% 2
C5329	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C7042	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V 5
C5330	1-164-852-11	CERAMIC CHIP 12PF	5.00% 50V	C7043	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V 5
C5331	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7202	1-112-777-11	CERAMIC CHIP 0.01UF	10% 20% 2
C5333	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7203	1-114-193-11	ELECT CHIP 470UF	20% 20% 2
C5335	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7204	1-114-193-11	ELECT CHIP 470UF	20% 20% 2
C5336	1-114-130-11	CERAMIC CHIP 1UF	10% 6.3V	C7205	1-114-193-11	ELECT CHIP 470UF	20% 20% 2
C5340	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7206	1-114-325-11	CERAMIC CHIP 0.1UF	10% 10% 2
C5342	1-164-874-11	CERAMIC CHIP 100PF	5.00% 50V	C7207	1-100-909-11	CERAMIC CHIP 100PF	10% 6 6
C5343	1-100-909-11	CERAMIC CHIP 100PF	10% 6.3V	C7208	1-114-325-11	CERAMIC CHIP 0.1UF	10% 10% 2
C5344	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7209	1-114-326-11	CERAMIC CHIP 0.22UF	10% 10% 2
C5346	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7210	1-100-912-11	CERAMIC CHIP 1UF	10% 10% 2
C5348	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7211	1-114-326-11	CERAMIC CHIP 0.22UF	10% 10% 2
C5350	1-100-906-11	CERAMIC CHIP 0.001UF	10% 50V	C7212	1-114-326-11	CERAMIC CHIP 0.22UF	10% 10% 2
C5351	1-100-906-11	CERAMIC CHIP 0.001UF	10% 50V	C7213	1-114-326-11	CERAMIC CHIP 0.22UF	10% 10% 2
C5352	1-112-781-11	CERAMIC CHIP 1UF	10% 10V	C7214	1-100-912-11	CERAMIC CHIP 1UF	10% 10% 2
C5353	1-112-781-11	CERAMIC CHIP 1UF	10% 10V	C7215	1-114-326-11	CERAMIC CHIP 0.22UF	10% 10% 2
C5356	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7216	1-114-325-11	CERAMIC CHIP 0.1UF	10% 10% 2
C5800	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C7217	1-114-334-11	CERAMIC CHIP 100PF	10% 2 2
C5801	1-164-850-11	CERAMIC CHIP 10PF	0.50PF 50V	C7218	1-114-325-11	CERAMIC CHIP 0.1UF	10% 10% 2
C7001	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7220	1-114-814-11	CERAMIC CHIP 0.33UF	10% 10% 2
C7007	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7221	1-114-814-11	CERAMIC CHIP 0.33UF	10% 10% 2
C7008	1-100-167-21	ELECT CHIP 220UF	20% 16V	C7222	1-114-814-11	CERAMIC CHIP 0.33UF	10% 10% 2
C7009	1-114-354-11	CAP, CERAMIC 0.1MF XTR (1410)	10% 10% 2	C7223	1-114-814-11	CERAMIC CHIP 0.33UF	10% 10% 2
C7010	1-114-354-11	CAP, CERAMIC 0.1MF XTR (1410)	10% 10% 2	C7224	1-164-874-11	CERAMIC CHIP 100PF	5.00% 5 5
C7011	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C7225	1-164-874-11	CERAMIC CHIP 100PF	5.00% 5 5
C7012	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7226	1-164-874-11	CERAMIC CHIP 100PF	5.00% 5 5
C7013	1-100-916-21	ELECT CHIP 220UF	20% 16V	C7227	1-164-874-11	CERAMIC CHIP 100PF	5.00% 5 5
C7014	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C7301	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10% 1
C7016	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7302	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10% 1
C7017	1-114-130-11	CERAMIC CHIP 1UF	10% 6.3V	C7303	1-137-942-21	ELECT CHIP 47UF	20% 20% 2
C7018	1-114-130-11	CERAMIC CHIP 1UF	10% 6.3V	C7304	1-114-320-11	CAP, CERAMIC 1MF X5S (1410)	10% 10% 2
C7020	1-114-354-11	CAP, CERAMIC 0.1MF XTR (1410)	10% 10% 2	C7305	1-112-776-11	CERAMIC CHIP 0.0047UF	10% 10% 5
C7021	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7306	1-114-320-11	CAP, CERAMIC 1MF X5S (1410)	10% 10% 2
C7023	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7307	1-112-776-11	CERAMIC CHIP 0.0047UF	10% 10% 5
C7025	1-112-781-11	CERAMIC CHIP 1UF	10% 10V	C7308	1-114-325-11	CAP, CERAMIC 1MF X5S (1410)	10% 10% 2
C7026	1-114-320-11	CAP, CERAMIC 1MF X5S (1410)	10% 10% 2	C7311	1-114-325-11	CAP, CERAMIC 1MF X5S (1410)	10% 10% 2
C7027	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7312	1-114-325-11	CERAMIC CHIP 0.1UF	10% 10% 2
C7029	1-114-354-11	CAP, CERAMIC 0.1MF XTR (1410)	10% 10% 2	C7313	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10% 1
C7030	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C7314	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10% 1
C7031	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7315	1-114-325-11	CERAMIC CHIP 0.1UF	10% 10% 2
C7032	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C7316	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10% 1
C7033	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7318	1-114-325-11	CERAMIC CHIP 0.1UF	10% 10% 2
C7034	1-100-167-21	ELECT CHIP 220UF	20% 16V	C7319	1-114-334-11	CERAMIC CHIP 100PF	10% 2 2
C7035	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7320	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10% 1
C7036	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C7321	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10% 1
C7037	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7322	1-116-079-11	CERAMIC CHIP 100PF	10% 10% 1
C7038	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7326	1-114-320-11	CAP, CERAMIC 1MF X5S (1410)	10% 10% 1

REFNO.	PARTNO.	DESCRIPTION	REMARK	REFNO.	PARTNO.	DESCRIPTION	REMARK
C7327	1-114-520-11	CAP, CERAMIC 1UF X6S (1410)	10%	C7914	1-112-775-11	CERAMIC CHIP 0.0022UF	10%
C7328	1-112-781-11	CERAMIC CHIP 1UF	10%	C7916	1-114-520-11	CERAMIC CHIP 0.22UF	10%
C7329	1-112-781-11	CERAMIC CHIP 1UF	10%	C7918	1-114-531-11	CERAMIC CHIP 4.7UF	10%
C7330	1-114-534-11	CERAMIC CHIP 100F	10%	C7923	1-135-566-11	ELECT CHIP 100F	20%
C7331	1-100-766-21	ELECT CHIP 47UF	20%	C7925	1-112-777-11	CERAMIC CHIP 0.01UF	10%
C7332	1-100-766-21	ELECT CHIP 47UF	20%	C7927	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C7335	1-112-781-11	CERAMIC CHIP 1UF	10%	C7929	1-164-874-11	CERAMIC CHIP 100F	5.00%
C7336	1-112-781-11	CERAMIC CHIP 1UF	10%	C7930	1-114-532-11	CERAMIC CHIP 22UF	10%
C7337	1-112-781-11	CERAMIC CHIP 1UF	10%	C7931	1-112-781-11	CERAMIC CHIP 1UF	10%
C7338	1-112-781-11	CERAMIC CHIP 1UF	10%	C7932	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C7341	1-112-781-11	CERAMIC CHIP 1UF	10%	C7933	1-112-781-11	CERAMIC CHIP 1UF	10%
C7342	1-112-781-11	CERAMIC CHIP 1UF	10%	C7936	1-135-566-11	ELECT CHIP 100F	20%
C7343	1-112-781-11	CERAMIC CHIP 1UF	10%	C7937	1-164-874-11	CERAMIC CHIP 100F	5.00%
C7344	1-112-781-11	CERAMIC CHIP 1UF	10%	C7938	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C7345	1-112-781-11	CERAMIC CHIP 1UF	10%	C7940	1-135-566-11	ELECT CHIP 100F	20%
C7346	1-112-781-11	CERAMIC CHIP 1UF	10%	C7944	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C7401	1-100-909-11	CERAMIC CHIP 100F	10%	C7945	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C7402	1-114-554-11	CAP, CERAMIC 0.1UF XTR (1410)	10%	C7946	1-112-777-11	CERAMIC CHIP 0.01UF	10%
C7403	1-100-909-11	CERAMIC CHIP 100F	10%	C7955	1-112-781-11	CERAMIC CHIP 1UF	10%
C7405	1-112-781-11	CERAMIC CHIP 1UF	10%	C7958	1-100-909-11	CERAMIC CHIP 0.001UF	10%
C7406	1-112-774-11	CERAMIC CHIP 4700F	10%	C7963	1-112-764-11	CERAMIC CHIP 2.20F	10%
C7407	1-112-781-11	CERAMIC CHIP 1UF	10%	C7976	1-135-566-11	ELECT CHIP 100F	20%
C7408	1-112-774-11	CERAMIC CHIP 4700F	10%	C7977	1-135-566-11	ELECT CHIP 100F	20%
C7600	1-112-777-11	CERAMIC CHIP 0.01UF	10%	C7978	1-112-777-11	CERAMIC CHIP 0.01UF	10%
C7601	1-112-777-11	CERAMIC CHIP 0.01UF	10%	C7979	1-112-777-11	CERAMIC CHIP 0.01UF	10%
C7602	1-112-777-11	CERAMIC CHIP 0.01UF	10%	C7980	1-135-566-11	ELECT CHIP 100F	20%
C7603	1-112-777-11	CERAMIC CHIP 0.01UF	10%	C7981	1-112-777-11	CERAMIC CHIP 0.01UF	10%
C7604	1-112-777-11	CERAMIC CHIP 0.01UF	10%	C7983	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C7605	1-112-777-11	CERAMIC CHIP 0.01UF	10%	C7984	1-112-781-11	CERAMIC CHIP 1UF	10%
C7606	1-112-777-11	CERAMIC CHIP 0.01UF	10%	C7985	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C7607	1-112-777-11	CERAMIC CHIP 0.01UF	10%	C7986	1-164-872-11	CERAMIC CHIP 820F	5.00%
C7608	1-112-777-11	CERAMIC CHIP 0.01UF	10%	C7991	1-100-909-11	CERAMIC CHIP 100F	10%
C7610	1-112-777-11	CERAMIC CHIP 0.01UF	10%	C7994	1-100-909-11	CERAMIC CHIP 100F	10%
C7611	1-112-777-11	CERAMIC CHIP 0.01UF	10%	C9602	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C7612	1-100-916-11	CERAMIC CHIP 0.1UF	10%	C9608	1-112-781-11	CERAMIC CHIP 1UF	10%
C7614	1-100-916-11	CERAMIC CHIP 0.1UF	10%	C9610	1-112-777-11	CERAMIC CHIP 0.01UF	10%
C7615	1-114-130-11	CERAMIC CHIP 1UF	10%	C9612	1-100-931-91	CERAMIC CHIP 0.001UF	2%
C7617	1-164-874-11	CERAMIC CHIP 100F	5.00%	C9614	1-114-531-91	CERAMIC CHIP 0.001UF	2%
C7900	1-100-766-21	ELECT CHIP 47UF	20%	C9616	1-114-813-11	CERAMIC CHIP 1UF	10%
C7901	1-100-916-11	CERAMIC CHIP 0.1UF	10%	C9617	1-114-813-11	CERAMIC CHIP 1UF	10%
C7903	1-112-778-11	CERAMIC CHIP 0.022UF	10%	C9636	1-100-916-11	CERAMIC CHIP 0.1UF	10%
C7904	1-164-874-11	CERAMIC CHIP 100F	5.00%	C9637	1-112-777-11	CERAMIC CHIP 0.01UF	10%
C7905	1-112-779-11	CERAMIC CHIP 0.047UF	10%	C9638	1-162-927-11	CERAMIC CHIP 100F	5.00%
C7906	1-100-916-11	CERAMIC CHIP 0.1UF	10%	C9639	1-162-927-11	CERAMIC CHIP 100F	5.00%
C7907	1-114-532-11	CERAMIC CHIP 22UF	10%	C9642	1-100-931-91	CERAMIC CHIP 0.001UF	2%
C7908	1-112-776-11	CERAMIC CHIP 0.0047UF	10%	C9643	1-100-931-91	CERAMIC CHIP 0.001UF	2%
C7909	1-100-916-11	CERAMIC CHIP 0.1UF	10%	C9645	1-100-906-11	CERAMIC CHIP 0.001UF	10%
C7910	1-100-916-11	CERAMIC CHIP 0.1UF	10%	C9646	1-114-813-11	CERAMIC CHIP 1UF	10%
C7911	1-100-916-11	CERAMIC CHIP 0.1UF	10%	C9647	1-114-813-11	CERAMIC CHIP 1UF	10%
C7913	1-114-599-21	ELECT CHIP 47UF	20%	C9648	1-112-068-11	CERAMIC CHIP 220F	10%



Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

REFNO.	PARTNO.	DESCRIPTION	REMARK	REFNO.	PARTNO.	DESCRIPTION	REMARK
C9649	1-112-088-11	CERAMIC CHIP 220PF	10% 50V	D7604	6-502-318-01	DI MA4U1130GES0	
C9650	1-112-778-11	CERAMIC CHIP 0.022UF	10% 25V	D7605	6-502-318-01	DI MA4U1130GES0	
C9651	1-112-778-11	CERAMIC CHIP 0.022UF	10% 25V	D7607	6-502-318-01	DI MA4U1130GES0	
C9803	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	D7608	6-502-158-01	DI MA2S0320G8S0	
C9804	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	D7609	6-502-158-01	DI MA2S0320G8S0	
C9805	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	D7900	8-719-056-24	DI08E RB501V-40VE-17	
C9806	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	D9602	6-502-318-01	DI MA4U1130GES0	
C9809	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	D9605	6-502-574-01	DI MALH120YGS0	
C9810	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	D9606	6-502-574-01	DI MALH120YGS0	
C9811	1-114-410-21	CERAMIC CHIP 680PF	2% 50V	D9807	6-502-574-01	DI MALH120YGS0	
C9818	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	D9808	6-502-574-01	DI MALH120YGS0	
C9820	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	D9812	6-501-754-01	DI08E MA2809160LS0	
C9821	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	D9814	6-501-754-01	DI08E MA2809160LS0	
C9822	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	D9815	6-501-754-01	DI08E MA2809160LS0	
C9823	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	D9816	6-501-754-01	DI08E MA2809160LS0	
C9824	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	D9817	6-501-754-01	DI08E MA2809160LS0	
C9825	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	D9818	6-502-574-01	DI MALH120YGS0	
C9826	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	D9819	6-502-574-01	DI MALH120YGS0	
C9827	1-112-781-11	CERAMIC CHIP 1UF	10% 10V	D9824	6-501-754-01	DI08E MA2809160LS0	
C9828	1-112-781-11	CERAMIC CHIP 1UF	10% 10V	D9826	6-501-754-01	DI08E MA2809160LS0	
C9839	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	D9827	6-501-754-01	DI08E MA2809160LS0	
C9840	1-114-813-11	CERAMIC CHIP 4.7UF	10% 10V	D9828	6-501-754-01	DI08E MA2809160LS0	
C9841	1-216-295-91	SHORT CHIP 0		D9829	6-501-754-01	DI08E MA2809160LS0	
C9842	1-216-295-91	SHORT CHIP 0					
C9843	1-114-410-21	CERAMIC CHIP 680PF	2% 50V				
< CONNECTOR >							
CN1300	1-819-797-11	HEADER ASSEMBLY FOR PWB 13P		E2000	1-694-974-21	CONTACT TERMINAL	
CN1301	1-819-476-11	HEADER ASSEMBLY FOR PWB 8P		E2001	1-694-974-21	CONTACT TERMINAL	
CN2000	1-821-180-11	MEMORY STRIP CONNECTOR		E2002	1-694-974-21	CONTACT TERMINAL	
CN3500	1-822-537-11	ETHERNET CONNECTOR		E2003	1-694-974-21	CONTACT TERMINAL	
CN3501	1-821-834-12	USB CONNECTOR		E2004	1-694-974-21	CONTACT TERMINAL	
CN3800	1-822-579-12	CARD CONNECTOR (PCMCIA CARD)					
CN4501	1-821-034-11	HEADER ASSEMBLY FOR PWB 51P					
CN5502	1-779-936-51	CONNECTOR, FPC/FPC 18P					
CN5503	1-820-235-11	HEADER ASSEMBLY 30P					
CN7201	1-819-461-11	HEADER ASSEMBLY FOR PWB 4P					
CN7600	*1-822-482-11	EDM1 CONNECTOR		F2001	1-576-913-11	FUSE	1.6A
CN7601	*1-822-482-11	EDM1 CONNECTOR		F2002	1-576-913-11	FUSE	1.6A
CN7602	*1-822-484-11	EDM1 CONNECTOR		F2003	1-576-603-11	FUSE	3.15A
CN7603	*1-822-484-11	EDM1 CONNECTOR		F2004	1-576-603-11	FUSE	3.15A
CN9600	*1-821-827-21	D SUB CONNECTOR		F2005	1-576-406-11	FUSE	0.5A
CN9602	*1-822-525-21	OPTICAL OUT CONNECTOR		F2006	1-576-406-11	FUSE	0.5A
CN9803	1-822-586-11	CONNECTOR DUAL SCART		F2007	1-576-406-11	FUSE	0.5A
< DIODE >							
DI314	6-502-736-01	DI RBX301L-30US7M25		F3000	1-576-603-11	FUSE	3.15A
D5509	8-719-056-48	DIODE ISS388 (TP13)		F3001	1-576-603-11	FUSE	3.15A
D7203	6-502-247-01	DI K0ZTR3 68		F3002	1-576-603-11	FUSE	3.15A
D7603	6-502-318-01	DI MA4U1130GES0		F3003	1-576-603-11	FUSE	3.15A
< FERRITE BEAD >							
				F3004	1-576-603-11	FUSE	3.15A
				F3005	1-576-603-11	FUSE	3.15A
				F3006	1-576-603-11	FUSE	3.15A
				F3007	1-576-603-11	FUSE	3.15A
				F3008	1-576-603-11	FUSE	3.15A
				F3009	1-576-603-11	FUSE	3.15A
				F3010	1-576-603-11	FUSE	3.15A
				F3011	1-576-603-11	FUSE	3.15A
				F3012	1-576-603-11	FUSE	3.15A
				F3013	1-576-603-11	FUSE	3.15A
				F3014	1-576-603-11	FUSE	3.15A
				F3015	1-576-603-11	FUSE	3.15A
				F3016	1-576-603-11	FUSE	3.15A
				F3017	1-576-603-11	FUSE	3.15A
				F3018	1-576-603-11	FUSE	3.15A
				F3019	1-576-603-11	FUSE	3.15A
				F3020	1-576-603-11	FUSE	3.15A
				F3021	1-576-603-11	FUSE	3.15A
				F3022	1-576-603-11	FUSE	3.15A
				F3023	1-576-603-11	FUSE	3.15A
				F3024	1-576-603-11	FUSE	3.15A
				F3025	1-576-603-11	FUSE	3.15A
				F3026	1-576-603-11	FUSE	3.15A
				F3027	1-576-603-11	FUSE	3.15A
				F3028	1-576-603-11	FUSE	3.15A
				F3029	1-576-603-11	FUSE	3.15A
				F3030	1-576-603-11	FUSE	3.15A
				F3031	1-576-603-11	FUSE	3.15A
				F3032	1-576-603-11	FUSE	3.15A
				F3033	1-576-603-11	FUSE	3.15A
				F3034	1-576-603-11	FUSE	3.15A
				F3035	1-576-603-11	FUSE	3.15A

REFNO	PARTNO	DESCRIPTION	REMARK
FB309	1-400-834-11	FERRITE	00H
FB310	1-400-089-21	FERRITE	00H
FB2000	1-400-461-21	FERRITE	00H
FB2001	1-400-461-21	FERRITE	00H
FB3302	1-481-466-11	FERRITE	00H
FB3303	1-481-466-11	FERRITE	00H
FB3304	1-481-466-11	FERRITE	00H
FB3305	1-481-466-11	FERRITE	00H
FB3306	1-481-466-11	FERRITE	00H
FB3800	1-481-517-11	FERRITE	00H
FB4000	1-400-462-21	FERRITE	00H
FB4001	1-400-462-21	FERRITE	00H
FB4002	1-400-462-21	FERRITE	00H
FB5000	1-400-462-21	FERRITE	00H
FB5001	1-400-462-21	FERRITE	00H
FB5500	1-500-922-11	FERRITE	00H
FB5501	1-500-922-11	FERRITE	00H
FB5502	1-500-922-11	FERRITE	00H
FB7001	1-481-517-11	FERRITE	00H
FB7201	1-400-089-21	FERRITE	00H
FB7202	1-400-089-21	FERRITE	00H
FB7203	1-400-089-21	FERRITE	00H
FB7204	1-400-089-21	FERRITE	00H
FB7900	1-469-869-21	FERRITE	00H
FB7901	1-400-834-11	FERRITE	00H
FB7902	1-400-834-11	FERRITE	00H
FB7903	1-400-834-11	FERRITE	00H
FB7904	1-400-834-11	FERRITE	00H
FB7905	1-400-834-11	FERRITE	00H
FB7906	1-400-834-11	FERRITE	00H
FB7907	1-400-834-11	FERRITE	00H
FB7908	1-400-834-11	FERRITE	00H
FB7909	1-400-834-11	FERRITE	00H
FB7910	1-400-834-11	FERRITE	00H
FB7911	1-400-834-11	FERRITE	00H
FB7917	1-400-462-21	FERRITE	00H
FB7919	1-400-461-21	FERRITE	00H
FB7920	1-400-461-21	FERRITE	00H
FB7921	1-400-179-21	FERRITE	00H
FB9904	1-400-461-21	FERRITE	00H
FB9905	1-400-461-21	FERRITE	00H
FB9906	1-400-461-21	FERRITE	00H
FB9907	1-400-461-21	FERRITE	00H

< FILTER >

FL4500	1-234-194-21	FILTER, EMI REMOVAL (SMD)	
FL7600	1-234-199-21	FILTER, EMI REMOVAL (SMD)	

< IC >

REFNO	PARTNO	DESCRIPTION	REMARK
IC1000	6-713-863-01	IC BD95408EV-E2	
IC1001	6-711-447-01	IC S-113218-05F1G	
IC1002	6-710-941-01	IC MM3141ZNRG (1.07V)	
IC1003	6-711-238-01	IC NNM2878F3-15 (FE2)	
IC1004	6-711-237-01	IC NNM2878F3-33 (FE2)	
IC1308	6-714-432-01	IC BD9321EEF-E2	
IC2003	6-712-397-01	IC 74AHCT08DM-1J5	
IC2901	6-713-835-01	IC K9P12080UC-PIB0F	
IC2902	6-713-835-01	IC K9P12080UC-PIB0F	
IC3001	6-710-949-01	IC SM0608006WPR	
IC3002	6-713-808-01	IC K411G164QE-HC87E	
IC3003	6-713-832-01	IC K4F51163QE-HC87E	
IC3500	6-712-775-11	IC KS2804TTR	
IC3502	6-711-288-01	IC MIC2005-0.5VM6TR	
IC3801	6-714-523-01	IC TC74CX245EK	
IC3804	6-714-523-01	IC TC74CX245EK	
IC3805	6-714-523-01	IC TC74CX245EK	
IC3806	6-714-523-01	IC TC74CX245EK	
IC3807	6-714-523-01	IC TC74CX245EK	
IC3808	6-714-523-01	IC TC74CX245EK	
IC3809	6-714-523-01	IC TC74CX245EK	
IC3810	6-711-288-01	IC MIC2005-0.5VM6TR	
IC4200	8-753-289-16	IC CMA22410-94	
IC4400	6-708-641-11	IC SMA1115AH/V1.518	
IC5500	6-713-333-01	IC PSF84290U	
IC5901	6-711-047-01	IC S-113218-05F1G	
IC5902	6-713-828-01	IC MB91E313AMC-CB1	
IC5903	6-710-482-01	IC TC7SH125FV/T5S00YF	
IC5904	6-710-786-01	IC TC7SH125FV/T5S00YF	
IC5905	6-706-489-01	IC TC7SH322FV/T5RS0JZF	
IC5906	6-712-974-01	IC CND926ANQ	
IC5907	6-713-333-01	IC PSF84290U	
IC5908	6-713-334-01	IC LM75BD	
IC7401	6-713-682-01	IC AK4388AER-E2	
IC7453	6-711-237-01	IC NNM2878F3-33 (FE2)	
IC7600	8-753-316-83	IC CMB147R-56	
IC7601	6-704-600-01	IC M24C02-NM6GT (B)	
IC7902	6-711-132-01	IC MM3210DNRE	
IC7905	6-710-532-01	IC NNM2878F4-25 (FE2)	
IC9600	6-704-600-01	IC M24C02-NM6GT (B)	
IC9601	6-708-132-01	IC 74LVC14AHV	

< SOCKET >

J8600	*1-822-524-31	PHONO JACK 2P	
-------	---------------	---------------	--

REFNO.	PARTNO	DESCRIPTION	REMARK	REFNO.	PARTNO	DESCRIPTION	REMARK
J3601	1-822-528-11	JACK		Q1304	6-551-690-01	TRANSISTOR RC31M-TP-1	
J3605	1-822-581-12	MULTIPLE PHONO JACK 4P		Q1420	6-551-690-01	TRANSISTOR RC31M-TP-1	
J3800	1-822-523-11	PHONO JACK 5P		Q2500	6-551-775-01	TR 28A2122G0LS0	
				Q2501	6-551-815-01	TR DNR52A1G0LS0	
				Q3000	6-552-212-01	TR HP6K61FT7R	
		< CONT >					
L1002	1-457-714-11	INDUCTOR	4.7UH	Q4000	8-729-426-53	TRANSISTOR 2SA1516A-TP106-QR	
L1003	1-457-714-11	INDUCTOR	1.50H	Q4031	6-551-775-01	TR 28A2122G0LS0	
L1308	1-424-918-21	INDUCTOR	100H	Q4200	6-551-903-01	TR RFS302M-TP11-1	
L3000	1-457-730-11	INDUCTOR	2.20H	Q4201	6-551-903-01	TR RFS302M-TP11-1	
L3500	1-457-223-11	INDUCTOR	00H	Q4202	6-551-903-01	TR RFS302M-TP11-1	
L4001	1-469-556-21	INDUCTOR	150H	Q4401	6-551-921-01	TRANSISTOR RC31M-TP-1P	
L4200	1-469-557-21	INDUCTOR	220H	Q5500	6-551-775-01	TR 28A2122G0LS0	
L4401	1-481-521-11	INDUCTOR	1H	Q5501	6-551-815-01	TR DNR52A1G0LS0	
L4514	1-481-521-11	INDUCTOR	1H	Q5503	6-551-828-01	TR DNR52A5G0LS0	
L4515	1-457-539-11	INDUCTOR	00H	Q5504	6-551-921-01	TRANSISTOR RC31M-TP-1P	
L4516	1-457-539-11	INDUCTOR	00H	Q5507	6-551-815-01	TR DNR52A1G0LS0	
L4517	1-457-539-11	INDUCTOR	00H	Q5510	6-551-824-01	TR DNR51A5G0LS0	
L4518	1-457-539-11	INDUCTOR	00H	Q5512	6-552-110-01	TR DNR52M0LS0	
L4519	1-457-539-11	INDUCTOR	00H	Q7201	6-551-689-01	TR RFS35M-TP-1	
L4520	1-457-539-11	INDUCTOR	00H	Q7302	6-551-551-01	TRANSISTOR RC31M-TP-1	
L7002	1-481-524-11	INDUCTOR	100H	Q7303	6-551-943-01	TR RFS3BM-TP11-1	
L7201	1-457-754-11	INDUCTOR	220H	Q7304	6-551-551-01	TRANSISTOR RC31M-TP-1	
L7204	1-457-754-11	INDUCTOR	220H	Q7305	6-551-551-01	TRANSISTOR RC31M-TP-1	
L7302	1-481-524-11	INDUCTOR	100H	Q7306	6-551-949-01	TR RFS3BM-TP11-1	
L7303	1-481-524-11	INDUCTOR	100H	Q7307	6-551-949-01	TR RFS3BM-TP11-1	
L7401	1-481-524-11	INDUCTOR	100H	Q7308	6-551-691-01	TRANSISTOR RC31M-TP-1	
L7600	1-456-844-11	INDUCTOR	00H	Q7309	6-551-943-01	TR RFS3BM-TP11-1	
L7601	1-456-844-11	INDUCTOR	00H	Q7901	6-551-904-01	TR RFS303M-TP11-1	
L7602	1-456-844-11	INDUCTOR	00H	Q7902	6-551-904-01	TR RFS303M-TP11-1	
L7603	1-456-844-11	INDUCTOR	00H	Q7903	6-551-775-01	TR 28A2122G0LS0	
L7604	1-456-844-11	INDUCTOR	00H	Q7905	6-551-775-01	TR 28A2122G0LS0	
L7605	1-456-844-11	INDUCTOR	00H	Q7906	6-551-775-01	TR 28A2122G0LS0	
L7606	1-456-844-11	INDUCTOR	00H	Q7910	6-551-776-01	TR 28C5950G0LS0	
L7607	1-456-844-11	INDUCTOR	00H	Q7914	6-551-904-01	TR RFS303M-TP11-1	
L7901	1-469-549-21	INDUCTOR	1H	Q7916	6-551-776-01	TR 28C5950G0LS0	
L7902	1-400-791-21	INDUCTOR	100H	Q7917	6-551-775-01	TR 28A2122G0LS0	
L7903	1-412-990-41	INDUCTOR	8.20H	Q9801	6-551-815-01	TR DNR52A1G0LS0	
L7905	1-400-791-21	INDUCTOR	100H	Q9806	6-551-776-01	TR 28C5950G0LS0	
L7907	1-400-791-21	INDUCTOR	100H	Q9812	6-551-776-01	TR 28C5950G0LS0	
L7913	1-469-555-21	INDUCTOR	100H	Q9813	6-551-829-01	TRANSISTOR RC31M	
L9600	1-400-177-21	RESISTOR	00H	Q9814	6-551-829-01	TRANSISTOR RC31M	
L9800	1-469-557-21	INDUCTOR	220H				
		< RESISTOR >					
Q1000	6-550-354-01	TRANSISTOR RQ0339Q2R		R1000	1-218-965-11	METAL CHIP 10K 5% 1/16W	
Q1001	6-551-815-01	TR DNR52A1G0LS0		R1001	1-218-986-11	METAL CHIP 470K 5% 1/16W	
Q1002	6-552-215-01	TR R8S100039PFT8L		R1002	1-208-711-11	METAL CHIP 15K 0.5% 1/16W	
Q1003	6-552-215-01	TR R8S100039PFT8L		R1003	1-208-699-11	METAL CHIP 4.3K 0.5% 1/16W	
Q1004	6-552-212-01	TR HP6K61FT7R		R1004	1-208-911-11	METAL CHIP 10K 0.5% 1/16W	
				R1005	1-208-699-11	METAL CHIP 4.3K 0.5% 1/16W	



REFNO.	PARTNO.	DESCRIPTION	REMARK	REFNO.	PARTNO.	DESCRIPTION	REMARK
R1006	1-218-965-11	METAL CHIP 10K 5%	1/1.6W	R2138	1-218-937-11	METAL CHIP 47 5%	1/1.6W
R1007	1-218-978-11	METAL CHIP 120K 5%	1/1.6W	R2139	1-218-937-11	METAL CHIP 47 5%	1/1.6W
R1008	1-218-953-11	METAL CHIP 1K 5%	1/1.6W	R2140	1-218-965-11	METAL CHIP 10K 5%	1/1.6W
R1009	1-218-974-11	METAL CHIP 56K 5%	1/1.6W	R2141	1-218-937-11	METAL CHIP 47 5%	1/1.6W
R1033	1-218-965-11	METAL CHIP 10K 5%	1/1.6W	R2142	1-218-937-11	METAL CHIP 47 5%	1/1.6W
R1304	1-218-969-11	METAL CHIP 22K 5%	1/1.6W	R2143	1-218-965-11	METAL CHIP 10K 5%	1/1.6W
R1311	1-218-990-81	SHORT CHIP 0		R2144	1-218-965-11	METAL CHIP 10K 5%	1/1.6W
R1313	1-218-957-11	METAL CHIP 2.2K 5%	1/1.6W	R2145	1-218-990-81	SHORT CHIP 0	
R1317	1-208-911-11	METAL CHIP 10K 0.5%	1/1.6W	R2146	1-218-990-81	SHORT CHIP 0	
R1321	1-218-965-11	METAL CHIP 10K 5%	1/1.6W	R2147	1-218-990-81	SHORT CHIP 0	
R1322	1-218-965-11	METAL CHIP 10K 5%	1/1.6W	R2148	1-218-990-81	SHORT CHIP 0	
R1324	1-218-965-11	METAL CHIP 10K 5%	1/1.6W	R2149	1-218-990-81	SHORT CHIP 0	
R1328	1-218-941-81	METAL CHIP 100 5%	1/1.6W	R2150	1-218-990-81	SHORT CHIP 0	
R1331	1-218-983-11	METAL CHIP 330K 5%	1/1.6W	R2151	1-218-990-81	SHORT CHIP 0	
R1405	1-218-990-81	SHORT CHIP 0		R2152	1-218-990-81	SHORT CHIP 0	
R1406	1-218-965-11	METAL CHIP 10K 5%	1/1.6W	R2506	1-218-937-11	METAL CHIP 47 5%	1/1.6W
R1407	1-208-699-11	METAL CHIP 4.7K 0.5%	1/1.6W	R2510	1-218-937-11	METAL CHIP 47 5%	1/1.6W
R1408	1-208-709-11	METAL CHIP 12K 0.5%	1/1.6W	R2514	1-218-937-11	METAL CHIP 47 5%	1/1.6W
R1410	1-208-911-11	METAL CHIP 10K 0.5%	1/1.6W	R2517	1-218-933-11	METAL CHIP 22 5%	1/1.6W
R1420	1-218-977-11	METAL CHIP 100K 5%	1/1.6W	R2518	1-218-933-11	METAL CHIP 22 5%	1/1.6W
R1501	1-218-990-81	SHORT CHIP 0		R2519	1-218-933-11	METAL CHIP 22 5%	1/1.6W
R2001	1-218-941-81	METAL CHIP 100 5%	1/1.6W	R2530	1-218-965-11	METAL CHIP 10K 5%	1/1.6W
R2002	1-218-937-11	METAL CHIP 47 5%	1/1.6W	R2579	1-218-937-11	METAL CHIP 47 5%	1/1.6W
R2008	1-218-965-11	METAL CHIP 10K 5%	1/1.6W	R2605	1-218-965-11	METAL CHIP 10K 5%	1/1.6W
R2010	1-218-990-81	SHORT CHIP 0		R2606	1-218-965-11	METAL CHIP 10K 5%	1/1.6W
R2011	1-218-937-11	METAL CHIP 10K 5%	1/1.6W	R2608	1-218-965-11	METAL CHIP 10K 5%	1/1.6W
R2012	1-218-965-11	METAL CHIP 47 5%	1/1.6W	R2612	1-218-965-11	METAL CHIP 10K 5%	1/1.6W
R2017	1-218-937-11	METAL CHIP 47 5%	1/1.6W	R2616	1-208-911-11	METAL CHIP 10K 0.5%	1/1.6W
R2021	1-218-941-81	METAL CHIP 100 5%	1/1.6W	R2657	1-218-965-11	METAL CHIP 10K 5%	1/1.6W
R2035	1-218-941-81	METAL CHIP 100 5%	1/1.6W	R2674	1-218-965-11	METAL CHIP 10K 5%	1/1.6W
R2040	1-218-937-11	METAL CHIP 47 5%	1/1.6W	R2675	1-218-965-11	METAL CHIP 10K 5%	1/1.6W
R2041	1-218-937-11	METAL CHIP 47 5%	1/1.6W	R2704	1-218-953-11	METAL CHIP 1K 5%	1/1.6W
R2043	1-218-939-11	METAL CHIP 68 5%	1/1.6W	R2705	1-218-965-11	METAL CHIP 10K 5%	1/1.6W
R2045	1-218-965-11	METAL CHIP 10K 5%	1/1.6W	R2706	1-218-961-11	METAL CHIP 4.7K 5%	1/1.6W
R2046	1-218-965-11	METAL CHIP 10K 5%	1/1.6W	R2707	1-218-937-11	METAL CHIP 47 5%	1/1.6W
R2047	1-218-957-11	METAL CHIP 2.2K 5%	1/1.6W	R2709	1-218-941-81	METAL CHIP 100 5%	1/1.6W
R2048	1-218-965-11	METAL CHIP 10K 5%	1/1.6W	R3000	1-208-911-11	METAL CHIP 10K 0.5%	1/1.6W
R2049	1-218-957-11	METAL CHIP 2.2K 5%	1/1.6W	R3001	1-208-929-11	METAL CHIP 10K 0.5%	1/1.6W
R2050	1-218-961-11	METAL CHIP 4.7K 5%	1/1.6W	R3002	1-208-663-11	METAL CHIP 150 0.5%	1/1.6W
R2051	1-218-961-11	METAL CHIP 4.7K 5%	1/1.6W	R3003	1-208-663-11	METAL CHIP 150 0.5%	1/1.6W
R2056	1-218-965-11	METAL CHIP 10K 5%	1/1.6W	R3009	1-218-933-11	METAL CHIP 22 5%	1/1.6W
R2057	1-218-965-11	METAL CHIP 10K 5%	1/1.6W	R3013	1-218-965-11	METAL CHIP 10K 5%	1/1.6W
R2067	1-218-965-11	METAL CHIP 10K 5%	1/1.6W	R3038	1-218-929-11	METAL CHIP 10 5%	1/1.6W
R2069	1-218-965-11	METAL CHIP 10K 5%	1/1.6W	R3044	1-208-660-81	METAL CHIP 75 0.5%	1/1.6W
R2070	1-218-965-11	METAL CHIP 10K 5%	1/1.6W	R3045	1-208-660-81	METAL CHIP 75 0.5%	1/1.6W
R2076	1-218-965-11	METAL CHIP 10K 5%	1/1.6W	R3046	1-208-660-81	METAL CHIP 75 0.5%	1/1.6W
R2086	1-208-683-81	METAL CHIP 680 0.5%	1/1.6W	R3047	1-208-660-81	METAL CHIP 75 0.5%	1/1.6W
R2087	1-208-683-11	METAL CHIP 1K 0.5%	1/1.6W	R3050	1-208-663-11	METAL CHIP 150 0.5%	1/1.6W
R2088	1-208-687-11	METAL CHIP 1.5K 0.5%	1/1.6W	R3051	1-208-663-11	METAL CHIP 150 0.5%	1/1.6W
R2100	1-218-937-11	METAL CHIP 47 5%	1/1.6W	R3052	1-208-911-11	METAL CHIP 10K 0.5%	1/1.6W



REFNO.	PARTNO	DESCRIPTION	REMARK	REFNO.	PARTNO	DESCRIPTION	REMARK
R3053	1-208-911-11	METAL CHIP	10K 0.5% 1/1.6W	R4002	1-218-990-81	SHORT CHIP	0
R3054	1-208-911-11	METAL CHIP	10K 0.5% 1/1.6W	R4003	1-218-941-81	METAL CHIP	100 5% 1/1.6W
R3055	1-208-911-11	METAL CHIP	10K 0.5% 1/1.6W	R4004	1-218-945-11	METAL CHIP	220 5% 1/1.6W
R3060	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R4005	1-220-177-81	METAL CHIP	360 5% 1/1.6W
R3061	1-208-911-11	METAL CHIP	15K 0.5% 1/1.6W	R4008	1-218-943-11	METAL CHIP	150 5% 1/1.6W
R3501	1-218-941-11	METAL CHIP	100 5% 1/1.6W	R4010	1-208-535-11	METAL CHIP	10 0.5% 1/1.6W
R3502	1-218-941-11	METAL CHIP	100 5% 1/1.6W	R4011	1-208-535-11	METAL CHIP	10 0.5% 1/1.6W
R3503	1-218-941-11	METAL CHIP	100 5% 1/1.6W	R4012	1-208-535-11	METAL CHIP	10 0.5% 1/1.6W
R3504	1-218-941-11	METAL CHIP	100 5% 1/1.6W	R4013	1-218-939-11	METAL CHIP	68 5% 1/1.6W
R3505	1-218-941-11	METAL CHIP	100 5% 1/1.6W	R4014	1-218-939-11	METAL CHIP	68 5% 1/1.6W
R3506	1-218-941-11	METAL CHIP	100 5% 1/1.6W	R4015	1-218-939-11	METAL CHIP	68 5% 1/1.6W
R3507	1-218-941-11	METAL CHIP	100 5% 1/1.6W	R4042	1-218-949-11	METAL CHIP	470 5% 1/1.6W
R3508	1-218-941-11	METAL CHIP	100 5% 1/1.6W	R4047	1-218-990-81	SHORT CHIP	0
R3510	1-208-703-11	METAL CHIP	6.8K 0.5% 1/1.6W	R4049	1-218-990-81	SHORT CHIP	0
R3511	1-218-939-11	METAL CHIP	68 5% 1/1.6W	R4070	1-218-939-11	METAL CHIP	56 5% 1/1.6W
R3512	1-218-937-11	METAL CHIP	47 5% 1/1.6W	R4072	1-218-939-11	METAL CHIP	68 5% 1/1.6W
R3513	1-218-978-11	METAL CHIP	120K 5% 1/1.6W	R4074	1-218-939-11	METAL CHIP	68 5% 1/1.6W
R3518	1-218-961-11	METAL CHIP	4.7K 5% 1/1.6W	R4091	1-208-555-81	METAL CHIP	47 0.5% 1/1.6W
R3524	1-218-953-11	METAL CHIP	1K 5% 1/1.6W	R4093	1-208-555-81	METAL CHIP	47 0.5% 1/1.6W
R3525	1-218-961-11	METAL CHIP	4.7K 5% 1/1.6W	R4095	1-208-555-81	METAL CHIP	47 0.5% 1/1.6W
R3528	1-218-953-11	METAL CHIP	1K 5% 1/1.6W	R4097	1-208-555-81	METAL CHIP	47 0.5% 1/1.6W
R3530	1-218-953-11	METAL CHIP	1K 5% 1/1.6W	R4099	1-208-555-81	METAL CHIP	47 0.5% 1/1.6W
R3534	1-218-953-11	METAL CHIP	1K 5% 1/1.6W	R4101	1-208-555-81	METAL CHIP	47 0.5% 1/1.6W
R3536	1-218-953-11	METAL CHIP	1K 5% 1/1.6W	R4102	1-208-687-11	METAL CHIP	1.5K 0.5% 1/1.6W
R3541	1-220-584-81	METAL CHIP	39 0.5% 1/1.6W	R4103	1-208-687-11	METAL CHIP	1.5K 0.5% 1/1.6W
R3542	1-220-584-81	METAL CHIP	39 0.5% 1/1.6W	R4119	1-218-990-81	SHORT CHIP	0
R3544	1-208-588-11	METAL CHIP	1.6K 0.5% 1/1.6W	R4120	1-218-990-81	SHORT CHIP	0
R3545	1-218-967-11	METAL CHIP	15K 5% 1/1.6W	R4121	1-218-941-81	METAL CHIP	100 5% 1/1.6W
R3546	1-218-967-11	METAL CHIP	15K 5% 1/1.6W	R4122	1-218-941-81	METAL CHIP	100 5% 1/1.6W
R3558	1-218-937-11	METAL CHIP	47 5% 1/1.6W	R4123	1-208-643-11	METAL CHIP	22 0.5% 1/1.6W
R3561	1-218-937-11	METAL CHIP	47 5% 1/1.6W	R4124	1-208-535-11	METAL CHIP	10 0.5% 1/1.6W
R3803	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R4125	1-208-535-11	METAL CHIP	10 0.5% 1/1.6W
R3806	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R4126	1-220-580-81	METAL CHIP	27 0.5% 1/1.6W
R3807	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R4127	1-220-580-81	METAL CHIP	27 0.5% 1/1.6W
R3809	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R4128	1-220-580-81	METAL CHIP	27 0.5% 1/1.6W
R3810	1-218-937-11	METAL CHIP	47 5% 1/1.6W	R4129	1-220-580-81	METAL CHIP	27 0.5% 1/1.6W
R3811	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R4130	1-220-580-81	METAL CHIP	27 0.5% 1/1.6W
R3812	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R4131	1-208-687-11	METAL CHIP	27 0.5% 1/1.6W
R3813	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R4144	1-208-687-11	METAL CHIP	1.5K 0.5% 1/1.6W
R3814	1-218-941-81	METAL CHIP	100 5% 1/1.6W	R4145	1-208-687-11	METAL CHIP	1.5K 0.5% 1/1.6W
R3815	1-218-941-81	METAL CHIP	100 5% 1/1.6W	R4146	1-208-687-11	METAL CHIP	1.5K 0.5% 1/1.6W
R3816	1-218-941-81	METAL CHIP	100 5% 1/1.6W	R4153	1-208-689-11	METAL CHIP	1K 0.5% 1/1.6W
R3817	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R4154	1-218-990-81	SHORT CHIP	0
R3818	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R4201	1-218-941-81	METAL CHIP	100 5% 1/1.6W
R3819	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R4203	1-218-962-11	METAL CHIP	5.6K 5% 1/1.6W
R3820	1-218-953-11	METAL CHIP	1K 5% 1/1.6W	R4204	1-218-962-11	METAL CHIP	5.6K 5% 1/1.6W
R3821	1-218-937-11	METAL CHIP	47 5% 1/1.6W	R4205	1-218-941-81	METAL CHIP	100 5% 1/1.6W
R3822	1-218-953-11	METAL CHIP	1K 5% 1/1.6W	R4207	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R3823	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R4208	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R4001	1-218-990-81	SHORT CHIP	0	R4216	1-218-990-81	SHORT CHIP	0

REFNO.	PARTNO.	DESCRIPTION	REMARK	REFNO.	PARTNO.	DESCRIPTION	REMARK
R4217	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R540	1-218-911-11	METAL CHIP	15K 0.5% 1/1.6W
R4218	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R542	1-208-703-11	METAL CHIP	6.8K 0.5% 1/1.6W
R4401	1-208-989-11	METAL CHIP	1.2K 0.5% 1/1.6W	R545	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R4403	1-218-958-11	METAL CHIP	2.7K 5% 1/1.6W	R546	1-208-931-11	METAL CHIP	68K 0.5% 1/1.6W
R4405	1-208-977-11	METAL CHIP	560 0.5% 1/1.6W	R550	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R4409	1-218-990-81	SHORT CHIP	0	R552	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R4411	1-218-933-11	METAL CHIP	22 5% 1/1.6W	R553	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R4420	1-218-937-11	METAL CHIP	47 5% 1/1.6W	R554	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R4421	1-218-937-11	METAL CHIP	47 5% 1/1.6W	R555	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R4422	1-216-995-91	SHORT CHIP	0	R559	1-218-937-11	METAL CHIP	47 5% 1/1.6W
R4505	1-208-939-11	METAL CHIP	1.8K 0.5% 1/1.6W	R560	1-218-937-11	METAL CHIP	47 5% 1/1.6W
R4506	1-208-935-11	METAL CHIP	10 0.5% 1/1.6W	R561	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R4507	1-218-990-81	SHORT CHIP	0	R563	1-218-941-81	METAL CHIP	100 5% 1/1.6W
R4512	1-216-964-11	SHORT CHIP	0	R579	1-208-939-11	METAL CHIP	150K 0.5% 1/1.6W
R4513	1-216-964-11	SHORT CHIP	0	R579	1-208-939-11	METAL CHIP	100K 0.5% 1/1.6W
R4514	1-242-967-81	METAL CHIP	1 5% 1/1.6W	R572	1-218-977-11	METAL CHIP	100K 5% 1/1.6W
R4517	1-208-935-11	METAL CHIP	10 0.5% 1/1.6W	R568	1-218-941-81	METAL CHIP	100 5% 1/1.6W
R4525	1-218-941-81	METAL CHIP	100 5% 1/1.6W	R569	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R4527	1-218-990-81	SHORT CHIP	0	R570	1-218-953-11	METAL CHIP	1K 5% 1/1.6W
R4528	1-218-990-81	SHORT CHIP	0	R571	1-218-977-11	METAL CHIP	100K 5% 1/1.6W
R4530	1-218-990-81	SHORT CHIP	0	R572	1-218-977-11	METAL CHIP	100K 5% 1/1.6W
R4532	1-218-990-81	SHORT CHIP	0	R576	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R5020	1-218-937-11	METAL CHIP	47 5% 1/1.6W	R577	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R5023	1-218-937-11	METAL CHIP	47 5% 1/1.6W	R578	1-208-939-11	METAL CHIP	150K 0.5% 1/1.6W
R5024	1-218-937-11	METAL CHIP	47 5% 1/1.6W	R579	1-208-939-11	METAL CHIP	100K 0.5% 1/1.6W
R5025	1-218-937-11	METAL CHIP	47 5% 1/1.6W	R582	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R5051	1-218-937-11	METAL CHIP	47 5% 1/1.6W	R594	1-218-941-81	METAL CHIP	100 5% 1/1.6W
R5000	1-208-703-11	METAL CHIP	6.8K 0.5% 1/1.6W	R599	1-218-953-11	METAL CHIP	1K 5% 1/1.6W
R5001	1-208-935-11	METAL CHIP	100K 0.5% 1/1.6W	R603	1-218-953-11	METAL CHIP	1K 5% 1/1.6W
R5002	1-208-935-11	METAL CHIP	3.3K 0.5% 1/1.6W	R605	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R503	1-218-961-11	METAL CHIP	4.7K 5% 1/1.6W	R802	1-218-937-11	METAL CHIP	47 5% 1/1.6W
R504	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R803	1-216-964-11	SHORT CHIP	0
R507	1-218-977-11	METAL CHIP	100K 5% 1/1.6W	R003	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R510	1-218-949-11	METAL CHIP	470 5% 1/1.6W	R006	1-218-990-81	SHORT CHIP	0
R511	1-218-937-11	METAL CHIP	47 5% 1/1.6W	R011	1-218-990-81	SHORT CHIP	0
R512	1-218-937-11	METAL CHIP	47 5% 1/1.6W	R013	1-218-990-81	SHORT CHIP	0
R513	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R017	1-218-953-11	METAL CHIP	1K 5% 1/1.6W
R514	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R024	1-218-990-81	SHORT CHIP	0
R518	1-245-604-11	METAL CHIP	10K 5% 1/1.6W	R025	1-218-990-81	SHORT CHIP	0
R519	1-218-941-81	METAL CHIP	100 5% 1/1.6W	R026	1-218-945-11	METAL CHIP	220 5% 1/1.6W
R520	1-218-961-11	METAL CHIP	4.7K 5% 1/1.6W	R027	1-218-945-11	METAL CHIP	220 5% 1/1.6W
R521	1-208-911-11	METAL CHIP	10K 0.5% 1/1.6W	R028	1-218-989-11	METAL CHIP	1M 5% 1/1.6W
R523	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R030	1-218-990-81	SHORT CHIP	0
R526	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R031	1-218-990-81	SHORT CHIP	0
R529	1-208-683-11	METAL CHIP	1K 0.5% 1/1.6W	R034	1-218-990-81	SHORT CHIP	0
R530	1-218-981-91	METAL CHIP	220K 5% 1/1.6W	R035	1-218-990-81	SHORT CHIP	0
R532	1-208-691-11	METAL CHIP	2.2K 0.5% 1/1.6W	R036	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R535	1-218-953-11	METAL CHIP	1K 5% 1/1.6W	R037	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R536	1-218-990-81	SHORT CHIP	0	R038	1-218-990-81	SHORT CHIP	0
R538	1-218-945-11	METAL CHIP	220 5% 1/1.6W	R021	1-218-990-81	SHORT CHIP	0



REFNO.	PARTNO	DESCRIPTION	REMARK	REFNO.	PARTNO	DESCRIPTION	REMARK
R7202	1-218-990-81	SHORT CHIP 0		R7922	1-218-941-81	METAL CHIP 100 5%	1/1.6W
R7204	1-218-990-81	SHORT CHIP 0		R7925	1-218-990-81	SHORT CHIP 0	
R7209	1-218-953-11	METAL CHIP 1K 5%	1/1.6W	R7926	1-218-989-11	METAL CHIP 1M 5%	1/1.6W
R7211	1-218-977-11	METAL CHIP 100K 5%	1/1.6W	R7927	1-216-664-11	SHORT CHIP 0	
R7212	1-218-977-11	METAL CHIP 100K 5%	1/1.6W	R7930	1-218-990-81	SHORT CHIP 0	
R7213	1-218-977-11	METAL CHIP 100K 5%	1/1.6W	R7935	1-218-959-11	METAL CHIP 3.3K 5%	1/1.6W
R7214	1-218-977-11	METAL CHIP 100K 5%	1/1.6W	R7936	1-218-990-81	SHORT CHIP 0	
R7302	1-218-990-81	SHORT CHIP 0		R7937	1-218-965-11	METAL CHIP 10K 5%	1/1.6W
R7303	1-218-990-81	SHORT CHIP 0		R7941	1-218-941-81	METAL CHIP 100 5%	1/1.6W
R7304	1-218-990-81	SHORT CHIP 0		R7942	1-218-990-81	SHORT CHIP 0	
R7305	1-218-965-11	METAL CHIP 10K 5%	1/1.6W	R7950	1-218-941-81	METAL CHIP 100 5%	1/1.6W
R7313	1-218-990-81	SHORT CHIP 0		R7951	1-216-664-11	SHORT CHIP 0	
R7314	1-218-990-81	SHORT CHIP 0		R7966	1-218-990-81	SHORT CHIP 0	
R7401	1-218-953-11	METAL CHIP 1K 5%	1/1.6W	R7968	1-216-664-11	SHORT CHIP 0	
R7600	1-218-929-11	METAL CHIP 10 5%	1/1.6W	R7973	1-218-957-11	METAL CHIP 2.2K 5%	1/1.6W
R7601	1-218-929-11	METAL CHIP 10 5%	1/1.6W	R7974	1-218-933-11	METAL CHIP 22 5%	1/1.6W
R7602	1-218-929-11	METAL CHIP 10 5%	1/1.6W	R7975	1-218-933-11	METAL CHIP 22 5%	1/1.6W
R7603	1-208-683-11	METAL CHIP 1K 0.5%	1/1.6W	R7982	1-218-961-11	METAL CHIP 4.7K 5%	1/1.6W
R7604	1-208-683-11	METAL CHIP 1K 0.5%	1/1.6W	R7984	1-218-965-11	METAL CHIP 10K 5%	1/1.6W
R7605	1-208-683-11	METAL CHIP 1K 0.5%	1/1.6W	R7986	1-218-990-81	SHORT CHIP 0	
R7606	1-218-929-11	METAL CHIP 10 5%	1/1.6W	R7987	1-218-990-81	SHORT CHIP 0	
R7607	1-208-683-11	METAL CHIP 1K 0.5%	1/1.6W	R7988	1-218-990-81	SHORT CHIP 0	
R7608	1-218-941-81	METAL CHIP 100 5%	1/1.6W	R7992	1-208-689-11	METAL CHIP 180 0.5%	1/1.6W
R7609	1-218-941-81	METAL CHIP 100 5%	1/1.6W	R8000	1-218-990-81	SHORT CHIP 0	
R7610	1-218-941-81	METAL CHIP 100 5%	1/1.6W	R8003	1-218-990-81	SHORT CHIP 0	
R7611	1-218-941-81	METAL CHIP 100 5%	1/1.6W	R8004	1-216-664-11	SHORT CHIP 0	
R7612	1-208-699-11	METAL CHIP 4.7K 0.5%	1/1.6W	R8030	1-216-664-11	SHORT CHIP 0	
R7613	1-218-973-11	METAL CHIP 47K 5%	1/1.6W	R8306	1-218-990-81	SHORT CHIP 0	
R7621	1-218-965-11	METAL CHIP 10K 5%	1/1.6W	R8600	1-218-990-81	SHORT CHIP 0	
R7622	1-218-990-81	SHORT CHIP 0		R8601	1-218-990-81	SHORT CHIP 0	
R7624	1-218-970-11	METAL CHIP 21K 5%	1/1.6W	R8602	1-218-990-81	SHORT CHIP 0	
R7625	1-218-941-81	METAL CHIP 100 5%	1/1.6W	R8603	1-216-653-11	METAL CHIP 470K 5%	1/1.0W
R7626	1-218-953-11	METAL CHIP 1K 5%	1/1.6W	R8604	1-216-653-11	METAL CHIP 470K 5%	1/1.0W
R7627	1-218-957-11	METAL CHIP 2.2K 5%	1/1.6W	R8610	1-218-990-81	SHORT CHIP 0	
R7628	1-218-957-11	METAL CHIP 2.2K 5%	1/1.6W	R8612	1-218-990-81	SHORT CHIP 0	
R7634	1-218-965-11	METAL CHIP 10K 5%	1/1.6W	R8614	1-218-990-81	SHORT CHIP 0	
R7902	1-218-941-81	METAL CHIP 100 5%	1/1.6W	R8617	1-218-965-11	METAL CHIP 10K 5%	1/1.6W
R7903	1-218-990-81	SHORT CHIP 0		R8618	1-216-653-11	METAL CHIP 470K 5%	1/1.0W
R7905	1-218-957-11	METAL CHIP 2.2K 5%	1/1.6W	R8619	1-208-660-81	METAL CHIP 75 0.5%	1/1.6W
R7907	1-218-961-11	METAL CHIP 4.7K 5%	1/1.6W	R8620	1-216-653-11	METAL CHIP 470K 5%	1/1.0W
R7908	1-218-961-11	METAL CHIP 4.7K 5%	1/1.6W	R8621	1-218-945-11	METAL CHIP 220 5%	1/1.6W
R7910	1-208-939-11	METAL CHIP 150K 0.5%	1/1.6W	R8622	1-218-946-11	METAL CHIP 220 5%	1/1.6W
R7911	1-218-989-11	METAL CHIP 1M 5%	1/1.6W	R8623	1-218-953-11	METAL CHIP 1K 5%	1/1.6W
R7912	1-218-989-11	METAL CHIP 1M 5%	1/1.6W	R8624	1-218-953-11	METAL CHIP 1K 5%	1/1.6W
R7914	1-218-957-11	METAL CHIP 2.2K 5%	1/1.6W	R8625	1-218-953-11	METAL CHIP 1K 5%	1/1.6W
R7916	1-218-959-11	METAL CHIP 3.3K 5%	1/1.6W	R8626	1-218-945-11	METAL CHIP 1K 5%	1/1.6W
R7917	1-218-990-81	SHORT CHIP 0		R8627	1-218-965-11	METAL CHIP 10K 5%	1/1.6W
R7918	1-218-956-11	METAL CHIP 2.7K 5%	1/1.6W	R8628	1-218-965-11	METAL CHIP 10K 5%	1/1.6W
R7919	1-208-699-11	METAL CHIP 3.3K 0.5%	1/1.6W	R8630	1-218-990-81	SHORT CHIP 0	
R7920	1-218-965-11	METAL CHIP 10K 5%	1/1.6W	R8631	1-218-990-81	SHORT CHIP 0	



REFNO.	PARTNO.	DESCRIPTION	REMARK	REFNO.	PARTNO.	DESCRIPTION	REMARK
R9632	1-218-990-81	SHORT CHIP 0		R9876	1-208-683-11	METAL CHIP 1K	0.5% 1/1.0W
R9633	1-216-853-11	METAL CHIP 470K	5% 1/1.0W	R9877	1-218-990-81	SHORT CHIP 0	
R9634	1-216-853-11	METAL CHIP 470K	5% 1/1.0W	R9878	1-218-990-81	SHORT CHIP 0	
R9635	1-216-809-11	METAL CHIP 100	5% 1/1.0W	R9879	1-218-990-81	SHORT CHIP 0	
R9636	1-218-941-81	METAL CHIP 100	5% 1/1.0W	R9881	1-208-660-81	METAL CHIP 75	0.5% 1/1.0W
R9637	1-218-941-81	METAL CHIP 100	5% 1/1.0W	R9916	1-208-660-81	METAL CHIP 75	0.5% 1/1.0W
R9639	1-218-933-11	METAL CHIP 22	5% 1/1.0W	R9919	1-218-933-11	METAL CHIP 1K	5% 1/1.0W
R9640	1-218-933-11	METAL CHIP 22	5% 1/1.0W	R9922	1-218-941-81	METAL CHIP 100	5% 1/1.0W
R9642	1-218-990-81	SHORT CHIP 0		R9923	1-218-990-81	SHORT CHIP 0	
R9643	1-218-990-81	SHORT CHIP 0		R9924	1-218-933-11	METAL CHIP 1K	5% 1/1.0W
R9801	1-218-965-11	METAL CHIP 10K	5% 1/1.0W	R9927	1-218-941-81	METAL CHIP 100	5% 1/1.0W
R9806	1-218-990-81	SHORT CHIP 0		R9933	1-208-683-11	METAL CHIP 1K	0.5% 1/1.0W
R9807	1-218-990-81	SHORT CHIP 0		R9934	1-208-683-11	METAL CHIP 1K	0.5% 1/1.0W
R9811	1-218-945-11	METAL CHIP 220	5% 1/1.0W	R9935	1-218-990-81	SHORT CHIP 0	
R9812	1-218-933-11	METAL CHIP 1K	5% 1/1.0W	R9936	1-218-990-81	SHORT CHIP 0	
R9813	1-218-933-11	METAL CHIP 1K	5% 1/1.0W	< RESISTOR CHIP >			
R9816	1-216-853-11	METAL CHIP 470K	5% 1/1.0W	RB1420	1-234-718-21	RES. NETWORK 10K	(1005X4)
R9817	1-216-853-11	METAL CHIP 470K	5% 1/1.0W	RB2011	1-234-799-21	RES. CHIP NETWORK 100K8	(3816)
R9818	1-216-853-11	METAL CHIP 470K	5% 1/1.0W	RB2022	1-234-718-21	RES. NETWORK 10K	(1005X4)
R9819	1-211-990-11	METAL CHIP 75	0.5% 1/1.0W	RB2003	1-234-371-21	RES. NETWORK 47	(1005X4)
R9820	1-216-809-11	METAL CHIP 100	5% 1/1.0W	RB2004	1-234-378-21	RES. NETWORK 10K	(1005X4)
R9821	1-216-853-11	METAL CHIP 470K	5% 1/1.0W	R9927	1-218-941-81	METAL CHIP 100	5% 1/1.0W
R9822	1-218-809-11	METAL CHIP 22K	5% 1/1.0W	R9933	1-208-683-11	METAL CHIP 1K	0.5% 1/1.0W
R9823	1-218-966-11	METAL CHIP 12K	5% 1/1.0W	R9934	1-208-683-11	METAL CHIP 1K	0.5% 1/1.0W
R9824	1-216-813-11	METAL CHIP 220	5% 1/1.0W	R9935	1-218-990-81	SHORT CHIP 0	
R9825	1-218-990-81	SHORT CHIP 0		R9936	1-218-990-81	SHORT CHIP 0	
R9831	1-218-990-81	SHORT CHIP 0		< RESISTOR CHIP >			
R9832	1-218-990-81	SHORT CHIP 0		RB1420	1-234-718-21	RES. NETWORK 10K	(1005X4)
R9833	1-218-966-11	METAL CHIP 22K	5% 1/1.0W	RB2011	1-234-799-21	RES. CHIP NETWORK 100K8	(3816)
R9834	1-218-966-11	METAL CHIP 12K	5% 1/1.0W	RB2022	1-234-718-21	RES. NETWORK 10K	(1005X4)
R9835	1-218-990-81	SHORT CHIP 0		RB2003	1-234-371-21	RES. NETWORK 47	(1005X4)
R9836	1-218-990-81	SHORT CHIP 0		RB2004	1-234-378-21	RES. NETWORK 10K	(1005X4)
R9837	1-218-933-11	METAL CHIP 1K	5% 1/1.0W	RB2006	1-239-670-81	RESISTOR, NETWORK 47	(1005X4)
R9838	1-218-933-11	METAL CHIP 1K	5% 1/1.0W	RB2009	1-234-718-21	RES. NETWORK 10K	(1005X4)
R9839	1-216-813-11	METAL CHIP 220	5% 1/1.0W	RB2010	1-234-371-21	RES. NETWORK 47	(1005X4)
R9841	1-216-853-11	METAL CHIP 470K	5% 1/1.0W	RB2013	1-234-371-21	RES. NETWORK 47	(1005X4)
R9842	1-218-990-81	SHORT CHIP 0		RB2504	1-234-710-21	RES. CHIP NETWORK 47K8	(3816)
R9843	1-216-853-11	METAL CHIP 470K	5% 1/1.0W	RB2505	1-234-710-21	RES. CHIP NETWORK 47K8	(3816)
R9844	1-211-990-11	METAL CHIP 75	0.5% 1/1.0W	RB2506	1-234-718-21	RES. CHIP NETWORK 100K8	(3816)
R9845	1-216-853-11	METAL CHIP 470K	5% 1/1.0W	RB2507	1-234-371-21	RES. NETWORK 47	(1005X4)
R9846	1-218-933-11	METAL CHIP 1K	5% 1/1.0W	RB2508	1-234-711-21	RES. CHIP NETWORK 22K8	(3816)
R9847	1-218-933-11	METAL CHIP 1K	5% 1/1.0W	RB2509	1-234-711-21	RES. CHIP NETWORK 22K8	(3816)
R9848	1-216-853-11	METAL CHIP 470K	5% 1/1.0W	RB2510	1-234-370-21	RES. NETWORK 22	(1005X4)
R9849	1-218-985-11	METAL CHIP 470K	5% 1/1.0W	RB2512	1-234-718-21	RES. NETWORK 10K	(1005X4)
R9850	1-218-985-11	METAL CHIP 470K	5% 1/1.0W	RB2513	1-234-718-21	RES. NETWORK 10K	(1005X4)
R9854	1-216-809-11	METAL CHIP 100	5% 1/1.0W	RB2516	1-234-799-21	RES. CHIP NETWORK 100K8	(3816)
R9855	1-216-809-11	METAL CHIP 100	5% 1/1.0W	RB2517	1-234-718-21	RES. NETWORK 10K	(1005X4)
R9861	1-218-990-81	SHORT CHIP 0		RB2518	1-234-371-21	RES. NETWORK 47	(1005X4)
R9862	1-216-809-11	METAL CHIP 100	5% 1/1.0W	RB2519	1-234-378-21	RES. NETWORK 10K	(1005X4)
R9866	1-208-683-11	METAL CHIP 1K	0.5% 1/1.0W	RB2520	1-234-378-21	RES. NETWORK 10K	(1005X4)

REFNO.	PARTNO	DESCRIPTION	REMARK	REFNO.	PARTNO	DESCRIPTION	REMARK
RB2521	1-234-378-21	RES, NETWORK 10K	(1005X4)	RB516	1-234-375-21	RES, NETWORK 1K	(1005X4)
RB2522	1-234-378-21	RES, NETWORK 10K	(1005X4)	RB518	1-234-372-11	RES, NETWORK 100	(1005X4)
RB2523	1-234-379-21	RES, CHIP NETWORK 10X8	(3816)	RB519	1-234-375-21	RES, NETWORK 1K	(1005X4)
RB3000	1-234-723-21	RES, NETWORK 75	(1005X4)	RB5520	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB3001	1-234-723-21	RES, NETWORK 75	(1005X4)	RB5521	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB3002	1-234-723-21	RES, NETWORK 75	(1005X4)	RB5522	1-234-375-21	RES, NETWORK 1K	(1005X4)
RB3003	1-234-723-21	RES, NETWORK 75	(1005X4)	RB524	1-234-375-21	RES, NETWORK 1K	(1005X4)
RB3004	1-234-723-21	RES, NETWORK 75	(1005X4)	RB525	1-234-375-21	RES, NETWORK 1K	(1005X4)
RB3006	1-234-389-21	RES, NETWORK 10	(1005X4)	RB5526	1-234-375-21	RES, NETWORK 1K	(1005X4)
RB3007	1-242-963-21	RES, NETWORK 33	(1005X4)	RB5527	1-234-372-11	RES, NETWORK 100	(1005X4)
RB3008	1-234-891-21	RES, CHIP NETWORK 10X8	(3816)	RB5528	1-234-372-11	RES, NETWORK 100	(1005X4)
RB3009	1-234-891-21	RES, CHIP NETWORK 10X8	(3816)	RB530	1-234-378-21	RES, NETWORK 1K	(1005X4)
RB3010	1-239-666-81	RESISTOR, NETWORK 22		RB531	1-234-372-11	RES, NETWORK 100	(1005X4)
RB3011	1-239-666-81	RESISTOR, NETWORK 22		RB532	1-234-376-11	RES, NETWORK 2.2K	(1005X4)
RB3500	1-234-371-21	RES, NETWORK 47	(1005X4)	RB5533	1-234-376-11	RES, NETWORK 2.2K	(1005X4)
RB3501	1-239-668-11	RESISTOR, NETWORK 10K		RB7001	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB3502	1-234-377-21	RES, NETWORK 4.7K	(1005X4)	RB7002	1-234-372-11	RES, NETWORK 100	(1005X4)
RB3503	1-234-371-21	RES, NETWORK 47	(1005X4)	RB7003	1-234-372-11	RES, NETWORK 100	(1005X4)
RB3504	1-234-371-21	RES, NETWORK 47	(1005X4)	RB7004	1-234-372-11	RES, NETWORK 100	(1005X4)
RB3802	1-234-799-21	RES, CHIP NETWORK 10X8	(3816)	RB7005	1-234-882-21	RES, CHIP NETWORK 47X8	(3816)
RB3803	1-234-378-21	RES, NETWORK 10K	(1005X4)	RB7007	1-234-882-21	RES, CHIP NETWORK 47X8	(3816)
RB3804	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)	RB7008	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB3805	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)	RB7009	1-234-380-21	RES, NETWORK 47K	(1005X4)
RB3806	1-234-371-21	RES, NETWORK 47	(1005X4)	RB7013	1-234-379-21	RES, NETWORK 22K	(1005X4)
RB3807	1-234-378-21	RES, NETWORK 10K	(1005X4)	RB7301	1-234-381-11	RES, NETWORK 100K	(1005X4)
RB3809	1-234-378-21	RES, NETWORK 10K	(1005X4)	RB7302	1-234-372-11	RES, NETWORK 100	(1005X4)
RB3810	1-234-371-21	RES, NETWORK 47	(1005X4)	RB7303	1-234-381-11	RES, NETWORK 100K	(1005X4)
RB3811	1-234-371-21	RES, NETWORK 47	(1005X4)	RB7304	1-234-375-21	RES, NETWORK 1K	(1005X4)
RB3812	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)	RB7305	1-234-372-21	RES, NETWORK 75	(1005X4)
RB4200	1-234-372-11	RES, NETWORK 100	(1005X4)	RB7306	1-234-375-21	RES, NETWORK 1K	(1005X4)
RB4201	1-234-372-11	RES, NETWORK 100	(1005X4)	RB7307	1-234-373-21	RES, NETWORK 220	(1005X4)
RB4203	1-234-372-11	RES, NETWORK 100	(1005X4)	RB7308	1-234-381-11	RES, NETWORK 100K	(1005X4)
RB4204	1-234-372-11	RES, NETWORK 100	(1005X4)	RB7310	1-234-379-21	RES, NETWORK 220	(1005X4)
RB4401	1-234-711-21	RES, CHIP NETWORK 22X8	(3816)	RB7311	1-234-381-11	RES, NETWORK 100K	(1005X4)
RB4503	1-239-662-81	RESISTOR, NETWORK 10		RB7312	1-234-373-21	RES, NETWORK 220	(1005X4)
RB4505	1-234-371-21	RES, NETWORK 47	(1005X4)	RB7313	1-234-373-21	RES, NETWORK 220	(1005X4)
RB5000	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)	RB7401	1-234-372-11	RES, NETWORK 100	(1005X4)
RB5001	1-234-371-21	RES, NETWORK 47	(1005X4)	RB7402	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB5501	1-234-376-11	RES, NETWORK 2.2K	(1005X4)	RB7403	1-234-379-21	RES, NETWORK 10K	(1005X4)
RB5502	1-234-372-11	RES, NETWORK 100	(1005X4)	RB7406	1-234-375-21	RES, NETWORK 1K	(1005X4)
RB5503	1-234-372-11	RES, NETWORK 100	(1005X4)	RB7600	1-239-674-81	RESISTOR, NETWORK 100	
RB5505	1-234-372-11	RES, NETWORK 100	(1005X4)	RB7601	1-239-674-81	RESISTOR, NETWORK 100	
RB5506	1-234-785-21	RES, CHIP NETWORK 100X8(3816)		RB7602	1-239-674-81	RESISTOR, NETWORK 100	
RB5507	1-234-372-11	RES, NETWORK 100	(1005X4)	RB7603	1-239-676-81	RESISTOR, NETWORK 47K	
RB5508	1-234-372-11	RES, NETWORK 100	(1005X4)	RB7604	1-239-706-81	RESISTOR, NETWORK 47K	
RB5509	1-234-376-11	RES, NETWORK 2.2K	(1005X4)	RB7605	1-239-706-81	RESISTOR, NETWORK 47K	
RB5510	1-234-710-21	RES, CHIP NETWORK 47X8	(3816)	RB7606	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB5512	1-234-372-11	RES, NETWORK 100	(1005X4)	RB7607	1-239-674-81	RESISTOR, NETWORK 100	
RB5513	1-234-372-11	RES, NETWORK 100	(1005X4)	RB7608	1-239-706-81	RESISTOR, NETWORK 47K	
RB5514	1-234-372-11	RES, NETWORK 100	(1005X4)	RB7610	1-239-680-81	RESISTOR, NETWORK 2.2K	



REFNO.	PARTNO	DESCRIPTION	REMARK
RB7901	1-234-372-11	RES, NETWORK 100	(1005X4)
RB7902	1-234-785-21	RES, CHIP NETWORK 100R(3816)	(1005X4)
RB7903	1-234-372-11	RES, NETWORK 100	(1005X4)
RB7904	1-239-690-81	RESISTOR, NETWORK 2 ZK	
RB7906	1-239-690-81	RESISTOR, NETWORK 2 ZK	
RB7907	1-234-378-21	RES, NETWORK 10K	(1005X4)
RB7908	1-234-370-21	RES, NETWORK 2Z	(1005X4)

< TUNER >

TU7904	8-597-702-00	UNIVERSAL, SII-TU SUP-HE101T	
--------	--------------	------------------------------	--

< VARISTOR >

VD9801	1-802-090-21	VARISTOR, CHIP	
VD9802	1-802-090-21	VARISTOR, CHIP	
VD9803	1-802-090-21	VARISTOR, CHIP	
VD9804	1-802-090-21	VARISTOR, CHIP	
VD9834	1-802-090-21	VARISTOR, CHIP	
VD9835	1-802-090-21	VARISTOR, CHIP	
VD9836	1-802-090-21	VARISTOR, CHIP	

< CRYSTAL >

XZ000	1-814-253-11	QUARTZ CRYSTAL UNIT	
X3500	1-814-147-11	QUARTZ CRYSTAL OSCILLATOR	
X3501	1-814-252-11	PIEZOELECTRIC OSCILLATOR 30MHZ	
X3501	1-813-784-21	VIBRATOR, CRYSTAL	
X3800	1-813-086-21	VIBRATOR, CRYSTAL 16.5MHZ	

XT001	1-814-267-11	QUARTZ CRYSTAL UNIT	
-------	--------------	---------------------	--

**A-1671-628-A HL1A Board, Complete**

< CAPACITOR >

C304	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16T
------	--------------	--------------------	---------

< CONNECTOR >

CN301	*1-821-147-11	HEADER ASSEMBLY FOR PWB 7P	
-------	---------------	----------------------------	--

< DIODE >

D302	6-502-294-01	DI SMD-D1209WT86S	
D303	6-502-598-01	DI SMD-D1209WT86	
D306	6-502-294-01	DI SMD-D1398WT86S	
D310	6-502-598-01	DI SMD-D1209WT86	

< TRANSISTOR >

Q301	6-551-815-01	TR DNB32A1GULS0	
Q302	6-551-815-01	TR DNB32A1GULS0	
Q303	6-551-815-01	TR DNB32A1GULS0	
Q305	6-551-815-01	TR DNB32A1GULS0	

REFNO.	PARTNO	DESCRIPTION	REMARK
R301	1-208-675-11	METAL CHIP	470 0.5% 1/16W
R302	1-218-958-11	METAL CHIP	2.7K 5% 1/16W
R303	1-208-675-11	METAL CHIP	470 0.5% 1/16W
R305	1-208-683-11	METAL CHIP	1K 0.5% 1/16W

< CAPACITOR >

C401	1-112-668-11	CERAMIC CHIP 220PF	10% 5
C402	1-100-909-11	CERAMIC CHIP 10UF	10% 6
C404	1-100-916-11	CERAMIC CHIP 0.1UF	10% 1
C405	1-114-399-21	ELECT CHIP 47UF	20% 6
C406	1-114-130-11	CERAMIC CHIP 1UF	10% 6

< CONNECTOR >

CN401	*1-821-132-11	HEADER ASSEMBLY FOR PWB 5P	
-------	---------------	----------------------------	--

< DIODE >

D402	6-501-732-01	DIODE MAZ80560L50	
------	--------------	-------------------	--

< IC >

IC401	6-600-681-01	IC RS-770N	
IC402	6-600-680-01	PHOTO DIODE BHL1609PC-C-TR	

< TRANSISTOR >

Q401	6-551-775-01	TR 2SA2122GULS0	
------	--------------	-----------------	--

< RESISTOR >

R401	1-218-941-81	METAL CHIP	100 5% 1/16W
R402	1-218-937-11	METAL CHIP	47 5% 1/16W
R403	1-218-990-81	SHEET CHIP	0
R404	1-218-955-11	METAL CHIP	1.5K 5% 1/16W
R406	1-218-990-81	SHEET CHIP	0
R407	1-218-979-11	METAL CHIP	150K 5% 1/16W
R408	1-218-965-11	METAL CHIP	10K 5% 1/16W
R409	1-218-971-11	METAL CHIP	33K 5% 1/16W
R411	1-218-953-11	METAL CHIP	1K 5% 1/16W

REFNO.	PARTNO	DESCRIPTION	REMARK
<b>ACCESSORIES AND CONNECTORS</b>			
<b>40 INCHES</b>			
*1-836-474-11	CONNECTOR ASSY (DIN(CM6650)-BALANCER, D2N(CM6850)-BALANCER)		
*1-836-742-11	CONNECTOR ASSY (DIN(CM6600)-68NS(CM6501))		
*1-836-743-11	CONNECTOR ASSY (D2N(CM6800)-68NS(CM6500))		
*1-836-853-11	CONNECTOR ASSY (68NS(CM6003)-POWER SWITCH)		
1-836-901-11	LEAD WIRE CONNECTOR(LWDS) (TCOM(CM100)- BA(CM4501))		
*1-910-057-05	HARNESS ASSY (1) (68NS(CM6100)-BA(CM1300), 68NS(CM6102)-BA(CM1301))		
*1-910-057-06	CONNECTOR ASSY 9P (TCOM(CM101)-66NS(CM6101))		
*1-910-057-07	CONNECTOR ASSY 12P (DIN(CM6703)-D2N(CM6903))		
*1-910-057-08	CONNECTOR ASSY 8P (DIN(CM6702)-66NS(CM6103))		
*1-910-057-10	HARNESS ASSY (2) (BA(CM5503/7201)- HSN(CM4401)-HE4A(CM301)-SWITCH UNIT-SPEAKERS)		
<b>46 INCHES</b>			
*1-836-473-11	CONNECTOR ASSY (DIN(CM6650)-BALANCER, D2N(CM6850)-BALANCER)		
*1-836-741-11	CONNECTOR ASSY (DIN(CM6600)-67NS(CM6501))		
*1-836-743-11	CONNECTOR ASSY (D2N(CM6800)-67NS(CM6502))		
*1-836-854-11	CONNECTOR ASSY (67NS(CM62063)-POWER SWITCH)		
1-836-902-11	LEAD WIRE CONNECTOR(LWDS) (TCOM(CM100)- BA(CM4501))		
*1-910-057-06	CONNECTOR ASSY 9P (TCOM(CM101)-67NS(CM6203))		
*1-910-057-08	CONNECTOR ASSY 8P (DIN(CM6702)-67NS(CM6103))		
*1-910-057-12	HARNESS ASSY (1) (67NS(CM6202)-BA(CM1300), 67NS(CM6204)-BA(CM1301))		
*1-910-057-15	HARNESS ASSY (2) (BA(CM5503/7201)- HSN(CM4401)-HE4A(CM301)-SWITCH UNIT-SPEAKERS)		
*1-910-057-18	CONNECTOR ASSY 12P (DIN(CM6703)-D2N(CM6903))		
<b>52 INCHES</b>			
*1-836-421-21	CONNECTOR ASSY MOPE1 (D3N(CM6650)-BALANCER)		
*1-836-472-21	CONNECTOR ASSY MOPE1 (D4N(CM6650)-BALANCER)		
*1-836-741-11	CONNECTOR ASSY (D3N(CM6600)-67NS(CM6501))		
*1-836-743-11	CONNECTOR ASSY (D4N(CM6800)-67NS(CM6502))		
*1-836-853-11	CONNECTOR ASSY (67NS(CM6206)-POWER SWITCH)		
1-836-903-11	LEAD WIRE CONNECTOR(LWDS) (TCOM(CM100)- BA(CM4501))		
*1-910-057-08	CONNECTOR ASSY 8P (D3N(CM6702)-67NS(CM6201))		
*1-910-057-16	HARNESS ASSY (1) (67NS(CM6202)-BA(CM1300), 67NS(CM6204)-BA(CM1301))		
*1-910-057-17	CONNECTOR ASSY 9P (TCOM(CM101)-67NS(CM6203))		
*1-910-057-18	CONNECTOR ASSY 12P (D3N(CM6703)-D4N(CM6903))		
*1-910-057-19	CONNECTOR ASSY 7P (D3N(CM6701)-(CM3))		
*1-910-058-60	HARNESS ASSY (2) (BA(CM5503/7201)- HSN(CM4401)-HE4A(CM301)-SWITCH UNIT-SPEAKERS)		

REFNO.	PARTNO	DESCRIPTION	REMARK
<b>INSTRUCTION MANUALS</b>			
*4-151-686-12	INSTRUCTION MANUAL (UK) ENGLISH		
*4-151-686-22	INSTRUCTION MANUAL (AEP) FRENCH/ITALIA GERMAN/DUTCH/SPANISH/PORTUG		
*4-151-686-32	INSTRUCTION MANUAL (AEP) DANISH/NORWEG SWEDISH/FINISH/POLISH/ROMA		
*4-151-686-42	INSTRUCTION MANUAL (AEP) HUNGARIAN/CZE GREEK/SLOVAK/TURKISH/BULG		
*4-151-686-52	INSTRUCTION MANUAL (AEP) RUSSIAN/UKRAI		
<b>REMOTE COMMANDER</b>			
1-487-400-11	REMOTE COMMANDER (RM-2019)		

9-883-446-02

**Sony Corporation**  
Sony UK  
Service Promotions Dept.

**English**  
09IP710  
Printed in  
© 2009