
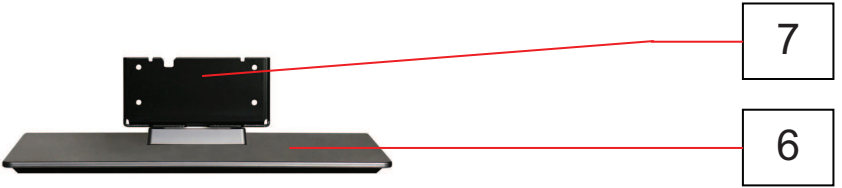
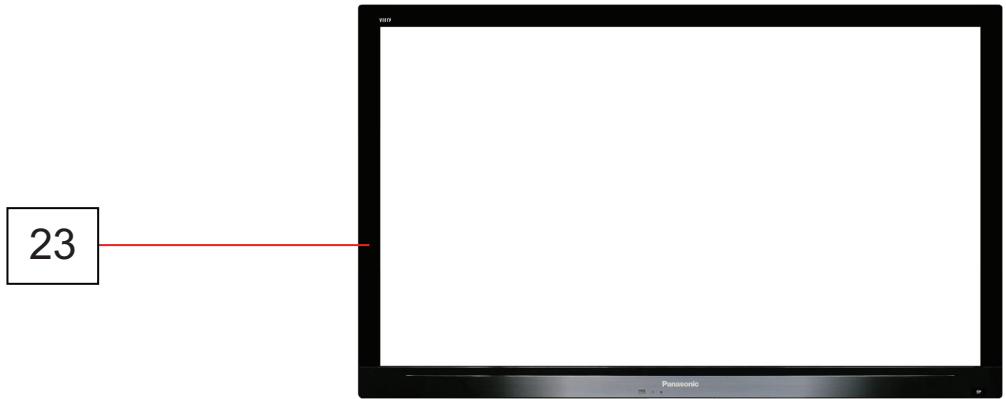


Parts Location


NOTE:
The numbers on the exploded view below refer to the exploded view section of the Replacement Parts List.

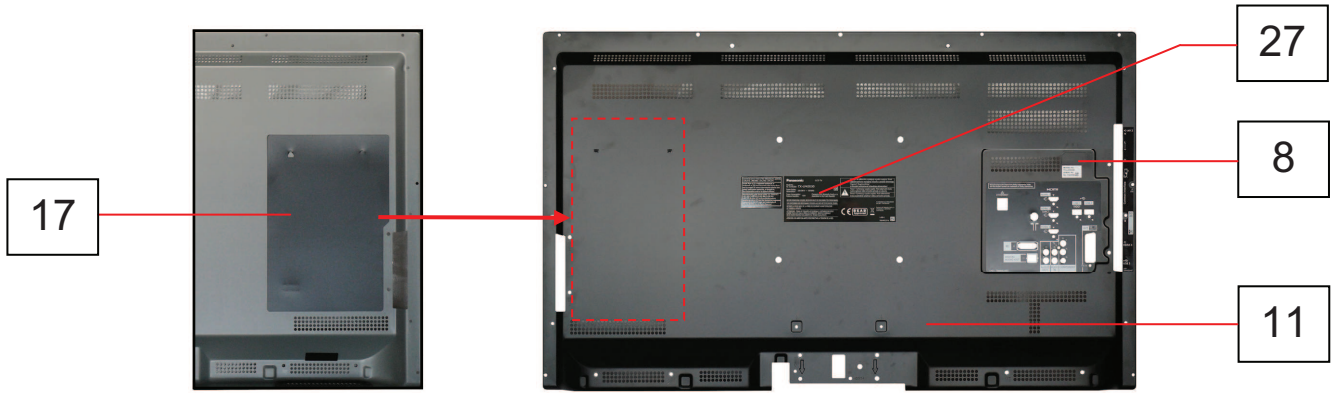

Parts Location


NOTE:

The numbers on the exploded view below refer to the exploded view section of the Replacement Parts List.

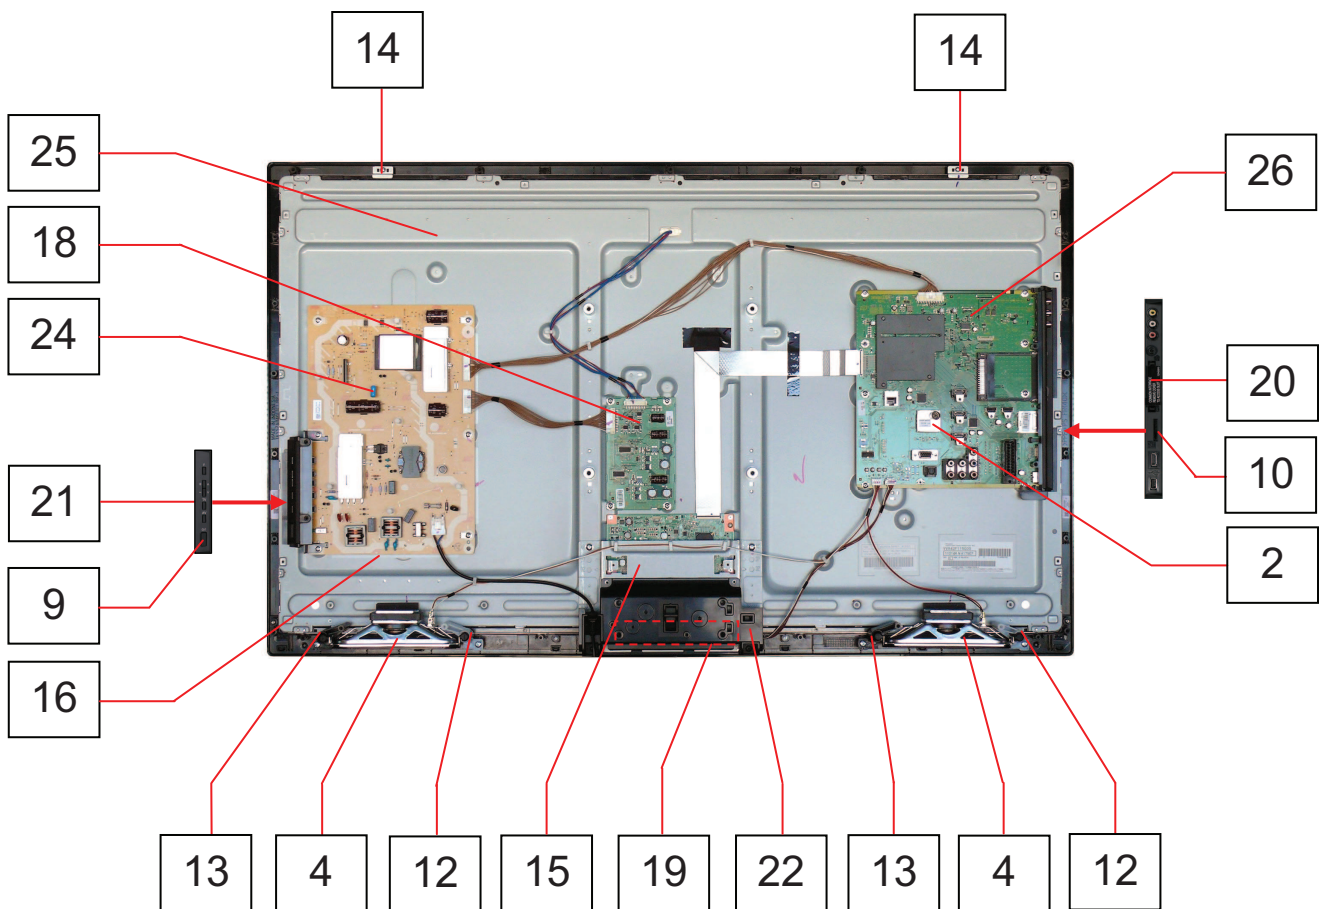

Replacement Parts List













Important Safety Notice


Components Identified by  mark have special characteristics important for safety.
 * When replacing any of these components, use only manufacturers specified parts.
 In case of ordering these spare parts, please always add the complete Model-Type number to your order.

RTL (Retention Time Limited)

Note: The marking (RTL) indicates that the Retention Time is Limited for this item. After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependent on the type of assembly, and in accordance with the laws governing part and product retention. After the end of this period, the assembly will no longer be available.

X The marking (X) indicates that board should be exchanged for service.

Cct Ref	Parts Number	Description	
COMMON PARTS			
EXPLODED VIEW			
1	BAT-C-0490	BATTERY COVER OF RC	
2	ENGS7302D5F	TUNER DVB-T/T2/C	
3	K2CQ2YY00083	AC CORD	
4	L0AA16C00003	SPEAKER UNIT	
5	N2QAYB000490	REMOTE CONTROL	
6	TBL5ZX0149	PACKED STAND ASSY	
7	TBL5ZX0166	STAND MOUNT ASSY	
8	TBM4GU113	COVER LABEL	
9	TBX0E50200	POWER BUTTON	
10	TKP0E47801	SIDE AV BRACKET	
11	TKU0E7801	BACK COVER	
12	TKX4GA04901	SP BRACKET L	
13	TKX4GA05001	SP BRACKET R	
14	TKZ4GA5001	LCD SUPPORT METAL	
15	TKZ4GX5094	METAL BRACKET BOTTOM	
16	TMK0EX047	BARRIER LCD ASSY	
17	TMK0EX048	BARRIER BC ASSY	
18	TNPA5376AA	LD P.C.B.	RTL 
19	TNPA5378AB	KA P.C.B.	RTL 
20	TQF4GX013	CI SLOT COVER SHEET	
21	TXAKP01PQUE	CONTROL PANEL ASSY	
22	TXFKX01PRUE	BOTTOM COVER ASSY	
23	TXFKY5Z0051	CABINET ASSY	
24	TZRNPO1PLUE	P P.C.B.	RTL 
25	VVX42F115G00	LCD PANEL	
MISCELLANEOUS COMPONENTS			
.	R6DB/2P	BATTERY	
.	TBM0E2493	REAR AV LABEL	
.	TBM0E2497	SIDE AV LABEL	
.	TBM0E3009	LOGO SHEET	
.	THE4GJ001J	SCREW	
.	THEJ036J	SCREW	
.	THEJ0389	SCREW	
.	TKKL5521	M6_CAP	
.	TKP4GA06901	LED PANEL	
.	TPE0E4043	PROTECTION SHEET	
.	TPE0E9004	POLYBAG_PEDESTAL	
.	TPE0E9008	BAG	
.	TQF0EM3534	LABEL	
.	XSS5+15FNK	SCREW	
.	XTB4+15JFJ	SCREW	
.	XTB4+15JFJK	SCREW	

Cct Ref	Parts Number	Description	
.	XTV3+10GFJK	SCREW	
.	XTV3+8JFJ	SCREW	
.	XTW3+10TFJ	SCREW	
.	XYN3+C8FJ	SCREW	
.	XYN4+F30FJK	SCREW	
.	XYN5+F14FN	SCREW	
BOTCUS1	TPD0E2174	BOTTOM CUSHION CENTRE	
BOTCUS2	TPD0E2173	BOTTOM CUSHION	
CA01	TMME397	CLAMPER	
CA02	TMME397	CLAMPER	
CA03	TMME397	CLAMPER	
CA04	TMME397	CLAMPER	
CARTON	TPC0EA06801	CARTON	
CK304	TMME268	CLAMPER	
CK305	TMME268	CLAMPER	
CK307	TMME268	CLAMPER	
CK308	TMME268	CLAMPER	
CK309	TMME268	CLAMPER	
CP01	TMME398	SPACER	
CP02	TMME398	SPACER	
CP03	TMME398	SPACER	
CP04	TMME398	SPACER	
CP05	TMME398	SPACER	
CP06	TMME398	SPACER	
CP07	TMME398	SPACER	
FK201	TMK0EG030	SP. SPONGE	
FK202	TMK0EG030	SP. SPONGE	
FK310	TEWB412	GASKET	
TOPCUS1	TPD0E1168	TOP CUSHION CENTER	
TOPCUS2	TPD0E1167	TOP CUSHION	
I.C.s			
IC3001	C1AB00003384	AUDIO VIDEO SWITCH	
IC4700	C1AB00003469	HDMI SWITCH	
IC4900	C1AB00003457	AUDIO AMPLIFIER	
IC5000	AN34043A-VF	ANALOG ASIC	
IC5205	C0DBGYY00281	REGULATOR	
IC5300	C0DBAYY00462	REGULATOR	
IC5400	C0DBAYY00915	REGULATOR	
IC5420	C0DBAYY00915	REGULATOR	
IC5440	C0DBAYY01058	REGULATOR	
IC5602	C0DBZYY00368	SWITCH IC	
IC5603	C0DBZYY00368	SWITCH IC	
IC5605	C0DBZYY00450	USB POWER SWITCH	
IC7201	C0DBBY000033	POWER FACTOR CONTROL	
IC7301	C5HAZYY00014	PWM CONTROLLER	
IC7502	C0DBZMC00006	REGULATOR	
IC7601	C0DBAYY00922	DC/DC CONVERTER	
IC8000	MN2WS0200LE	PEAKS_LDA3	

Cct Ref	Parts Number	Description
IC8100	C0DBAYY00715	DC/DC CONVERTER
IC8200	C3ABUY000009	DDR SDRAM
IC8201	C3ABTY000026	DDR SDRAM
IC8403	C0JBAZ003032	BUFFER
IC8404	C0DBZY00382	POWER SWITCH IC
IC8601	C1CB00003491	PHYSICAL LAYER TRANSCE
IC8702	C0CBCAG00039	REGULATOR
IC8703	C0DBAFF00019	REGULATOR
IC8706	C0DBAGF00030	REGULATOR
IC8900	TVRS076AA	NAND FLASH MEMORY
IC9500	C0ZBZ0001816	LED DRIVER WITH DC/DC
IC9600	C0ZBZ0001816	LED DRIVER WITH DC/DC
PC7301	B3PAA0000363	PHOTO COUPLER
PC7302	B3PAA0000363	PHOTO COUPLER
PC7303	B3PAA0000363	PHOTO COUPLER
RM2800	PNJ4815M01TV	RC RECEIVER
SN2800	B3JB00000078	PHOTO IC DIODE
FUSES		
F7101-2	K3GE1ZA00010	FUSE HOLDER
F7101-1	K3GE1ZA00010	FUSE HOLDER
F7101	K5D502BNA005	FUSE
PA5300	K5H5022A0031	FUSE
PA5440	K5H5022A0031	FUSE
PA7503	K5H502YA0063	FUSE
PA7504	K5H502Y00004	FUSE
PA7601	K5H502Y00004	FUSE
DIODES		
D1101	B0JCCD000020	DIODE
D2016	EZJZ0V120JA	VARISTOR
D2800A	B3AGB0000065	LED DIODE
D3130	DA2J10100L	DIODE
D4702	DA2J10100L	DIODE
D4704	B0JCCD000020	DIODE
D4719	DA2J10100L	DIODE
D4721	B0JCCD000020	DIODE
D4735	DA2J10100L	DIODE
D4737	B0JCCD000020	DIODE
D4770	DA2J10100L	DIODE
D4772	B0JCCD000020	DIODE
D4785	B0JCCD000020	DIODE
D5172	DZ2J220M0L	DIODE
D5173	DA2J10100L	DIODE
D5178	DZ2J068M0L	ZENER DIODE
D5179	DA2J10100L	DIODE
D5180	DZ2J033M0L	ZENER DIODE
D5183	DZ2J068M0L	ZENER DIODE
D5184	DA2J10100L	DIODE
D5187	DZ2J047M0L	ZENER DIODE
D5188	DA2J10100L	DIODE
D5207	B0JCCD000020	DIODE
D5301	B0JCMD000066	DIODE
D5440	B0JCPE000038	DIODE
D7101	ERZV10V621C2	VARISTOR
D7102	B0FBAT000018	DIODE
D7202	B0ADCJ000100	DIODE
D7203	B0JAME000091	DIODE
D7204	B0JAME000091	DIODE
D7205	B0HASR000018	DIODE
D7207	DZ2J068M0L	ZENER DIODE
D7208	DA2J10100L	DIODE
D7209	B0BC02500002	DIODE
D7302	B0HAGQ000001	DIODE
D7303	B0HAGQ000001	DIODE
D7313	DZ2J068M0L	ZENER DIODE
D7325	B0BC02500002	DIODE
D7326	DA2J10100L	DIODE
D7327	DA2J10100L	DIODE

Cct Ref	Parts Number	Description
D7328	DA2J10100L	DIODE
D7329	B0ACDJ000014	DIODE
D7330	B0ACDJ000014	DIODE
D7331	B0BC4R000002	ZENER DIODE
D7332	B0HAGQ000001	DIODE
D7333	B0JAME000126	DIODE
D7334	B0ADCJ000100	DIODE
D7335	DZ2J180M0L	DIODE
D7336	B0BC03300012	DIODE
D7337	B0BC02500002	DIODE
D7338	B0BC02500002	DIODE
D7339	B0BC02500002	DIODE
D7341	B0BC02500002	DIODE
D7342	DA2J10100L	DIODE
D7343	DA2J10100L	DIODE
D7501	B0JBSL000047	DIODE
D7502	B0JBSL000047	DIODE
D7507	B0ADCJ000100	DIODE
D7508	DA2J10100L	DIODE
D7600	B0JCPE000038	DIODE
D8716	B0ECKM000048	DIODE
D9500	B0FCAM000001	DIODE
D9509	DZ2J120M0L	DIODE
D9510	B0BC6R600005	ZENER DIODE
D9520	DB2J41100L	DIODE
D9521	B0ECKM000048	DIODE
D9522	B0ECKM000048	DIODE
D9600	B0FCAM000001	DIODE
D9610	B0BC6R600005	ZENER DIODE
D9620	DB2J41100L	DIODE
D9621	B0ECKM000048	DIODE
D9622	B0ECKM000048	DIODE
TRANSISTORS		
Q0900	B1ADCF000194	TRANSISTOR
Q2800	B1ABCE000015	TRANSISTOR
Q2801	B1ABCE000015	TRANSISTOR
Q2802	B1ABCE000015	TRANSISTOR
Q3102	B1ABCF000231	TRANSISTOR
Q3103	B1ABCF000231	TRANSISTOR
Q3104	B1ABCF000231	TRANSISTOR
Q3105	B1ABCF000231	TRANSISTOR
Q4512	B1HFCFA00026	TRANSISTOR
Q4513	B1ADCE000022	TRANSISTOR
Q4700	B1ABCF000231	TRANSISTOR
Q4702	B1ABCF000231	TRANSISTOR
Q4704	B1ABCF000231	TRANSISTOR
Q4709	B1ABCF000231	TRANSISTOR
Q4971	B1AAFB000002	TRANSISTOR
Q4972	B1AAFB000002	TRANSISTOR
Q4974	DSC2001S0L	TRANSISTOR
Q7201	B1CERR000057	TRANSISTOR
Q7202	B1HFCFA00020	TRANSISTOR
Q7301	B1ADCE000022	TRANSISTOR
Q7308	B1ADGJ000008	TRANSISTOR
Q7309	B1ABGF000019	TRANSISTOR
Q7310	B1ABCF000231	TRANSISTOR
Q7311	B1ABCF000231	TRANSISTOR
Q7312	B1ADCE000022	TRANSISTOR
Q7313	B1CBGD000001	TRANSISTOR
Q7314	B1ABCF000231	TRANSISTOR
Q7501	B1ABCF000231	TRANSISTOR
Q7502	B1ABCF000231	TRANSISTOR
Q7503	B1CHRE000005	TRANSISTOR
Q7504	B1CHRE000005	TRANSISTOR
Q7506	B1CHRE000005	TRANSISTOR
Q7507	B1ABCF000231	TRANSISTOR
Q8100	B1CFRD000077	TRANSISTOR

Cct Ref	Parts Number	Description
Q8101	B1CFRD000077	TRANSISTOR
Q8102	B1MBEDA00027	TRANSISTOR
Q9500	B1MBCMA00001	TRANSISTOR
Q9501	B1MBCMA00001	TRANSISTOR
Q9502	DSC200100L	TRANSISTOR
Q9503	B1CFQM000002	TRANSISTOR
Q9504	B1MBCMA00001	TRANSISTOR
Q9505	B1MBCMA00001	TRANSISTOR
Q9506	B1CFQM000002	TRANSISTOR
Q9603	B1CFQM000002	TRANSISTOR
Q9606	B1CFQM000002	TRANSISTOR
TRANSFORMERS		
T7201	G4DYA0000289	TRANSFORMER
T7301	G4DYA0000284	TRANSFORMER
COILS		
L3002	G1C100MA0072	COIL
L3100	J0JCC0000287	COIL
L3101	J0JCC0000287	COIL
L3102	J0JCC0000287	COIL
L3103	J0JCC0000287	COIL
L3104	J0JCC0000287	COIL
L3108	J0JCC0000287	COIL
L3111	J0JCC0000287	COIL
L3112	J0JCC0000287	COIL
L3113	J0JCC0000287	COIL
L3116	J0JCC0000287	COIL
L3117	J0JCC0000287	COIL
L3118	J0JCC0000287	COIL
L3119	J0JCC0000287	COIL
L3120	J0JCC0000287	COIL
L4700	J0JYC0000068	CHIP INDUCTOR
L4701	J0JYC0000068	CHIP INDUCTOR
L4702	J0JYC0000068	CHIP INDUCTOR
L4703	J0JYC0000068	CHIP INDUCTOR
L4704	J0JYC0000068	CHIP INDUCTOR
L4705	J0JYC0000068	CHIP INDUCTOR
L4706	J0JYC0000068	CHIP INDUCTOR
L4707	J0JYC0000068	CHIP INDUCTOR
L4708	J0JYC0000068	CHIP INDUCTOR
L4715	J0JYC0000068	CHIP INDUCTOR
L4716	J0JYC0000068	CHIP INDUCTOR
L4717	J0JYC0000068	CHIP INDUCTOR
L4800	G1CR39J00009	COIL
L4801	G1CR39J00009	COIL
L4802	J0JGC0000020	COIL
L4803	J0JGC0000020	COIL
L4804	J0JGC0000020	COIL
L4805	J0JCC0000287	COIL
L4900	G1C150MA0426	COIL
L4901	G1C150MA0426	COIL
L4902	G1C150MA0426	COIL
L4903	G1C150MA0426	COIL
L4905	J0JHC0000042	CHIP INDUCTOR
L5300	G1C220MA0291	COIL
L5400	G1C4R5ZA0156	COIL
L5420	G1C4R5ZA0156	COIL
L5440	G1C3R3ZA0240	COIL
L5601	J0JHC0000045	COIL BLM18PG121SN1D
L5602	J0JHC0000045	COIL BLM18PG121SN1D
L5603	J0JHC0000045	COIL BLM18PG121SN1D
L7201	J0JKB0000034	FILTER
L7207	EXCELSA39V	COIL
L7208	EXCELSA39V	COIL
L7209	J0JKB0000034	FILTER
L7302	J0JKB0000034	FILTER
L7306	J0JKB0000034	FILTER
L7502	EXCELSA39V	COIL

△
△

Cct Ref	Parts Number	Description
L7503	EXCELSA39V	COIL
L7504	EXCELSA39V	COIL
L7505	EXCELSA39V	COIL
L7600	G0C270MA0049	COIL
L8001	J0JCC0000287	COIL
L8002	J0JHC0000045	COIL BLM18PG121SN1D
L8003	J0JHC0000045	COIL BLM18PG121SN1D
L8004	J0JHC0000045	COIL BLM18PG121SN1D
L8005	J0JKB0000021	COIL
L8006	J0JCC0000287	COIL
L8007	J0JCC0000287	COIL
L8100	G1C4R7MA0416	COIL
L8102	G1C3R3MA0460	COIL
L8250	J0JHC0000045	COIL BLM18PG121SN1D
L8600	J0JHC0000045	COIL BLM18PG121SN1D
L8603	J0JBC0000115	FILTER
L8604	J0JBC0000115	FILTER
L8751	J0JHC0000045	COIL BLM18PG121SN1D
L8752	J0JHC0000045	COIL BLM18PG121SN1D
L9500	G1C470MA0490	COIL
L9501	G1C470MA0490	COIL
L9503	J0JHC0000075	COIL BLM21PG600SN1D
L9600	G1C470MA0490	COIL
L9601	G1C470MA0490	COIL
L9603	J0JHC0000075	COIL BLM21PG600SN1D
R8641	J0JBC0000115	FILTER
FILTERS		
FL4000	EXC28CE201U	FILTER
FL4001	EXC28CE201U	FILTER
FL4002	EXC28CE201U	FILTER
FL4003	EXC28CE201U	FILTER
FL4004	EXC28CE201U	FILTER
FL4005	EXC28CE201U	FILTER
FL5600	EXC24CE900U	FILTER
FL5601	EXC24CE900U	FILTER
FL5602	EXC24CE900U	FILTER
LF7101	G0B650H00002	LINE FILTER
LF7102	G0B103H00013	LINE FILTER
LF7103	G0B103H00013	LINE FILTER
CRYSTALS		
X8300	H0J245500110	CRYSTAL
X8600	H0J250500109	CRYSTAL
RESISTORS		
CF7101	D4CAY8R20001	THERMIST - - 8R2 Ω △
CF7102	D4CAY8R20001	THERMIST - - 8R2 Ω △
JS0036	D0GAR00J0005	SMD .063W 5% 0 Ω
JS0061	D0GAR00J0005	SMD .063W 5% 0 Ω
JS7402	D0GDR00J0004	SMD .125W 5% 0 Ω
JS7404	D0GDR00J0004	SMD .125W 5% 0 Ω
JS7502	D0GDR00J0004	SMD .125W 5% 0 Ω
R900	D0GA220JA023	SMD .063W 5% 22 Ω
R901	D0GA220JA023	SMD .063W 5% 22 Ω
R904	D0GA473JA015	SMD .063W 5% 47K Ω
R905	D0GA272JA023	SMD .063W 5% 2K7 Ω
R906	D0GA272JA023	SMD .063W 5% 2K7 Ω
R907	D0GA272JA023	SMD .063W 5% 2K7 Ω
R908	D0GA272JA023	SMD .063W 5% 2K7 Ω
R909	D0GA272JA023	SMD .063W 5% 2K7 Ω
R910	D0GA272JA023	SMD .063W 5% 2K7 Ω
R911	D0GA272JA023	SMD .063W 5% 2K7 Ω
R912	D0GA272JA023	SMD .063W 5% 2K7 Ω
R913	EXB28V332JX	SMD OTHER 5% 3K3 Ω
R916	D0GA220JA023	SMD .063W 5% 22 Ω
R917	D0GA220JA023	SMD .063W 5% 22 Ω
R918	D0GA220JA023	SMD .063W 5% 22 Ω
R919	D0GA220JA023	SMD .063W 5% 22 Ω
R920	D0GA220JA023	SMD .063W 5% 22 Ω

△
△
△

Cct Ref	Parts Number	Description			
R921	D0GA220JA023	SMD	.063W	5%	22 Ω
R932	D0GA220JA023	SMD	.063W	5%	22 Ω
R933	D0GA220JA023	SMD	.063W	5%	22 Ω
R934	D0GA220JA023	SMD	.063W	5%	22 Ω
R935	D0GA220JA023	SMD	.063W	5%	22 Ω
R0951	D0GA473JA015	SMD	.063W	5%	47K Ω
R0952	D0GA102JA023	SMD	.063W	5%	1K Ω
R1007	D0GAR00J0005	SMD	.063W	5%	0 Ω
R1008	D0GAR00J0005	SMD	.063W	5%	0 Ω
R1009	D0GAR00J0005	SMD	.063W	5%	0 Ω
R1010	D0GAR00J0005	SMD	.063W	5%	0 Ω
R1101	D0GA331JA023	SMD	.063W	5%	330 Ω
R1102	D1BB7151A055	SMD	0.1W	1%	7K15 Ω
R1105	D0GA102JA023	SMD	.063W	5%	1K Ω
R1106	D0GA182JA023	SMD	.063W	5%	1K8 Ω
R1108	D0GAR00J0005	SMD	.063W	5%	0 Ω
R1111	D0GA332JA023	SMD	.063W	5%	3K3 Ω
R1300	D0GA103JA015	SMD	.063W	5%	10K Ω
R1301	D0GA103JA015	SMD	.063W	5%	10K Ω
R1302	D0GA103JA015	SMD	.063W	5%	10K Ω
R2001	D0GAR00J0005	SMD	.063W	5%	0 Ω
R2002	D0GAR00J0005	SMD	.063W	5%	0 Ω
R2008	D0GA473JA015	SMD	.063W	5%	47K Ω
R2013	D0GA101JA015	SMD	.063W	5%	100 Ω
R2014	D0GA101JA015	SMD	.063W	5%	100 Ω
R2015	D0GAR00J0005	SMD	.063W	5%	0 Ω
R2016	D0GAR00J0005	SMD	.063W	5%	0 Ω
R2017	D0GAR00J0005	SMD	.063W	5%	0 Ω
R2018	D0GAR00J0005	SMD	.063W	5%	0 Ω
R2049	D0GA101JA015	SMD	.063W	5%	100 Ω
R2052	D0GAR00J0005	SMD	.063W	5%	0 Ω
R2800	D1BA9530A014	SMD	.063W	1%	953 Ω
R2801	D0GA473JA015	SMD	.063W	5%	47K Ω
R2802	D0GA223JA023	SMD	.063W	5%	22K Ω
R2803	D0GA473JA015	SMD	.063W	5%	47K Ω
R2804	D0GA103JA015	SMD	.063W	5%	10K Ω
R2805	D1BA2261A014	SMD	.063W	1%	2K26 Ω
R2806	D0GA470JA023	SMD	.063W	5%	47 Ω
R2807	D0GA562JA023	SMD	.063W	5%	5K6 Ω
R2808	D0GA184JA023	SMD	.063W	5%	180K Ω
R2809	D0GA103JA015	SMD	.063W	5%	10K Ω
R2810	D0GA104JA023	SMD	.063W	5%	100K Ω
R2811	D0GA103JA015	SMD	.063W	5%	10K Ω
R2826	D0GAR00J0005	SMD	.063W	5%	0 Ω
R3001	D0GA102JA023	SMD	.063W	5%	1K Ω
R3002	D0GA122JA023	SMD	.063W	5%	1K2 Ω
R3030	D0GA101JA015	SMD	.063W	5%	100 Ω
R3101	D0GA472JA023	SMD	.063W	5%	4K7 Ω
R3102	D0GA472JA023	SMD	.063W	5%	4K7 Ω
R3103	D1BD75R0A066	SMD	.125W	1%	75 Ω
R3104	D1BD75R0A066	SMD	.125W	1%	75 Ω
R3105	D1BD75R0A066	SMD	.125W	1%	75 Ω
R3106	D0GA333JA023	SMD	.063W	5%	33K Ω
R3107	D0GA333JA023	SMD	.063W	5%	33K Ω
R3109	D1BF75R0A011	SMD	0.25W	1%	75 Ω
R3117	D0GA221JA023	SMD	.063W	5%	220 Ω
R3121	EXB28V221JX	SMD	.031W	5%	220 Ω
R3123	EXB28V680JX	SMD	.031W	5%	68 Ω
R3127	D0GA680JA023	SMD	.063W	5%	68 Ω
R3129	D0GA104JA023	SMD	.063W	5%	100K Ω
R3137	D1BD75R0A066	SMD	.125W	1%	75 Ω
R3141	D1BF75R0A011	SMD	0.25W	1%	75 Ω
R3142	D1BF75R0A011	SMD	0.25W	1%	75 Ω
R3143	D1BF75R0A011	SMD	0.25W	1%	75 Ω
R3147	D1BF75R0A011	SMD	0.25W	1%	75 Ω
R3148	D0GAR00J0005	SMD	.063W	5%	0 Ω
R3150	D0GA221JA023	SMD	.063W	5%	220 Ω
R3157	EXB28V221JX	SMD	.031W	5%	220 Ω

Cct Ref	Parts Number	Description			
R3163	D0GA104JA023	SMD	.063W	5%	100K Ω
R3164	D0GA104JA023	SMD	.063W	5%	100K Ω
R3167	D0GA333JA023	SMD	.063W	5%	33K Ω
R3168	D0GA333JA023	SMD	.063W	5%	33K Ω
R3171	D0GA101JA015	SMD	.063W	5%	100 Ω
R3172	D0GA101JA015	SMD	.063W	5%	100 Ω
R3173	EXB28V221JX	SMD	.031W	5%	220 Ω
R3174	D0GA221JA023	SMD	.063W	5%	220 Ω
R3175	D0GA221JA023	SMD	.063W	5%	220 Ω
R3179	D0GA331JA023	SMD	.063W	5%	330 Ω
R3180	D0GA331JA023	SMD	.063W	5%	330 Ω
R3181	D1BD75R0A066	SMD	.125W	1%	75 Ω
R3182	D1BD75R0A066	SMD	.125W	1%	75 Ω
R3183	D1BD75R0A066	SMD	.125W	1%	75 Ω
R3184	D0GA104JA023	SMD	.063W	5%	100K Ω
R3185	D0GA104JA023	SMD	.063W	5%	100K Ω
R3186	D0GA333JA023	SMD	.063W	5%	33K Ω
R3187	D0GA333JA023	SMD	.063W	5%	33K Ω
R3190	D0GA101JA015	SMD	.063W	5%	100 Ω
R3191	D0GA101JA015	SMD	.063W	5%	100 Ω
R3192	EXB28V820JX	SMD	OTHER	5%	82 Ω
R3194	D0GA331JA023	SMD	.063W	5%	330 Ω
R3195	D0GA331JA023	SMD	.063W	5%	330 Ω
R3198	D0GA680JA023	SMD	.063W	5%	68 Ω
R3202	D1BF75R0A011	SMD	0.25W	1%	75 Ω
R3204	D1BA2152A014	SMD	.063W	1%	21K5 Ω
R3206	D1BA1302A014	SMD	.063W	1%	13K Ω
R3208	D0GA273JA023	SMD	.063W	5%	27K Ω
R3212	D0GA680JA023	SMD	.063W	5%	68 Ω
R3361	D0GA473JA015	SMD	.063W	5%	47K Ω
R3900	D0GA103JA015	SMD	.063W	5%	10K Ω
R3901	D0GA103JA015	SMD	.063W	5%	10K Ω
R4081	D0GA101JA015	SMD	.063W	5%	100 Ω
R4082	D0GA101JA015	SMD	.063W	5%	100 Ω
R4107	D0GA473JA015	SMD	.063W	5%	47K Ω
R4548	D0GA220JA023	SMD	.063W	5%	22 Ω
R4549	D0GA151JA023	SMD	.063W	5%	150 Ω
R4550	D0GA151JA023	SMD	.063W	5%	150 Ω
R4551	D0GA151JA023	SMD	.063W	5%	150 Ω
R4552	D0GA560JA023	SMD	.063W	5%	56 Ω
R4553	D0GA103JA015	SMD	.063W	5%	10K Ω
R4554	D0GA102JA023	SMD	.063W	5%	1K Ω
R4556	D0GA103JA015	SMD	.063W	5%	10K Ω
R4557	D0GAR00J0005	SMD	.063W	5%	0 Ω
R4560	D0GA473JA015	SMD	.063W	5%	47K Ω
R4702	D0GA103JA015	SMD	.063W	5%	10K Ω
R4703	D0GA330JA023	SMD	.063W	5%	33 Ω
R4708	D0GA103JA015	SMD	.063W	5%	10K Ω
R4709	D0GA103JA015	SMD	.063W	5%	10K Ω
R4710	D0GA473JA015	SMD	.063W	5%	47K Ω
R4711	D0GA102JA023	SMD	.063W	5%	1K Ω
R4712	D0GA473JA015	SMD	.063W	5%	47K Ω
R4715	D0GA103JA015	SMD	.063W	5%	10K Ω
R4716	D0GA330JA023	SMD	.063W	5%	33 Ω
R4721	D0GA103JA015	SMD	.063W	5%	10K Ω
R4722	D0GA103JA015	SMD	.063W	5%	10K Ω
R4723	D0GA473JA015	SMD	.063W	5%	47K Ω
R4724	D0GA102JA023	SMD	.063W	5%	1K Ω
R4725	D0GA473JA015	SMD	.063W	5%	47K Ω
R4728	D0GA103JA015	SMD	.063W	5%	10K Ω
R4729	D0GA330JA023	SMD	.063W	5%	33 Ω
R4734	D0GA103JA015	SMD	.063W	5%	10K Ω
R4735	D0GA103JA015	SMD	.063W	5%	10K Ω
R4736	D0GA473JA015	SMD	.063W	5%	47K Ω
R4737	D0GA102JA023	SMD	.063W	5%	1K Ω
R4738	D0GA473JA015	SMD	.063W	5%	47K Ω
R4739	D0GA220JA023	SMD	.063W	5%	22 Ω
R4744	D0GA680JA023	SMD	.063W	5%	68 Ω

Cct Ref	Parts Number	Description			
R4745	D0GA680JA023	SMD	.063W	5%	68 Ω
R4746	D0GA680JA023	SMD	.063W	5%	68 Ω
R4747	D0GA680JA023	SMD	.063W	5%	68 Ω
R4748	D0GA680JA023	SMD	.063W	5%	68 Ω
R4749	D0GA680JA023	SMD	.063W	5%	68 Ω
R4750	D0GA680JA023	SMD	.063W	5%	68 Ω
R4751	D0GA680JA023	SMD	.063W	5%	68 Ω
R4763	D0GA473JA015	SMD	.063W	5%	47K Ω
R4764	D0GA473JA015	SMD	.063W	5%	47K Ω
R4765	D0GA473JA015	SMD	.063W	5%	47K Ω
R4766	D0GA473JA015	SMD	.063W	5%	47K Ω
R4767	D0GA392JA023	SMD	.063W	5%	3K9 Ω
R4770	D0GA473JA015	SMD	.063W	5%	47K Ω
R4771	D0GA152JA023	SMD	.063W	5%	1K5 Ω
R4772	D0GA152JA023	SMD	.063W	5%	1K5 Ω
R4774	D0GA473JA015	SMD	.063W	5%	47K Ω
R4775	D0GA473JA015	SMD	.063W	5%	47K Ω
R4776	D0GA680JA023	SMD	.063W	5%	68 Ω
R4777	D0GA680JA023	SMD	.063W	5%	68 Ω
R4780	D0GA121JA023	SMD	.063W	5%	120 Ω
R4788	D0GA103JA015	SMD	.063W	5%	10K Ω
R4789	D0GA330JA023	SMD	.063W	5%	33 Ω
R4794	D0GA103JA015	SMD	.063W	5%	10K Ω
R4795	D0GA103JA015	SMD	.063W	5%	10K Ω
R4796	D0GA473JA015	SMD	.063W	5%	47K Ω
R4797	D0GA102JA023	SMD	.063W	5%	1K Ω
R4798	D0GA473JA015	SMD	.063W	5%	47K Ω
R4799	D0GA273JA023	SMD	.063W	5%	27K Ω
R4800	D0GA103JA015	SMD	.063W	5%	10K Ω
R4803	D0GA103JA015	SMD	.063W	5%	10K Ω
R4910	D0GA100JA023	SMD	.063W	5%	10 Ω
R4911	D0GA100JA023	SMD	.063W	5%	10 Ω
R4912	D0GA100JA023	SMD	.063W	5%	10 Ω
R4913	D0GA103JA015	SMD	.063W	5%	10K Ω
R4914	EXB28V220JX	SMD	.031W	5%	22 Ω
R4915	D0GF5R6JA020	SMD	0.25	5%	5R6 Ω
R4916	D0GF5R6JA020	SMD	0.25	5%	5R6 Ω
R4917	D0GF5R6JA020	SMD	0.25	5%	5R6 Ω
R4918	D0GF5R6JA020	SMD	0.25	5%	5R6 Ω
R4921	D0GA103JA015	SMD	.063W	5%	10K Ω
R4970	D1BB1403A055	SMD	0.1W	1%	140K Ω
R4971	D1BB1403A055	SMD	0.1W	1%	140K Ω
R4972	D0GA103JA015	SMD	.063W	5%	10K Ω
R4973	D0GA103JA015	SMD	.063W	5%	10K Ω
R4974	D0GF122JA048	SMD	0.1W	5%	1K2 Ω
R4978	D0GA101JA015	SMD	.063W	5%	100 Ω
R4979	D0GA101JA015	SMD	.063W	5%	100 Ω
R4984	D0GA473JA015	SMD	.063W	5%	47K Ω
R4985	D0GA103JA015	SMD	.063W	5%	10K Ω
R4986	D0GAR00J0005	SMD	.063W	5%	0 Ω
R4987	D0GF122JA048	SMD	0.1W	5%	1K2 Ω
R5002	D0GA683JA023	SMD	.063W	5%	68K Ω
R5003	D0GA103JA015	SMD	.063W	5%	10K Ω
R5006	D0GA563JA023	SMD	.063W	5%	56K Ω
R5007	D0GA223JA023	SMD	.063W	5%	22K Ω
R5009	D1BA5602A014	SMD	.063W	1%	56K Ω
R5012	D1BA2202A014	SMD	.063W	1%	22K Ω
R5030	D0GA103JA015	SMD	.063W	5%	10K Ω
R5100	D0GA101JA015	SMD	.063W	5%	100 Ω
R5104	D0GA103JA015	SMD	.063W	5%	10K Ω
R5152	D0GA222JA023	SMD	.063W	5%	2K2 Ω
R5174	D0GA103JA015	SMD	.063W	5%	10K Ω
R5175	D0GA680JA023	SMD	.063W	5%	68 Ω
R5179	D0GA153JA023	SMD	.063W	5%	15K Ω
R5180	D0GA683JA023	SMD	.063W	5%	68K Ω
R5181	D0GA103JA015	SMD	.063W	5%	10K Ω
R5182	D0GA104JA023	SMD	.063W	5%	100K Ω
R5301	ERJ12YJ102U	SMD	0.5W	5%	1K Ω

Cct Ref	Parts Number	Description			
R5302	D0GA390JA023	SMD	.063W	5%	39 Ω
R5303	D1BB1402A055	SMD	0.1W	1%	14K Ω
R5304	D1BB1001A055	SMD	0.1W	1%	1K Ω
R5305	D0GA103JA015	SMD	.063W	5%	10K Ω
R5307	D1BB2202A055	SMD	0.1W	1%	22K Ω
R5400	D0GA390JA023	SMD	.063W	5%	39 Ω
R5401	D1BB4301A055	SMD	0.1W	1%	4K3 Ω
R5402	D1BB6041A055	SMD	0.1W	1%	6K04 Ω
R5403	D1BB2402A055	SMD	0.1W	1%	24K Ω
R5420	D0GA390JA023	SMD	.063W	5%	39 Ω
R5421	D1BB5601A055	SMD	0.1W	1%	5K6 Ω
R5422	D1BB3001A055	SMD	0.1W	1%	3K Ω
R5423	D1BB2002A055	SMD	0.1W	1%	20K Ω
R5441	D0GB332JA065	SMD	0.1W	5%	3K3 Ω
R5442	D1BB7870A055	SMD	0.1W	1%	787 Ω
R5443	D1BB4021A055	SMD	0.1W	1%	4K02 Ω
R5444	D0GD4R7JA059	SMD	0.25W	5%	4R7 Ω
R5448	D0GAR00J0005	SMD	.063W	5%	0 Ω
R5449	D0GA103JA015	SMD	.063W	5%	10K Ω
R5606	D0GA103JA015	SMD	.063W	5%	10K Ω
R5607	D0GA103JA015	SMD	.063W	5%	10K Ω
R5608	D0GA103JA015	SMD	.063W	5%	10K Ω
R5609	D0GA103JA015	SMD	.063W	5%	10K Ω
R5612	D0GA103JA015	SMD	.063W	5%	10K Ω
R5613	D0GA103JA015	SMD	.063W	5%	10K Ω
R5910	D0GA472JA023	SMD	.063W	5%	4K7 Ω
R6943	D0GAR00J0005	SMD	.063W	5%	0 Ω
R6955	D0GBR00J0004	SMD	0.1W	5%	0 Ω
R6957	D0GBR00J0004	SMD	0.1W	5%	0 Ω
R7104	ERC12ZGK105V	CARBON	0.5W	10%	1M Ω [△]
R7105	D0B1106JA033	METAL	1W	5%	10M Ω [△]
R7201	ERX1SJR22V	METEL	1W	5%	R22 Ω
R7202	ERX1SJR22V	METEL	1W	5%	R22 Ω
R7203	D0GD683JA052	SMD	.125W	5%	68K Ω
R7205	ERDS1TJ391T	CARBON	0.5W	5%	390 Ω
R7206	D0GD393JA052	SMD	.125W	5%	39K Ω
R7207	D0GD470JA052	SMD	.125W	5%	47 Ω
R7208	ERDS1TJ220	CARBON	0.5W	5%	22 Ω
R7209	D0GD104JA052	SMD	.125W	5%	100K Ω
R7210	ERX1SJR22V	METEL	1W	5%	R22 Ω
R7215	D1BD1202A066	SMD	.125W	1%	12K Ω
R7216	D1BD3302A066	SMD	.125W	1%	33K Ω
R7219	D1BD7503A066	SMD	.125W	1%	750K Ω
R7221	D0GD683JA052	SMD	.125W	5%	68K Ω
R7231	D0GD104JA052	SMD	.125W	5%	100K Ω
R7232	D0GD472JA052	SMD	.125W	5%	4K7 Ω
R7233	D0GD103JA052	SMD	.125W	5%	10K Ω
R7234	D0GD103JA052	SMD	.125W	5%	10K Ω
R7235	D1BD4701A066	SMD	.125W	1%	4K7 Ω
R7240	ERJ8ENF1504V	SMD	0.25W	1%	1M5 Ω
R7241	ERJ8ENF1504V	SMD	0.25W	1%	1M5 Ω
R7242	ERJ8ENF1504V	SMD	0.25W	1%	1M5 Ω
R7243	D1BD6803A066	SMD	.125W	1%	680K Ω
R7244	D1BD5102A066	SMD	.125W	1%	51K Ω
R7301	D0GD223JA052	SMD	.125W	5%	22K Ω
R7302	D0GD103JA052	SMD	.125W	5%	10K Ω
R7303	D0GD470JA052	SMD	.125W	5%	47 Ω
R7305	D1BD1803A066	SMD	.125W	1%	180K Ω
R7313	D1BD1803A066	SMD	.125W	1%	180K Ω
R7314	D1BD1203A066	SMD	.125W	1%	120K Ω
R7330	D0GDR00J0004	SMD	.125W	5%	0 Ω
R7331	D0GD301JA052	SMD	.125W	5%	300 Ω
R7332	ERJ12YJ474U	SMD	0.5W	5%	470K Ω
R7333	ERJ12YJ474U	SMD	0.5W	5%	470K Ω
R7353	D0GD301JA052	SMD	.125W	5%	300 Ω
R7354	D0GD113JA052	SMD	.125W	5%	11K Ω
R7355	D0GD100JA052	SMD	.125W	5%	10 Ω
R7356	D0GD301JA052	SMD	.125W	5%	300 Ω

Cct Ref	Parts Number	Description				
R7357	D0GD104JA052	SMD	.125W	5%	100K Ω	
R7358	ERDS1TJ222T	CARBON	0.5W	5%	2K2 Ω	
R7359	D0GD104JA052	SMD	.125W	5%	100K Ω	
R7360	ERX1SJ1R0V	METAL	1W	5%	1 Ω	
R7361	D0GD105JA052	SMD	.125W	5%	1M Ω	
R7362	D0GD821JA052	SMD	.125W	5%	820 Ω	
R7364	D0GD103JA052	SMD	.125W	5%	10K Ω	
R7365	D0GD103JA052	SMD	.125W	5%	10K Ω	
R7367	D0GD152JA052	SMD	.125W	5%	1K5 Ω	
R7376	D0GD223JA052	SMD	.125W	5%	22K Ω	
R7377	D0GD103JA052	SMD	.125W	5%	10K Ω	
R7380	ERX1SJR22V	METEL	1W	5%	R22 Ω	
R7381	ERX1SJR22V	METEL	1W	5%	R22 Ω	
R7387	D0GD152JA052	SMD	.125W	5%	1K5 Ω	
R7388	D0GD162JA052	SMD	.125W	5%	1K6 Ω	
R7389	D0GD162JA052	SMD	.125W	5%	1K6 Ω	
R7392	D0GD392JA052	SMD	.125W	5%	3K9 Ω	
R7393	D0GD101JA052	SMD	.125W	5%	100 Ω	
R7394	D0GD101JA052	SMD	.125W	5%	100 Ω	
R7395	D0GD103JA052	SMD	.125W	5%	10K Ω	
R7396	ERJ8ENF2204V	SMD	0.25W	1%	2M2 Ω	
R7397	ERJ8ENF2204V	SMD	0.25W	1%	2M2 Ω	
R7398	ERJ8ENF2204V	SMD	0.25W	1%	2M2 Ω	
R7399	ERJ8ENF2204V	SMD	0.25W	1%	2M2 Ω	
R7402	D1BD6651A066	SMD	.125W	1%	6K65 Ω	
R7406	D1BD1741A066	SMD	.125W	1%	1K74 Ω	
R7407	D0GDR00J0004	SMD	.125W	5%	0 Ω	
R7408	D1BD7151A066	SMD	.125W	1%	7K15 Ω	
R7409	D1BD1432A066	SMD	.125W	1%	14K3 Ω	
R7501	D0GD102JA052	SMD	.125W	5%	1K Ω	
R7502	D0GD102JA052	SMD	.125W	5%	1K Ω	
R7503	D0GD472JA052	SMD	.125W	5%	4K7 Ω	
R7504	D0GD103JA052	SMD	.125W	5%	10K Ω	
R7505	D0GD222JA052	SMD	.125W	5%	2K2 Ω	
R7513	D1BD3321A066	SMD	.125W	1%	3K32 Ω	
R7514	D0GD103JA052	SMD	.125W	5%	10K Ω	
R7515	D1BD1822A066	SMD	.125W	1%	18K2 Ω	
R7516	D0GD153JA052	SMD	.125W	5%	15K Ω	
R7517	D0GD153JA052	SMD	.125W	5%	15K Ω	
R7518	D0GD153JA052	SMD	.125W	5%	15K Ω	
R7519	D0GD153JA052	SMD	.125W	5%	15K Ω	
R7524	D0GD473JA052	SMD	.125W	5%	47K Ω	
R7527	D0GD153JA052	SMD	.125W	5%	15K Ω	
R7528	D0GD153JA052	SMD	.125W	5%	15K Ω	
R7529	D0GD472JA052	SMD	.125W	5%	4K7 Ω	
R7530	D0GD103JA052	SMD	.125W	5%	10K Ω	
R7531	D0GD103JA052	SMD	.125W	5%	10K Ω	
R7532	D0GD103JA052	SMD	.125W	5%	10K Ω	
R7535	D0GD473JA052	SMD	.125W	5%	47K Ω	
R7600	D0GD473JA052	SMD	.125W	5%	47K Ω	
R7601	D0GD105JA052	SMD	.125W	5%	1M Ω	
R7603	D1BD7872A066	SMD	.125W	1%	78K7 Ω	
R7604	D1BD2212A066	SMD	.125W	1%	22K1 Ω	
R7605	D0GD473JA052	SMD	.125W	5%	47K Ω	
R7606	D0GD683JA052	SMD	.125W	5%	68K Ω	
R8003	D0GBR00J0004	SMD	0.1W	5%	0 Ω	
R8004	D0GAR00J0005	SMD	.063W	5%	0 Ω	
R8005	D0GAR00J0005	SMD	.063W	5%	0 Ω	
R8006	D0GBR00J0004	SMD	0.1W	5%	0 Ω	
R8007	D0GAR00J0005	SMD	.063W	5%	0 Ω	
R8008	D0GA331JA023	SMD	.063W	5%	330 Ω	
R8009	D0GBR00J0004	SMD	0.1W	5%	0 Ω	
R8100	D1BB1271A087	SMD	0.1W	0.5	1K27 Ω	
R8102	D1BB2101A087	SMD	0.1W	0.5	2K1 Ω	
R8104	D1BB8200A087	SMD	0.1W	0.5	820 Ω	
R8106	D1BB2001A087	SMD	0.1W	0.5	2K Ω	
R8108	D0GB100JA065	SMD	0.1W	5%	10 Ω	
R8110	D0GB100JA065	SMD	0.1W	5%	10 Ω	

Cct Ref	Parts Number	Description				
R8114	D0GA303JA023	SMD	.063W	5%	30K Ω	
R8118	D0GA183JA023	SMD	.063W	5%	18K Ω	
R8200	D1BA2400A014	SMD	.063W	1%	240 Ω	
R8201	D1BA1001A014	SMD	.063W	1%	1K Ω	
R8202	D1BA1001A014	SMD	.063W	1%	1K Ω	
R8203	D1BA1001A014	SMD	.063W	1%	1K Ω	
R8204	D1BA1001A014	SMD	.063W	1%	1K Ω	
R8205	D1BA1001A014	SMD	.063W	1%	1K Ω	
R8206	D1BA1001A014	SMD	.063W	1%	1K Ω	
R8207	D1BA1001A014	SMD	.063W	1%	1K Ω	
R8208	D1BA1001A014	SMD	.063W	1%	1K Ω	
R8209	D0GA111JA023	SMD	.063W	5%	110 Ω	
R8210	D0GA111JA023	SMD	.063W	5%	110 Ω	
R8211	D1BA2400A014	SMD	.063W	1%	240 Ω	
R8212	D1BA2400A014	SMD	.063W	1%	240 Ω	
R8213	D0GA103JA015	SMD	.063W	5%	10K Ω	
R8214	D0GA103JA015	SMD	.063W	5%	10K Ω	
R8215	D1BA2400A014	SMD	.063W	1%	240 Ω	
R8216	D1BA1001A014	SMD	.063W	1%	1K Ω	
R8217	D1BA1001A014	SMD	.063W	1%	1K Ω	
R8218	EXB28V220JX	SMD	.031W	5%	22 Ω	
R8219	EXB28V220JX	SMD	.031W	5%	22 Ω	
R8220	EXB28V220JX	SMD	.031W	5%	22 Ω	
R8221	EXB28V220JX	SMD	.031W	5%	22 Ω	
R8222	EXB28V220JX	SMD	.031W	5%	22 Ω	
R8223	EXB28V220JX	SMD	.031W	5%	22 Ω	
R8224	EXB28V220JX	SMD	.031W	5%	22 Ω	
R8225	EXB28V220JX	SMD	.031W	5%	22 Ω	
R8226	EXB28V220JX	SMD	.031W	5%	22 Ω	
R8227	EXB28V220JX	SMD	.031W	5%	22 Ω	
R8228	EXB28V220JX	SMD	.031W	5%	22 Ω	
R8229	EXB28V220JX	SMD	.031W	5%	22 Ω	
R8230	D0GA220JA023	SMD	.063W	5%	22 Ω	
R8231	D0GA220JA023	SMD	.063W	5%	22 Ω	
R8232	D0GA220JA023	SMD	.063W	5%	22 Ω	
R8301	D0GA471JA023	SMD	.063W	5%	470 Ω	
R8302	D0GA360JA023	SMD	.063W	5%	36 Ω	
R8303	D0GA360JA023	SMD	.063W	5%	36 Ω	
R8304	D1BA6201A014	SMD	.063W	1%	6K2 Ω	
R8305	D1BA6201A014	SMD	.063W	1%	6K2 Ω	
R8307	D1BA6201A014	SMD	.063W	1%	6K2 Ω	
R8400	D0GA680JA023	SMD	.063W	5%	68 Ω	
R8401	D0GA680JA023	SMD	.063W	5%	68 Ω	
R8402	D0GA680JA023	SMD	.063W	5%	68 Ω	
R8403	D0GA680JA023	SMD	.063W	5%	68 Ω	
R8404	D0GA680JA023	SMD	.063W	5%	68 Ω	
R8405	D0GA680JA023	SMD	.063W	5%	68 Ω	
R8406	EXB2HV680JV	SMD	.063W	5%	68 Ω	
R8407	EXB2HV680JV	SMD	.063W	5%	68 Ω	
R8408	EXB2HV680JV	SMD	.063W	5%	68 Ω	
R8409	EXB28V680JX	SMD	.031W	5%	68 Ω	
R8410	EXB2HV680JV	SMD	.063W	5%	68 Ω	
R8411	EXB2HV680JV	SMD	.063W	5%	68 Ω	
R8418	D0GA103JA015	SMD	.063W	5%	10K Ω	
R8421	EXB2HV101JV	SMD	.063W	5%	100 Ω	
R8424	D0GA223JA023	SMD	.063W	5%	22K Ω	
R8425	D0GA223JA023	SMD	.063W	5%	22K Ω	
R8426	D0GA473JA015	SMD	.063W	5%	47K Ω	
R8427	D0GA473JA015	SMD	.063W	5%	47K Ω	
R8429	D0GA103JA015	SMD	.063W	5%	10K Ω	
R8433	D0GA103JA015	SMD	.063W	5%	10K Ω	
R8434	D0GA103JA015	SMD	.063W	5%	10K Ω	
R8435	D0GA223JA023	SMD	.063W	5%	22K Ω	
R8436	EXB2HV101JV	SMD	.063W	5%	100 Ω	
R8437	EXB2HV473JV	CHIP RES	.063W	5%	47K Ω	
R8438	EXB2HV103JV	SMD	.063W	5%	10K Ω	
R8440	D0GA103JA015	SMD	.063W	5%	10K Ω	
R8441	D0GA103JA015	SMD	.063W	5%	10K Ω	

Cct Ref	Parts Number	Description			
R8442	D0GA103JA015	SMD	.063W	5%	10K Ω
R8606	D0GA472JA023	SMD	.063W	5%	4K7 Ω
R8607	D0GA472JA023	SMD	.063W	5%	4K7 Ω
R8608	D0GA102JA023	SMD	.063W	5%	1K Ω
R8609	D1BA6491A014	SMD	.063W	1%	6K49 Ω
R8610	D0GA221JA023	SMD	.063W	5%	220 Ω
R8615	D0GA105JA023	SMD	.063W	5%	1M Ω
R8624	D0GA560JA023	SMD	.063W	5%	56 Ω
R8625	D0GA560JA023	SMD	.063W	5%	56 Ω
R8626	D0GA560JA023	SMD	.063W	5%	56 Ω
R8627	D0GA560JA023	SMD	.063W	5%	56 Ω
R8628	D0GA560JA023	SMD	.063W	5%	56 Ω
R8629	D0GA820JA023	SMD	.063W	5%	82 Ω
R8630	D1HG1038A002	SMD	.063W	5%	10K Ω
R8634	EXB28V560JX	SMD	.031W	5%	56 Ω
R8636	D0GA220JA023	SMD	.063W	5%	22 Ω
R8648	D0GA273JA023	SMD	.063W	5%	27K Ω
R8649	D0GA101JA015	SMD	.063W	5%	100 Ω
R8650	D0GA101JA015	SMD	.063W	5%	100 Ω
R8651	D0GA101JA015	SMD	.063W	5%	100 Ω
R8652	D0GA101JA015	SMD	.063W	5%	100 Ω
R8653	D0GA101JA015	SMD	.063W	5%	100 Ω
R8654	D0GA101JA015	SMD	.063W	5%	100 Ω
R8655	D0GA101JA015	SMD	.063W	5%	100 Ω
R8656	D0GAR00J0005	SMD	.063W	5%	0 Ω
R8657	D0GA101JA015	SMD	.063W	5%	100 Ω
R8658	D0GA101JA015	SMD	.063W	5%	100 Ω
R8659	D0GA101JA015	SMD	.063W	5%	100 Ω
R8660	D0GA101JA015	SMD	.063W	5%	100 Ω
R8661	D0GA101JA015	SMD	.063W	5%	100 Ω
R8662	D0GA101JA015	SMD	.063W	5%	100 Ω
R8663	D0GA101JA015	SMD	.063W	5%	100 Ω
R8664	D0GA101JA015	SMD	.063W	5%	100 Ω
R8665	D0GA101JA015	SMD	.063W	5%	100 Ω
R8666	D0GA101JA015	SMD	.063W	5%	100 Ω
R8667	D0GA101JA015	SMD	.063W	5%	100 Ω
R8670	D0GA560JA023	SMD	.063W	5%	56 Ω
R8671	D0GA560JA023	SMD	.063W	5%	56 Ω
R8672	D0GA560JA023	SMD	.063W	5%	56 Ω
R8755	D0GA104JA023	SMD	.063W	5%	100K Ω
R8811	D0GA103JA015	SMD	.063W	5%	10K Ω
R8816	D0GA103JA015	SMD	.063W	5%	10K Ω
R8818	D0GA103JA015	SMD	.063W	5%	10K Ω
R8819	D0GA103JA015	SMD	.063W	5%	10K Ω
R8821	D0GA473JA015	SMD	.063W	5%	47K Ω
R8824	D0GA103JA015	SMD	.063W	5%	10K Ω
R8830	D0GA103JA015	SMD	.063W	5%	10K Ω
R8831	D0GA103JA015	SMD	.063W	5%	10K Ω
R8835	D0GA103JA015	SMD	.063W	5%	10K Ω
R8849	D0GA103JA015	SMD	.063W	5%	10K Ω
R8852	D0GA243JA023	SMD	.063W	5%	24K Ω
R8856	D0GA103JA015	SMD	.063W	5%	10K Ω
R8909	D0GA222JA023	SMD	.063W	5%	2K2 Ω
R8910	D0GA103JA015	SMD	.063W	5%	10K Ω
R8914	D0GA472JA023	SMD	.063W	5%	4K7 Ω
R8964	D0GA472JA023	SMD	.063W	5%	4K7 Ω
R9500	D0GD473JA052	SMD	.125W	5%	47K Ω
R9501	D0GAR00J0005	SMD	.063W	5%	0 Ω
R9502	D1BD3R30A066	SMD	.125W	1%	3R3 Ω
R9503	D1BD3R30A066	SMD	.125W	1%	3R3 Ω
R9504	D1BD3R30A066	SMD	.125W	1%	3R3 Ω
R9505	D1BD3R30A066	SMD	.125W	1%	3R3 Ω
R9506	D1BD3R30A066	SMD	.125W	1%	3R3 Ω
R9507	D1BD3R30A066	SMD	.125W	1%	3R3 Ω
R9508	D1BD3R30A066	SMD	.125W	1%	3R3 Ω
R9509	D1BD3R30A066	SMD	.125W	1%	3R3 Ω
R9510	D0GA473JA015	SMD	.063W	5%	47K Ω
R9511	D1BA2202A014	SMD	.063W	1%	22K Ω

Cct Ref	Parts Number	Description			
R9512	D1BA1102A014	SMD	.063W	1%	11K Ω
R9513	D1BA1602A014	SMD	.063W	1%	16K Ω
R9514	D0GA331JA023	SMD	.063W	5%	330 Ω
R9515	D1BA4703A014	SMD	.063W	1%	470K Ω
R9516	D0GA473JA015	SMD	.063W	5%	47K Ω
R9517	D0GA203JA023	SMD	.063W	5%	20K Ω
R9520	D0GFR20JA020	SMD	0.25W	5%	R2 Ω
R9521	D0GFR20JA020	SMD	0.25W	5%	R2 Ω
R9523	D0GD304JA052	SMD	.125W	5%	300K Ω
R9524	D0GD244JA052	SMD	.125W	5%	240K Ω
R9525	D0GD203JA052	SMD	.125W	5%	20K Ω
R9526	D0GA134JA023	SMD	.063W	5%	130K Ω
R9527	D0GA203JA023	SMD	.063W	5%	20K Ω
R9528	D0GD220JA059	SMD	0.25W	5%	22 Ω
R9529	D0GA473JA015	SMD	.063W	5%	47K Ω
R9540	D0GD1R0JA052	SMD	.125W	5%	1 Ω
R9541	D0GD244JA052	SMD	.125W	5%	240K Ω
R9542	D0GAR00J0005	SMD	.063W	5%	0 Ω
R9543	D0GAR00J0005	SMD	.063W	5%	0 Ω
R9545	D0GAR00J0005	SMD	.063W	5%	0 Ω
R9547	D0GAR00J0005	SMD	.063W	5%	0 Ω
R9548	D0GA101JA015	SMD	.063W	5%	100 Ω
R9549	D0GA101JA015	SMD	.063W	5%	100 Ω
R9550	D0GD220JA059	SMD	0.25W	5%	22 Ω
R9551	D0GA473JA015	SMD	.063W	5%	47K Ω
R9556	D0GD2R2JA059	SMD	0.25	5%	2R2 Ω
R9557	D0GD2R2JA059	SMD	0.25	5%	2R2 Ω
R9611	D1BA2202A014	SMD	.063W	1%	22K Ω
R9612	D1BA1102A014	SMD	.063W	1%	11K Ω
R9613	D1BA1602A014	SMD	.063W	1%	16K Ω
R9614	D0GA331JA023	SMD	.063W	5%	330 Ω
R9615	D1BA4703A014	SMD	.063W	1%	470K Ω
R9616	D0GA473JA015	SMD	.063W	5%	47K Ω
R9617	D0GA203JA023	SMD	.063W	5%	20K Ω
R9620	D0GFR20JA020	SMD	0.25W	5%	R2 Ω
R9621	D0GFR20JA020	SMD	0.25W	5%	R2 Ω
R9623	D0GD304JA052	SMD	.125W	5%	300K Ω
R9624	D0GD244JA052	SMD	.125W	5%	240K Ω
R9625	D0GD203JA052	SMD	.125W	5%	20K Ω
R9626	D0GA134JA023	SMD	.063W	5%	130K Ω
R9627	D0GA203JA023	SMD	.063W	5%	20K Ω
R9628	D0GD220JA059	SMD	0.25W	5%	22 Ω
R9629	D0GA473JA015	SMD	.063W	5%	47K Ω
R9640	D0GD1R0JA052	SMD	.125W	5%	1 Ω
R9641	D0GD244JA052	SMD	.125W	5%	240K Ω
R9645	D0GAR00J0005	SMD	.063W	5%	0 Ω
R9647	D0GAR00J0005	SMD	.063W	5%	0 Ω
R9648	D0GA101JA015	SMD	.063W	5%	100 Ω
R9649	D0GA101JA015	SMD	.063W	5%	100 Ω
R9650	D0GD220JA059	SMD	0.25W	5%	22 Ω
R9651	D0GA473JA015	SMD	.063W	5%	47K Ω
R9656	D0GD2R2JA059	SMD	0.25	5%	2R2 Ω
R9657	D0GD2R2JA059	SMD	0.25	5%	2R2 Ω
R9705	D0GBR00J0004	SMD	0.1W	5%	0 Ω
R9901	D0GAR00J0005	SMD	.063W	5%	0 Ω
R9904	D0GAR00J0005	SMD	.063W	5%	0 Ω

CAPACITORS

C1080	F1G1C104A077	S.M.CAP	16V	100nF
C1081	F1J1A106A087	S.M.CAP	10V	10μF
C1082	F2G1C470A022	ELECT	16V	47μF
C1101	F1G1E1030005	S.M.CAP	25V	10nF
C1103	F1J1E4740001	S.M.CAP	25V	470nF
C2000	F1G1C104A077	S.M.CAP	16V	100nF
C2001	F1G1H1020008	S.M.CAP	50V	1nF
C2004	F1G1H1020008	S.M.CAP	50V	1nF
C2005	F1G1H1020008	S.M.CAP	50V	1nF
C2010	F1G1H101A565	S.M.CAP	50V	100pF

Cct Ref	Parts Number	Description		
C2014	F1K1E106A136	S.M.CAP	25V	10µF
C2023	F1G1C104A077	S.M.CAP	16V	100nF
C2801	F2G0J470A019	ELECT	6.3V	47µF
C2802	F1G1C1030008	S.M.CAP	16V	10nF
C2805	F1H1C104A041	CERAMIC	16V	100nF
C3001	F1G1A105A047	S.M.CAP	10V	1000nF
C3002	F1G1A105A047	S.M.CAP	10V	1000nF
C3003	F1G1C104A077	S.M.CAP	16V	100nF
C3004	F1G1C104A077	S.M.CAP	16V	100nF
C3005	F1G1A105A047	S.M.CAP	10V	1000nF
C3006	F1G1A105A047	S.M.CAP	10V	1000nF
C3008	F1J1A106A087	S.M.CAP	10V	10µF
C3011	F1J1A106A087	S.M.CAP	10V	10µF
C3016	F1G1C104A077	S.M.CAP	16V	100nF
C3018	F1G1C104A077	S.M.CAP	16V	100nF
C3019	F1G1C104A077	S.M.CAP	16V	100nF
C3020	F1J1A106A043	S.M.CAP	10V	10µF
C3084	F1J1A106A043	S.M.CAP	10V	10µF
C3085	F1J1A106A043	S.M.CAP	10V	10µF
C3086	F1J1A106A043	S.M.CAP	10V	10µF
C3105	F1G1H5610004	S.M.CAP	50V	560pF
C3106	F1G1H5610004	S.M.CAP	50V	560pF
C3108	F1G1H5610004	S.M.CAP	50V	560pF
C3109	F1G1H5610004	S.M.CAP	50V	560pF
C3111	F1H1A105A025	S.M.CAP	10V	1µF
C3112	F1H1A105A025	S.M.CAP	10V	1µF
C3113	F1J1A106A087	S.M.CAP	10V	10µF
C3114	F1G1C333A081	S.M.CAP	16V	33nF
C3115	F1G1C333A081	S.M.CAP	16V	33nF
C3116	F1J1A106A087	S.M.CAP	10V	10µF
C3117	F1J1A106A087	S.M.CAP	10V	10µF
C3118	F1J1A106A087	S.M.CAP	10V	10µF
C3120	F2H1A101A040	ELECT	10V	100µF
C3121	F2H1A101A040	ELECT	10V	100µF
C3124	F1J1A106A087	S.M.CAP	10V	10µF
C3130	F1J1A106A087	S.M.CAP	10V	10µF
C3131	F1J1A106A087	S.M.CAP	10V	10µF
C3132	F1J1A106A087	S.M.CAP	10V	10µF
C3135	F1G1H5610004	S.M.CAP	50V	560pF
C3136	F1G1H5610004	S.M.CAP	50V	560pF
C3139	F1G1H5610004	S.M.CAP	50V	560pF
C3140	F1G1H5610004	S.M.CAP	50V	560pF
C3145	F1J1A106A087	S.M.CAP	10V	10µF
C3146	F1J1A106A087	S.M.CAP	10V	10µF
C3147	F1J1A106A087	S.M.CAP	10V	10µF
C3148	F1J1A106A087	S.M.CAP	10V	10µF
C3151	F1H1A105A025	S.M.CAP	10V	1µF
C3152	F1H1A105A025	S.M.CAP	10V	1µF
C3153	F1G1H5610004	S.M.CAP	50V	560pF
C3154	F1G1H5610004	S.M.CAP	50V	560pF
C3155	F1G1H5610004	S.M.CAP	50V	560pF
C3156	F1G1H5610004	S.M.CAP	50V	560pF
C3157	F1H1A105A025	S.M.CAP	10V	1µF
C3158	F1H1A105A025	S.M.CAP	10V	1µF
C3159	F1J1A106A087	S.M.CAP	10V	10µF
C3160	F1J1A106A087	S.M.CAP	10V	10µF
C3161	F1J1A106A087	S.M.CAP	10V	10µF
C3162	F1J1A106A087	S.M.CAP	10V	10µF
C3172	F1G1A105A047	S.M.CAP	10V	1000nF
C3173	F1G1A105A047	S.M.CAP	10V	1000nF
C3174	F1G1A105A047	S.M.CAP	10V	1000nF
C3175	F1G1A105A047	S.M.CAP	10V	1000nF
C3178	F1J1A106A087	S.M.CAP	10V	10µF
C3179	F1J1A106A087	S.M.CAP	10V	10µF
C4003	F1H1H103A219	CERAMIC	50V	10nF
C4004	F1H1H103A219	CERAMIC	50V	10nF
C4546	F1H0J1050013	CERAMIC	6.3V	1µF
C4547	F1H0J1050013	CERAMIC	6.3V	1µF

Cct Ref	Parts Number	Description		
C4701	F1G1C104A077	S.M.CAP	16V	100nF
C4704	F1G1C104A077	S.M.CAP	16V	100nF
C4707	F1G1C104A077	S.M.CAP	16V	100nF
C4713	F1G1C104A077	S.M.CAP	16V	100nF
C4716	F1G1C104A077	S.M.CAP	16V	100nF
C4722	F1G1C104A077	S.M.CAP	16V	100nF
C4723	F1G1C104A077	S.M.CAP	16V	100nF
C4727	F1J1A106A087	S.M.CAP	10V	10µF
C4730	F1G1C104A077	S.M.CAP	16V	100nF
C4800	F1G1A105A047	S.M.CAP	10V	1000nF
C4801	F1G1A105A047	S.M.CAP	10V	1000nF
C4802	F1G1H220A565	S.M.CAP	50V	22pF
C4804	F1G1C104A077	S.M.CAP	16V	100nF
C4805	F1G1C104A077	S.M.CAP	16V	100nF
C4806	F1G1C104A077	S.M.CAP	16V	100nF
C4807	F1J1A106A043	S.M.CAP	10V	10µF
C4809	F1J1A106A043	S.M.CAP	10V	10µF
C4811	F1J1A106A043	S.M.CAP	10V	10µF
C4816	F1G1H220A565	S.M.CAP	50V	22pF
C4817	F1G1H220A565	S.M.CAP	50V	22pF
C4819	F1G1C104A077	S.M.CAP	16V	100nF
C4820	F1G1C104A077	S.M.CAP	16V	100nF
C4824	F1G1H220A565	S.M.CAP	50V	22pF
C4906	F1K1E106A136	S.M.CAP	25V	10µF
C4907	F1K1E106A136	S.M.CAP	25V	10µF
C4908	F1G1H1020008	S.M.CAP	50V	1nF
C4909	F1J1E105A231	S.M.CAP	25V	1µF
C4911	F1H1H104A970	S.M.CAP	50V	100nF
C4912	F1J1E105A231	S.M.CAP	25V	1µF
C4913	F1H1H104A970	S.M.CAP	50V	100nF
C4914	F1J1E105A231	S.M.CAP	25V	1µF
C4915	F1H1H104A970	S.M.CAP	50V	100nF
C4917	F1H1H104A970	S.M.CAP	50V	100nF
C4918	F1J1E105A231	S.M.CAP	25V	1µF
C4919	F1G1H1020008	S.M.CAP	50V	1nF
C4921	F1J1E4740001	S.M.CAP	25V	470nF
C4922	F1J1E4740001	S.M.CAP	25V	470nF
C4924	F1J1E4740001	S.M.CAP	25V	470nF
C4926	F1H1H222A219	S.M.CAP	50V	2.2nF
C4927	F1H1H222A219	S.M.CAP	50V	2.2nF
C4928	F1H1H222A219	S.M.CAP	50V	2.2nF
C4929	F1H1H222A219	S.M.CAP	50V	2.2nF
C4930	F1H1H222A219	S.M.CAP	50V	2.2nF
C4931	F1H1H222A219	S.M.CAP	50V	2.2nF
C4932	F1H1H222A219	S.M.CAP	50V	2.2nF
C4933	F1H1H222A219	S.M.CAP	50V	2.2nF
C4938	F1K1E106A136	S.M.CAP	25V	10µF
C4939	F1K1E106A136	S.M.CAP	25V	10µF
C4970	F1J1A106A087	S.M.CAP	10V	10µF
C4971	F1J1A106A087	S.M.CAP	10V	10µF
C4972	F2H1A101A040	ELECT	10V	100µF
C4973	F2H1A101A040	ELECT	10V	100µF
C5000	F1H1A105A025	S.M.CAP	10V	1µF
C5001	F2H0J1010009	ELECT	6.3V	100µF
C5002	F1H1A105A025	S.M.CAP	10V	1µF
C5004	F1H1A105A025	S.M.CAP	10V	1µF
C5006	F1J1E105A231	S.M.CAP	25V	1µF
C5012	F1H1A105A025	S.M.CAP	10V	1µF
C5020	F1G1C104A077	S.M.CAP	16V	100nF
C5021	F1G1A105A047	S.M.CAP	10V	1000nF
C5022	F1G1A105A047	S.M.CAP	10V	1000nF
C5026	F1H1C105A145	S.M.CAP	16V	1000nF
C5151	F1H1H103A219	CERAMIC	50V	10nF
C5171	F1G1C1030008	S.M.CAP	16V	10nF
C5240	F1H1A105A025	S.M.CAP	10V	1µF
C5243	F1H1A105A025	S.M.CAP	10V	1µF
C5301	F1K1E106A136	S.M.CAP	25V	10µF

Cct Ref	Parts Number	Description			
C5302	F1K1E106A136	S.M.CAP	25V	10µF	
C5303	F1K1E106A136	S.M.CAP	25V	10µF	
C5304	F1K1E106A136	S.M.CAP	25V	10µF	
C5305	F1K1E106A136	S.M.CAP	25V	10µF	
C5306	F1K1E106A136	S.M.CAP	25V	10µF	
C5307	F1H1H223A219	S.M.CAP	50V	22nF	
C5309	F1G1C333A116	S.M.CAP	16V	33nF	
C5310	F1G1H150A731	S.M.CAP	50V	15pF	
C5311	F1G1H222A571	S.M.CAP	50V	2.2nF	
C5400	F1K1E106A136	S.M.CAP	25V	10µF	
C5401	F1K1E106A136	S.M.CAP	25V	10µF	
C5402	F1G1E1030005	S.M.CAP	25V	10nF	
C5403	F1J1A106A087	S.M.CAP	10V	10µF	
C5404	F1J1A106A087	S.M.CAP	10V	10µF	
C5405	F1J1A106A087	S.M.CAP	10V	10µF	
C5406	F1J1A106A087	S.M.CAP	10V	10µF	
C5407	F1G1C223A081	S.M.CAP	16V	22nF	
C5408	F1G1E1030005	S.M.CAP	25V	10nF	
C5420	F1K1E106A136	S.M.CAP	25V	10µF	
C5421	F1K1E106A136	S.M.CAP	25V	10µF	
C5422	F1G1E1030005	S.M.CAP	25V	10nF	
C5423	F1J1A106A087	S.M.CAP	10V	10µF	
C5424	F1J1A106A087	S.M.CAP	10V	10µF	
C5425	F1J1A106A087	S.M.CAP	10V	10µF	
C5426	F1J1A106A087	S.M.CAP	10V	10µF	
C5427	F1G1C223A081	S.M.CAP	16V	22nF	
C5428	F1G1H272A571	S.M.CAP	50V	2.7nF	
C5440	F1K1E106A136	S.M.CAP	25V	10µF	
C5441	F1K1E106A136	S.M.CAP	25V	10µF	
C5443	F1J1A106A043	S.M.CAP	10V	10µF	
C5444	F1J1A106A043	S.M.CAP	10V	10µF	
C5445	F1J1A106A043	S.M.CAP	10V	10µF	
C5448	F1G1H103A509	S.M.CAP	50V	10nF	
C5451	F1G1H821A459	S.M.CAP	50V	820pF	
C5613	F2H0J2210005	ELECT	6.3V	220µF	
C5616	F1G1C104A077	S.M.CAP	16V	100nF	
C5618	F2H0J2210005	ELECT	6.3V	220µF	
C5621	F1G1C104A077	S.M.CAP	16V	100nF	
C5622	F1J1A106A087	S.M.CAP	10V	10µF	
C5623	F1G1C104A077	S.M.CAP	16V	100nF	
C5624	F1J1A106A087	S.M.CAP	10V	10µF	
C5625	F1G1C104A077	S.M.CAP	16V	100nF	
C5627	F2H0J2210005	ELECT	6.3V	220µF	
C5630	F1G1C104A077	S.M.CAP	16V	100nF	
C5631	F1J1A106A087	S.M.CAP	10V	10µF	
C5632	F1G1C104A077	S.M.CAP	16V	100nF	
C7102	F1A2E471A003	CERAMIC	250V	470pF	⚠
C7103	F1A2E471A003	CERAMIC	250V	470pF	⚠
C7104	F0CAF224A021	FILM	275	220nF	⚠
C7105	F0CAF224A021	FILM	275	220nF	⚠
C7107	F1A2E471A003	CERAMIC	250V	470pF	⚠
C7201	F1J1H222A721	S.M.CAP	50V	2.2nF	
C7203	F1J1H102A721	S.M.CAP	50V	1nF	
C7204	F1J1H104A717	S.M.CAP	50V	100nF	
C7205	F1J1E224A136	S.M.CAP	25V	220nF	
C7206	F1J1H1030007	S.M.CAP	50V	10nF	
C7207	F1J1H1030007	S.M.CAP	50V	10nF	
C7208	F1J1H474A757	S.M.CAP	50V	470nF	
C7209	F1J1H104A717	S.M.CAP	50V	100nF	
C7213	F1A3A221A060	CERAMIC	1KV	220pF	
C7214	F0CZZ1050007	PLASTIC	OTHER	1000nF	⚠
C7218	F1J1H1030007	S.M.CAP	50V	10nF	
C7219	F1J1H2240009	S.M.CAP	50V	220nF	
C7220	F1A3A221A060	CERAMIC	1KV	220pF	
C7221	F1J1H102A721	S.M.CAP	50V	1nF	
C7301	F2A2W8200012	ELECT	450V	82µF	
C7302	F1J1H102A721	S.M.CAP	50V	1nF	
C7314	F0C2K273A046	PLASTIC	800V	27nF	

Cct Ref	Parts Number	Description			
C7320	F1J1E223A226	S.M.CAP	25V	22nF	
C7321	F1J1H221A709	S.M.CAP	50V	220pF	
C7322	F2A1V4710023	ELECT	35V	470µF	
C7323	F1J1H104A717	S.M.CAP	50V	100nF	
C7324	F1J1H221A709	S.M.CAP	50V	220pF	
C7325	F1J1E105A231	S.M.CAP	25V	1µF	
C7326	F1J1H104A717	S.M.CAP	50V	100nF	
C7327	F1J1E223A226	S.M.CAP	25V	22nF	
C7328	F1J1E105A231	S.M.CAP	25V	1µF	
C7501	F2A1V1820031	ELECT	35V	1800µF	
C7502	F2A1E1820025	ELECT	25V	1800µF	
C7513	F1J1C475A217	S.M.CAP	16V	4700nF	
C7514	F1J1E105A231	S.M.CAP	25V	1µF	
C7516	F1J1H104A717	S.M.CAP	50V	100nF	
C7521	F1J1H104A717	S.M.CAP	50V	100nF	
C7523	F1J1E105A231	S.M.CAP	25V	1µF	
C7600	F1K1E106A136	S.M.CAP	25V	10µF	
C7601	F1K1E106A136	S.M.CAP	25V	10µF	
C7602	F1J1E224A136	S.M.CAP	25V	220nF	
C7604	F1J1E105A231	S.M.CAP	25V	1µF	
C7606	F1K1E106A136	S.M.CAP	25V	10µF	
C7607	F1J1E223A226	S.M.CAP	25V	22nF	
C7608	F1J1H222A721	S.M.CAP	50V	2.2nF	
C7610	F1J1H472A702	S.M.CAP	50V	4.7nF	
C7611	F1J1E105A231	S.M.CAP	25V	1µF	
C8001	F1G1C104A077	S.M.CAP	16V	100nF	
C8002	F1J1A106A087	S.M.CAP	10V	10µF	
C8003	F1G1C104A077	S.M.CAP	16V	100nF	
C8004	F1G1C104A077	S.M.CAP	16V	100nF	
C8005	F1G1C104A077	S.M.CAP	16V	100nF	
C8006	F1G1C104A077	S.M.CAP	16V	100nF	
C8007	F1G1C104A077	S.M.CAP	16V	100nF	
C8008	F1G1C104A077	S.M.CAP	16V	100nF	
C8009	F1J1A106A087	S.M.CAP	10V	10µF	
C8011	F1G1C104A077	S.M.CAP	16V	100nF	
C8013	F1G1C104A077	S.M.CAP	16V	100nF	
C8014	F1G1C104A077	S.M.CAP	16V	100nF	
C8015	F1G1C104A077	S.M.CAP	16V	100nF	
C8016	F1G1C104A077	S.M.CAP	16V	100nF	
C8017	F1J1A106A087	S.M.CAP	10V	10µF	
C8018	F1G1C104A077	S.M.CAP	16V	100nF	
C8019	F1G1C104A077	S.M.CAP	16V	100nF	
C8020	F1G1C104A077	S.M.CAP	16V	100nF	
C8021	F1G1C104A077	S.M.CAP	16V	100nF	
C8022	F1J1A106A087	S.M.CAP	10V	10µF	
C8023	F1J1A106A087	S.M.CAP	10V	10µF	
C8024	F1J0G2260001	S.M.CAP	4V	22µF	
C8026	F1G1C104A077	S.M.CAP	16V	100nF	
C8027	F1G1C104A077	S.M.CAP	16V	100nF	
C8028	F1G1C104A077	S.M.CAP	16V	100nF	
C8030	F1G1C104A077	S.M.CAP	16V	100nF	
C8032	F1G1C104A077	S.M.CAP	16V	100nF	
C8036	F1G1C104A077	S.M.CAP	16V	100nF	
C8039	F1G1C104A077	S.M.CAP	16V	100nF	
C8041	F1G1H1020008	S.M.CAP	50V	1nF	
C8042	F1G1C104A077	S.M.CAP	16V	100nF	
C8043	F1G1C104A077	S.M.CAP	16V	100nF	
C8044	F1G1C104A077	S.M.CAP	16V	100nF	
C8045	F1G1C104A077	S.M.CAP	16V	100nF	
C8047	F1G1C104A077	S.M.CAP	16V	100nF	
C8048	F1G1C104A077	S.M.CAP	16V	100nF	
C8049	F1J1A106A087	S.M.CAP	10V	10µF	
C8050	F1G1C104A077	S.M.CAP	16V	100nF	
C8051	F1J1A106A087	S.M.CAP	10V	10µF	
C8052	F1G1C104A077	S.M.CAP	16V	100nF	
C8053	F1G1C104A077	S.M.CAP	16V	100nF	
C8054	F1G1C104A077	S.M.CAP	16V	100nF	
C8055	F1G1C104A077	S.M.CAP	16V	100nF	

Cct Ref	Parts Number	Description		
C8056	F1G1C104A077	S.M.CAP	16V	100nF
C8057	F1G1C104A077	S.M.CAP	16V	100nF
C8100	F1G1E682A123	S.M.CAP	25V	6.8nF
C8102	F1J1A475A087	S.M.CAP	10V	4.7µF
C8104	F1H1C105A145	S.M.CAP	16V	1000nF
C8106	F1G1C223A081	S.M.CAP	16V	22nF
C8108	F1G1C104A077	S.M.CAP	16V	100nF
C8110	F1G1C104A077	S.M.CAP	16V	100nF
C8112	F1K1E106A136	S.M.CAP	25V	10µF
C8114	F1K1E106A136	S.M.CAP	25V	10µF
C8116	F1K1E106A136	S.M.CAP	25V	10µF
C8118	F1K1E106A136	S.M.CAP	25V	10µF
C8120	F1J0G2260001	S.M.CAP	4V	22µF
C8122	F1J0G2260001	S.M.CAP	4V	22µF
C8124	F1J0G2260001	S.M.CAP	4V	22µF
C8126	F1J0G2260001	S.M.CAP	4V	22µF
C8128	F1J0G2260001	S.M.CAP	4V	22µF
C8200	F1G1C104A077	S.M.CAP	16V	100nF
C8201	F1G1C104A077	S.M.CAP	16V	100nF
C8202	F1G1C104A077	S.M.CAP	16V	100nF
C8203	F1G1C104A077	S.M.CAP	16V	100nF
C8204	F1G1C104A077	S.M.CAP	16V	100nF
C8205	F1J1A106A087	S.M.CAP	10V	10µF
C8206	F1G1C104A077	S.M.CAP	16V	100nF
C8208	F1G1C104A077	S.M.CAP	16V	100nF
C8210	F1G1C104A077	S.M.CAP	16V	100nF
C8213	F1G1C104A077	S.M.CAP	16V	100nF
C8214	F1J1A106A087	S.M.CAP	10V	10µF
C8216	F1G1C104A077	S.M.CAP	16V	100nF
C8218	F1G1C104A077	S.M.CAP	16V	100nF
C8219	F1G1C104A077	S.M.CAP	16V	100nF
C8222	F1G1C104A077	S.M.CAP	16V	100nF
C8223	F1G1C104A077	S.M.CAP	16V	100nF
C8224	F1G1C104A077	S.M.CAP	16V	100nF
C8225	F1G1C104A077	S.M.CAP	16V	100nF
C8226	F1G1C104A077	S.M.CAP	16V	100nF
C8227	F1G1C104A077	S.M.CAP	16V	100nF
C8300	F1G1H9R0A732	S.M.CAP	50V	9pF
C8301	F1G1H8R0A732	S.M.CAP	50V	8pF
C8302	F1G1C104A077	S.M.CAP	16V	100nF
C8303	F1G1C104A077	S.M.CAP	16V	100nF
C8304	F1G1C104A077	S.M.CAP	16V	100nF
C8305	F1G1A105A047	S.M.CAP	10V	1000nF
C8306	F1G1A105A047	S.M.CAP	10V	1000nF
C8307	F1G1A105A047	S.M.CAP	10V	1000nF
C8308	F1G1A105A047	S.M.CAP	10V	1000nF
C8309	F1G1A105A047	S.M.CAP	10V	1000nF
C8310	F1G1A105A047	S.M.CAP	10V	1000nF
C8311	F1G1A105A047	S.M.CAP	10V	1000nF
C8401	F1G1C104A077	S.M.CAP	16V	100nF
C8402	F1K0J226A049	S.M.CAP	6.3V	22µF
C8403	F1K0J226A049	S.M.CAP	6.3V	22µF
C8406	F1G1C104A077	S.M.CAP	16V	100nF
C8407	F1G1C104A077	S.M.CAP	16V	100nF
C8411	F1G1C104A077	S.M.CAP	16V	100nF
C8602	F1G1H390A565	S.M.CAP	50V	39pF
C8603	F1J1A106A087	S.M.CAP	10V	10µF
C8604	F1G1C104A077	S.M.CAP	16V	100nF
C8605	F1G1C104A077	S.M.CAP	16V	100nF
C8607	F1G1H100A565	S.M.CAP	50V	10pF
C8608	F1G1H100A565	S.M.CAP	50V	10pF
C8609	F1G1C104A077	S.M.CAP	16V	100nF
C8611	F1G1C104A077	S.M.CAP	16V	100nF
C8615	F1J1A106A087	S.M.CAP	10V	10µF
C8616	F1J1A106A087	S.M.CAP	10V	10µF
C8617	F1G1C104A077	S.M.CAP	16V	100nF
C8619	F1G1C104A077	S.M.CAP	16V	100nF
C8620	F1G1C104A077	S.M.CAP	16V	100nF

Cct Ref	Parts Number	Description		
C8621	F1G1H100A565	S.M.CAP	50V	10pF
C8622	F1G1H100A565	S.M.CAP	50V	10pF
C8624	F1G1H100A565	S.M.CAP	50V	10pF
C8625	F1G1H100A565	S.M.CAP	50V	10pF
C8626	F1G1H100A565	S.M.CAP	50V	10pF
C8629	F1G1H390A565	S.M.CAP	50V	39pF
C8630	F1G1H220A565	S.M.CAP	50V	22pF
C8644	F1G1C104A077	S.M.CAP	16V	100nF
C8714	F1J1A475A087	S.M.CAP	10V	4.7µF
C8715	F1J1A106A087	S.M.CAP	10V	10µF
C8716	F1G1C104A077	S.M.CAP	16V	100nF
C8717	F1G1C104A077	S.M.CAP	16V	100nF
C8724	F1J1A475A087	S.M.CAP	10V	4.7µF
C8725	F1J1A475A087	S.M.CAP	10V	4.7µF
C8764	F1J1A475A087	S.M.CAP	10V	4.7µF
C8765	F1J1A475A087	S.M.CAP	10V	4.7µF
C8900	F1G1C104A077	S.M.CAP	16V	100nF
C8901	F1G1C104A077	S.M.CAP	16V	100nF
C8902	F1G1C104A077	S.M.CAP	16V	100nF
C8903	F1G1C104A077	S.M.CAP	16V	100nF
C9500	F2A1V4710079	ELECT	35V	470µF
C9501	F1K1H225A118	S.M.CAP	50V	2200nF
C9502	F1H1C474A143	S.M.CAP	16V	470nF
C9503	F1G1E1030005	S.M.CAP	25V	10nF
C9505	F1G1E1030005	S.M.CAP	25V	10nF
C9506	F1J1A475A087	S.M.CAP	10V	4.7µF
C9507	F1H1C474A143	S.M.CAP	16V	470nF
C9509	F1J1H182A721	S.M.CAP	50V	1.8nF
C9510	F1J1H182A721	S.M.CAP	50V	1.8nF
C9511	F1J1H182A721	S.M.CAP	50V	1.8nF
C9512	F1J1H182A721	S.M.CAP	50V	1.8nF
C9513	F1J1H182A721	S.M.CAP	50V	1.8nF
C9514	F1J1H182A721	S.M.CAP	50V	1.8nF
C9515	F1J1H182A721	S.M.CAP	50V	1.8nF
C9516	F1J1H182A721	S.M.CAP	50V	1.8nF
C9517	F2A2C5600001	ELECT	160V	56µF
C9518	F1G1E1030005	S.M.CAP	25V	10nF
C9524	F1L2E1040002	S.M.CAP	250V	100nF
C9601	F1K1H225A118	S.M.CAP	50V	2200nF
C9602	F1H1C474A143	S.M.CAP	16V	470nF
C9603	F1G1E1030005	S.M.CAP	25V	10nF
C9605	F1G1E1030005	S.M.CAP	25V	10nF
C9606	F1J1A475A087	S.M.CAP	10V	4.7µF
C9607	F1H1C474A143	S.M.CAP	16V	470nF
C9617	F2A2C5600001	ELECT	160V	56µF
C9624	F1L2E1040002	S.M.CAP	250V	100nF
TERMINALS AND LINKS				
A02	K1KY15BA0324	15P CONNECTOR		
A02-P2	TXJA02PKUE	A02-P2 WIRE		
A10	K1KY07AA0719	7P CONNECTOR		
A10-KA10	TXJA10PKUE	A10-KA10 WIRE		
A12	K1KA04BA0055	4P CONNECTOR		
A12-SP	TXJA12PKUE	A12-SPK WIRE		
A15	K1MY51B00004	51P CONNECTOR		
A15-CN5	TSXM420	LVDS FFC		
CN0100	K1KA14A00248	14P CONNECTOR		
D1006	K7AAAY000011	OPTICAL LINK		
JK1001	K1U710A00002	YUV,AUDIO I/O		
JK1003	K1FY121A0012	SCART TERMINAL		
JK1005	K1FY315A0009	PC TERMINAL		
JK1020	K1FY119D0015	HDMI TERMINAL		
JK1021	K1FY119D0015	HDMI TERMINAL		
JK1022	K1FY119D0015	HDMI TERMINAL		
JK1030	K1FY104A0020	USB TERMINAL		
JK1031	K1FY104A0020	USB TERMINAL		
JK1040	K2LC1YYA0016	ETHERNET TERMINAL		
JK1051	K1U306B00010	AV IN RCA		

Cct Ref	Parts Number	Description			
JK1052	K2HC1YYB0063	HP TERMINAL			
JK1061	K1FY119E0026	HDMI TERMINAL			
JK1070	K1NA68B00056	CI SLOT			
JK1080	K1NA12E00016	SD SLOT			
JK1090	K1FY104E0009	USB TERMINAL			
KA10	K1KA07B00135	7P CONNECTOR			
LD2	K1KY12BA0322	12P CONNECTOR			
LD4	K1KY14BA0302	14P CONNECTOR			
P1	K1KA02B00295	2P CONNECTOR			
P2	K1KY16BA0311	16P CONNECTOR			
P4	K1KA14BA0311	14P CONNECTOR			
P4-LD4	TXJP04PKUE	P4-LD4 WIRE			
ZA7001	K4AD01A00003	PLUG			
ZA7003	K4AD01A00003	PLUG			
SWITCHES					
SW7401	K0F122A00203	SWITCH			
SW7402	EVQ11G05R	SWITCH			
SW7403	EVQ11G05R	SWITCH			
SW7404	EVQ11G05R	SWITCH			
SW7406	EVQ11G05R	SWITCH			
SW7407	EVQ11G05R	SWITCH			
DIFFERENCES FOR MODEL TX--L42E30E					
EXPLODED VIEW					
26	A-L42E30E	A P.C.B.	X	RTL	⚠
27	TBM0E2498	MODEL LABEL			⚠
INSTRUCTION BOOKS					
.	TQB0E2097A	GERMAN			⚠
.	TQB0E2097B	DUTCH			⚠
.	TQB0E2097C	ITALIAN			⚠
.	TQB0E2097D	FRENCH			⚠
.	TQB0E2097E	SPANISH			⚠
.	TQB0E2097F	SWEDISH			⚠
.	TQB0E2097G	NORWEGIAN			⚠
.	TQB0E2097H	FINNISH			⚠
.	TQB0E2097I	LITHUANIAN			⚠
.	TQB0E2097J	PORTUGUESE			⚠
.	TQB0E2097K	DANISH			⚠
.	TQB0E2097M	BULGARIAN			⚠
.	TQB0E2097N	ROMANIAN			⚠
.	TQB0E2097O	LATVIAN			⚠
.	TQB0E2097P	POLISH			⚠
.	TQB0E2097Q	HUNGARIAN			⚠
.	TQB0E2097R	CZECH			⚠
.	TQB0E2097S	GREEK			⚠
.	TQB0E2097T	TURKISH			⚠
.	TQB0E2097U	ENGLISH			⚠
.	TQB0E2097V	CROATIAN			⚠
.	TQB0E2097W	SLOVAKIAN			⚠
.	TQB0E2097X	CD			⚠
.	TQB0E2097Z	ESTONIAN			⚠
I.C.s					
IC8901	STML42E30E	EEPROM STM			
IC8902	X24CL42E30E	EEPROM LDA3			
DIFFERENCES FOR MODEL TX--LF42E30					
EXPLODED VIEW					
26	A-LF42E30	A P.C.B.	X	RTL	⚠
27	TBM0E2516	MODEL LABEL			⚠
INSTRUCTION BOOKS					
.	TQB0E2098D	FRENCH			⚠
.	TQB0E2098U	ENGLISH			⚠
I.C.s					
IC8901	STMLF42E30	EEPROM STM			

Cct Ref	Parts Number	Description			
IC8902	X24CLF42E30	EEPROM LDA3			
DIFFERENCES FOR MODEL TX--LR42E30					
EXPLODED VIEW					
26	A-LR42E30	A P.C.B.	X	RTL	⚠
27	TBM0E2517	MODEL LABEL			⚠
INSTRUCTION BOOKS					
.	TQB0E21009	KAZAKHSTAN			⚠
.	TQB0E2100L	RUSSIAN			⚠
.	TQB0E2100Y	UKRAINIAN			⚠
I.C.s					
IC8901	STMLR42E30	EEPROM STM			
IC8902	X24CLR42E30	EEPROM LDA3			