

SECTION 5 EXPLODED VIEWS


NOTE :

- Non-serviceable items with no part number and no description are not stocked because they are not required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remarks column.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

5-1. CHASSIS

Note : Les composants identifiés par une trame et par une marque Δ sont d'une importance critique pour la sécurité. Ne les remplacer que par des pièces du numéro spécifié.


Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

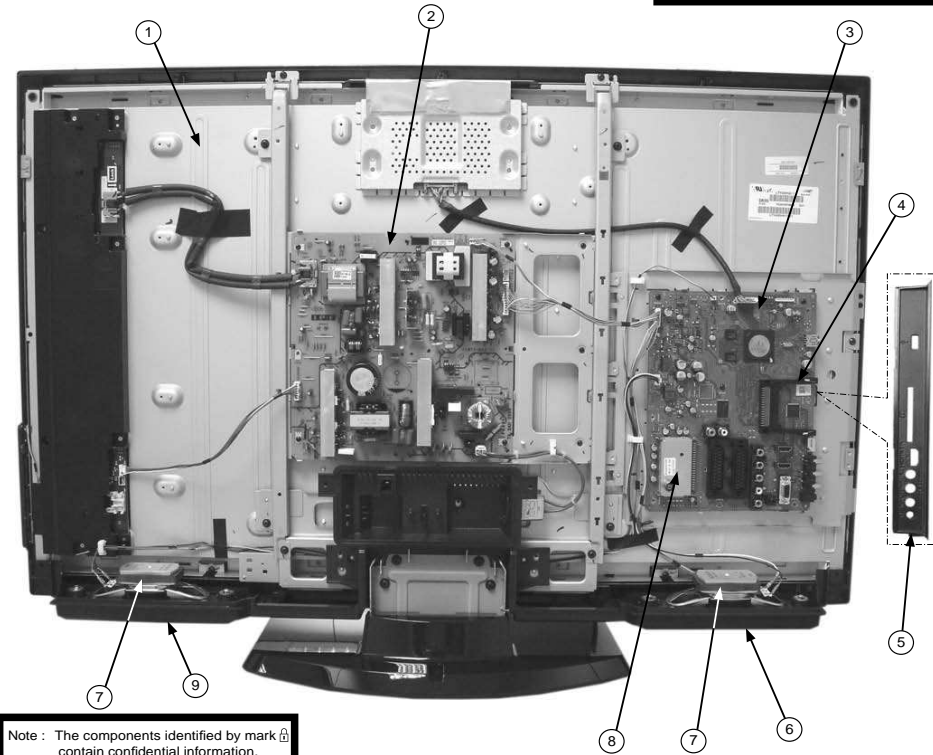

Note : The components identified by mark Δ contain confidential information. Strictly follow the instructions when ever the components are repaired and/or replaced.


REF.NO.	PART.NO	DESCRIPTION	REMARK	REF.NO.	PART.NO	DESCRIPTION	REMARK
1	Δ 1-802-931-21	LCD PANEL (32 INCH FHD TFT)	32 inches	5	4-136-501-21	BRACKET, SIDE JACK	
	Δ 1-802-884-11	LCD PANEL (37 INCH FHD TFT)	37 inches	6	X-2349-490-3	BAFFLE, SP (32/37R) ASSY	32/37 inches
	Δ 1-802-800-11	LCD PANEL (40 INCH FHD TFT)	40 inches	7	X-2349-495-3	BAFFLE, SP (40R) ASSY	40 inches
2	1-474-153-13	POWER UNIT (G2)	32 inches	7	1-826-873-11	LOUDSPEAKER (3.4X17.5CM)	32/37 inches
	1-474-162-13	POWER UNIT (G4)	37 inches	8	1-858-196-11	LOUDSPEAKER (4.5X20CM)	40 inches
	A-1708-948-A	IPLF BOARD, COMPLETE	40 inches	8	1-693-773-21	TUNER UNIT (TUVIF VP-61HRV)	
3	Δ A-1740-833-A	B BOARD, COMPLETE	32/40 inches	9	X-2349-489-3	BAFFLE, SP (32/37L) ASSY	32/37 inches
	Δ A-1740-832-A	B BOARD, COMPLETE	37 inches		X-2349-494-3	BAFFLE, SP (40L) ASSY	40 inches
4	4-136-306-01	DUMMY CARD PCMCIA					

5-1. CHASSIS Cont.

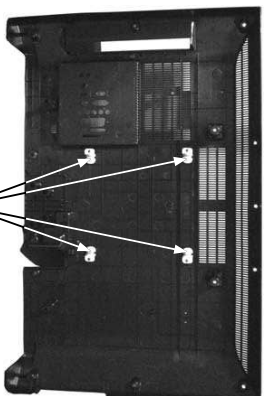

Note : Les composants identifiés par un triangle et par une marque Δ sont d'une importance critique pour la sécurité. Ne les remplacez que par des pièces du numéro spécifique.

Note : The components identified by shape and marked Δ are critical for safety. Replace only with the part number specified in the parts list.

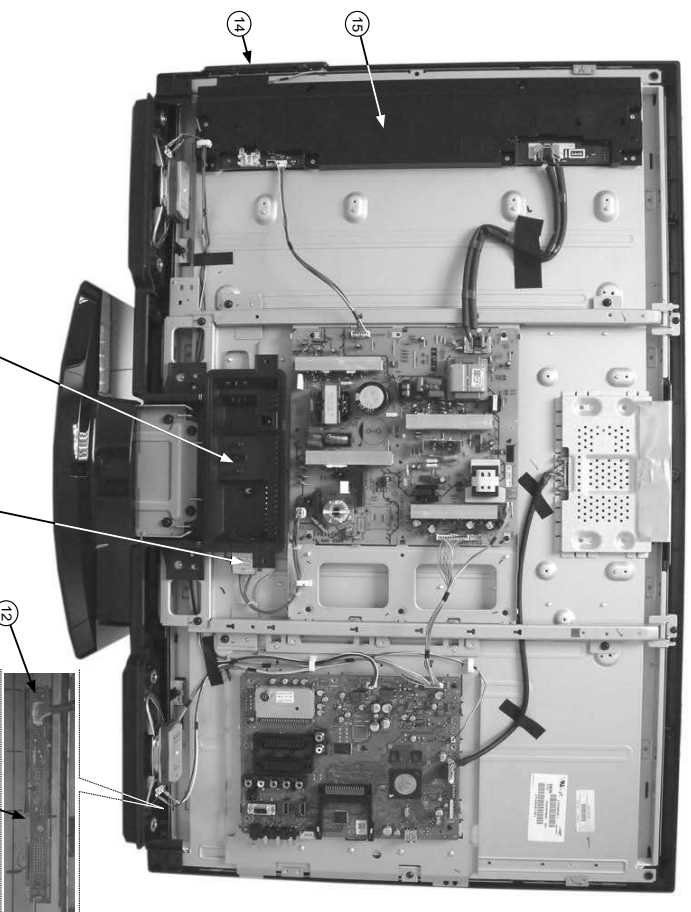


REF.NO.	PART NO	DESCRIPTION	REMARK	REF.NO.	PART NO	DESCRIPTION	REMARK
10	Δ 1-822-617-11	AC INLET FILTER	40 Inches	14	1-487-328-11	SWITCH UNIT	
11	4-136-754-01	COVER, UNDER	32 Inches	15	1-857-395-11	ETC-INVERTER MT BOARD	32 Inches
	4-123-683-13	COVER, UNDER	37 Inches		1-857-395-11	ETC-INVERTER MT BOARD	37 Inches
	4-123-683-04	COVER, UNDER	40 Inches		1-857-249-11	ETC-INVERTER MT BOARD	40 Inches
12	h-1643-232-A	MT BOARD, COMPLETE		16	4-122-585-01	FRAME, VESA (M6)	
13	4-139-595-02	GUIDE, LIGHT					

5-2. BEZEL ASSY & STAND ASSY

Note : Les composants identifiés par un triangle et par une marque Δ sont d'une importance critique pour la sécurité. Ne les remplacez que par des pièces du numéro spécifié.

Note : The components identified by shape and marked Δ are critical for safety. Replace only with the part number specified in the parts list.

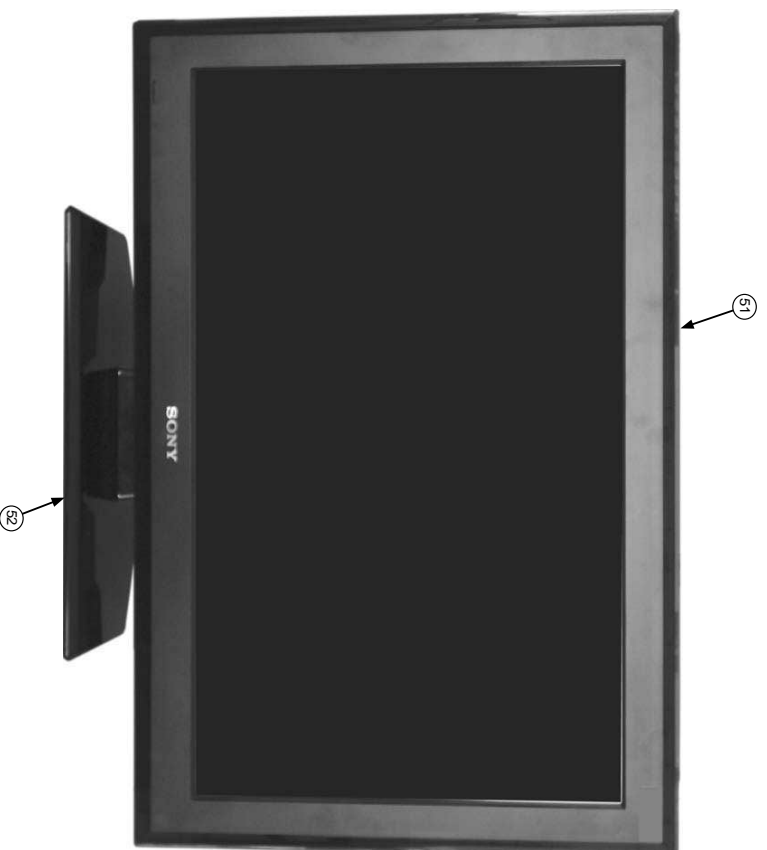


REF.NO.	PARTNO	DESCRIPTION	REMARK	REF.NO.	PARTNO	DESCRIPTION	REMARK
51	X-2346-452-2	BEZEL (32P) ASSY	32 inches	52	X-2345-301-2	STAND ASSY (M/G)	32 inches
	X-2346-155-2	BEZEL (37P) ASSY	37 inches		X-2345-302-3	STAND ASSY (M/G)	37/40 inches
	X-2346-156-1	BEZEL (40P) ASSY	40 inches				


5-3. REAR COVER & POWER SUPPLY CORDS

Note : Les composants identifiés par un triangle et par une marque Δ sont d'une importance critique pour la sécurité. Ne les remplacer que par des pièces du numéro spécifié.

Note : The components identified by a triangle and marked Δ are critical for safe. Replace only with the part number specified in the parts list.

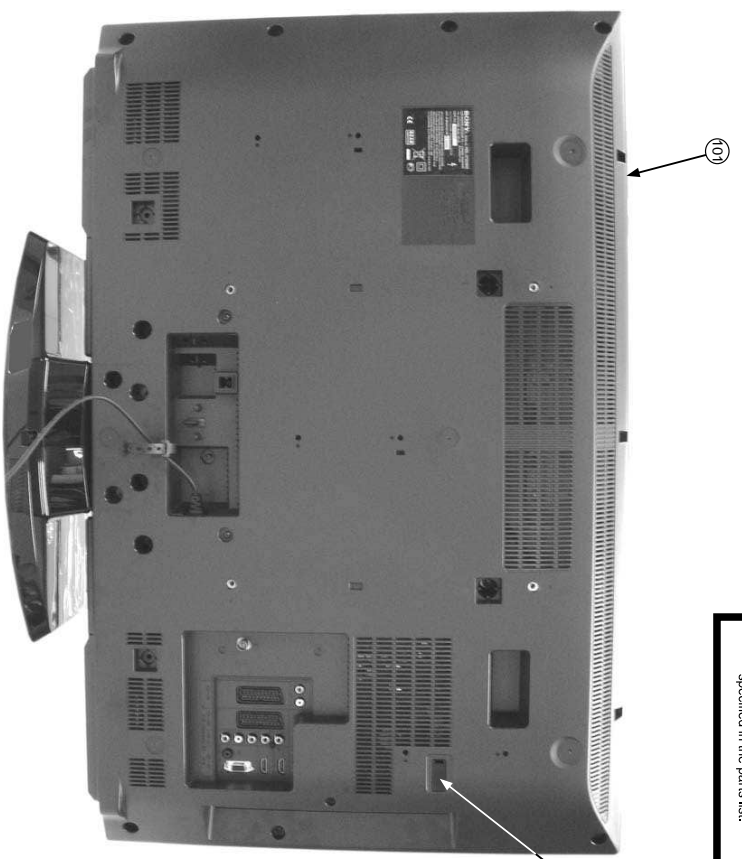

REF.NO.	PARTNO	DESCRIPTION	REMARK
101	X-2349-984-1	REAR COVER ASSY (32P)	32 inches
	X-2349-893-1	REAR COVER ASSY (37P)	37 inches
	X-2349-894-1	REAR COVER ASSY (40P)	40 inches
102	4-122-617-01	COVER, ECS(S)	



REF.NO.	PARTNO	DESCRIPTION	REMARK
103	1-832-132-31	POWER-SUPPLY CORD (AEP)	32/37 inch
	1-835-200-11	POWER-SUPPLY CORD (AEP)	40 inches
104	1-832-170-41	POWER-SUPPLY CORD (UK)	32/37 inch
	1-835-165-11	POWER-SUPPLY CORD (UK)	40 inches




SECTION 6 ELECTRICAL PARTS LIST

PARTS LISTING TABLE OF CONTENTS

B BOARD COMPLETE Parts List :	Page
H1 BOARD COMPLETE Parts List :	42
ACCESSORIES AND CONNECTORS :	54
REMOTE COMMANDER :	55
		55

Note: To ensure safety and reliability, it is Sony policy that power supply boards should not be repaired at component level in the field as a result... The G2, G4 and IPrIF boards are regarded as non service items for exchange only and are not indicated in the parts list of this service manual.

Note : Items marked "xxx" are not stocked since they are seldom required for routine service.
Some delay should be anticipated when ordering these items.

Note : The components identified by mark  contain confidential information. Strictly follow the instructions when ever the components are repaired and/or replaced.

REFNO PARTNO DESCRIPTION REMARK
 A-1740-833-A B Board Complete (32 & 40 Inches)
 A-1740-832-A B Board Complete (37 Inches)

< CAPACITOR >

C2000	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V
C2001	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V
C2002	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V
C2003	1-135-366-11	ELECT CHIP 1000PF	20%	16V
C2004	1-135-366-11	ELECT CHIP 1000PF	20%	16V
C2005	1-112-786-11	ELECT CHIP 220UF	20%	6.3V
C2006	1-135-366-11	ELECT CHIP 1000PF	20%	16V
C2007	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V
C2008	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V
C2009	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V
C2010	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V
C2011	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V
C2012	1-116-079-11	CERAMIC CHIP 100PF	10%	10V
C2013	1-100-904-11	CERAMIC CHIP 330PF	10%	50V
C2014	1-100-904-11	CERAMIC CHIP 330PF	10%	50V
C2015	1-100-904-11	CERAMIC CHIP 330PF	10%	50V
C2016	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V
C2017	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V
C2018	1-100-904-11	CERAMIC CHIP 330PF	10%	50V
C2019	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V
C2020	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V
C2023	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V
C2024	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V
C2025	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V
C2026	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V
C2027	1-100-766-21	ELECT CHIP 47UF	20%	16V
C2028	1-100-766-21	ELECT CHIP 47UF	20%	16V
C2029	1-100-766-21	ELECT CHIP 47UF	20%	16V
C2030	1-100-766-21	ELECT CHIP 47UF	20%	16V
C2031	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V
C2033	1-112-771-11	CERAMIC CHIP 0.01UF	10%	25V
C2034	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V
C2035	1-112-771-11	CERAMIC CHIP 0.01UF	10%	25V
C2036	1-112-771-11	CERAMIC CHIP 0.01UF	10%	25V
C2038	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V
C2039	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V
C2040	1-164-850-11	CERAMIC CHIP 100PF	0.50PF	50V
C2041	1-164-850-11	CERAMIC CHIP 100PF	0.50PF	50V
C2042	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V
C2043	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V
C2044	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V
C2045	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V
C2046	1-164-854-11	CERAMIC CHIP 150PF	5.00%	50V
C2047	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V
C2048	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V

C2049	1-112-771-11	CERAMIC CHIP 0.01UF	10%	25V
C2051	1-100-916-11	CERAMIC CHIP 0.1UF	10%	16V
C2054	1-100-905-11	CERAMIC CHIP 0.001UF	10%	50V
C2055	1-100-904-11	CERAMIC CHIP 330PF	10%	50V
C2056	1-100-904-11	CERAMIC CHIP 330PF	10%	50V
C2059	1-164-870-11	CERAMIC CHIP 680PF	5.00%	50V
C2060	1-164-870-11	CERAMIC CHIP 680PF	5.00%	50V
C2071	1-112-776-11	CERAMIC CHIP 0.0047UF	10%	50V
C2073	1-112-776-11	CERAMIC CHIP 0.0047UF	10%	50V
C2074	1-112-776-11	CERAMIC CHIP 0.0047UF	10%	50V
C2102	1-114-130-11	CERAMIC CHIP 1UF	10%	6V
C2103	1-114-130-11	CERAMIC CHIP 1UF	10%	6V
C2104	1-114-130-11	CERAMIC CHIP 1UF	10%	6V
C3000	1-100-904-11	CERAMIC CHIP 330PF	10%	50V
C3001	1-100-904-11	CERAMIC CHIP 330PF	10%	50V
C3004	1-162-927-11	CERAMIC CHIP 100PF	5.00%	50V
C3005	1-162-927-11	CERAMIC CHIP 100PF	5.00%	50V
C3007	1-164-874-11	CERAMIC CHIP 330PF	5.00%	50V
C3008	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V
C3009	1-100-831-91	CERAMIC CHIP 0.001UF	2%	50V
C3010	1-100-831-91	CERAMIC CHIP 0.001UF	2%	50V
C3011	1-100-906-11	CERAMIC CHIP 0.001UF	10%	50V
C3012	1-100-906-11	CERAMIC CHIP 0.001UF	10%	50V
C3015	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V
C3016	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V
C3017	1-100-831-91	CERAMIC CHIP 0.001UF	2%	50V
C3018	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V
C3019	1-100-916-11	CERAMIC CHIP 0.001UF	2%	50V
C3020	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V
C3021	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V
C3022	1-100-831-91	CERAMIC CHIP 0.001UF	2%	50V
C3023	1-164-874-11	CERAMIC CHIP 100PF	5.00%	50V
C3024	1-100-831-91	CERAMIC CHIP 0.001UF	2%	50V
C3025	1-114-130-11	CERAMIC CHIP 1UF	10%	6V
C3028	1-114-130-11	CERAMIC CHIP 1UF	10%	6V
C3029	1-112-781-11	CERAMIC CHIP 1UF	10%	1V
C3030	1-112-781-11	CERAMIC CHIP 1UF	10%	1V
C3033	1-112-781-11	CERAMIC CHIP 1UF	10%	1V
C3034	1-112-781-11	CERAMIC CHIP 1UF	10%	1V
C3037	1-100-831-91	CERAMIC CHIP 0.001UF	2%	50V
C3038	1-100-831-91	CERAMIC CHIP 0.001UF	2%	50V
C3039	1-100-906-11	CERAMIC CHIP 100PF	10%	6V
C3040	1-114-323-11	CERAMIC CHIP 0.1UF	10%	2V
C3041	1-114-323-11	CERAMIC CHIP 0.1UF	10%	2V
C3042	1-100-909-11	CERAMIC CHIP 100PF	10%	6V
C3043	1-112-771-11	CERAMIC CHIP 0.01UF	10%	2V
C3044	1-112-771-11	CERAMIC CHIP 0.01UF	10%	2V
C4000	1-114-333-11	CERAMIC CHIP 470PF	10%	6V
C4001	1-114-323-11	CERAMIC CHIP 0.1UF	10%	2V
C4002	1-100-909-11	CERAMIC CHIP 100PF	10%	6V

REFNO.	PARTNO.	DESCRIPTION	REMARK	REFNO.	PARTNO.	DESCRIPTION	REMARK
C4005	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4104	1-112-777-11	CERAMIC CHIP 0.01UF	10% 2
C4009	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4105	1-112-777-11	CERAMIC CHIP 0.01UF	10% 2
C4011	1-114-913-11	CERAMIC CHIP 10P	10% 16V	C4107	1-114-996-21	ELECT CHIP 220P	20% 6
C4012	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4108	1-100-916-11	CERAMIC CHIP 0.10UF	10% 1
C4014	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4109	1-100-916-11	CERAMIC CHIP 0.10UF	10% 1
C4015	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4111	1-164-954-11	CERAMIC CHIP 15PF	5.00% 5
C4016	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4112	1-164-959-11	CERAMIC CHIP 22P	5.00% 5
C4020	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4113	1-164-660-11	CERAMIC CHIP 27P	5.00% 5
C4021	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4114	1-100-916-11	CERAMIC CHIP 0.10UF	10% 1
C4023	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4115	1-114-996-11	ELECT CHIP 820UF	20% 6
C4024	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4116	1-100-916-11	CERAMIC CHIP 0.10UF	10% 1
C4026	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4117	1-100-906-11	CERAMIC CHIP 0.0010UF	10% 5
C4027	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4118	1-100-916-11	CERAMIC CHIP 0.10UF	10% 1
C4029	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4119	1-100-167-21	ELECT CHIP 220UF	20% 1
C4030	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4120	1-100-916-11	CERAMIC CHIP 0.10UF	10% 1
C4031	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4121	1-100-165-21	ELECT CHIP 100P	20% 1
C4032	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4122	1-164-914-11	CERAMIC CHIP 100PF	5.00% 5
C4033	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4300	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4034	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4301	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4035	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4302	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4036	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4304	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4037	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4306	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4038	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4307	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4039	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4308	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4040	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4309	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4041	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4310	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4042	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4311	1-112-777-11	CERAMIC CHIP 0.010UF	10% 2
C4043	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4312	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4044	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4313	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4045	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4314	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4046	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4315	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4047	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4316	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4048	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4317	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4049	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4318	1-114-935-11	CERAMIC CHIP 0.10UF	10% 2
C4050	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4319	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4051	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4320	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4052	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4321	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4053	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4322	1-112-777-11	CERAMIC CHIP 0.010UF	10% 2
C4054	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4323	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4055	1-100-909-11	CERAMIC CHIP 100P	10% 6.3V	C4325	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4056	1-100-909-11	CERAMIC CHIP 100P	10% 6.3V	C4327	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4057	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4328	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4058	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4329	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4059	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4330	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4060	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4331	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4062	1-114-932-11	CERAMIC CHIP 220P	10% 6.3V	C4332	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4100	1-112-777-11	CERAMIC CHIP 0.010UF	10% 25V	C4333	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4101	1-112-777-11	CERAMIC CHIP 0.010UF	10% 25V	C4334	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4102	1-100-916-11	CERAMIC CHIP 0.10UF	10% 16V	C4335	1-112-778-11	CERAMIC CHIP 0.0220UF	10% 2
C4103	1-112-966-11	CERAMIC CHIP 220PF	10% 50V	C4340	1-164-952-11	CERAMIC CHIP 12PF	5.00% 5

REFNO.	PARTNO.	DESCRIPTION	REMARK	REFNO.	PARTNO.	DESCRIPTION	REMARK
C4341	1-112-778-11	CERAMIC CHIP 0.022UF	10% 25V	C4753	1-164-916-11	CERAMIC CHIP 100PF	5.00% 50V
C4342	1-112-778-11	CERAMIC CHIP 0.022UF	10% 25V	C5500	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4343	1-112-778-11	CERAMIC CHIP 0.022UF	10% 25V	C5501	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4344	1-112-778-11	CERAMIC CHIP 0.022UF	10% 25V	C5502	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4345	1-112-778-11	CERAMIC CHIP 0.022UF	10% 25V	C5506	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4346	1-112-778-11	CERAMIC CHIP 0.022UF	10% 25V	C5507	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4347	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C5508	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4348	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C5511	1-100-909-11	CERAMIC CHIP 100PF	10% 6V
C4349	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5512	1-114-325-11	CERAMIC CHIP 220PF	10% 6V
C4350	1-100-905-11	CERAMIC CHIP 0.001UF	10% 50V	C5513	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4351	1-100-635-21	ELECT CHIP 470F	20% 35V	C5514	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4500	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C5515	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4501	1-112-068-11	CERAMIC CHIP 220PF	10% 50V	C5518	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4502	1-112-068-11	CERAMIC CHIP 220PF	10% 50V	C5519	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4700	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C5521	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4701	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C5522	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4702	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C5524	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4703	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C5526	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4704	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C5527	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4705	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C5528	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4706	1-114-535-21	ELECT CHIP 3300F	20% 6.3V	C5529	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4710	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C5530	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4711	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C5531	1-114-130-11	CERAMIC CHIP 1UF	10% 6V
C4716	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C5532	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4717	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	C6001	1-114-130-11	CERAMIC CHIP 1UF	10% 6V
C4718	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	C6002	1-100-169-21	ELECT CHIP 470UF	20% 10V
C4719	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C6004	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4720	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	C6006	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4721	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C6007	1-112-780-11	CERAMIC CHIP 0.47UF	10% 10V
C4722	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	C6009	1-114-813-11	CERAMIC CHIP 1UF	10% 10V
C4723	1-100-909-11	CERAMIC CHIP 100F	10% 6.3V	C6010	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4724	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C6012	1-114-130-11	CERAMIC CHIP 1UF	10% 6V
C4725	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	C6013	1-114-813-11	CERAMIC CHIP 1UF	10% 10V
C4727	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C6014	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V
C4728	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	C6015	1-164-816-11	CERAMIC CHIP 100PF	5.00% 50V
C4730	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C6018	1-100-912-11	CERAMIC CHIP 1UF	10% 20V
C4735	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C6020	1-114-813-11	CERAMIC CHIP 2.2UF	10% 5V
C4736	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C6021	1-100-912-11	CERAMIC CHIP 1UF	10% 20V
C4737	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	C6022	1-100-916-11	CERAMIC CHIP 1UF	10% 20V
C4738	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	C6027	1-114-868-11	CERAMIC CHIP 0.1UF	10% 5V
C4739	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C6028	1-114-813-11	CERAMIC CHIP 1UF	10% 10V
C4740	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	C6029	1-114-407-21	ELECT CHIP 4.7UF	20% 5V
C4741	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C6031	1-100-906-11	CERAMIC CHIP 0.001UF	10% 5V
C4742	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	C6032	1-112-777-11	CERAMIC CHIP 0.1UF	10% 20V
C4743	1-100-909-11	CERAMIC CHIP 100F	10% 6.3V	C6034	1-112-778-11	CERAMIC CHIP 0.022UF	10% 20V
C4744	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C6039	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4745	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	C6040	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4747	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C6042	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C4748	1-100-831-91	CERAMIC CHIP 0.001UF	2% 50V	C6043	1-114-813-11	CERAMIC CHIP 1UF	10% 10V
C4750	1-114-325-11	CERAMIC CHIP 0.1UF	10% 25V	C6044	1-112-777-11	CERAMIC CHIP 0.01UF	10% 20V

REFNO.	PARTNO.	DESCRIPTION	REMARK	REFNO.	PARTNO.	DESCRIPTION	REMARK
C6045	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7809	1-164-858-11	CERAMIC CHIP 22PF	5.00% 50V
C6047	1-112-777-11	CERAMIC CHIP 0.01UF	10% 25V	C7810	1-164-858-11	CERAMIC CHIP 22PF	5.00% 50V
C6048	1-114-553-11	CERAMIC CHIP 100F	10% 16V	C7811	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V
C6049	1-114-553-11	CERAMIC CHIP 100F	10% 16V	C7812	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V
C6050	1-114-553-11	CERAMIC CHIP 100F	10% 16V	C7813	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V
C6051	1-114-553-11	CERAMIC CHIP 100F	10% 16V	C7814	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V
C6054	1-114-553-11	CERAMIC CHIP 100F	10% 16V	C7815	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V
C6055	1-114-553-11	CERAMIC CHIP 100F	10% 16V	C7816	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V
C6056	1-114-553-11	CERAMIC CHIP 100F	10% 16V	C7817	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V
C6060	1-116-079-11	CERAMIC CHIP 100F	10% 10V	C7818	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V
C6061	1-116-079-11	CERAMIC CHIP 100F	10% 10V	C7819	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V
C6063	1-116-079-11	CERAMIC CHIP 100F	10% 10V	C7820	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V
C6064	1-116-079-11	CERAMIC CHIP 100F	10% 10V	C7821	1-112-780-11	CERAMIC CHIP 0.47UF	10% 10V
C6065	1-116-079-11	CERAMIC CHIP 100F	10% 10V	C7822	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C6067	1-116-079-11	CERAMIC CHIP 100F	10% 10V	C7823	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C6068	1-116-079-11	CERAMIC CHIP 100F	10% 10V	C7824	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C6069	1-116-079-11	CERAMIC CHIP 100F	10% 10V	C7825	1-100-765-21	ELECT CHIP 100F	20% 20%
C6071	1-116-079-11	CERAMIC CHIP 100F	10% 10V	C7826	1-100-765-21	ELECT CHIP 100F	20% 20%
C6072	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	C7827	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C6086	1-114-813-11	CERAMIC CHIP 1UF	10% 16V	C7828	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C6090	1-116-079-11	CERAMIC CHIP 100F	10% 10V	C7829	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C6091	1-100-766-21	ELECT CHIP 47UF	20% 16V	C7830	1-100-931-91	CERAMIC CHIP 0.001UF	2% 5%
C6092	1-200-766-21	ELECT CHIP 47UF	20% 16V	C7831	1-200-931-91	CERAMIC CHIP 0.001UF	2% 5%
C6093	1-114-130-11	CERAMIC CHIP 1UF	10% 6.3V	C7832	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C6096	1-114-130-11	CERAMIC CHIP 1UF	10% 6.3V	C7833	1-114-802-11	CERAMIC CHIP 0.0033UF	10% 5%
C6098	1-100-909-11	CERAMIC CHIP 100F	10% 6.3V	C7836	1-114-802-11	CERAMIC CHIP 0.0033UF	10% 5%
C6099	1-114-130-11	CERAMIC CHIP 1UF	10% 6.3V	C7837	1-200-765-21	ELECT CHIP 470UF	20% 10%
C6100	1-112-780-11	CERAMIC CHIP 0.47UF	10% 16V	C7838	1-114-802-11	CERAMIC CHIP 0.0033UF	10% 5%
C6101	1-112-780-11	CERAMIC CHIP 0.47UF	10% 16V	C7839	1-114-802-11	CERAMIC CHIP 0.0033UF	10% 5%
C6105	1-114-533-21	ELECT CHIP 330UF	20% 6.3V	C7840	1-100-765-21	ELECT CHIP 100F	20%
C6107	1-116-079-11	CERAMIC CHIP 100F	10% 10V	C7841	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C6108	1-116-079-11	CERAMIC CHIP 100F	10% 10V	C7842	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V
C6109	1-116-079-11	CERAMIC CHIP 100F	10% 10V	C7843	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V
C7300	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7844	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V
C7302	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7845	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V
C7303	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7848	1-100-766-21	ELECT CHIP 47UF	20% 10%
C7304	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7849	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C7305	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7850	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C7306	1-100-906-11	CERAMIC CHIP 0.001UF	10% 50V	C7851	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C7307	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V	C7852	1-112-781-11	CERAMIC CHIP 1UF	10% 10V
C7308	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7853	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C7800	1-100-916-11	CERAMIC CHIP 0.1UF	10% 16V	C7855	1-137-946-21	ELECT CHIP 47UF	20% 2%
C7801	1-164-858-11	CERAMIC CHIP 22PF	5.00% 50V	C7857	1-114-325-11	CERAMIC CHIP 0.1UF	10% 2%
C7802	1-164-858-11	CERAMIC CHIP 22PF	5.00% 50V	C7859	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C7803	1-164-858-11	CERAMIC CHIP 22PF	5.00% 50V	C7863	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C7804	1-164-858-11	CERAMIC CHIP 22PF	5.00% 50V	C7864	1-100-916-11	CERAMIC CHIP 0.1UF	10% 10V
C7805	1-164-858-11	CERAMIC CHIP 22PF	5.00% 50V	C7865	1-114-334-11	CERAMIC CHIP 100F	10% 2%
C7806	1-164-858-11	CERAMIC CHIP 22PF	5.00% 50V	C7870	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V
C7807	1-164-858-11	CERAMIC CHIP 22PF	5.00% 50V	C7871	1-114-331-11	CERAMIC CHIP 4.7UF	10% 10V
C7808	1-164-858-11	CERAMIC CHIP 22PF	5.00% 50V	C7872	1-100-765-21	ELECT CHIP 100F	20% 10%

REFNO.	PARTNO	DESCRIPTION	REMARK	REFNO.	PARTNO	DESCRIPTION	REMARK
FB3002	1-400-639-21	FEERRITE	00H				
FB3003	1-400-639-21	FEERRITE	00H				
FB4003	1-481-467-11	FEERRITE	00H	FB4001	1-234-939-21	FILTER, EMT REMOVAL (SW)	
FB4004	1-481-467-11	FEERRITE	00H	FB4002	1-234-939-21	FILTER, EMT REMOVAL (SW)	
FB4005	1-481-467-11	FEERRITE	00H	FB4003	1-234-939-21	FILTER, EMT REMOVAL (SW)	
				FB4004	1-234-939-21	FILTER, EMT REMOVAL (SW)	
FB4010	1-481-467-11	FEERRITE	00H	FB4005	1-234-939-21	FILTER, EMT REMOVAL (SW)	
FB4011	1-481-467-11	FEERRITE	00H	FB4006	1-234-939-21	FILTER, EMT REMOVAL (SW)	
FB4013	1-481-467-11	FEERRITE	00H	FB4007	1-234-939-21	FILTER, EMT REMOVAL (SW)	
FB4014	1-481-467-11	FEERRITE	00H	FB4008	1-234-939-21	FILTER, EMT REMOVAL (SW)	
FB4015	1-481-467-11	FEERRITE	00H	FB4009	1-234-939-21	FILTER, EMT REMOVAL (SW)	
FB4016	1-481-467-11	FEERRITE	00H	FB4010	1-234-939-21	FILTER, EMT REMOVAL (SW)	
FB4017	1-481-467-11	FEERRITE	00H	FB4301	1-234-939-21	FILTER, EMT REMOVAL (SW)	
FB4100	1-400-461-21	FEERRITE	00H	FB4700	1-234-939-21	FILTER, EMT REMOVAL (SW)	
FB4101	1-400-461-21	FEERRITE	00H	FB4701	1-234-939-21	FILTER, EMT REMOVAL (SW)	
FB4102	1-469-084-21	FEERRITE	00H	FB5300	1-234-939-21	FILTER, EMT REMOVAL (SW)	
FB4103	1-469-084-21	FEERRITE	00H	FB5901	1-234-939-21	FILTER, EMT REMOVAL (SW)	
FB4104	1-469-084-21	FEERRITE	00H				
FB4106	1-469-084-21	FEERRITE	00H				
FB4107	1-469-084-21	FEERRITE	00H				
FB4108	1-481-467-11	FEERRITE	00H				
FB4301	1-400-940-21	FEERRITE	00H	IC2000	6-713-349-01	IC TDA10048HN/C200	
FB4302	1-400-940-21	FEERRITE	00H	IC4100	6-713-333-01	IC P8F8429UL	
FB4303	1-400-940-21	FEERRITE	00H	IC4102	6-702-888-01	IC M24C64-MNMG7 (B)	
FB4500	1-400-462-21	FEERRITE	00H	IC4105	6-711-288-01	IC M2C005-0 5WMTF	
FB4501	1-469-080-11	FEERRITE	00H	IC4106	6-708-624-01	IC M25E10-VANM6TF	
FB4502	1-469-080-11	FEERRITE	00H	IC4500	6-704-600-01	IC M24C02-MNMG7 (B)	
FB4503	1-469-080-11	FEERRITE	00H	IC4701	6-713-111-01	IC NAND512M3A2CM6F	
FB4700	1-481-467-11	FEERRITE	00H	IC4702	6-712-189-01	IC EDS5116A9B6-6E-8E	
FB6000	1-400-331-11	FEERRITE	00H	IC5903	6-713-662-01	IC TDA9995HL/01	
FB6001	1-400-331-11	FEERRITE	00H	IC6000	6-706-419-01	IC M4930TF (A)	
FB6002	1-400-331-11	FEERRITE	00H	IC6001	6-709-932-01	IC M4G141CMRE	
FB6003	1-400-331-11	FEERRITE	00H	IC6002	6-709-607-01	IC L4S795F-TLM-E	
FB6004	1-400-915-21	FEERRITE	00H	IC6003	6-708-762-01	IC P020MNA12EH	
FB6005	1-400-915-21	FEERRITE	00H	IC6004	6-711-586-01	IC M23030N-LF-2	
FB6006	1-400-915-21	FEERRITE	00H	IC6005	6-711-586-01	IC M23030N-LF-2	
FB6008	1-400-915-21	FEERRITE	00H	IC6007	6-711-586-01	IC M23030N-LF-2	
FB6009	1-400-940-21	FEERRITE	00H	IC6008	6-708-603-01	IC P070MNA12EH	
FB6010	1-400-461-21	FEERRITE	00H	IC6009	6-708-603-01	IC P070MNA12EH	
FB7300	1-469-869-21	FEERRITE	00H	IC6010	6-712-750-01	IC M4G143CMRE	
FB7301	1-400-834-11	FEERRITE	00H	IC6011	6-711-133-01	IC M4G291CMRE	
FB7302	1-400-834-11	FEERRITE	00H	IC7301	6-712-563-01	IC 74VWC45A1PW-118	
FB7303	1-400-834-11	FEERRITE	00H	IC7302	8-759-644-48	IC 74VWC541A1PW	
FB7304	1-400-834-11	FEERRITE	00H	IC7303	8-759-644-48	IC 74VWC541A1PW	
FB7800	1-400-834-11	FEERRITE	00H	IC7304	8-759-644-48	IC 74VWC541A1PW	
FB7900	1-400-089-21	FEERRITE	00H	IC7305	6-711-288-01	IC M2C005-0 5WMTF	
FB7901	1-400-089-21	FEERRITE	00H	IC7801	8-753-314-50	IC CA3185R-56	
FB7902	1-400-089-21	FEERRITE	00H	IC7900	6-712-648-01	IC TDA9810T-N1	
FB7903	1-400-089-21	FEERRITE	00H				

< FILTER >

< IC >

< SOCKET >

Note : The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

REFNO.	PARTNO	DESCRIPTION	REMARK
J3001	*1-822-524-31	PHONO JACK 2P	
J3002	1-822-523-11	PHONO JACK 5P	
J7800	1-822-528-11	JACK	

< CONT >

12000	1-469-549-21	INDUCTOR	
12001	1-469-555-21	INDUCTOR	
12002	1-469-555-21	INDUCTOR	
12003	1-469-555-21	INDUCTOR	
12004	1-469-555-21	INDUCTOR	
12005	1-481-329-21	INDUCTOR	
12006	1-481-329-21	INDUCTOR	
12007	1-469-549-21	INDUCTOR	
12008	1-469-549-21	INDUCTOR	
12009	1-469-549-21	INDUCTOR	
12010	1-469-549-21	INDUCTOR	
12012	1-469-549-21	INDUCTOR	
12013	1-469-549-21	INDUCTOR	
12015	1-481-329-21	INDUCTOR	
12016	1-481-329-21	INDUCTOR	
12017	1-469-555-21	INDUCTOR	
12018	1-469-555-21	INDUCTOR	
12019	1-469-555-21	INDUCTOR	
14101	1-457-574-21	INDUCTOR	
14300	1-456-583-11	INDUCTOR	
14301	1-456-583-11	INDUCTOR	
14302	1-456-583-11	INDUCTOR	
14303	1-456-583-11	INDUCTOR	
14304	1-456-583-11	INDUCTOR	
14305	1-456-583-11	INDUCTOR	
14306	1-456-583-11	INDUCTOR	
14307	1-456-583-11	INDUCTOR	
14308	1-456-583-11	INDUCTOR	
14309	1-456-583-11	INDUCTOR	
14310	1-400-180-21	FERRITE	
16000	1-481-329-21	INDUCTOR	
16001	1-457-509-11	INDUCTOR	
16002	1-457-509-11	INDUCTOR	
16004	1-457-497-11	INDUCTOR	
16005	1-400-180-21	FERRITE	
16006	1-400-180-21	FERRITE	
L7800	1-469-549-21	INDUCTOR	
L7907	1-457-754-11	INDUCTOR	
L7908	1-457-754-11	INDUCTOR	
RS6000	1-576-736-4L	IC LINK	
RS6001	1-576-736-4L	IC LINK	
RS6002	1-576-736-4L	IC LINK	
RS6003	1-576-736-4L	IC LINK	

< PROTECTOR MODULE >

REFNO.	PARTNO	DESCRIPTION	REMARK
Q2000	6-551-775-01	TR 28A212260LS0	
Q2002	6-551-776-01	TR 28C5395060LS0	
Q2010	6-551-776-01	TR 28C5395060LS0	
Q2011	6-551-776-01	TR 28C5395060LS0	
Q3000	6-551-776-01	TR 28C5395060LS0	
Q3001	6-551-776-01	TR 28C5395060LS0	
Q3002	6-551-776-01	TR 28C5395060LS0	
Q3003	6-551-776-01	TR 28C5395060LS0	
Q3004	6-551-775-01	TR 28A212260LS0	
Q3005	6-551-775-01	TR 28A212260LS0	
Q3006	6-551-776-01	TR 28C5395060LS0	
Q3007	6-551-776-01	TR 28C5395060LS0	
Q4700	6-551-817-01	TR 08E52A360LS0	
Q5500	8-729-028-28	TRANSISTOR 28R2036(TE85L)	
Q5502	6-551-775-01	TR 28A212260LS0	
Q5503	6-551-775-01	TR 28A212260LS0	
Q6000	6-551-775-01	TR 28A212260LS0	
Q6001	6-551-817-01	TR 08E52A360LS0	
Q6004	6-551-776-01	TR 28C5395060LS0	
Q6005	6-551-817-01	TR 08E52A360LS0	
Q6007	6-551-776-01	TR 28C5395060LS0	
Q6008	6-551-776-01	TR 28C5395060LS0	
Q6009	8-729-028-28	TRANSISTOR 28R2036(TE85L)	
Q6010	6-551-776-01	TR 28C5395060LS0	
Q6012	6-550-354-01	TRANSISTOR RTQ35PQ2TR	
Q6013	6-551-775-01	TR 28A212260LS0	
Q7801	6-551-551-01	TRANSISTOR RT3N7M-TP-1	
Q7802	6-551-551-01	TRANSISTOR RT3N7M-TP-1	
Q7803	6-551-551-01	TRANSISTOR RT3N7M-TP-1	
Q7807	6-551-551-01	TRANSISTOR RT3N7M-TP-1	
Q7901	6-551-815-01	TR 08E52A160LS0	
R2000	1-218-953-11	METAL CHIP 1K 5% 1/16W	
R2001	1-218-953-11	METAL CHIP 100K 5% 1/16W	
R2003	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R2004	1-218-990-81	SHORT CHIP 0	
R2006	1-218-990-81	SHORT CHIP 0	
R2007	1-218-990-81	SHORT CHIP 0	
R2008	1-218-990-81	SHORT CHIP 0	
R2009	1-218-990-81	SHORT CHIP 0	
R2010	1-218-953-11	METAL CHIP 1K 5% 1/16W	
R2011	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R2012	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R2013	1-218-953-11	METAL CHIP 1K 5% 1/16W	
R2014	1-216-833-11	METAL CHIP 10K 5% 1/10W	

< RESISTOR >

< TRANSISTOR >

REFNO.	PARTNO.	DESCRIPTION	REMARK	REFNO.	PARTNO.	DESCRIPTION	REMARK
R2015	1-218-941-81	METAL CHIP 100 5%	1/16W	R3030	1-218-953-11	METAL CHIP 1K 5%	1/16W
R2016	1-218-941-81	METAL CHIP 100 5%	1/16W	R3034	1-208-695-11	METAL CHIP 3.3K 0.5%	1/16W
R2018	1-218-990-81	SHORT CHIP 0		R3035	1-216-864-11	SHORT CHIP 0	
R2020	1-218-990-81	SHORT CHIP 0		R3036	1-216-864-11	SHORT CHIP 0	
R2021	1-216-833-11	METAL CHIP 10K 5%	1/10W	R3037	1-208-683-11	METAL CHIP 1K 0.5%	1/16W
R2022	1-216-833-11	METAL CHIP 10K 5%	1/10W	R3038	1-208-860-81	METAL CHIP 75 0.5%	1/16W
R2024	1-218-933-11	METAL CHIP 22 5%	1/16W	R3039	1-208-995-11	METAL CHIP 3.3K 0.5%	1/16W
R2026	1-218-990-81	SHORT CHIP 0		R3040	1-218-985-11	METAL CHIP 470K 5%	1/16W
R2028	1-218-990-81	SHORT CHIP 0		R3042	1-216-833-11	METAL CHIP 470K 5%	1/10W
R2029	1-218-990-81	SHORT CHIP 0		R3043	1-216-853-11	METAL CHIP 470K 5%	1/10W
R2030	1-218-990-81	SHORT CHIP 0		R3044	1-216-853-11	METAL CHIP 470K 5%	1/10W
R2031	1-218-990-81	SHORT CHIP 0		R3045	1-216-853-11	METAL CHIP 470K 5%	1/10W
R2032	1-218-990-81	SHORT CHIP 0		R3046	1-208-860-81	METAL CHIP 75 0.5%	1/16W
R2033	1-218-990-81	SHORT CHIP 0		R3047	1-218-985-11	METAL CHIP 470K 5%	1/16W
R2035	1-218-990-81	SHORT CHIP 0		R3050	1-218-985-11	METAL CHIP 470K 5%	1/16W
R2037	1-208-889-11	METAL CHIP 1.2K 0.5%	1/16W	R3051	1-216-853-11	METAL CHIP 470K 5%	1/10W
R2038	1-208-889-11	METAL CHIP 1.2K 0.5%	1/16W	R3052	1-216-853-11	METAL CHIP 470K 5%	1/10W
R2039	1-218-990-81	METAL CHIP 0		R3053	1-216-853-11	METAL CHIP 470K 5%	1/10W
R2042	1-218-941-81	METAL CHIP 100 5%	1/16W	R3054	1-216-853-11	METAL CHIP 470K 5%	1/10W
R2044	1-208-869-11	METAL CHIP 180 0.5%	1/16W	R3055	1-208-927-11	METAL CHIP 47K 0.5%	1/16W
R2047	1-218-941-81	METAL CHIP 100 5%	1/16W	R3056	1-218-985-11	METAL CHIP 470K 5%	1/16W
R2049	1-218-941-81	METAL CHIP 100 5%	1/16W	R3060	1-216-853-11	METAL CHIP 470K 5%	1/10W
R2051	1-218-990-81	SHORT CHIP 0		R3061	1-216-853-11	METAL CHIP 470K 5%	1/10W
R2053	1-218-990-81	SHORT CHIP 0		R3062	1-216-811-11	METAL CHIP 150 5%	1/10W
R2055	1-218-990-81	SHORT CHIP 0		R3063	1-216-811-11	METAL CHIP 150 5%	1/10W
R2056	1-218-990-81	SHORT CHIP 0		R3064	1-216-817-11	METAL CHIP 470 5%	1/10W
R2063	1-218-990-81	SHORT CHIP 0		R3066	1-216-817-11	METAL CHIP 470 5%	1/10W
R2070	1-218-990-81	SHORT CHIP 0		R3067	1-216-811-11	METAL CHIP 150 5%	1/10W
R2071	1-218-990-81	SHORT CHIP 0		R3068	1-208-119-11	METAL CHIP 18K 0.5%	1/16W
R2074	1-218-990-81	SHORT CHIP 0		R3069	1-216-833-11	METAL CHIP 10K 5%	1/10W
R2075	1-218-990-81	SHORT CHIP 0		R3070	1-218-953-11	METAL CHIP 1K 5%	1/16W
R2096	1-218-990-81	METAL CHIP 3.3 5%	1/10W	R3071	1-208-713-11	METAL CHIP 18K 0.5%	1/16W
R2100	1-216-791-11	METAL CHIP 47 0.5%	1/16W	R3072	1-216-833-11	METAL CHIP 10K 5%	1/10W
R2101	1-208-855-81	METAL CHIP 330 5%	1/16W	R3073	1-218-953-11	METAL CHIP 1K 5%	1/16W
R3003	1-218-947-11	METAL CHIP 100 5%	1/16W	R3079	1-218-941-81	METAL CHIP 100 5%	1/16W
R3004	1-218-941-81	METAL CHIP 100 5%	1/16W	R3080	1-218-941-81	METAL CHIP 100 5%	1/16W
R3005	1-218-947-11	METAL CHIP 330 5%	1/16W	R4000	1-218-864-11	SHORT CHIP 0	
R3006	1-218-941-81	METAL CHIP 100 5%	1/16W	R4001	1-216-864-11	SHORT CHIP 0	
R3007	1-216-821-11	METAL CHIP 1K 5%	1/10W	R4011	1-218-990-81	SHORT CHIP 0	
R3008	1-216-821-11	METAL CHIP 1K 5%	1/10W	R4103	1-218-865-11	METAL CHIP 10K 5%	1/16W
R3009	1-218-990-81	SHORT CHIP 0		R4106	1-218-990-81	SHORT CHIP 0	
R3010	1-218-990-81	SHORT CHIP 0		R4107	1-218-990-81	SHORT CHIP 0	
R3012	1-216-853-11	METAL CHIP 470K 5%	1/10W	R4109	1-218-865-11	METAL CHIP 10K 5%	1/16W
R3013	1-216-853-11	METAL CHIP 470K 5%	1/10W	R4114	1-218-865-11	METAL CHIP 10K 5%	1/16W
R3015	1-218-953-11	METAL CHIP 1K 5%	1/16W	R4115	1-218-973-11	METAL CHIP 47K 5%	1/16W
R3016	1-208-860-81	METAL CHIP 75 0.5%	1/16W				
R3017	1-218-953-11	METAL CHIP 1K 5%	1/16W				
R3027	1-208-883-11	METAL CHIP 1K 0.5%	1/16W				
R3028	1-208-860-81	METAL CHIP 75 0.5%	1/16W				
R3029	1-218-953-11	METAL CHIP 1K 5%	1/16W				

REFNO.	PARTNO.	DESCRIPTION	REMARK	REFNO.	PARTNO.	DESCRIPTION	REMARK
RA118	1-218-957-11	METAL CHIP	2.2K 5%	RA186	1-218-963-11	METAL CHIP	6.8K 5%
RA119	1-218-957-11	METAL CHIP	2.2K 5%	RA187	1-218-963-11	METAL CHIP	6.8K 5%
RA120	1-218-957-11	METAL CHIP	2.2K 5%	RA188	1-218-957-11	METAL CHIP	2.2K 5%
RA121	1-218-957-11	METAL CHIP	2.2K 5%	RA189	1-218-957-11	METAL CHIP	2.2K 5%
RA122	1-218-965-11	METAL CHIP	10K 5%	RA193	1-218-990-01	SHORT CHIP	0
RA124	1-218-941-01	METAL CHIP	100 5%	RA197	1-218-990-01	SHORT CHIP	0
RA125	1-218-941-01	METAL CHIP	100 5%	RA198	1-218-965-11	METAL CHIP	10K 5%
RA126	1-218-965-11	METAL CHIP	10K 5%	RA199	1-218-965-11	METAL CHIP	10K 5%
RA128	1-218-965-11	METAL CHIP	10K 5%	RA200	1-218-965-11	METAL CHIP	10K 5%
RA129	1-218-965-11	METAL CHIP	10K 5%	RA201	1-218-941-01	METAL CHIP	100 5%
RA130	1-218-965-11	METAL CHIP	10K 5%	RA202	1-218-941-01	METAL CHIP	100 5%
RA131	1-218-965-11	METAL CHIP	10K 5%	RA300	1-218-943-11	METAL CHIP	150 5%
RA132	1-218-941-01	METAL CHIP	100 5%	RA301	1-218-943-11	METAL CHIP	150 5%
RA134	1-218-935-11	METAL CHIP	33 5%	RA302	1-218-965-11	METAL CHIP	10K 5%
RA135	1-218-935-11	METAL CHIP	33 5%	RA303	1-218-943-11	METAL CHIP	150 5%
RA136	1-218-941-01	METAL CHIP	100 5%	RA304	1-218-943-11	METAL CHIP	150 5%
RA137	1-218-965-11	METAL CHIP	10K 5%	RA305	1-218-957-11	METAL CHIP	2.2K 5%
RA138	1-218-941-01	METAL CHIP	100 5%	RA306	1-218-943-11	METAL CHIP	150 5%
RA139	1-208-709-11	METAL CHIP	12K 0.5%	RA307	1-218-943-11	METAL CHIP	150 5%
RA140	1-218-965-11	METAL CHIP	10K 5%	RA308	1-218-938-11	METAL CHIP	56 5%
RA141	1-218-965-11	METAL CHIP	1.5K 5%	RA309	1-218-938-11	METAL CHIP	56 5%
RA142	1-218-965-11	METAL CHIP	10K 5%	RA310	1-220-976-01	METAL CHIP	18 0.5%
RA143	1-218-990-01	SHORT CHIP	0	RA311	1-220-976-01	METAL CHIP	18 0.5%
RA144	1-218-990-01	SHORT CHIP	0	RA312	1-218-943-11	METAL CHIP	150 5%
RA147	1-218-941-01	METAL CHIP	100 5%	RA313	1-218-943-11	METAL CHIP	150 5%
RA148	1-218-941-01	METAL CHIP	100 5%	RA314	1-218-966-11	METAL CHIP	12K 5%
RA149	1-218-941-01	METAL CHIP	100 5%	RA315	1-208-071-11	METAL CHIP	330 0.5%
RA150	1-218-941-01	METAL CHIP	100 5%	RA316	1-208-955-01	METAL CHIP	47 0.5%
RA152	1-218-965-11	METAL CHIP	10K 5%	RA317	1-208-955-01	METAL CHIP	47 0.5%
RA160	1-218-965-11	METAL CHIP	10K 5%	RA318	1-208-955-01	METAL CHIP	47 0.5%
RA161	1-218-965-11	METAL CHIP	10K 5%	RA319	1-218-990-01	SHORT CHIP	0
RA162	1-218-965-11	METAL CHIP	10K 5%	RA320	1-218-938-11	METAL CHIP	56 5%
RA164	1-218-965-11	METAL CHIP	10K 5%	RA321	1-208-663-11	METAL CHIP	150 0.5%
RA165	1-218-965-11	METAL CHIP	10K 5%	RA322	1-218-990-01	SHORT CHIP	0
RA166	1-218-965-11	METAL CHIP	10K 5%	RA323	1-218-990-01	SHORT CHIP	0
RA167	1-218-965-11	METAL CHIP	10K 5%	RA324	1-220-880-01	METAL CHIP	27 0.5%
RA168	1-218-990-01	SHORT CHIP	0	RA325	1-218-938-11	METAL CHIP	56 5%
RA169	1-218-990-01	SHORT CHIP	0	RA326	1-218-938-11	METAL CHIP	56 5%
RA170	1-218-965-11	METAL CHIP	10K 5%	RA327	1-218-938-11	METAL CHIP	56 5%
RA171	1-218-965-11	METAL CHIP	10K 5%	RA328	1-220-880-01	METAL CHIP	27 0.5%
RA172	1-218-965-11	METAL CHIP	10K 5%	RA329	1-220-876-01	METAL CHIP	18 0.5%
RA173	1-218-965-11	METAL CHIP	10K 5%	RA330	1-218-946-11	METAL CHIP	390 5%
RA174	1-218-965-11	METAL CHIP	10K 5%	RA331	1-220-876-01	METAL CHIP	18 0.5%
RA175	1-218-965-11	METAL CHIP	10K 5%	RA332	1-220-876-01	METAL CHIP	18 0.5%
RA176	1-218-965-11	METAL CHIP	10K 5%	RA333	1-220-876-01	METAL CHIP	18 0.5%
RA178	1-218-965-11	METAL CHIP	10K 5%	RA334	1-220-880-01	METAL CHIP	27 0.5%
RA179	1-218-965-11	METAL CHIP	10K 5%	RA335	1-218-938-11	METAL CHIP	56 5%
RA180	1-218-965-11	METAL CHIP	10K 5%	RA336	1-218-938-11	METAL CHIP	56 5%
RA182	1-218-965-11	METAL CHIP	10K 5%	RA337	1-218-938-11	METAL CHIP	56 5%
RA184	1-218-965-11	METAL CHIP	10K 5%	RA338	1-218-946-11	METAL CHIP	390 5%

REFNO.	PARTNO.	DESCRIPTION	REMARK	REFNO.	PARTNO.	DESCRIPTION	REMARK
RA339	1-220-976-81	METAL CHIP	18 0.5% 1/16W	RA717	1-218-937-11	METAL CHIP	2.2K 5% 1/16W
RA340	1-220-976-81	METAL CHIP	18 0.5% 1/16W	RA718	1-218-966-11	METAL CHIP	10K 5% 1/16W
RA341	1-220-976-81	METAL CHIP	18 0.5% 1/16W	RA720	1-208-677-11	METAL CHIP	560 0.5% 1/16W
RA342	1-218-938-11	METAL CHIP	56 5% 1/16W	RA721	1-208-677-11	METAL CHIP	560 0.5% 1/16W
RA343	1-218-938-11	METAL CHIP	56 5% 1/16W	RA726	1-218-941-81	METAL CHIP	100 5% 1/16W
RA344	1-218-938-11	METAL CHIP	56 5% 1/16W	RA728	1-218-941-81	METAL CHIP	100 5% 1/16W
RA345	1-220-976-81	METAL CHIP	18 0.5% 1/16W	RA742	1-218-935-11	METAL CHIP	33 5% 1/16W
RA346	1-220-976-81	METAL CHIP	18 0.5% 1/16W	RA743	1-218-935-11	METAL CHIP	33 5% 1/16W
RA347	1-220-976-81	METAL CHIP	18 0.5% 1/16W	RA744	1-218-935-11	METAL CHIP	33 5% 1/16W
RA348	1-218-990-81	SHORT CHIP	0	RA745	1-218-935-11	METAL CHIP	33 5% 1/16W
RA361	1-218-935-11	METAL CHIP	1K 5% 1/16W	RA749	1-218-935-11	METAL CHIP	33 5% 1/16W
RA362	1-218-961-11	METAL CHIP	4.7K 5% 1/16W	RA750	1-218-935-11	METAL CHIP	33 5% 1/16W
RA363	1-218-961-11	METAL CHIP	4.7K 5% 1/16W	RA751	1-218-935-11	METAL CHIP	33 5% 1/16W
RA364	1-218-990-81	SHORT CHIP	0	RA752	1-218-935-11	METAL CHIP	33 5% 1/16W
RA365	1-218-990-81	SHORT CHIP	0	RA753	1-218-935-11	METAL CHIP	33 5% 1/16W
RA366	1-218-990-81	SHORT CHIP	0	RA754	1-218-935-11	METAL CHIP	33 5% 1/16W
RA367	1-218-990-81	SHORT CHIP	0	RA755	1-218-935-11	METAL CHIP	33 5% 1/16W
RA368	1-218-990-81	SHORT CHIP	0	RA756	1-218-935-11	METAL CHIP	33 5% 1/16W
RA369	1-218-990-81	SHORT CHIP	0	RA757	1-218-935-11	METAL CHIP	33 5% 1/16W
RA378	1-218-990-81	SHORT CHIP	0	RA758	1-218-935-11	METAL CHIP	33 5% 1/16W
RA379	1-218-990-81	SHORT CHIP	0	RA765	1-220-169-11	METAL CHIP	75 5% 1/16W
RA388	1-218-990-81	SHORT CHIP	0	RA766	1-220-169-11	METAL CHIP	75 5% 1/16W
RA389	1-218-990-81	SHORT CHIP	0	RS509	1-208-693-11	METAL CHIP	1.8K 0.5% 1/16W
RA390	1-218-990-81	SHORT CHIP	0	RS510	1-208-693-11	METAL CHIP	1.8K 0.5% 1/16W
RA391	1-218-990-81	SHORT CHIP	0	RS511	1-208-709-11	METAL CHIP	12K 0.5% 1/16W
RA392	1-218-990-81	SHORT CHIP	0	RS512	1-218-990-81	SHORT CHIP	0
RA393	1-218-990-81	SHORT CHIP	0	RS513	1-218-990-81	SHORT CHIP	0
RA394	1-218-990-81	SHORT CHIP	0	RS515	1-218-961-11	METAL CHIP	4.7K 5% 1/16W
RA500	1-218-937-11	METAL CHIP	47 5% 1/16W	RS521	1-218-971-11	METAL CHIP	27K 5% 1/16W
RA504	1-218-937-11	METAL CHIP	47 5% 1/16W	RS524	1-218-966-11	METAL CHIP	12K 5% 1/16W
RA505	1-216-864-11	SHORT CHIP	0	RS526	1-218-966-11	METAL CHIP	10K 5% 1/16W
RA506	1-218-961-11	METAL CHIP	4.7K 5% 1/16W	RS528	1-218-966-11	METAL CHIP	22K 5% 1/16W
RA507	1-218-966-11	METAL CHIP	10K 5% 1/16W	RS529	1-218-961-11	METAL CHIP	4.7K 5% 1/16W
RA508	1-218-966-11	METAL CHIP	10K 5% 1/16W	RS530	1-218-966-11	METAL CHIP	10K 5% 1/16W
RA509	1-218-937-11	METAL CHIP	47 5% 1/16W	RS534	1-218-969-11	METAL CHIP	22K 5% 1/16W
RA510	1-218-937-11	METAL CHIP	47 5% 1/16W	RS535	1-218-990-81	SHORT CHIP	0
RA511	1-218-961-11	METAL CHIP	4.7K 5% 1/16W	RS536	1-218-990-81	SHORT CHIP	0
RA517	1-208-691-11	METAL CHIP	2.2K 0.5% 1/16W	RS537	1-218-990-81	SHORT CHIP	0
RA518	1-218-977-11	METAL CHIP	100K 5% 1/16W	RS541	1-218-990-81	SHORT CHIP	0
RA525	1-218-941-81	METAL CHIP	100 5% 1/16W	RS544	1-218-966-11	METAL CHIP	22K 5% 1/16W
RA526	1-218-941-81	METAL CHIP	100 5% 1/16W	RS535	1-218-990-81	SHORT CHIP	0
RA700	1-218-935-11	METAL CHIP	1K 5% 1/16W	RS536	1-218-990-81	SHORT CHIP	0
RA702	1-218-966-11	METAL CHIP	10K 5% 1/16W	RS537	1-218-990-81	SHORT CHIP	0
RA705	1-218-941-81	METAL CHIP	100 5% 1/16W	RS541	1-218-990-81	SHORT CHIP	0
RA706	1-218-935-11	METAL CHIP	33 5% 1/16W	RS544	1-218-966-11	METAL CHIP	22K 5% 1/16W
RA708	1-218-952-11	METAL CHIP	820 5% 1/16W	RS534	1-218-969-11	METAL CHIP	22K 5% 1/16W
RA709	1-218-962-11	METAL CHIP	5.6K 5% 1/16W	RS535	1-218-990-81	SHORT CHIP	0
RA710	1-218-935-11	METAL CHIP	33 5% 1/16W	RS536	1-218-990-81	SHORT CHIP	0
RA711	1-218-935-11	METAL CHIP	33 5% 1/16W	RS537	1-218-990-81	SHORT CHIP	0
RA713	1-218-935-11	METAL CHIP	33 5% 1/16W	RS541	1-218-990-81	SHORT CHIP	0
RA610	1-218-966-11	METAL CHIP	10K 5% 1/16W	RS544	1-218-966-11	METAL CHIP	22K 5% 1/16W
RA612	1-218-971-11	METAL CHIP	56K 5% 1/16W	RS535	1-218-990-81	SHORT CHIP	0
RA614	1-218-961-11	METAL CHIP	4.7K 5% 1/16W	RS536	1-218-990-81	SHORT CHIP	0
RA616	1-218-971-11	METAL CHIP	47K 5% 1/16W	RS537	1-218-990-81	SHORT CHIP	0
RA617	1-218-961-11	METAL CHIP	4.7K 5% 1/16W	RS541	1-218-990-81	SHORT CHIP	0

REFNO.	PARTNO.	DESCRIPTION	REMARK	REFNO.	PARTNO.	DESCRIPTION	REMARK
R6018	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R6123	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R6020	1-218-990-81	SHORT CHIP	0	R6124	1-218-990-81	SHORT CHIP	0
R6021	1-218-957-11	METAL CHIP	2.2K 5% 1/1.6W	R6125	1-218-990-81	SHORT CHIP	0
R6025	1-218-941-81	METAL CHIP	100 5% 1/1.6W	R6126	1-218-990-81	SHORT CHIP	0
R6026	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R6128	1-216-931-11	METAL CHIP	3.3 5% 1/1.0W
R6030	1-216-864-11	SHORT CHIP	0	R6135	1-216-864-11	SHORT CHIP	0
R6031	1-216-864-11	SHORT CHIP	0	R6136	1-216-864-11	SHORT CHIP	0
R6032	1-216-864-11	SHORT CHIP	0	R6137	1-216-864-11	SHORT CHIP	0
R6033	1-218-959-11	METAL CHIP	3.3K 5% 1/1.6W	R6138	1-208-905-11	METAL CHIP	12K 0.5% 1/1.6W
R6037	1-218-990-81	SHORT CHIP	0	R6139	1-216-864-11	SHORT CHIP	0
R6038	1-218-989-11	METAL CHIP	330K 5% 1/1.6W	R6140	1-216-864-11	SHORT CHIP	0
R6039	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R6141	1-216-864-11	SHORT CHIP	0
R6040	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R6142	1-216-864-11	SHORT CHIP	0
R6042	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R6143	1-216-864-11	SHORT CHIP	0
R6043	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R6144	1-216-864-11	SHORT CHIP	0
R6044	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R6147	1-218-990-81	SHORT CHIP	0
R6045	1-218-957-11	METAL CHIP	2.2K 5% 1/1.6W	R6148	1-218-990-81	SHORT CHIP	0
R6046	1-218-961-11	METAL CHIP	4.7K 5% 1/1.6W	R6149	1-218-941-81	METAL CHIP	100 5% 1/1.6W
R6047	1-218-937-11	METAL CHIP	47 5% 1/1.6W	R6150	1-218-961-11	METAL CHIP	47K 5% 1/1.6W
R6048	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R6151	1-218-937-11	METAL CHIP	47 5% 1/1.6W
R6049	1-208-931-11	METAL CHIP	68K 0.5% 1/1.6W	R6152	1-218-937-11	METAL CHIP	47 5% 1/1.6W
R6050	1-218-983-11	METAL CHIP	330K 5% 1/1.6W	R6153	1-218-943-11	METAL CHIP	150 5% 1/1.6W
R6052	1-218-971-11	METAL CHIP	33K 5% 1/1.6W	R6154	1-218-943-11	METAL CHIP	150 5% 1/1.6W
R6053	1-218-975-11	METAL CHIP	68K 5% 1/1.6W	R6155	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R6054	1-216-809-11	METAL CHIP	100 5% 1/1.0W	R6157	1-218-945-11	METAL CHIP	100 5% 1/1.6W
R6057	1-218-963-11	METAL CHIP	6.8K 5% 1/1.6W	R6158	1-218-943-11	METAL CHIP	150 5% 1/1.6W
R6058	1-218-967-11	METAL CHIP	15K 5% 1/1.6W	R6159	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R6060	1-218-969-11	METAL CHIP	22K 5% 1/1.6W	R6160	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R6061	1-218-990-81	SHORT CHIP	0	R6161	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R6065	1-218-990-81	SHORT CHIP	0	R6162	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R6066	1-218-990-81	SHORT CHIP	0	R6163	1-218-937-11	METAL CHIP	47 5% 1/1.6W
R6068	1-218-990-81	SHORT CHIP	0	R6164	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R6069	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R6165	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R6074	1-208-975-11	METAL CHIP	22K 0.5% 1/1.6W	R6166	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R6075	1-208-911-11	METAL CHIP	10K 0.5% 1/1.6W	R6167	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R6079	1-208-931-11	METAL CHIP	68K 0.5% 1/1.6W	R6168	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R6081	1-208-927-11	METAL CHIP	47K 0.5% 1/1.6W	R6169	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R6082	1-208-911-11	METAL CHIP	10K 0.5% 1/1.6W	R6170	1-218-935-11	METAL CHIP	33 5% 1/1.6W
R6083	1-208-911-11	METAL CHIP	15K 0.5% 1/1.6W	R6171	1-218-941-81	METAL CHIP	100 5% 1/1.6W
R6084	1-208-939-11	METAL CHIP	4.7K 0.5% 1/1.6W	R6172	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R6088	1-208-975-11	METAL CHIP	22K 0.5% 1/1.6W	R6173	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R6089	1-218-990-81	SHORT CHIP	0	R6174	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R6090	1-218-990-81	SHORT CHIP	0	R6175	1-218-965-11	METAL CHIP	10K 5% 1/1.6W
R6091	1-208-931-11	METAL CHIP	68K 0.5% 1/1.6W	R6176	1-218-937-11	METAL CHIP	47 5% 1/1.6W
R6092	1-208-975-11	METAL CHIP	22K 0.5% 1/1.6W	R6177	1-218-937-11	METAL CHIP	47 5% 1/1.6W
R6107	1-208-975-11	METAL CHIP	22K 0.5% 1/1.6W	R6178	1-218-937-11	METAL CHIP	47 5% 1/1.6W
R6108	1-208-927-11	METAL CHIP	47K 0.5% 1/1.6W	R6179	1-218-935-11	METAL CHIP	33 5% 1/1.6W
R6116	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R6180	1-218-941-81	METAL CHIP	100 5% 1/1.6W
R6121	1-218-953-11	METAL CHIP	1K 5% 1/1.6W	R6181	1-218-941-81	METAL CHIP	100 5% 1/1.6W
R6122	1-218-965-11	METAL CHIP	10K 5% 1/1.6W	R6182	1-208-860-81	METAL CHIP	75 0.5% 1/1.6W

REFNO.	PARTNO.	DESCRIPTION	REMARK	REFNO.	PARTNO.	DESCRIPTION	REMARK
RT803	1-218-961-11	METAL CHIP	4.7K 5% 1/16W	RT944	1-218-941-81	METAL CHIP	100 5% 1/16W
RT804	1-211-969-11	METAL CHIP	10 0.5% 1/10W			< RESISTOR CHIP >	
RT805	1-218-953-11	METAL CHIP	1K 5% 1/16W				
RT806	1-218-953-11	METAL CHIP	1K 5% 1/16W				
RT809	1-220-880-81	METAL CHIP	27 0.5% 1/16W	RB2000	1-242-863-21	RES. NETWORK 33	(1005X4)
RT810	1-216-853-11	METAL CHIP	470K 5% 1/10W	RB2002	1-242-863-21	RES. NETWORK 33	(1005X4)
RT811	1-216-853-11	METAL CHIP	470K 5% 1/10W	RB2004	1-242-863-21	RES. NETWORK 33	(1005X4)
RT817	1-218-990-81	SHORT CHIP	0	RB4002	1-242-863-21	RES. NETWORK 33	(1005X4)
RT818	1-218-990-81	SHORT CHIP	0	RB4003	1-242-863-21	RES. NETWORK 33	(1005X4)
RT819	1-218-990-81	SHORT CHIP	0	RB4105	1-234-372-11	RES. NETWORK 100	(1005X4)
RT820	1-208-935-11	METAL CHIP	100K 0.5% 1/16W	RB4107	1-234-372-11	RES. NETWORK 100	(1005X4)
RT822	1-218-990-81	SHORT CHIP	0	RB4108	1-234-372-11	RES. NETWORK 100	(1005X4)
RT823	1-218-990-81	SHORT CHIP	0	RB4109	1-234-372-11	RES. NETWORK 100	(1005X4)
RT824	1-211-969-11	METAL CHIP	10 0.5% 1/10W	RB4110	1-234-372-21	RES. NETWORK 10K	(1005X4)
RT826	1-218-990-81	SHORT CHIP	0	RB4111	1-239-698-11	RESISTOR, NETWORK 10K	
RT827	1-218-953-11	METAL CHIP	1K 5% 1/16W	RB4115	1-239-674-81	RESISTOR, NETWORK 100	
RT828	1-218-953-11	METAL CHIP	1K 5% 1/16W	RB4116	1-239-698-11	RESISTOR, NETWORK 10K	
RT829	1-218-990-81	SHORT CHIP	0	RB4117	1-239-674-81	RESISTOR, NETWORK 100	
RT830	1-218-990-81	SHORT CHIP	0	RB4118	1-239-674-81	RESISTOR, NETWORK 100	
RT903	1-218-978-11	METAL CHIP	120K 5% 1/16W	RB4119	1-234-372-11	RES. NETWORK 100	(1005X4)
RT904	1-218-978-11	METAL CHIP	120K 5% 1/16W	RB4120	1-239-674-81	RESISTOR, NETWORK 100	
RT905	1-218-978-11	METAL CHIP	120K 5% 1/16W	RB4121	1-239-698-11	RESISTOR, NETWORK 10K	
RT906	1-218-978-11	METAL CHIP	120K 5% 1/16W	RB4122	1-239-698-11	RESISTOR, NETWORK 10K	
RT907	1-218-965-11	METAL CHIP	10K 5% 1/16W	RB4708	1-242-863-21	RES. NETWORK 33	(1005X4)
RT908	1-218-965-11	METAL CHIP	10K 5% 1/16W	RB4709	1-242-863-21	RES. NETWORK 33	(1005X4)
RT909	1-218-965-11	METAL CHIP	10K 5% 1/16W	RB4710	1-242-863-21	RES. NETWORK 33	(1005X4)
RT910	1-218-965-11	METAL CHIP	10K 5% 1/16W	RB4711	1-242-863-21	RES. NETWORK 33	(1005X4)
RT911	1-218-965-11	METAL CHIP	10K 5% 1/16W	RB4712	1-242-863-21	RES. NETWORK 33	(1005X4)
RT912	1-218-965-11	METAL CHIP	10K 5% 1/16W	RB4713	1-234-372-21	RES. NETWORK 10K	(1005X4)
RT913	1-218-965-11	METAL CHIP	10K 5% 1/16W	RB4715	1-242-863-21	RES. NETWORK 33	(1005X4)
RT914	1-218-965-11	METAL CHIP	10K 5% 1/16W	RB4716	1-242-863-21	RES. NETWORK 33	(1005X4)
RT915	1-218-965-11	METAL CHIP	10K 5% 1/16W	RB4717	1-242-863-21	RES. NETWORK 33	(1005X4)
RT916	1-218-965-11	METAL CHIP	10K 5% 1/16W	RB4718	1-242-863-21	RES. NETWORK 33	(1005X4)
RT917	1-218-965-11	METAL CHIP	10K 5% 1/16W	RB4720	1-234-372-21	RES. NETWORK 10K	(1005X4)
RT918	1-218-965-11	METAL CHIP	10K 5% 1/16W	RB4721	1-200-051-21	RES. NETWORK 150 (1005X4)	
RT919	1-211-969-11	METAL CHIP	10 0.5% 1/10W	RB4722	1-200-051-21	RES. NETWORK 150 (1005X4)	
RT920	1-218-933-11	METAL CHIP	22 5% 1/16W	RB4723	1-200-051-21	RES. NETWORK 150 (1005X4)	
RT921	1-218-965-11	METAL CHIP	10K 5% 1/16W	RB4724	1-234-372-21	RES. NETWORK 75	(1005X4)
RT922	1-218-981-91	METAL CHIP	220K 5% 1/16W	RB4725	1-234-372-21	RES. NETWORK 75	(1005X4)
RT923	1-218-965-11	METAL CHIP	10K 5% 1/16W	RB4726	1-200-051-21	RES. NETWORK 150 (1005X4)	
RT930	1-218-990-81	SHORT CHIP	0	RB4727	1-200-051-21	RES. NETWORK 150 (1005X4)	
RT931	1-218-990-81	SHORT CHIP	0	RB4728	1-200-051-21	RES. NETWORK 150 (1005X4)	
RT932	1-218-990-81	SHORT CHIP	0	RB4729	1-242-863-21	RES. NETWORK 33	(1005X4)
RT933	1-218-990-81	SHORT CHIP	0	RB4730	1-242-863-21	RES. NETWORK 33	(1005X4)
RT934	1-216-864-11	SHORT CHIP	0	RB4731	1-242-863-21	RES. NETWORK 33	(1005X4)
RT935	1-216-864-11	SHORT CHIP	0	RB4732	1-242-863-21	RES. NETWORK 33	(1005X4)
RT936	1-216-864-11	SHORT CHIP	0	RB4733	1-242-863-21	RES. NETWORK 33	(1005X4)
RT937	1-216-864-11	SHORT CHIP	0	RB5500	1-239-706-81	RESISTOR, NETWORK 47K	(1005X4)
RT938	1-216-864-11	SHORT CHIP	0	RB5501	1-234-380-21	RES. NETWORK 47K	(1005X4)
RT939	1-216-864-11	SHORT CHIP	0	RB5502	1-239-674-81	RESISTOR, NETWORK 100	

REFNO.	PARTNO	DESCRIPTION	REMARK	REFNO.	PARTNO	DESCRIPTION	REMARK
RB7300	1-242-963-21	RES, NETWORK 33	(1005X4)	VD3029	1-802-078-11	VARIABLE (SMD)	
RB7301	1-242-963-21	RES, NETWORK 33	(1005X4)	VD3030	1-802-078-11	VARIABLE (SMD)	
RB7302	1-234-078-21	RES, NETWORK 10K	(1005X4)	VD3031	1-802-078-11	VARIABLE (SMD)	
RB7303	1-234-078-21	RES, NETWORK 10K	(1005X4)	VD3032	1-802-078-11	VARIABLE (SMD)	
RB7800	1-234-079-21	RES, NETWORK 22K	(1005X4)	VD3033	1-802-078-11	VARIABLE (SMD)	
RB7801	1-234-080-21	RES, NETWORK 47K	(1005X4)	VD3034	1-802-078-11	VARIABLE (SMD)	
RB7802	1-239-076-81	RESISTOR, NETWORK 47K		VD3035	1-802-078-11	VARIABLE (SMD)	
RB7806	1-239-694-81	RESISTOR, NETWORK 4.7K		VD3036	1-802-078-11	VARIABLE (SMD)	
RB7807	1-239-668-81	RESISTOR, NETWORK 33		VD4002	1-802-078-11	VARIABLE (SMD)	
RB7808	1-239-668-81	RESISTOR, NETWORK 33		VD4100	1-802-090-21	VARIABLE, CHIP	
RB7809	1-239-668-81	RESISTOR, NETWORK 33		VD4101	1-802-078-11	VARIABLE (SMD)	
RB7810	1-239-668-81	RESISTOR, NETWORK 33	(1005X4)	VD4102	1-802-078-11	VARIABLE (SMD)	
RB7812	1-234-381-11	RES, NETWORK 100K	(1005X4)	VD4103	1-802-078-11	VARIABLE (SMD)	
RB7813	1-239-674-81	RESISTOR, NETWORK 100	(1005X4)	VD4104	1-805-774-21	VARIABLE, CHIP	
RB7814	1-234-075-21	RES, NETWORK 1K	(1005X4)	VD4105	1-805-774-21	VARIABLE, CHIP	
RB7817	1-239-666-11	RESISTOR, NETWORK 1K		VD4501	1-802-078-11	VARIABLE (SMD)	
RB7818	1-239-666-11	RESISTOR, NETWORK 1K		VD4502	1-802-078-11	VARIABLE (SMD)	
RB7821	1-239-710-11	RESISTOR, NETWORK 100K		VD4503	1-802-078-11	VARIABLE (SMD)	
RB7822	1-239-710-11	RESISTOR, NETWORK 100K		VD4504	1-802-078-11	VARIABLE (SMD)	
RB7823	1-234-073-21	RES, NETWORK 75	(1005X4)	VD4505	1-802-078-11	VARIABLE (SMD)	
RB7824	1-234-381-11	RES, NETWORK 100K	(1005X4)	VD4506	1-802-078-11	VARIABLE (SMD)	
		< VARIABLE >		VD4507	1-802-078-11	VARIABLE (SMD)	
VD3001	1-802-078-11	VARIABLE (SMD)		VD4508	1-802-078-11	VARIABLE (SMD)	
VD3002	1-802-078-11	VARIABLE (SMD)		VD6001	1-802-078-11	VARIABLE (SMD)	
VD3003	1-802-078-11	VARIABLE (SMD)		VD7803	1-802-078-11	VARIABLE (SMD)	
VD3004	1-802-078-11	VARIABLE (SMD)		VD7804	1-802-078-11	VARIABLE (SMD)	
VD3006	1-802-078-11	VARIABLE (SMD)					
VD3007	1-802-078-11	VARIABLE (SMD)					
VD3008	1-802-078-11	VARIABLE (SMD)					
VD3009	1-802-078-11	VARIABLE (SMD)					
VD3010	1-802-078-11	VARIABLE (SMD)					
VD3011	1-802-078-11	VARIABLE (SMD)					
VD3012	1-802-078-11	VARIABLE (SMD)					
VD3013	1-802-078-11	VARIABLE (SMD)					
VD3014	1-802-078-11	VARIABLE (SMD)					
VD3015	1-802-078-11	VARIABLE (SMD)					
VD3016	1-802-078-11	VARIABLE (SMD)					
VD3017	1-802-078-11	VARIABLE (SMD)					
VD3018	1-802-078-11	VARIABLE (SMD)					
VD3019	1-802-078-11	VARIABLE (SMD)					
VD3020	1-802-078-11	VARIABLE (SMD)					
VD3022	1-802-078-11	VARIABLE (SMD)					
VD3023	1-802-078-11	VARIABLE (SMD)					
VD3024	1-802-078-11	VARIABLE (SMD)					
VD3025	1-802-078-11	VARIABLE (SMD)					
VD3026	1-802-078-11	VARIABLE (SMD)					
VD3027	1-802-078-11	VARIABLE (SMD)					
VD3028	1-802-078-11	VARIABLE (SMD)					

A-1643-232-A H1 Board Complete

REFNO.	PARTNO	DESCRIPTION	REMARK
K2000	1-813-095-11	VIBRATOR, CRYSTAL	
X4100	1-814-173-11	VIBRATOR, CRYSTAL	
		< CRYSTAL >	
		< CAPACITOR >	
C1002	1-164-230-11	CERAMIC CHIP 220PF	5.00% 5
C1004	1-100-909-11	CERAMIC CHIP 100F	10% 6
		< CONNECTOR >	
CM1000	*1-921-137-11	HEADER ASSEMBLY FOR PWB 10P	
		< DIODE >	
D1001	6-502-352-01	DI SMD-5220T081869Q	
D1004	6-502-352-01	DI SMD-5220T081869Q	
D1007	6-500-817-01	DIODE (LED) SMD-5120W86	
		< IC >	
IC1000	6-600-888-01	IC KSM-512M2Q	

REFNO.	PARTNO	DESCRIPTION	REMARK
		< TRANSISTOR >	
Q1000	8-729-028-96	TRANSISTOR DTC114EPA-1106	
Q1001	8-729-028-96	TRANSISTOR DTC114EPA-1106	
Q1002	8-729-028-96	TRANSISTOR DTC114EPA-1106	
Q1004	8-729-028-96	TRANSISTOR DTC114EPA-1106	
		< RESISTOR >	
R1000	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R1001	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
R1002	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R1004	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
R1005	1-216-817-11	METAL CHIP 470 5% 1/10W	
R1012	1-216-805-11	METAL CHIP 47 5% 1/10W	
R1013	1-216-864-11	SHORT CHIP 0	

REFNO.	PARTNO	DESCRIPTION	REMARK
--------	--------	-------------	--------

ACCESSORIES AND CONNECTORS

- 32 INCHES
- *1-836-914-11 LVDS HARNESS (32) [B] (CN3400) - PAPER1
 - *1-910-058-17 CONNECTOR ASSY 30P [B] (CN6000) - 62/H1/SV
 - *1-910-058-18 SPEAKER HARNESS (32) [B] (CN7900) - SPEAKER

37 INCHES

- *1-936-483-11 LEAD WIRE CONNECTOR (LVDS) (PAPER)-B (CN4000)
- *1-910-055-82 HARNESS ASSY MAIN (37) [B] (CN6000) - 64/H1 (CN1000) / 2IN
- *1-910-055-84 CONNECTOR ASSY 3P [B] (CN4100) - 5W ASSY
- *1-910-055-86 SPEAKER HARNESS (37) [B] (CN7900) - SPEAKER

40 INCHES

- *1-836-420-11 CONNECTOR ASSY, NOF61 (BALANCER-1P1P)
- *1-836-483-11 LEAD WIRE CONNECTOR (LVDS) (PAPER)-B (CN4000)
- *1-910-054-60 CONNECTOR ASSY 7P (BALANCER-1P1P)
- *1-910-055-83 CONNECTOR ASSY 30P [B] (CN6000) - 1P1P/PAPER

- *1-910-055-85 CONNECTOR ASSY 3P [B] (CN4100) - 5W ASSY
- *1-910-055-87 SPEAKER HARNESS (40) [B] (CN7900) - SPEAKER

INSTRUCTION MANUALS

- *4-152-587-11 INSTRUCTION MANUAL (I) ENGLISH
- *4-152-587-21 INSTRUCTION MANUAL (E) FRENCH/ITALIAN/GERMAN/DUTCH/SPANISH/PORTUG
- *4-152-587-31 INSTRUCTION MANUAL (K) DANISH/NORWEGIAN/SWEDISH/FINISH/POLISH/ROMAN
- *4-152-587-41 INSTRUCTION MANUAL (K) HUNGARIAN/CZECH/GREEK/SLOVAK/TURKISH/BULG
- *4-152-587-51 INSTRUCTION MANUAL (R) RUSSIAN/UKRAINIAN

REMOTE COMMANDER

- *1-487-192-31 REMOTE COMMANDER (RM-2D017)

9-883-457-01

Sony Corporation
Sony UK
Service Promotions Dept.

English
09GP71
Printed in
© 2005