



website:<http://biz.LGservice.com>
e-mail:<http://www.LGservice.com/techsup.html>

COLOR TV


SERVICE MANUAL

CHASSIS : MP-03AB

MODEL : RE/RL-39NZ43RB

CAUTION

BEFORE SERVICING THE CHASSIS,
READ THE SAFETY PRECAUTIONS IN THIS MANUAL.

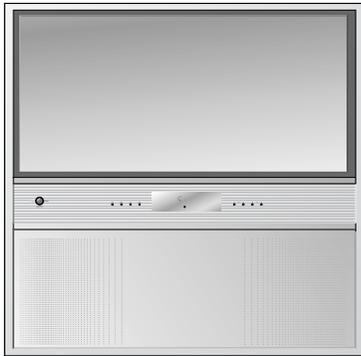

CONTENTS

| | |
|--------------------------------|----|
| CONTENTS | 2 |
| SAFETY PRECAUTIONS | 3 |
| SERVICING PRECAUTIONS | 4 |
| SPECIFICATIONS | 6 |
| CONTROL DESCRIPTIONS | 9 |
| ADJUSTMENT INSTRUCTIONS | 13 |
| TROUBLE SHOOTING | 26 |
| BLOCK DIAGRAM | 33 |
| PRINTED CIRCUIT BOARD | 34 |
| EXPLODED VIEW | 46 |
| EXPLODED VIEW PARTS LIST | 47 |
| REPLACEMENT PARTS LIST | 48 |
| SVC. Sheet | |

SAFETY PRECAUTIONS

IMPORTANT SAFETY NOTICE

Many electrical and mechanical parts in this chassis have special safety-related characteristics. These parts are identified by Δ in the Schematic Diagram and Replacement Parts List. It is essential that these special safety parts should be replaced with the same components as recommended in this manual to prevent X-RADIATION, Shock, Fire, or other Hazards. Do not modify the original design without permission of manufacturer.

General Guidance

An **isolation Transformer should always be used** during the servicing of a receiver whose chassis is not isolated from the AC power line. Use a transformer of adequate power rating as this protects the technician from accidents resulting in personal injury from electrical shocks.

It will also protect the receiver and its components from being damaged by accidental shorts of the circuitry that may be inadvertently introduced during the service operation.

If any fuse (or Fusible Resistor) in this TV receiver is blown, replace it with the specified.

When replacing a high wattage resistor (Oxide Metal Film Resistor, over 1W), keep the resistor 10mm away from PCB.

Keep wires away from high voltage or high temperature parts.

Due to high vacuum and large surface area of picture tube, extreme care should be used in **handling the Picture Tube**. Do not lift the Picture tube by its Neck.

X-RAY Radiation

Warning:

The source of X-RAY RADIATION in this TV receiver is the High Voltage Section and the Picture Tube. For continued X-RAY RADIATION protection, the replacement tube must be the same type tube as specified in the Replacement Parts List.

To determine the presence of high voltage, use an accurate high impedance HV meter.

Adjust brightness, color, contrast controls to minimum.

Measure the high voltage.

The meter reading should indicate

31.5 ; 15KV

If the meter indication is out of tolerance, immediate service and correction is required to prevent the possibility of premature component failure.

Before returning the receiver to the customer,

always perform an **AC leakage current check** on the exposed metallic parts of the cabinet, such as antennas, terminals, etc., to be sure the set is safe to operate without damage of electrical shock.

Leakage Current Cold Check(Antenna Cold Check)

With the instrument AC plug removed from AC source, connect an electrical jumper across the two AC plug prongs. Place the AC switch in the on position, connect one lead of ohm-meter to the AC plug prongs tied together and touch other ohm-meter lead in turn to each exposed metallic parts such as antenna terminals, phone jacks, etc.

If the exposed metallic part has a return path to the chassis, the measured resistance should be between $1M\Omega$ and $5.2M\Omega$.

When the exposed metal has no return path to the chassis the reading must be infinite.

An other abnormality exists that must be corrected before the receiver is returned to the customer.

Leakage Current Hot Check (See below Figure)

Plug the AC cord directly into the AC outlet.

Do not use a line Isolation Transformer during this check.


Connect 1.5K/10watt resistor in parallel with a 0.15uF capacitor between a known good earth ground (Water Pipe, Conduit, etc.) and the exposed metallic parts.

Measure the AC voltage across the resistor using AC voltmeter with 1000 ohms/volt or more sensitivity.

Reverse plug the AC cord into the AC outlet and repeat AC voltage measurements for each exposed metallic part. Any voltage measured must not exceed 0.75 volt RMS which corresponds to 0.5mA.

In case any measurement is out of the limits specified, there is possibility of shock hazard and the set must be checked and repaired before it is returned to the customer.

Leakage Current Hot Check circuit

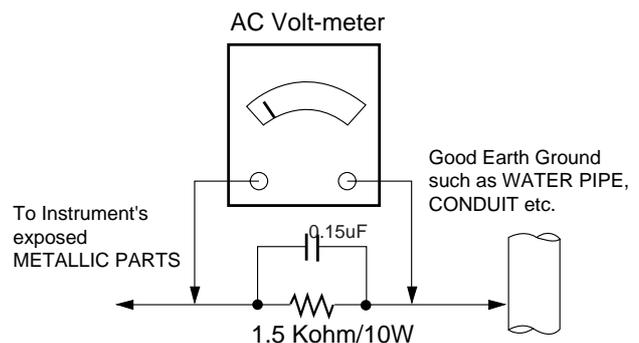

SERVICING PRECAUTIONS

CAUTION: Before servicing receivers covered by this service manual and its supplements and addenda, read and follow the **SAFETY PRECAUTIONS** on page 3 of this publication.

NOTE: If unforeseen circumstances create conflict between the following servicing precautions and any of the safety precautions on page 3 of this publication, always follow the safety precautions. Remember: Safety First.

General Servicing Precautions

1. Always unplug the receiver AC power cord from the AC power source before;
 - a. Removing or reinstalling any component, circuit board module or any other receiver assembly.
 - b. Disconnecting or reconnecting any receiver electrical plug or other electrical connection.
 - c. Connecting a test substitute in parallel with an electrolytic capacitor in the receiver.

CAUTION: A wrong part substitution or incorrect polarity installation of electrolytic capacitors may result in an explosion hazard.

- d. Discharging the picture tube anode.
2. Test high voltage only by measuring it with an appropriate high voltage meter or other voltage measuring device (DVM, FETVOM, etc) equipped with a suitable high voltage probe. Do not test high voltage by "drawing an arc".
 3. Discharge the picture tube anode only by (a) first connecting one end of an insulated clip lead to the degaussing or kine aquadag grounding system shield at the point where the picture tube socket ground lead is connected, and then (b) touch the other end of the insulated clip lead to the picture tube anode button, using an insulating handle to avoid personal contact with high voltage.
 4. Do not spray chemicals on or near this receiver or any of its assemblies.
 5. Unless specified otherwise in this service manual, clean electrical contacts only by applying the following mixture to the contacts with a pipe cleaner, cotton-tipped stick or comparable nonabrasive applicator; 10% (by volume) Acetone and 90% (by volume) isopropyl alcohol (90%-99% strength)

CAUTION: This is a flammable mixture. Unless specified otherwise in this service manual, lubrication of contacts is not required.
 6. Do not defeat any plug/socket B+ voltage interlocks with which receivers covered by this service manual might be equipped.
 7. Do not apply AC power to this instrument and/or any of its electrical assemblies unless all solid-state device heat sinks are correctly installed.
 8. Always connect the test receiver ground lead to the receiver chassis ground before connecting the test receiver positive lead. Always remove the test receiver ground lead last.
 9. *Use with this receiver only the test fixtures specified in this service manual.*

CAUTION: Do not connect the test fixture ground strap to any heatsink in this receiver.

Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called *Electrostatically Sensitive (ES) Devices*. Examples of typical ES devices are integrated circuits and some field-effect

transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by static by static electricity.

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any electrostatic charge on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging wrist strap device, which should be removed to prevent potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static type solder removal device. Some solder removal devices not classified as "anti-static" can generate electrical charges sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

CAUTION: Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.
8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity sufficient to damage an ES device.)

General Soldering Guidelines

1. Use a grounded-tip, low-wattage soldering iron and appropriate tip size and shape that will maintain tip temperature within the range of 500 °F to 600 °F.
2. Use an appropriate gauge of RMA resin-core solder composed of 60 parts tin/40 parts lead.
3. Keep the soldering iron tip clean and well tinned.
4. Thoroughly clean the surfaces to be soldered. Use a mall wirebrush (0.5 inch, or 1.25cm) brush with a metal handle. Do not use freon-propelled spray-on cleaners.
5. Use the following unsoldering technique
 - a. Allow the soldering iron tip to reach normal temperature. (500 °F to 600 °F)
 - b. Heat the component lead until the solder melts.
 - c. Quickly draw the melted solder with an anti-static, suction-type solder removal device or with solder braid.

CAUTION: Work quickly to avoid overheating the circuit board printed foil.
6. Use the following soldering technique.
 - a. Allow the soldering iron tip to reach a normal temperature (500 °F to 600 °F)
 - b. First, hold the soldering iron tip and solder the strand against the component lead until the solder melts.

- c. Quickly move the soldering iron tip to the junction of the component lead and the printed circuit foil, and hold it there only until the solder flows onto and around both the component lead and the foil.

CAUTION: Work quickly to avoid overheating the circuit board printed foil.

- d. Closely inspect the solder area and remove any excess or splashed solder with a small wire-bristle brush.

IC Remove/Replacement

Some chassis circuit boards have slotted holes (oblong) through which the IC leads are inserted and then bent flat against the circuit foil. When holes are the slotted type, the following technique should be used to remove and replace the IC. When working with boards using the familiar round hole, use the standard technique as outlined in paragraphs 5 and 6 above.

Removal

1. Desolder and straighten each IC lead in one operation by gently prying up on the lead with the soldering iron tip as the solder melts.
2. Draw away the melted solder with an anti-static suction-type solder removal device (or with solder braid) before removing the IC.

Replacement

1. Carefully insert the replacement IC in the circuit board.
2. Carefully bend each IC lead against the circuit foil pad and solder it.
3. Clean the soldered areas with a small wire-bristle brush. (It is not necessary to reapply acrylic coating to the areas).

"Small-Signal" Discrete Transistor

Removal/Replacement

1. Remove the defective transistor by clipping its leads as close as possible to the component body.
2. Bend into a "U" shape the end of each of three leads remaining on the circuit board.
3. Bend into a "U" shape the replacement transistor leads.
4. Connect the replacement transistor leads to the corresponding leads extending from the circuit board and crimp the "U" with long nose pliers to insure metal to metal contact then solder each connection.

Power Output, Transistor Device

Removal/Replacement

1. Heat and remove all solder from around the transistor leads.
2. Remove the heatsink mounting screw (if so equipped).
3. Carefully remove the transistor from the heat sink of the circuit board.
4. Insert new transistor in the circuit board.
5. Solder each transistor lead, and clip off excess lead.
6. Replace heatsink.

Diode Removal/Replacement

1. Remove defective diode by clipping its leads as close as possible to diode body.
2. Bend the two remaining leads perpendicular y to the circuit board.
3. Observing diode polarity, wrap each lead of the new diode around the corresponding lead on the circuit board.
4. Securely crimp each connection and solder it.
5. Inspect (on the circuit board copper side) the solder joints of the two "original" leads. If they are not shiny, reheat them and if necessary, apply additional solder.

Fuse and Conventional Resistor

Removal/Replacement

1. Clip each fuse or resistor lead at top of the circuit board hollow stake.
2. Securely crimp the leads of replacement component around notch at stake top.
3. Solder the connections.

CAUTION: Maintain original spacing between the replaced component and adjacent components and the circuit board to prevent excessive component temperatures.

Circuit Board Foil Repair

Excessive heat applied to the copper foil of any printed circuit board will weaken the adhesive that bonds the foil to the circuit board causing the foil to separate from or "lift-off" the board. The following guidelines and procedures should be followed whenever this condition is encountered.

At IC Connections

To repair a defective copper pattern at IC connections use the following procedure to install a jumper wire on the copper pattern side of the circuit board. (Use this technique only on IC connections).

1. Carefully remove the damaged copper pattern with a sharp knife. (Remove only as much copper as absolutely necessary).
2. Carefully scratch away the solder resist and acrylic coating (if used) from the end of the remaining copper pattern.
3. Bend a small "U" in one end of a small gauge jumper wire and carefully crimp it around the IC pin. Solder the IC connection.
4. Route the jumper wire along the path of the out-away copper pattern and let it overlap the previously scraped end of the good copper pattern. Solder the overlapped area and clip off any excess jumper wire.

At Other Connections

Use the following technique to repair the defective copper pattern at connections other than IC Pins. This technique involves the installation of a jumper wire on the component side of the circuit board.

1. Remove the defective copper pattern with a sharp knife. Remove at least 1/4 inch of copper, to ensure that a hazardous condition will not exist if the jumper wire opens.
2. Trace along the copper pattern from both sides of the pattern break and locate the nearest component that is directly connected to the affected copper pattern.
3. Connect insulated 20-gauge jumper wire from the lead of the nearest component on one side of the pattern break to the lead of the nearest component on the other side. Carefully crimp and solder the connections.

CAUTION: Be sure the insulated jumper wire is dressed so the it does not touch components or sharp edges.

SPECIFICATIONS

NOTE : Specifications and others are subject to change without notice for improvement.

■ Scope

This specification can be applied to all the Projection television related to MP-03AB Chassis.

| Chassis | Model Name | Market Place | Brand | Remark |
|-------------------|----------------------|----------------------------------|-------|----------------------------|
| MP-03AB | RE-39NZ43RB | Europe (except France) | LG | 'T'/'RB' : Teletext option |
| | RE-44/49/54NA13RB | | | |
| | RE-44NA14T | | | |
| | RE-40/45/56NZ60RB | | | |
| | RE-44/49/56NZ23RB | | | |
| | RT-39NZ43RB | China, Asia, Africa, Middle East | | |
| | RT-44/49/54NA13RB/RP | | | |
| | RT-44/49/54NA23RB/RP | | | |
| | RT-44/49/54NA43RB/RP | | | |
| | RT-44NA14T | | | |
| | RT-40/45/56NZ60RB/RP | | | |
| | RT-44/49/56NZ23RB/RP | | | |
| | RL-39NZ43RB | France | | |
| | RL-44/49/54NA13RB | | | |
| | RL-44NA14T | | | |
| RL-40/45/56NZ60RB | | | | |
| RL-44/49/56NZ23RB | | | | |

■ Test Condition

Conduct the test as mentioned below.

- 1) Temperature : 25 ± 5°C
- 2) Relative Humidity : 65 ± 10%
- 3) Power Voltage : Standard input voltage (230V~, 50Hz)
But Standard input voltage mark value is marked by model.
- 4) Use the parts only designated in B.O.M.,PARTS SPEC.,or drawings.
- 5) Follow each drawing or spec for spec and performance of parts,based upon P/N of RPL
- 6) Warm up TV set for more than 60min before the measurement.

■ Test and Inspection Method

- 1) Performance : Follow the Standard of LG TV test
- 2) Extra requirement

| Model | Market | Remark | Appliance |
|---------------------------------|--------|--|-----------|
| RE/RL-44NA14T RE/RL-40NZ60RB | EUROPE | CE SAFETY : CB EMI : EN55013 EMS : EN55020 | OK |

■ Test and Inspection Method

(★ Mark : Option Item)

| No | Item | | Specification | Remark |
|----|-----------------------|----|---|-------------------------|
| 1 | Receiving System | RE | PAL, SECAM-BG PAL, SECAM-DK, PAL-I | AV can be input NTSC-M |
| | | RL | PAL, SECAM-BG SECAM-LL' | |
| | | RT | PAL, SECAM-BG, PAL, SECAM-DK, PAL-I NTSC-M | |
| 2 | Available Channel | | 1) VHF : E2 ~ E12 2) UHF : E21 ~ E69 3) CATV : S1~S20 4) HYPER : S21~S41 | ★ (RL model for France) |
| | | | LL'VHF : B,C,D | |
| 3 | Input Voltage | | AC 110-240V~, 50/60Hz | ★ (RT model w/o China) |
| | | | AC 230V~, 50/60Hz | ★ (RE,RL, China model) |
| 4 | Market | RE | Europe except France | |
| | | RL | France | |
| | | RT | Asia, Africa, Middle East | |
| 5 | Screen Size | | 44/49/54, 39/40/45/50/57 inch | |
| 6 | Aspect Ratio | | 4:3, 16:9 | |
| 7 | Tuning System | | FVS 100 Program | ★ (With Teletext model) |
| | | | FVS 200 Program | ★ (W/O Teletext model) |
| 8 | TUNER IF | | 38.9MHz, 39MHz | |
| 9 | Operating Environment | | 1)Temperature : -5 ~ 40 °C | |
| | | | 2) Humidity : 30 ~ 95 % | |
| 10 | Storage Environment | | 3) Temperature : -20 ~ 50 °C | |
| | | | 4) Humidity : 30 ~ 95 % | |

■ Feature and Function


| No | Item | | Specification | Remark | |
|----------|-----------------|---|--|------------------------------------|--|
| 1 | Feature | AV Input | 1 | V/L/R | Side |
| | | | 2 | V/L/R | ★ (Rear, RT model) |
| | | AV Output | 1 | V/L/R | ★ (Rear, RT model) |
| | | Component Input | 2 | COMPONENT1, L/R COMPONENT2, L/R | Rear 480i/ 480P/ 576i (1080i for CHINA) |
| | | S-Video Input | 2 | Y/C | side 1, Rear 1 |
| | SCART | 3 | Full SCART (with RGB Input) : 1 Half SCART : 1 (AV In/Out) Half SCART ; 1 (AV In, YC In) | ★ (Rear, RE,RL model) | |
| 2 | key | Local Key | POWER, MENU, VOL(◀,▶), PR(▲,▼) TV/AV, OK, MUTE (W/O Index) | Front ★ INDEX (With Index) | |
| | | Remocon | NEC Code | | |
| 3 | Picture | PSM | Dynamic/ Standard/ Mild/ Game/ User | | |
| | | User Control | Contrast/ Brightness/ Colour/ Sharpness/ Tint | Tint : NTSC system only | |
| | | DRPC | On/ Off | ★ | |
| | | VM | 1/ 2/ 3/ 4 | | |
| | Convergence | 1[+] Point/ 9[+] Point Auto Convergence (option) | ★ 3*3 EDC | | |
| 4 | Sound | SSM | Dolby Virtual/ Flat/ Music/ Movie/ Speech/ User | ★ Dolby virtual (Option) | |
| | | AVL | On/ Off | | |
| | | DBS | On/ Off | | |
| | | TV Speaker | On/ Off | | |
| | | Balance | L 50 ~ 0 ~ R 50 | | |
| 5 | Timer | Clock | -- : -- AM | | |
| | | Off time | -- : -- AM Off (On) | | |
| | | On time | -- : -- AM Pr 1 VOL 30 Off(On) | | |
| | | Auto sleep | On/ Off | | |
| 6 | Special | Language | Multi language | ★ | |
| | | Input | TV/ AV1/ AV2/ AV3/ AV4/ S-VIDEO4/ Component1/ Component2 | ★ S-VIDEO4 (EU ONLY) | |
| | | PIP Input | TV/ AV1/ AV2/ AV3/ AV4/ S-VIDEO4 | ★ S-VIDEO4 (EU ONLY) | |
| | | child lock | On/ Off | | |
| 7 | Etc. | Convergence | MANUAL ADJUST Auto Adjust | ★ | |
| | | Comb Filter | Digital comb filter | | |
| | | SVM | O | | |
| | | ARC | 4:3/ 16:9 (4:3 Model) 16:9/ 14:9/ ZOOM/ AUTO/ 4:3 (16:9 Model) | ★ | |
| | | ACMS | O | ★ | |
| | | Auto Off | On/ Off | | |
| Teletext | TOP/ FLOF/ LIST | ★ | | | |

CONTROLS DESCRIPTION

All the functions can be controlled with the remote control handset. Some functions can also be adjusted with the buttons on the front panel of the set.

Remote control handset

Before you use the remote control handset, please install the batteries. See the next page.

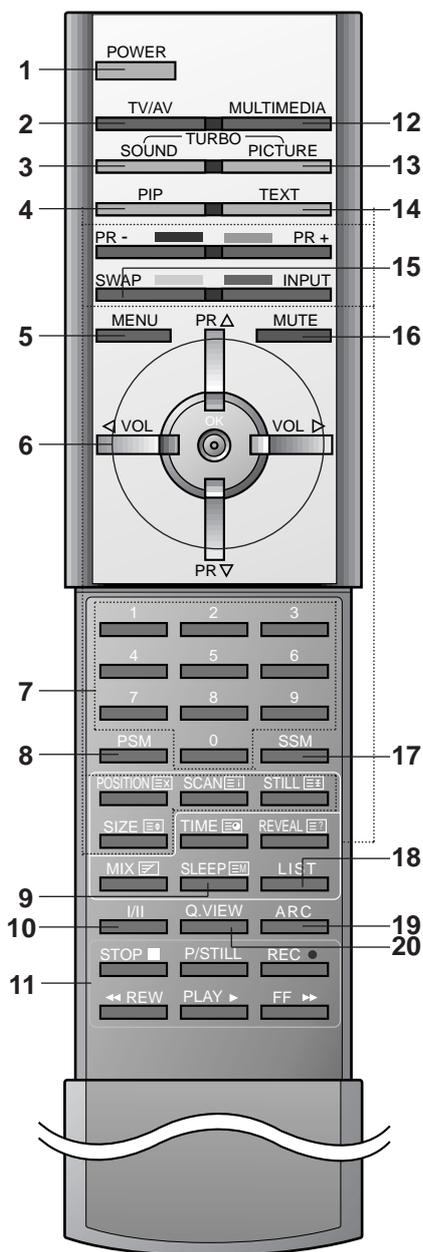

(With TELETEXT/PIP)

1. **POWER**
switches the set on from standby or off to standby.
2. **TV/AV**
selects TV or AV mode.
switches the set on from standby.
3. **TURBO SOUND BUTTON**
selects Turbo sound.
4. **PIP BUTTONS (option)**
PIP
switches the sub picture on or off.
PR +/-
selects a programme for the sub picture.
SWAP
alternates between main and sub picture.
INPUT
selects the input mode for the sub picture.
SIZE
adjusts the sub picture size.
STILL
freezes motion of the sub picture.
POSITION
relocates the sub picture in clockwise direction.
5. **MENU**
selects a menu.
6. **▲ / ▼ (Programme Up/Down)**
selects a programme or a menu item.
switches the set on from standby.
◀ / ▶ (Volume Up/Down)
adjusts the volume.
OK
accepts your selection or displays the current mode.
7. **NUMBER BUTTONS**
switches the set on from standby or directly select a number.
8. **PSM (Picture Status Memory)**
recalls your preferred picture setting.
9. **SLEEP**
sets the sleep timer.
10. **I/II**
selects the language during dual language broadcast.
selects the sound output (option).
11. **VCR BUTTONS**
control a LG video cassette recorder.

12. MULTIMEDIA

selects Component 1 or Component 2 modes.
switches the set on from standby.

13. TURBO PICTURE BUTTON

selects Turbo picture.

14. TELETEXT BUTTONS (option)

These buttons are used for teletext.
For further details, see the 'Teletext' section.

15. SWAP

returns to the previously viewed programme.
selects a favourite programme.

16. MUTE

switches the sound on or off.

17. SSM (Sound Status Memory)

recalls your preferred sound setting.

18. LIST

displays the programme table.

19. ARC (Aspect Ratio Control)

select your desired picture format.


20. Q.VIEW

returns to the previously viewed programme.
selects a favourite programme.

*** : No function**

COLOURED BUTTONS : These buttons are used for teletext (only TELETEXT models) or programme edit.




Note : In teletext mode, the **PR +/-**, **SWAP** and **INPUT** buttons are used for teletext function.

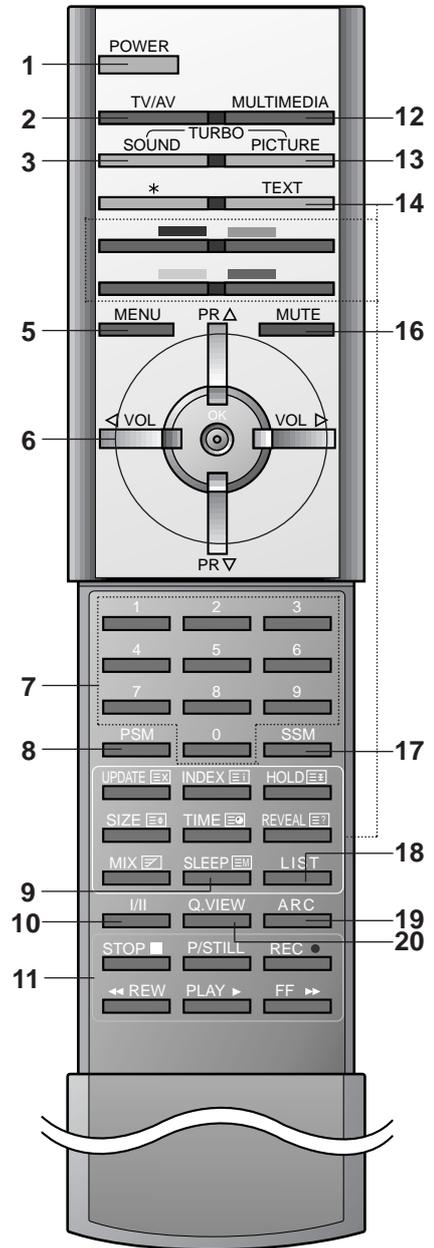

(With TELETEXT/Without PIP)



Front panel

• RE/RL-44/49/54NA13/14 series

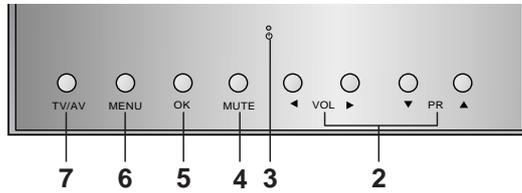



(Side panel)



• RE/RL-39NZ43 series

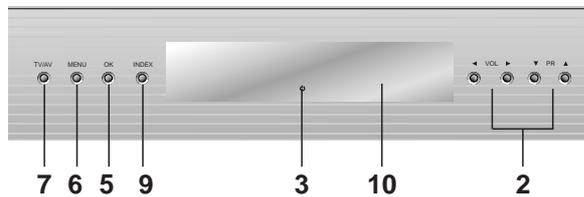



• RE/RL-44/49/54NZ23 series

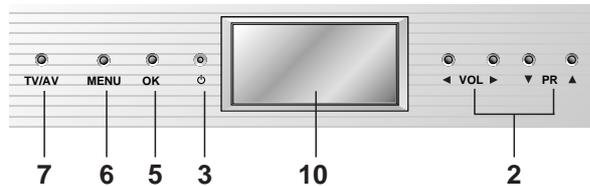

• RE/RL-44/54NA23/24 series


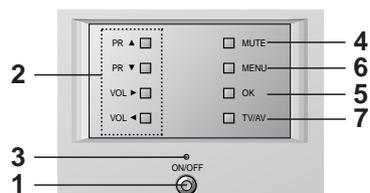



• RE/RL-44/54NA43/44 series



Front panel

• RE/RL-39/45/56NZ60 series

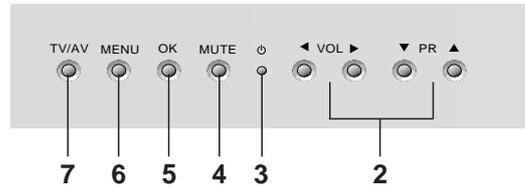

(Side panel)

1. **MAIN POWER (ON/OFF)**
switches the set on or off.
2. **◀ / ▶ (Volume Up/Down)**
adjusts the volume.
adjusts menu settings.
▲ / ▼ (Programme Up/Down)
selects a programme or a menu item.
switches the set on from standby.
3. **POWER/STANDBY INDICATOR**
illuminates brightly when the set is in standby mode.
dims when the set is switched on.
4. **MUTE (option)**
switches the sound on or off.
5. **OK**
accepts your selection or displays the current mode.
6. **MENU**
selects a menu.
7. **TV/AV**
selects TV or AV mode.
switches the set on from standby.
8. **REMOTE CONTROL SENSOR**
9. **INDEX (option)**
switches LED DISPLAY on or off.
10. **LED (Light Emitting Diode) DISPLAY (option)**
illuminates brightly when the set is switched on.
Option : Only RE/RL-39NZ43 series,
 : PAL/SECAM indicator
 : NTSC indicator
 : STEREO indicator
 : SLEEP Timer indicator
 : CHILD LOCK indicator
11. **AUDIO/VIDEO IN SOCKETS (AV3)**
Connect the audio/video out sockets of external equipment to these sockets.
S-VIDEO/AUDIO IN SOCKETS (S-AV)
Connect the video out socket of an S-VIDEO VCR to the **S-VIDEO** socket.
Connect the audio out sockets of the S-VIDEO VCR to the audio sockets as in **AV3**.

- * **CASTERS (on the bottom)**
turn and move the set easily.

ADJUSTMENT INSTRUCTIONS

These instructions are applied to only MP-03AB chassis.

Notes

1. Because this is not a hot chassis, it is not necessary to use an isolation transformer. However, the use of isolation transformer will help protect test instrument.
2. Adjustment must be done in the correct order.
3. The receiver must be operated for about 60 minutes prior to the adjustment. Pre-heatrun must be operated receiving moving pictures or 100% white pattern.

※ Never operate the SET over 10 minutes with still picture because a fluorescent material may get damage.

● Raster Slope/Focus 1th Adjustment

1. Preliminary steps

- 1) Apply power to the unit and switch the unit ON.
- 2) Receive the EU 05 CH signal.
- 3) Select INSTART key on the Remote Control and then select "0 RASTER ADJ" move the cursor or by pressing the key No. 0.
- 4) Adjust Lens Focus/Electric focus temporarily.


※ When select "0 RASTER ADJ" mode after entering adjustment mode with INSTART key, the convergence reset and then preparation for adjustment complete.

※ The convergence reset is possible even from convergence adjustment mode.


- 1) Enter into convergence adjustment mode: Select INSTART key on the Remote Control and then select "3 CONVERGENCE" move the cursor or using the key No..
- 2) Convergence reset: After press the key No. 5, press the ENTER key.
- 3) Adjustment mode release: Press the INSTART key

2. Adjustment

- 1) Display only the Green raster using lens covers to block Red and Blue.
- 2) Rotate the Green DY and tilt the screen like the figure below.

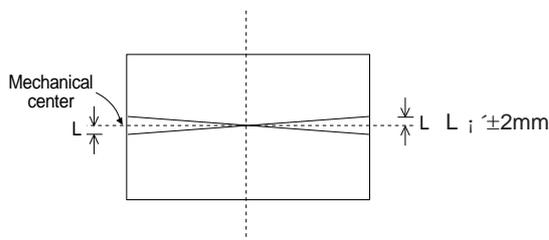

- 3) Make 2color raster with Red or Blue and Green.
- 4) Coincide the slope of red and blue raster to that of green.

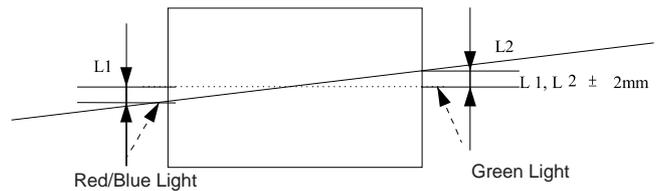

- Note) 1. When adjusting raster slope, loosen the DY and fasten it after adjusting.
2. Never rotate and adjust the fixed DY without loosening it.


● Beam Alignment Adjustment

1. Test Equipment

Video Test Generator(801GF) or Signal Generator can produce NTSC DOT pattern(408NPS or 5518/5418 equipment)

2. Preparation

- 1) Heat run over 60 minutes.
- 2) Pre-adjust Raster slope, Raster position & Lens focus & centering Magnet.
- 3) Check if the Magnet is located 45mm from the end of CRT.
- 4) In case of using 801GF : Receive #13 DOT Pattern of VGA mode(Format #5) through PC input terminal.
In case of using NTSC generator : Receive Dot signal through the external input terminal.

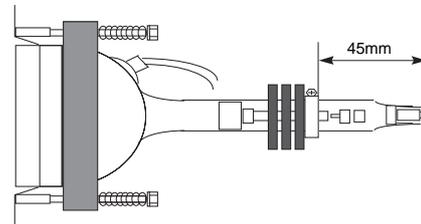


3. 2-Pole Magnet Adjustment

- 1) Make Green raster using lens cover.
- 2) Check the center position of DOT pattern on the center of the screen after turning Green focus volume left.
- 3) Turning green focus volume right and adjust 2-Pole magnet so the position to coincide that of item "(2)".
- 4) Adjust not to shift the screen by turning green focus volume clockwise and counter clockwise.
- 5) If the screen shifts, readjust (2)-(4).
- 6) Do the same method in Red and Blue.

4. Beam Shape (4 & 6-Pole Magnet) Adjustment

- 1) Do after 2-Pole magnet adjustment.
- 2) Make Green raster using lens cover and turn the focus volume right.
- 3) Make the dot in the center a perfect circle using 4 & 6-Pole magnet.
- 4) Do the same method in Red & Blue.
- 5) Fasten the Magnet after adjustment.
- 6) Adjust focus accurately.

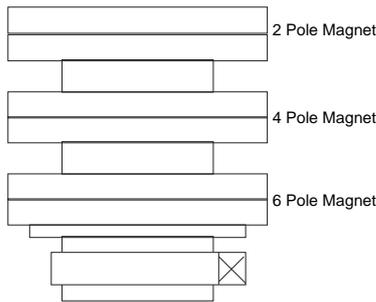

● Centering Magnet Adjustment

1. Preliminary steps

- 1) Receive the EU 05 CH signal.(PR.1 : PAL B/G 175.25MHZ)
- 2) Press the keys of Remote Controller for adjustment to reset the convergence.
 - a.Adjustment mode:Press the IN-START key.
 - b.Data reset : Press 0 KEY.
 - c.Adjustment mode cancellation : Press the ENTER key.

2. Adjustment

- 1) Operate adjustment about Red,Green,Blue centering magnet.
- 2) SGS-THOMSON Convergence assy
Adjust until the center of blue signal is shifted up to 40mm left from that of green signal and center of red signal is shifted up to 40mm right from that of green signal with turning the centering magnet.
- 3) After adjustment, re-adjust convergence data and exit the adjusting mode.
 - a.Adjustment mode:Press the IN_START key.
 - b.Data reset : Press 0 KEY.
 - c.Adjustment mode cancellation : Press the Enter key.

● High Voltage Regulation Adjustment

1. Test Equipment

Digital Multi-Meter(DMM)

2. Preparation for Adjustment.

Select picture mode to 'DYNAMIC' in no signal input.

3. Adjustment

- 1) Press the IN_START key and then press '1' key.(HV ADS)
- 2) Connect "+" terminal(Red) of DMM to the P415 of the Deflection PCB, [+] and the "-"terminal(Black) to the P416,[-].
- 3) Adjust VR401 so that the voltage of multimeter to be below voltage.
Voltage : $21.7 \pm 0.1V$.
- 4) Exit the adjustment mode by pressing the enter key


● CUT-OFF Voltage Adjustment

1. Preliminary steps

- (1) Select INSTART key on the Remote Control and then select "2 SCREEN ADJ" move the cursor or using the key No..
- (2) Adjustment must be operated in a dark room (simple dark room)

2. Adjustment

- 1) Test Equipment: Oscilloscope, 100:1 Probe
- 2) Connect oscilloscope to cathode of R, G, B(R926R/B/G: SCREEN ADJ on the PCB) and GND.
- 3) Turning Screen Volume (R/G/B) in Focus Pack and adjust R/G/B is $165V \pm 0.5V$.
- 4) After adjustment complete, exit the RASTER adjustment mode using ENTER key and exit the SVC adjustment mode using INSTART key.



● Deflection Adjustment

1. Preliminary steps

- 1) NTSC mode should be adjusted after adjusting PAL mode.
- 2) PAL adjustment should be done in the EU CH05,and NTSC adjustment should be done in the CH13 or Multi 48CH.
Note, RE/RL Model(without NTSC-M system) receive CH13 in the V-3 input.
- 3) Press the button of Remote Controller for adjustment to reset the convergence
Adjustment Mode : Press the IN_START key
Data reset : Press the 0 key.
Saving and returning Adjustment mode : Press the ENTER Key

Note. Refer adjustment items to Appendix1.

2. PAL Mode Deflection adjustment

Do not adjust H-POS,V-POS, V-LIN, S-COR, A-BOW, A-ANG, UCPIN, LCPIN, V-ASP,V-SCR in PAL mode.
Select the below each mode using CH▲, ▼ and adjust using VOL◀, ▶ on the remote controller.
At SVC mode, press the '0' key get into the deflection adjustment mode.

1) H-POS (Horizontal Position Adjustment)

Adjust so that the horizontal center line of screen is in accord with the geometric horizontal center line of screen JIG.

2) V-POS (Vertical Position Adjustment)

Adjust so that the vertical center line of picture is in accord with the vertical center line of the screen.

3) HSIZE (Horizontal SIZE Adjustment)

Adjust so that the outermost left and right vertical line of the screen is accord with the last point of the frame

4) VSIZE (Vertical SIZE Adjustment)

Adjust until Sixth vertical center line from upper and lower center of the picture is accord with the last point of the frame.

5) U-VL (Upper Vertical Linearity Adjustment)

Adjust the vertical interval of screen upper.

6) L-VL (Lower Vertical Linearity Adjustment)

Adjust the vertical interval of screen lower.

7) PIN-P (Horizontal Trapezoid Distortion Compensation Adjustment)

Adjust to make the length of top horizontal line same with it of the bottom horizontal line.

8) PIN-A (Horizontal PIN Distortion Compensation Amount Adjustment)

Adjust the horizontal width of picture upper and lower is to be same.

9) V-LIN (Vertical Linearity Adjustment)

Adjust vertical size of the picture to be same with upper and lower.

10) S-COR (Vertical S Correction)

Adjust so that all distance between each horizontal lines are to be the same.

11) A-BOW (AFC BOW)

Adjust so that the vertical line at every 4 corners of the screen look like parallel with the vertical center lines of picture.

12) A-ANG (AFC Angle)

Adjust so that all vertical slope of the picture are vertical.

13) UCPIN (Upper Corner Pincushion)

The pin cushion adjustment of upper part

14) LCPIN (Lower Corner Pincushion)

The pin cushion adjustment of lower part


15) V-ASP (Vertical Aspect Ratio)

Adjust the vertical aspect ratio.

16) V-SCR (Vertical Scroll)

Adjust the vertical aspect position.

Store the adjusted data in EEPROM by pressing the ENTER key before exiting adjustment mode.
Exit the adjustment mode by pressing the ENTER key.

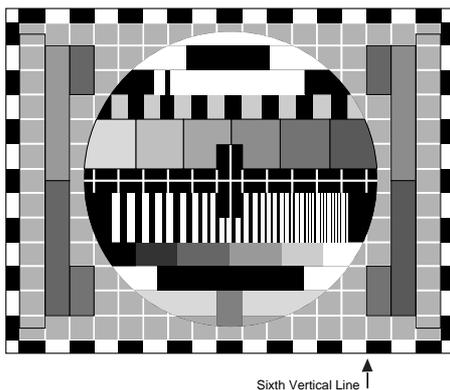


3. NTSC Mode Deflection Adjustment

Do not adjust V-LIN, S-COR, A-BOW, A-ANG, UCPIN, LCPIN, V-ASP, V-SCR in NTSC mode.

- 1) Adjust vertical size (V-SIZE Adjustment) until fifth vertical bar from upper and lower center screen is accord with the edge of the frame.

- 2) Adjust horizontal size (H-SIZE Adjustment) until third bar to indicate horizontal size of circle is accord with the edge of the frame.
- 3) Do other adjustments the same as in PAL mode.

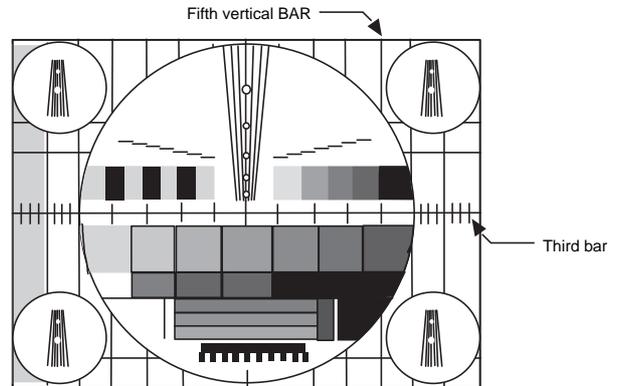


4. 1080i Mode deflection Adjustment (option)

(1) Test Equipment

SETTOP BOX with 1080i output or MSPG-925LTH (Programmael VIDEO Signal Generator).

(2) Preliminary steps

- 1) After adjust 1080i with output of the SETTOP BOX, connects to AV-3 (Side-AV) the Y signal only which is output from SETTOP BOX with the VIDEO input terminal.
- 2) Select INSTART key on the Remote Control and then select "5 1080I-ADJ" move the cursor or using the key No.5.
- 3) Adjust vertical size (V-SIZE Adjustment) until fifth vertical bar from upper and lower center screen is accord with the edge of the frame.
- 4) Adjust horizontal size (H-SIZE Adjustment) until twelfth vertical bar is accord with the edge of th frame.
- 5) Do other adjustments the same as in PAL mode

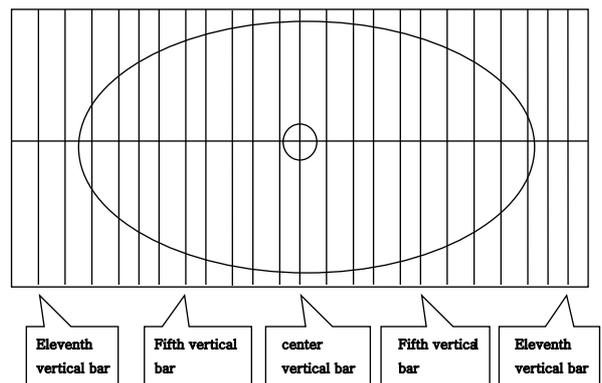

<Fig. 3>

● Lens Focus & Electronic Focus Adjustment

1. Preliminary steps


- 1) Electronic focus, Raster slope & Raster position must be pre-adjusted.
- 2) Heat-run over 60 minutes.

- 3) Receive Crosshatch pattern.
(PAL:EU07(PR 8) or NTSC:09CH(PR 13))

* Note: Loosen the butterfly nut in the lens tub slightly, being careful that it is not loosened to the point that the lens can move out of focus.


- 4) Adjustment must be done in a dark room (simple dark room)
Be careful not to touch the lens during adjustment.
- 5) Make any one color raster using lens covers.
- 6) Rotating lens right from the front side chromatic haze occurs beside Cross-hatch line changes as follows;

| Lens | Change of chromatic aberration |
|-------|--------------------------------|
| Red | Orange ⇄ Scarlet |
| Green | Blue ⇄ Red |
| Blue | Purple ⇄ Green |




2. G-lens Adjustment

- 1) Rotate the lens until the chromatic haze changes from blue to red.
- 2) Viewing the all screen, in no case of the chromatic aberration appeared slimly within 3.5 cross-Hatch of the picture center. At this time, in case that the red chromatic aberrations bright line isn't equal, adjust Green lens so that the red chromatic aberration is appeared more than previous time.
- 3) Switching the signal to 13CH and operate adjustment minutely.
- 4) Adjust Green focus control volume of focus pack so that the external big circle's part appeared clearly.
- 5) Adjust accurately by repeat the upper control.
- 6) Especially, noting to the Green light because it influenced on picture's function.



3. R-lens adjustment


- 1) Rotate the RED lens until the chromatic haze changes from orange to scarlet.
- 2) Adjust to appear Red chromatic aberration in right 3.5 cross-hatch section at center screen. Adjust the chromatic aberration so that it located center correctly.
- 3) Switching the signal to 13CH and adjust it as same method of Green lens.
- 4) Adjust as same method of Green lens with Red focus control volume of focus pack.



4. B- lens adjustment

- 1) Rotate the lens until the chromatic aberration of 3.5 Cross-Hatch left from center point changes from Violet to Green. Adjust the chromatic aberration to be center point between violet and green.

- 2) Adjust as same as method of Green lens with Red focus control volume of focus pack.



5. Focus checking

After adjustment Red, Green & Blue lens, remove lens cover and receive Cross-Hatch pattern and check the overall focus. If needed, repeat above.

● Convergence Adjustment

1. Preliminary steps

This adjustment should be performed after warming up 60 minutes.

- 1) Adjust after Horizontal/Vertical Raster position, Beam alignment magnet, and focus adjustments have been completed.
- 2) Do it always with crosshatch pattern.
- 3) Adjust for both PAL and NTSC system.
- 4) Use the JIG screen with the cross hatch pattern for Adjustment.

2. Convergence Key

- 1) Convergence Mode : IN_START, '3'
- 2) Cursor shift : ◀, ▶, ▲, ▼
- 3) Cursor Movement/Adjustment Selection : ENTER
- 4) Cursor Color Selection : TV/AV
- 5) Adjustment mode out : IN_START

*Note: When cursor flashes, set is in adjustment mode. When R, G or B selected color flashes, the set is in cursor movement mode.


● PAL Mode Adjustment

1. Preliminary steps

- 1) Receive the EU 05CH signal.
- 2) Press the buttons IN_START, '3' of Remote Controller for adjustment to get into the convergence adjustment mode.

2. Horizontal/Vertical phase adjustment

- 1) Press the buttons 9 & 5 to get into the phase adjustment mode.
- 2) Horizontal Phase Adjustment.
Move the convex part to the quarter of vertical center by pressing the Volume ◀, ▶ key.

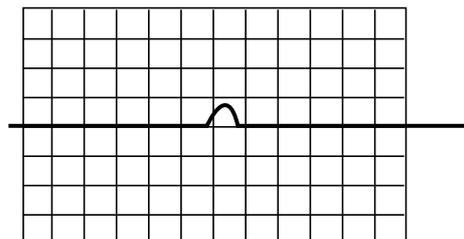

- 3) Press the ENTER Key to escape from the adjustment.

3. Pattern position adjustment

- 1) Change into pattern shift mode.
(Press numeric buttons "9" & "4")
- 2) Make sure to overlap pattern and image.
(Use MUTE button)
- 3) Accord the center of image and pattern.
(Use ◀, ▶, ▲, ▼ buttons)
- 4) Quit pattern shift mode. (Press "OK" button)
- 5) Save adjusted phase/pattern position adjustment mode.(Press "9", "2" & "OK" buttons)

4. Auto convergence (option)

*Convergence is based on the auto adjustment using PC and Camera while applying the THOMSON convergence Assy and if need,adjust manually like below method.

5. Green convergence adjustment

- 1) Show the OSD on screen by pressing 2 button,then change the OSD to green(G) adjustment mode with pressing TV/AV button.
- 2) Close the cover of red PRT and blue PRT so that green display on screen only.
- 3) Adjust to coincide green pattern with screen JIG pattern.
(Use ◀, ▶, ▲, ▼ buttons)
At this time move cursor from center to around and adjust convergence.

6. Red convergence adjustment

- 1) Show the OSD on screen by pressing 2 button,then change the OSD to red(R) adjustment mode with pressing TV/AV button.
- 2) If the need arises,close the cover of the blue lens.
- 3) Coincide the red screen with the green screen in same way with that of green convergence adjustment.

7. Blue convergence adjustment

- 1) Show the OSD on screen by pressing 2 button,then change the OSD to blue(B) adjustment mode with pressing TV/AV button.
- 2) Coincide the blue screen with the green screen in same way with that of red convergence adjustment.

8. Saving adjusted data

- 1) To save the data after adjustment,Press "9", "1" & "OK" button.
- 2) Quit convergence adjustment mode. ("IN_START" button)

9. NTSC mode adjustment

- 1) Receive the 13CH or Multi 48 CH signal.
- 2) Adjust as same method of PAL mode.

10. Auto-Convergence measuring or Measuring back up data (option)

- 1) Operate the auto-convergence measuring or the measuring back up data separately in PAL,NTSC mode.
- 2) Operate in the condition of 'Zero magnetometer ' in room after correcting convergence manually.
- 3) How to measuring
Press the 'IN_START -> 3 ->MENU->3' key to operate Auto convergence measuring or the measuring back up data.

● White Balance Adjustment


1. Test Equipment

Brightness meter(CA110)

2. Adjustment

- 1) This adjustment must be operated in a dark room or equivalent.
- 2) Adjust after Cut-Off and Focus adjustment.
- 3) The brightness meter must be located in 20 ± 5 cm distance from the center of the screen.
- 4) Receive WINDOW signal.
 - * High Light : RE/RL : 250±10 cd/m² (16:9)
RT : 160±10 cd/m² (16:9)
RE/RL : 190± 10 cd/m² (4:3)
RT : 160±10 cd/m² (4:3)
 - * Low Light : 10±3 cd/m²
- 5) Set BRIGHT to H/Light adjustment mode in 4) and enter SVC mode by pressing the "IN_START & 4" button. Adjust RG (R Gain) and BG (B Gain) until color coordinate becomes RE/RL - X=0.283 and Y=0.292, RT - X=0.269 and Y=0.274 (Deviation : ±0.03).
- 6) Set BRIGHT to L/Light adjustment mode and adjust CR (R Cut Off) and CB (B Cut Off) until color coordinate becomes RE/RL - X=0.280 and Y=0.260, RT - X=0.269 and Y=0.274 (Deviation : ±0.03).
- 7) Repeat adjusting until the color coordinate of H/Light and L/Light is satisfied.
- 8) Save the data after adjustment. (Press "ENTER" button)
- 9) Exit adjustment mode. ("INSTANT" button)

● Sub-Bright Adjustment

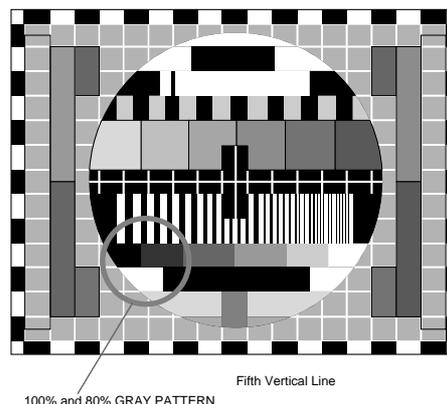

- 1) Tune the TV set to receive a EU 05 CH.
- 2) Enter WB mode by pressing the IN_START & '4' button. Adjust S-BRI data until 100% and 80% GRAY PATTERN is classified.
(Use ◀, ▶, ▲, ▼, ENTER buttons)

● Auto-Convergence Check (option)

- 1) Check the Auto-Convergence in PAL/NTSC/1080i(option) mode separating.
 - 2) Press the IN_START key on R/C for adjustment and press the CAPTION key to check whether Auto-Convergence works normally in each mode.
 - 3) If not,check the Convergence condition or Measuring condition and SENSOR condition.
 - 4)The shipment must be done after restoring the final auto convergence data value.
- * Restore a Convergence data
IN_START -> '3' -> TEXT

● Check the Option Adjustment

- 1) Check the OPTION1~5 data of attach 6 is well recorded.
- 2) The option value of each suffix is started on JOB EXP of 3141VMN chassis Assy.

● Convergence Adjustment Mode

- INSTART -> 3 -> MENU

* **This Mode is for engineering. So, don't change before permission from Design Department.**

0.AC POSITION READ : Distance data(After auto convergence measuring)

1.Save to 50Hz/60Hz : Save (convergence adjustment data)
It's same 9,1,Enter.

2.Save Control data : Save (A phase adjustment data)
It's same 9,2,OK.

3.AC Position Meas/ Meas backup data. : Execute(auto convergence measuring)

4.Pattern : Adjust location of convergence pattern.
It's same 9,4,Enter.

5.Phase : Adjust a phase of convergence pattern.
It's same 9,5,Enter.

6.GRID Border

| Item | Description | (NTSC) | (PAL) | (1080i) |
|------|-----------------------------|--------|-------|---------|
| HGD | Horizontal Grid Distance | 27 | 27 | 29 |
| HRD | Horizontal Retrace Distance | 55 | 55 | 42 |
| VGD | Vertical Grid Adjustment | 38 | 23 | 44 |
| BPH | Border Position Horizontal | 18 | 20 | 22 |
| BPV | Border Position Vertical | 26 | 18 | 35 |

7.ADJUST: Set the Dynamic focus data&auto-convergence data

| Item | Description | 4:3 TV (WIDE = 0) | | | 16:9 TV (WIDE =1) | | |
|---------|---------------------------------------|-------------------|-------|-------|-------------------|-------|-------|
| | | NTSC | PAL | 1080i | NTSC | PAL | 1080i |
| FV1 | Focus parabola top value | 29 | 24 | 29 | 30 | 28 | 30 |
| FV2 | Focus parabola middle value | 23 | 19 | 23 | 27 | 26 | 27 |
| FV3 | Focus parabola bottom value | 31 | 30 | 31 | 32 | 31 | 32 |
| VFP | Focus parabola position | 9 | 6 | 9 | 13 | 54 | 0 |
| FSB | Start of the retrace value | 31 | 31 | 31 | 31 | 31 | 31 |
| FVR | Focus value during frame retrace | 31 | 31 | 31 | 31 | 31 | 31 |
| STA | Force the video pattern fast blanking | 110 | 110 | 110 | 110 | 110 | 110 |
| ACO | Auto convergence offset | 60 | 60 | 60 | 60 | 60 | 60 |
| PBH | Pattern Bright Horizontal | 3 | 3 | 3 | 3 | 3 | 3 |
| PBV | Pattern Bright Vertical | 3 | 3 | 3 | 3 | 3 | 3 |
| OPT | EEPROM/MICOM selection | MICOM | MICOM | MICOM | MICOM | MICOM | MICOM |
| ACINIT | Initialization of AC Pattern data | NO | NO | NO | NO | NO | NO |
| ADJINIT | Initialization of ADJ. Focus data | NO | NO | NO | NO | NO | NO |

8.OSD POSITION

9.AC PATTERN ADJ :Assign location for pattern start

<PAL mode>

| H,V | H,V | H,V |
|-------|------|-------|
| 17,16 | 4,7 | 8,17 |
| 17,15 | 3,7 | 10,15 |
| 18,17 | 3,6 | 11,14 |
| | | |
| 14,17 | | 11,16 |
| 14,17 | | 13,17 |
| 15,16 | | 13,17 |
| | | |
| 18,9 | 6,18 | 9,5 |
| 18,8 | 5,20 | 10,7 |
| 19,6 | 4,18 | 10,9 |

<NTSC mode>

| H,V | H,V | H,V |
|-------|------|-------|
| 14,30 | 5,17 | 10,33 |
| 14,32 | 3,15 | 12,31 |
| 15,33 | 3,15 | 13,28 |
| | | |
| 11,31 | | 14,27 |
| 11,29 | | 15,29 |
| 12,29 | | 15,30 |
| | | |
| 15,11 | 6,28 | 12,5 |
| 15,9 | 5,28 | 13,6 |
| 16,10 | 4,28 | 13,10 |

2. Sound adjustment data (IC:MSP3411G)

| Menu | Description | Range | Default |
|---------|--------------------------|-------|---------|
| FM | FM Prescaler | | 14 |
| NP | NICAM Prescaler | | 53 |
| SP | SCART Prescaler | | 12 |
| S1 VOL | SCART 1 Volume | | 66 |
| S2 VOL | SCART 2 Volume | | 66 |
| MDB-STR | MDB Effect Bass Strength | | 2D |
| MDB-HMC | MDB Harmonic Content | | 19 |
| MDB-HP | MDB High Pass | | 09 |
| MDB-LP | MDB Low Pass | | OB |
| MDB-LIM | MDB Amplitude Limit | | FC |

- MDB(MICRONAS DYNAMIC BASS)

● SVC Adjustment mode & Initial data

1. White Balane adjustment data (IC:CXA2100)

| Menu | Description | Range | Default | |
|-------|---------------|-------|---------|----|
| | | | RE/RL | RT |
| RD | Red Drive | | 14 | 09 |
| GD | Green Drive | | 27 | 1F |
| BD | Blue Drive | | 29 | 2D |
| RC | Red Cut-off | | 0D | 14 |
| GC | Green Cut-off | | 1F | 1F |
| BC | Blue Cut-off | | 09 | 13 |
| S-BRI | Sub BRIGHT | | 20 | 20 |
| DVCO | Digital VCO | | 75 | 75 |

3. Picture adjustment data(IC:CXA21801)

| Menu | Description | Range | PAL |
|--------|---|-------|-----|
| D-COL | Dynamic color mode setting | | 03 |
| EXTSW | Selects the Y/Cb/Cr input or EY/ECb/Ecr | | 00 |
| SHPFO | Sharpness f0 setting | | 00 |
| BLKBT | RGB output bottom limiter level control (for blanking/signal) | | 00 |
| PREOV | Pre-shoot/over-shoot ratio setting | | 03 |
| CTILE | CTI level setting | | 01 |
| LTILE | LTI level setting | | 02 |
| PLMTL | RGB output amplitude level setting | | 03 |
| ABLMO | ABL mode setting | | 02 |
| CTI-M | CTI mode setting | | 00 |
| LTI-M | LTI mode setting | | 01 |
| GAMMA | RGB output GAMMA correction amount control | | 02 |
| DPIC | Dynamic picture(black expansion) control | | 03 |
| DC-TR | Y system DC transmission ratio setting | | 02 |
| S-CON | Sub Contrast control | | 0A |
| LRGB2 | Picture level control for LRGB2 | | 05 |
| P-ABL | RGB output level detection DC setting for PEAK ABL | | 0B |
| ABLTH | Threshold voltage adjustment for ABL_IN input | | 07 |
| CB-OFF | DC_OFFSET canceling for Cb signal | | 1f |
| CR-OFF | DC_OFFSET canceling for Cr signal | | 1f |
| Y-OFF | DC_OFFSET canceling for Y signal | | 07 |
| AGN-W | White(80IRE) output aging mode ON/OFF switch | | 00 |
| AGN-B | All blank(0IRE) output aging mode ON/OFF switch | | 00 |
| SYSTEM | Selects the signal band | | 00 |
| VM-DL | VM_OUT phase control | | 02 |
| VM-FO | VM_OUT level control | | 02 |
| VM-LE | VM_OUT f0 setting | | 03 |
| FLCOL | Flesh color enhancement function control | | 00 |
| FL-SW | Flesh color enhancement function ON.OFF switch | | 00 |

4. Picture adjustment data (IC:CXA21802)

| Menu | Description | Range | PAL |
|--------|--|-------|-----|
| R-Y R | R-Y axis + (R-Y) component setting | | 07 |
| R-Y B | R-Y axis + (B-Y) component setting | | 0A |
| G-Y R | G-Y axis + (R-Y) component setting | | 08 |
| G-Y B | G-Y axis + (B-Y) component setting | | 06 |
| UP-BL | VBLK position control for top of picture, when VBLK_SW = 1 | | 00 |
| LO-BL | VBLK position control for bottom of picture, when VBLK_SW=1 | | 00 |
| EW-DC | EW_DRV signal DC level down switch | | 00 |
| UP-UP | Horizontal pin distortion compensation position adjustment for extreme top edge of picture | | 00 |
| LO-UP | Horizontal pin distortion compensation position adjustment for extreme bottom edge of picture | | 00 |
| UP-UG | Horizontal pin distortion compensation amount adjustment for extreme bottom edge of picture | | 00 |
| LO-UG | Horizontal pin distortion compensation amount adjustment for extreme top edge of picture | | 00 |
| UC-PO | Horizontal pin distortion compensation polarity setting for extreme top/bottom edge of picture | | 00 |
| VB-SW | VBLK period mode setting switch | | 00 |
| CLP-S | Internal clamp pulse start phase setting | | 00 |
| NON-I | Interlace/progressive mode switch | | 00 |
| AFC-M | AFC loop gain control | | 01 |
| L-BLK | HBLK width control for left side of picture when HBLK_SW =1 | | 39 |
| R-BLK | HBLK width control for right side of picture when HBLK_SW =1 | | 0F |
| CLP-P | Internal clamp pulse phase control | | 00 |
| CLP-G | Switch for gating internal clamp pulse with input HSYNC | | 00 |
| HB-SW | HBLK width control ON/OFF switch during 4:3 software full display mode on a 16:9 CRT | | 01 |
| ZOOSW | Zoom mode ON/OFF switch for 16:9 CRT | | 00 |
| JMP SW | Reference pulse jump mode ON/OFF switch | | 00 |
| VFREQ | Vertical frequency setting | | 02 |
| VCOMP | High voltage fluctuation compensation amount setting for vertical picture size | | 00 |
| HCOMP | High voltage fluctuation compensation amount setting for horizontal picture size | | 00 |
| AKBTM | AKB Bch reference pulse timing setting | | 07 |
| BLK-O | Blanking ON/OFF SW when AKBOFF=1 | | 00 |
| AKBOF | Automatic cut-off/manual cut-off setting | | 00 |

5.CXA2151Q adjustment item

| Menu | Description | Range | PAL |
|-------|---|-------|-----|
| INPUT | Selects the four systems of inputs IN1 to IN4 | | 0 |
| MAT-O | Selects the type of matrix conversion | | 0 |
| VFREQ | Selects the frequency of the dummy sync output to SELV_OUT(pin23) | | 0 |
| SELS1 | Selects the type of the signal input to IN1_H/L1(pin36) and IN1_V/L2(pin37) | | 0 |
| SELS2 | Selects the type of the signal input to IN1_H/L1(pin44) and IN1_V/L2(pin45) | | 1 |
| FIX-S | Switches the sync identification circuit operating mode | | 0 |
| V-TC | Sets the V sync separation time constant | | 0 |
| H-WID | Sets the SELH_OUT (pin22) output pulse width | | 0 |
| HSEPS | Sets the sync separation method. (Valid for YG_IN(Pin16) input) | | 0 |
| HD-DC | Sets the H sync separation time constant of the YG_IN (Pin16) input | | 0 |
| HYSW | Switches the signal output to YG_OUT (Pin 15) | | 0 |
| HS-MA | Sets whether or not to add H-sync within V-sync at SELH_OUT(Pin22) | | 0 |
| MACRO | Switch for eliminating the macrovision signal of the 525P signal at SELH_OUT (Pin22). This is valid only when HFREQ =1 | | 0 |
| SELDU | This Switch selects whether to output the sync separated signal or the dummy Sync to SELH_OUT (Pin22) and SELV_OUT(Pin23) | | 0 |
| CLK-S | This switch selects the clock for the sync counter | | 0 |
| G-SEL | This switch selects the gain or mute of the signals output to SELCR_OUT (Pin25), SELCB_OUT(Pin26) and SELY_OUT (pin27) | | 1 |
| CBGAI | SELCB_OUT(Pin26) gain control | | 0 |
| CRGAI | SELCR_OUT(Pin25) gain control | | 0 |
| YGAIN | SELY_OUT(Pin27) gain control | | 0 |
| HFREQ | Selects the frequency of the dummy sync output to SELH_OUT(Pin22) | | 1 |

6. OPTION Data Adjustment

Option 1

| No | Item | Specification | Remark |
|----|----------|---|--|
| 1 | 200PR | 1 : 200 PROGRAM (CHINA ONLY) 0 : 100 PROGRAM (OTHER COUNTRIES) | 1 : LIST no operation 0 : LIST operation |
| 2 | TSEAR | 1 : WITH TURBO SEARCH 0 : WITHOUT TURBO SEARCH (FRANCE) | 1 : RT/ RE 2 ; RL |
| 3 | I /II SR | 1 : SAVE DUAL SOUND CONDITION (RT) 0 : NOT SAVE DUAL SOUND CONDITION(RE/RL) | 1 : NON - EU 2 : EU |
| 4 | TOP | 1 : TOP + FLOF TEXT 0 : FLOF TEXT | 1 : Dutch/ Swiss/ Austria/ Sweden/ Norway/ Finland/ Poland/ Italy/ Spain/ Benelux 3 2 : OTHERS |
| 5 | Eye | 1 : WITH DIGITAL EYE 0 : WITHOUT DIGITAL EYE | |
| 6 | A2 ST | 1 : WITH FM STEREO 0 : WITHOUT FM STEREO | 1 : ALL 0 : |
| 7 | SYS | 0 : BG/ I/ DK (RE MODEL) 1 : BG/ L (RL MODEL) 2 : BG/ I/ DK/ M (RT MODEL) 3 : RESERVED | 0 : BG/ I/ DK 1 : 2 : 3 : |

Option 2

| No | Item | Specification | Remark |
|----|-------|--|--|
| 1 | ACMS | 1 : WITH CHANNEL NAME DISPLAY 0 : WITHOUT CHANNEL NAME DISPLAY | 1 : ALL CONTRIES EXCEPT AUSTRALIA 0 : AUSTRALIA |
| 2 | VOL | 1 : RUSHED SOUND CURVE (ASIA, MIDDLE EAST ASIA) 0 : STANDARD SOUND CURVE (OTHER CONTRIES) | |
| 3 | Wide | 1 : 16 : 9 0 : 4 : 3 | 1 : NZ TOOL 2 : NA TOOL |
| 4 | EU | 1 : RE/ RL MODEL 0 : RT MODEL | AV MODE sequence decision |
| 5 | Compo | 1 : WITH COMPONENT INPUT 0 : WITHOUT COMPONENT INPUT | |
| 6 | 1080i | 1 : WITH 1080i INPUT 0 : WITHOUT 080i INPUT | |
| 7 | PC | 1 : WITH VGA PC INPUT 0 : WITHOUT VGA PC INPUT | |
| 8 | DRP | 1 : WITH H - FILTER 0 : WITHOUT H - FILTER | |

Option 3

| No | Item | Specification | Remark |
|----|---------|--|--|
| 1 | PIP | 1 : WITH PIP 0 : WITHOUT PIP | |
| 2 | INDEX | 1 : WITH INDEX 0 : WITHOUT INDEX | |
| 3 | HDEV | 1 : HIGH DEVIATION MODULATION (CHINA) 0 : RF NORMAL SOUND MODULATION (OTHERS) | 1 : China/ Saudi/ Indo/ Indonesia 0 : |
| 4 | D - PRO | 1 : WITH DOLBY PRO LOGIC 0 : WITHOUT DOLBY PRO LOGIC | 1 ; 0 : ALL Model |
| 5 | D - VIR | 1 : WITH DOLBY VIRTUAL SURROUND 0 : WITHOUT DOLBY VIRTUAL SURROUND | 1 : 0 : '4' series Model Only |
| 6 | TEXT | 1 : WITH TELETEXT 0 : WITHOUT TELETEXT | |
| 7 | SCART | 1 : RF 54% MODULATION INPUT 0 : RF 100% MODULATION INPUT | |
| 8 | CH + AU | 1 : CHINA + AUSTRALIA CHANNEL TABLE 0 : OTHER CONTRIES CHANNEL TABLE | |

Option 4


| No | Item | Specification | Remark |
|----|---------|---|---------------------------------------|
| 1 | AV4 - S | 1 : WITH SCART TYPE 0 : WITH PHONE TYPE | 1 : SCART -> over 1 0 : PHONE ONLY |
| 2 | BOOSTER | 1 : WITH BOOSTER 0 : WITHOUT BOOSTER | |
| 3 | AV SV | 1 : SAVE LAST AV 0 : NOT SAVE LAST AV | |
| 4 | SAV4 | 1 : WITH SAV4 (RE, RL) 0 : WITHOUT SAV4 (RT) | 1 : 3 SCART area S-JACK 0 : others |
| 5 | EZ-AV | 1 : WITH EZ-AV 0 : WITHOUT EZ-AV | 1 : RT 0 : Scart jack (RE/RL) |
| 6 | B - DEF | 1 : BOOSTER DEFAULT ON AFTER CHANNEL SEARCH 0 : BOOSTER DEFAULT OFF AFTER CHANNEL SEARCH | 1 : DEFAULT "1" 0 : |
| 7 | I-KEY | 1 : WITH INDEX KEY IN THE LOCAL BUTTON 0 : WITH MUTE KEY IN THE LOCAL BUTTON | |
| 8 | HAIER | 1 : HAIER OEM ONLY 2 : OTHERS | |

Option 5

| No. | State | Language | Function |
|-----------------|----------|------------------|---|
| 1 | LANGUEGE | 0:ENG Only | English |
| | | 1:EU 5EA | English/German/French/Italy/Spanish |
| | | 2:EU ETC | Pol./Hungary/Czech/Russia/Eng |
| | | 3:GREECE | English/ Greece |
| | | 4:PARSI | English/Parsi (Iran) |
| | T-LAN | 5:ARAB URDU | English/French/Arab+Urdu |
| | | 6:English+Hindi | English/Hindi |
| | | 7:English+I+M+V | English/Indonesian/Malaysian/Vietnamese |
| | | 8:English+THAI | English/Thai |
| | | 9:English+China | English/China |
| 2 | | 0:West Europe | English/French/Swedish/Czech/German/Spanish/Italian |
| | | 1:East Europe | Polish/French/Swedish/Czech/German/Slovenian/Italian/Rumanian |
| | | 2:Turkey EU | English/French/Swedish/Turkish/German/Spanish/Italian |
| | | 3:EAST EU2 | |
| | | | Rumanian |
| | | 4:Cyrillic 1 | |
| | | 5:Cyrillic 2 | |
| | | 6:Cyrillic 3 | Russia |
| | | 7:Turkey/Greek 1 | |
| | | 8:Turkey/Greek 2 | |
| | | 9:Turkey/Greek 3 | Eng./ Greece |
| | | 10:Arab/France | |
| | | 11:Arab/English | |
| | | 12:Arab/Hebrew 1 | |
| | | 13:Arab/Hebrew 2 | |
| | | 14:Farsi/English | |
| 15:Farsi/France | | | |
| 16:Farsi all | | | |

Trouble Shooting


1. NO PICTURE (SOUND OK)

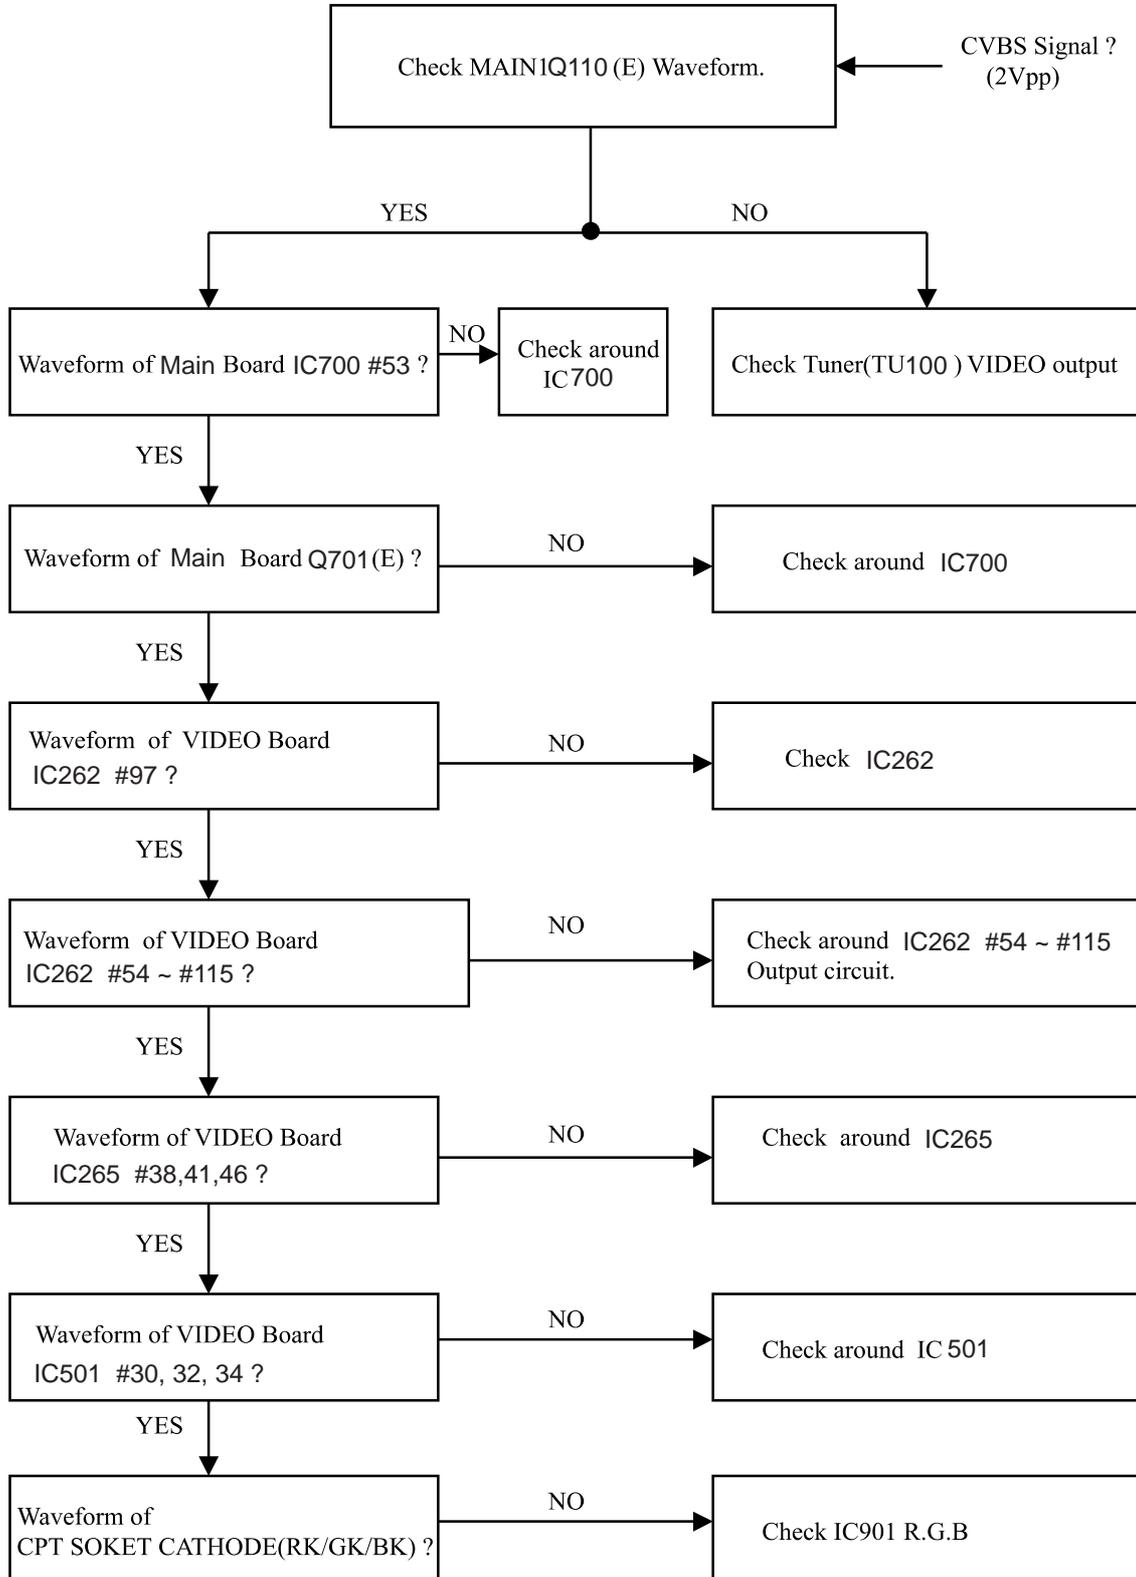


2. NO SOUND (PICTURE OK)

<AV1,2,3, Component1,2 INPUT>


< RF >

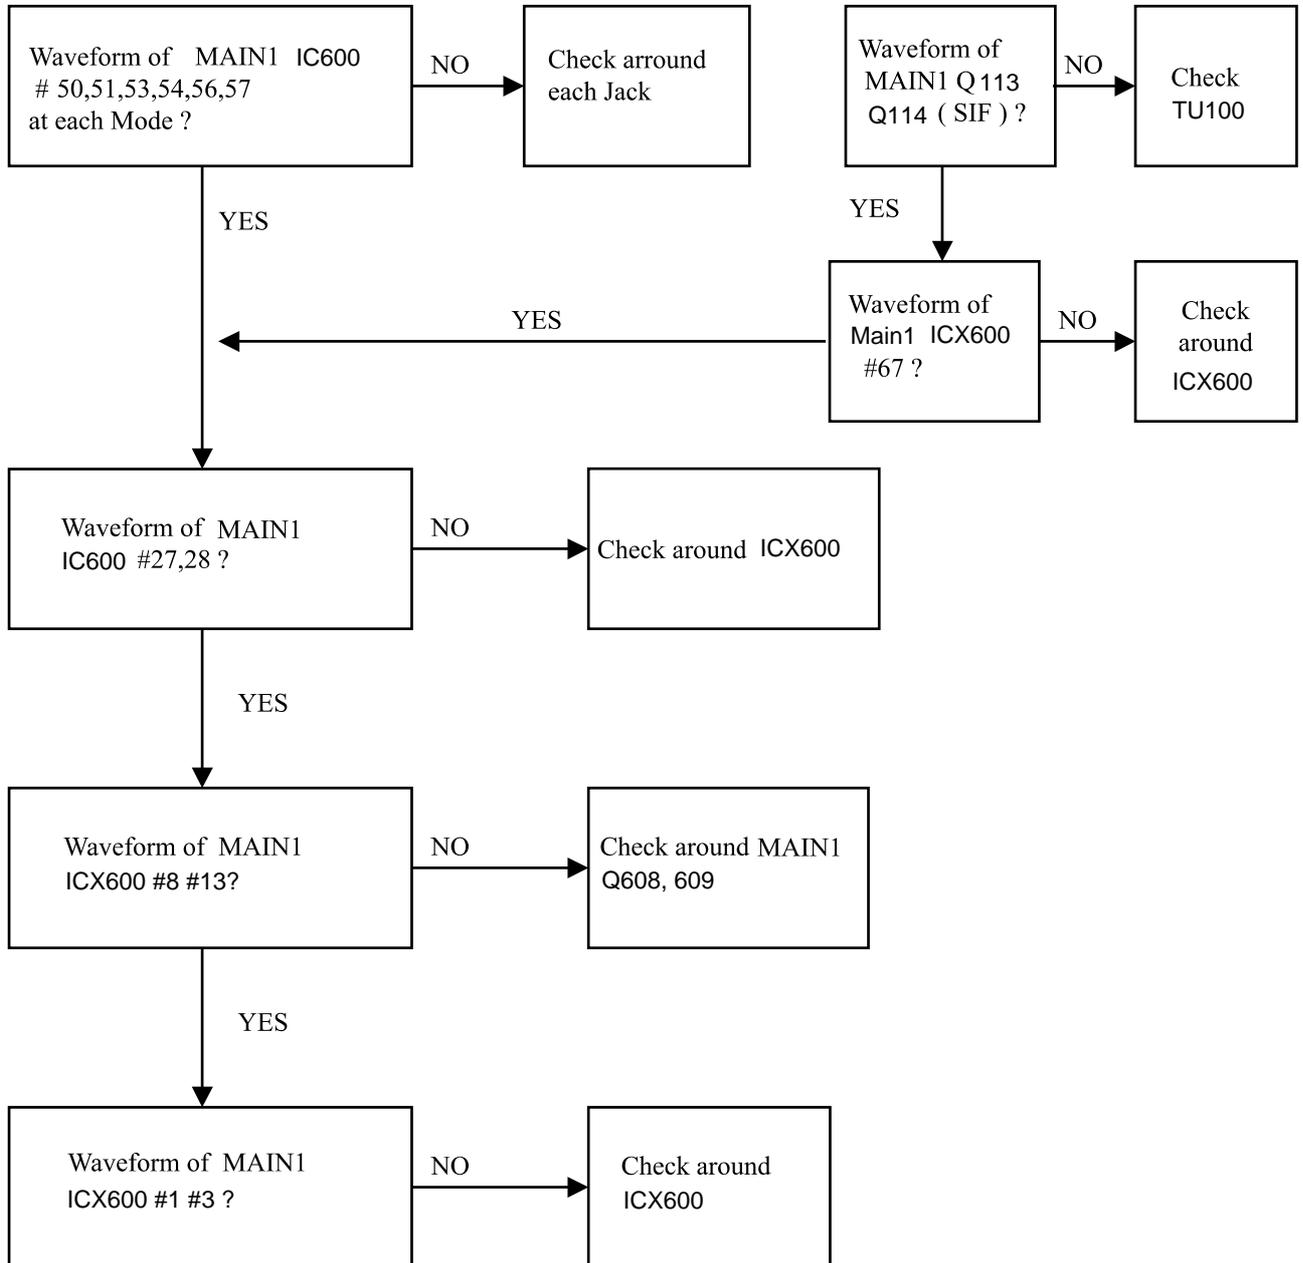


3. NO PIP

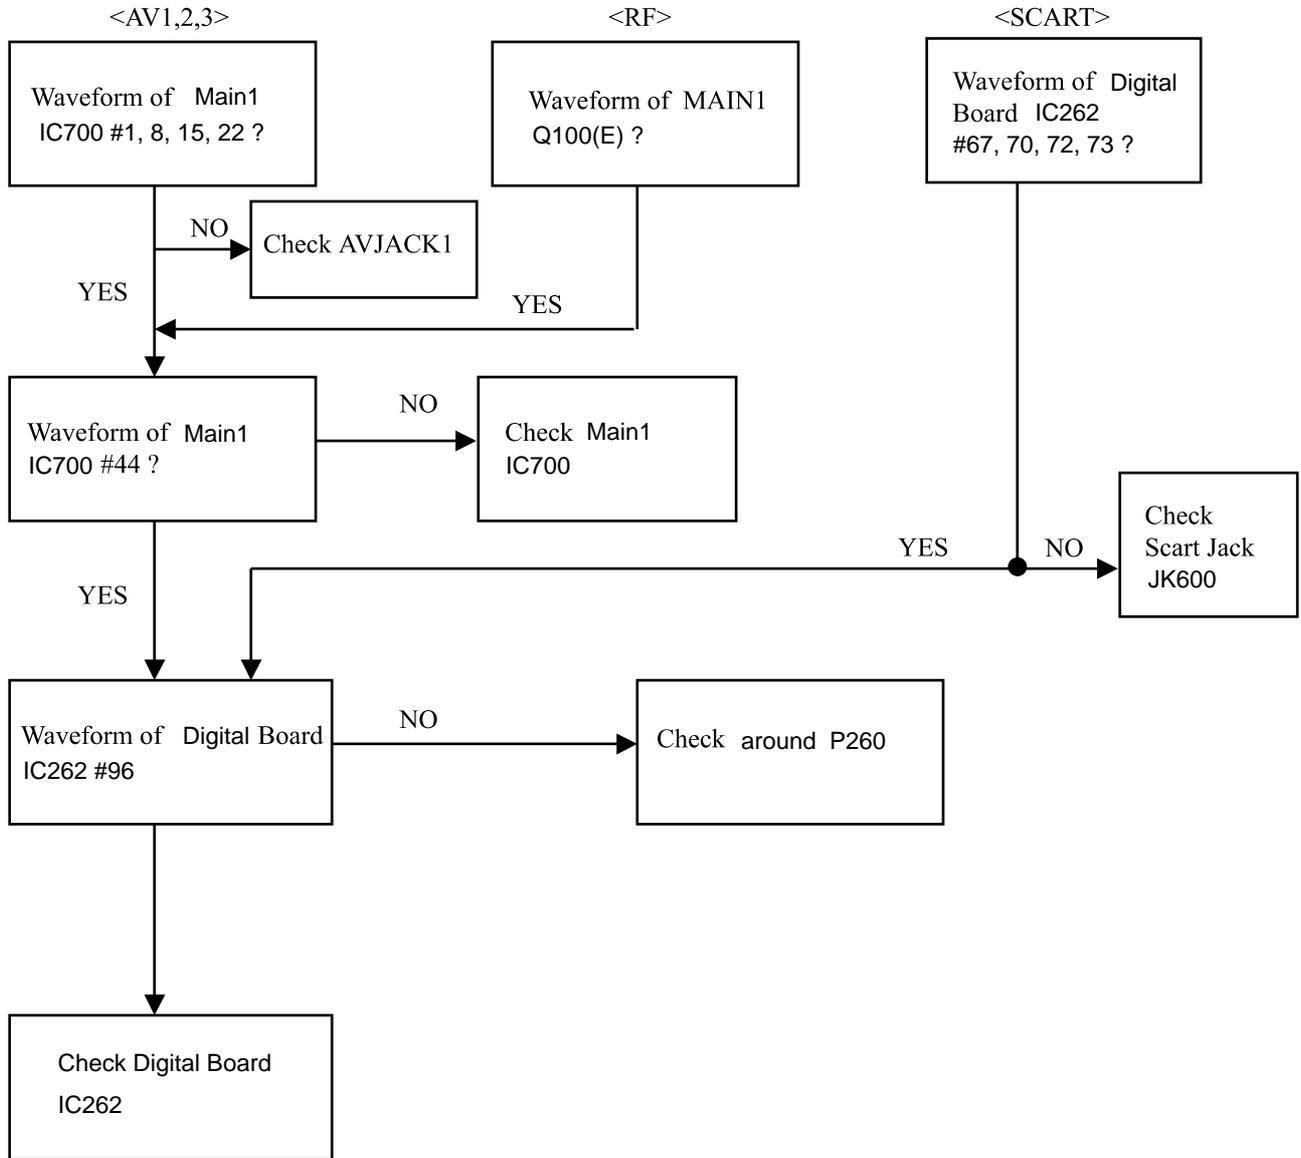


4. NO Teletext (Picture OK)

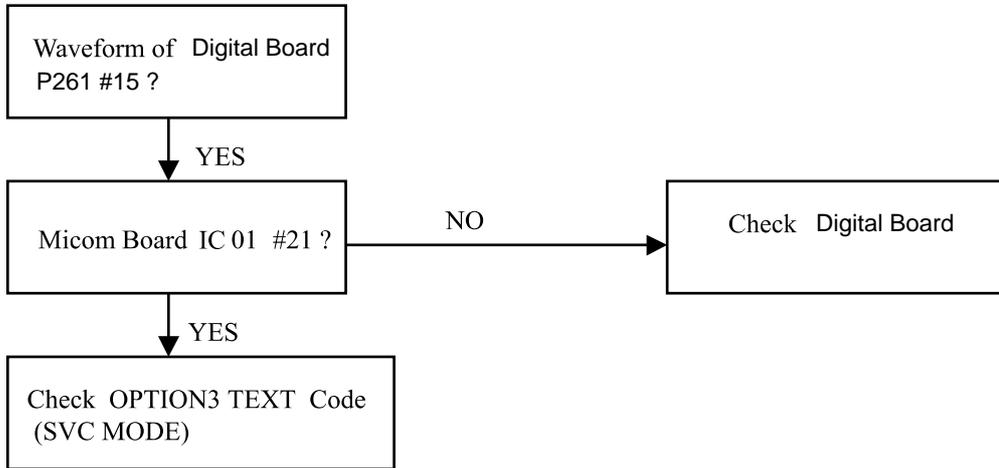


5. NO OSD (ON SCREEN DISPLAY)

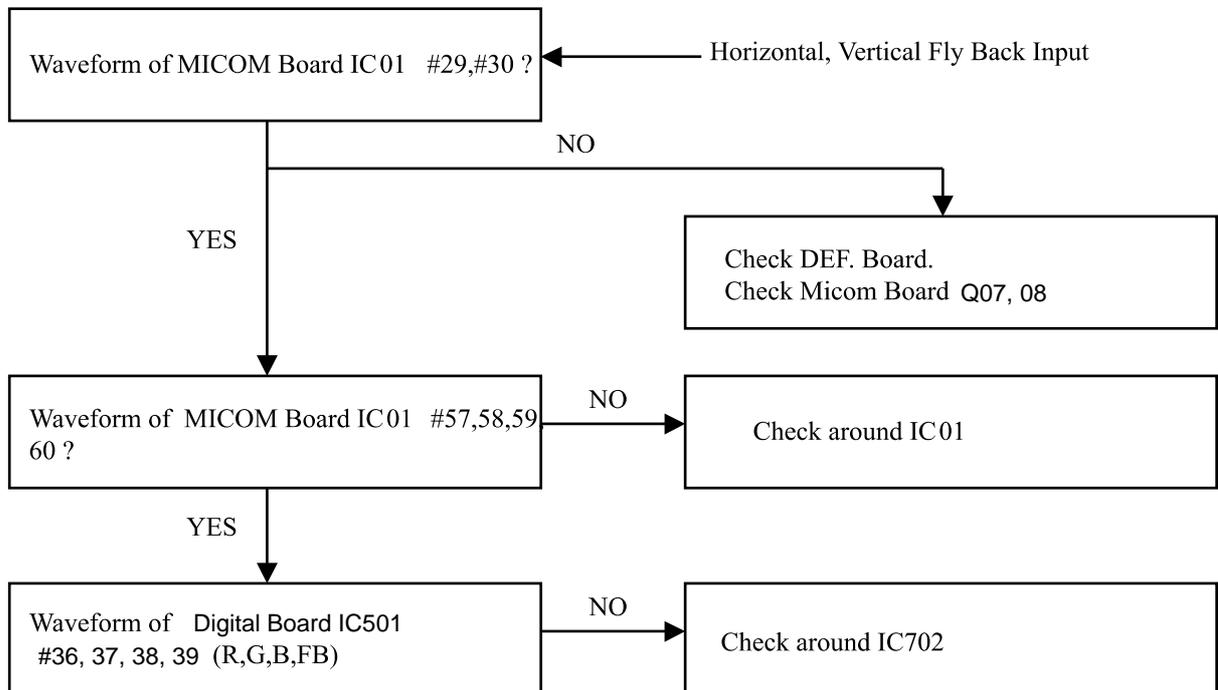


6. NO POWER ON

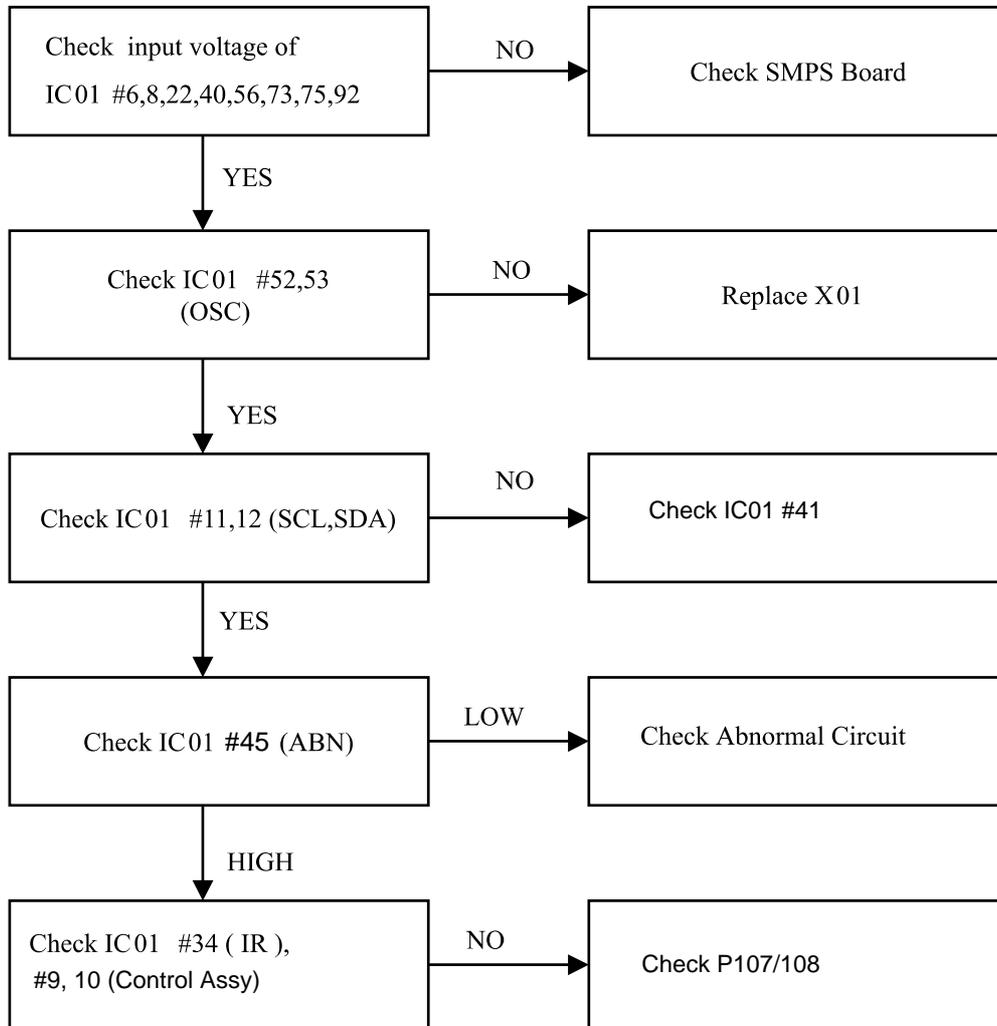


7.NO RASTER

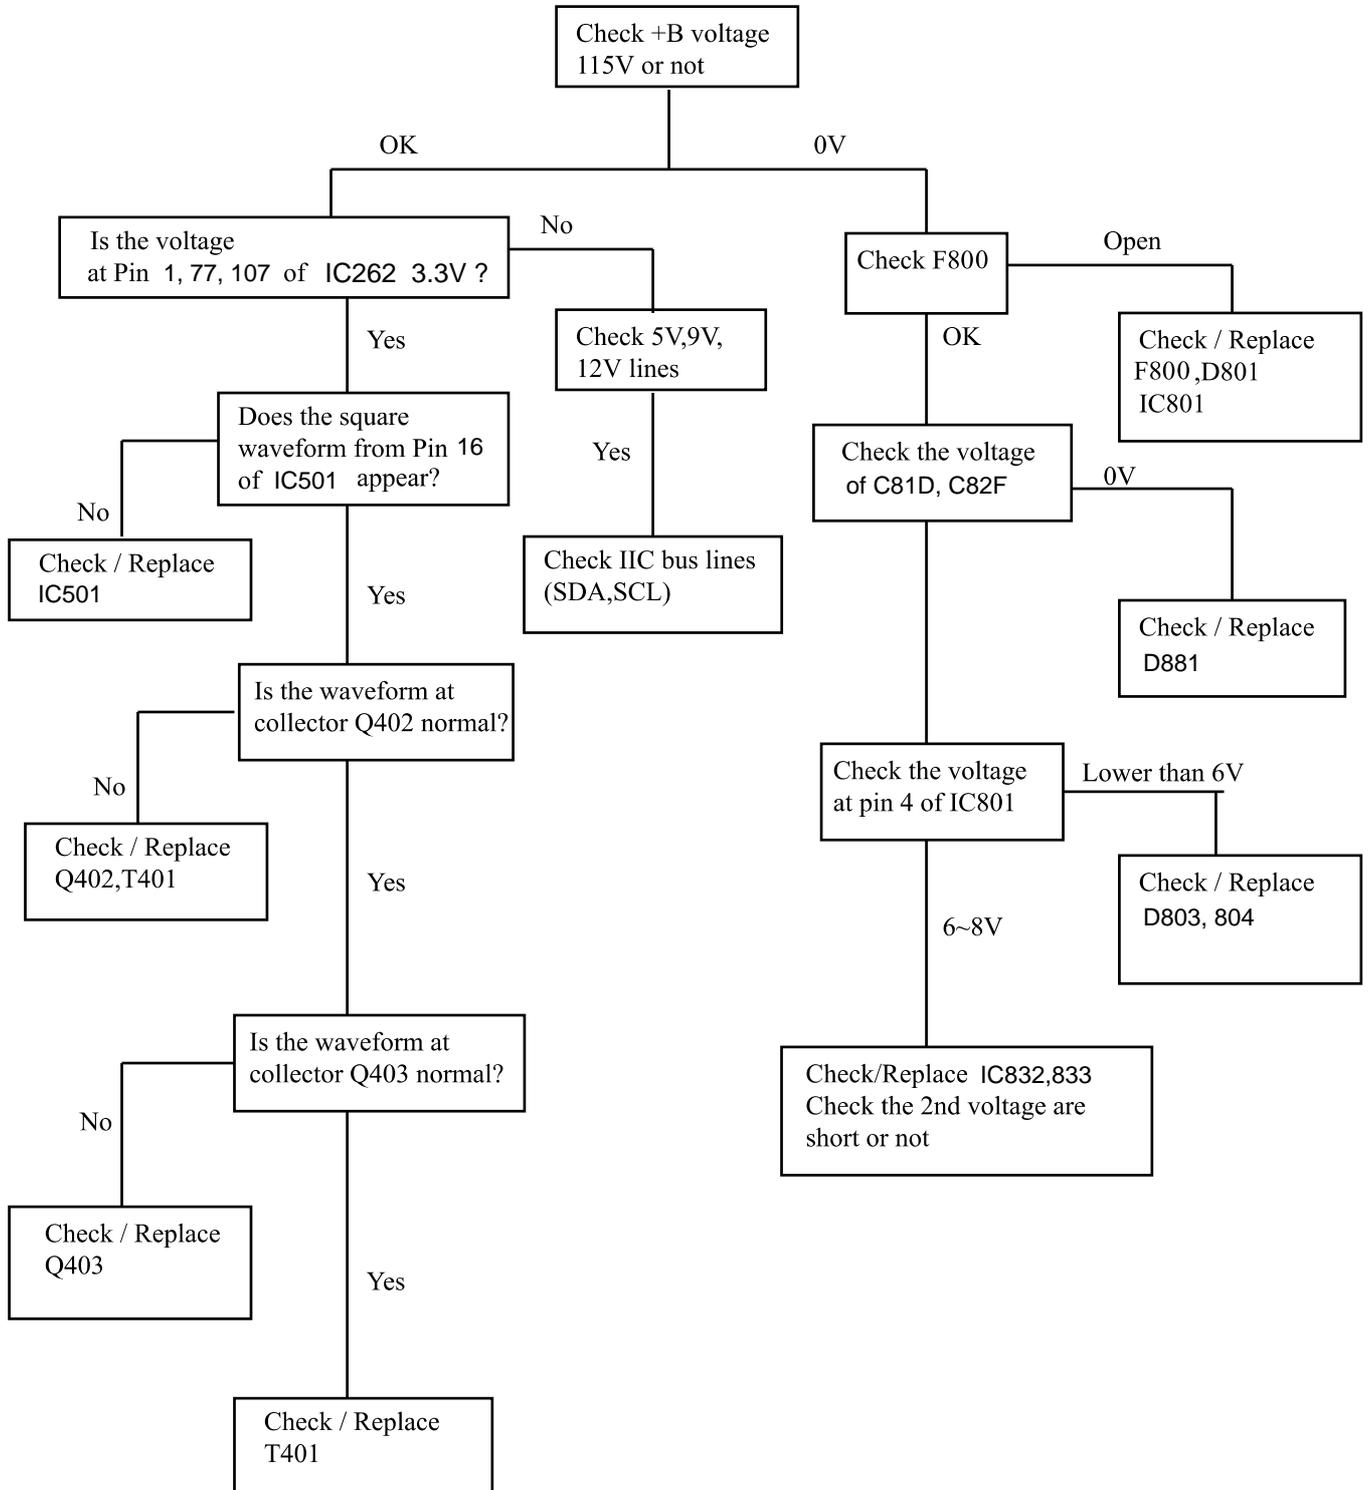

8 . INCORRECT CONVERGENCE

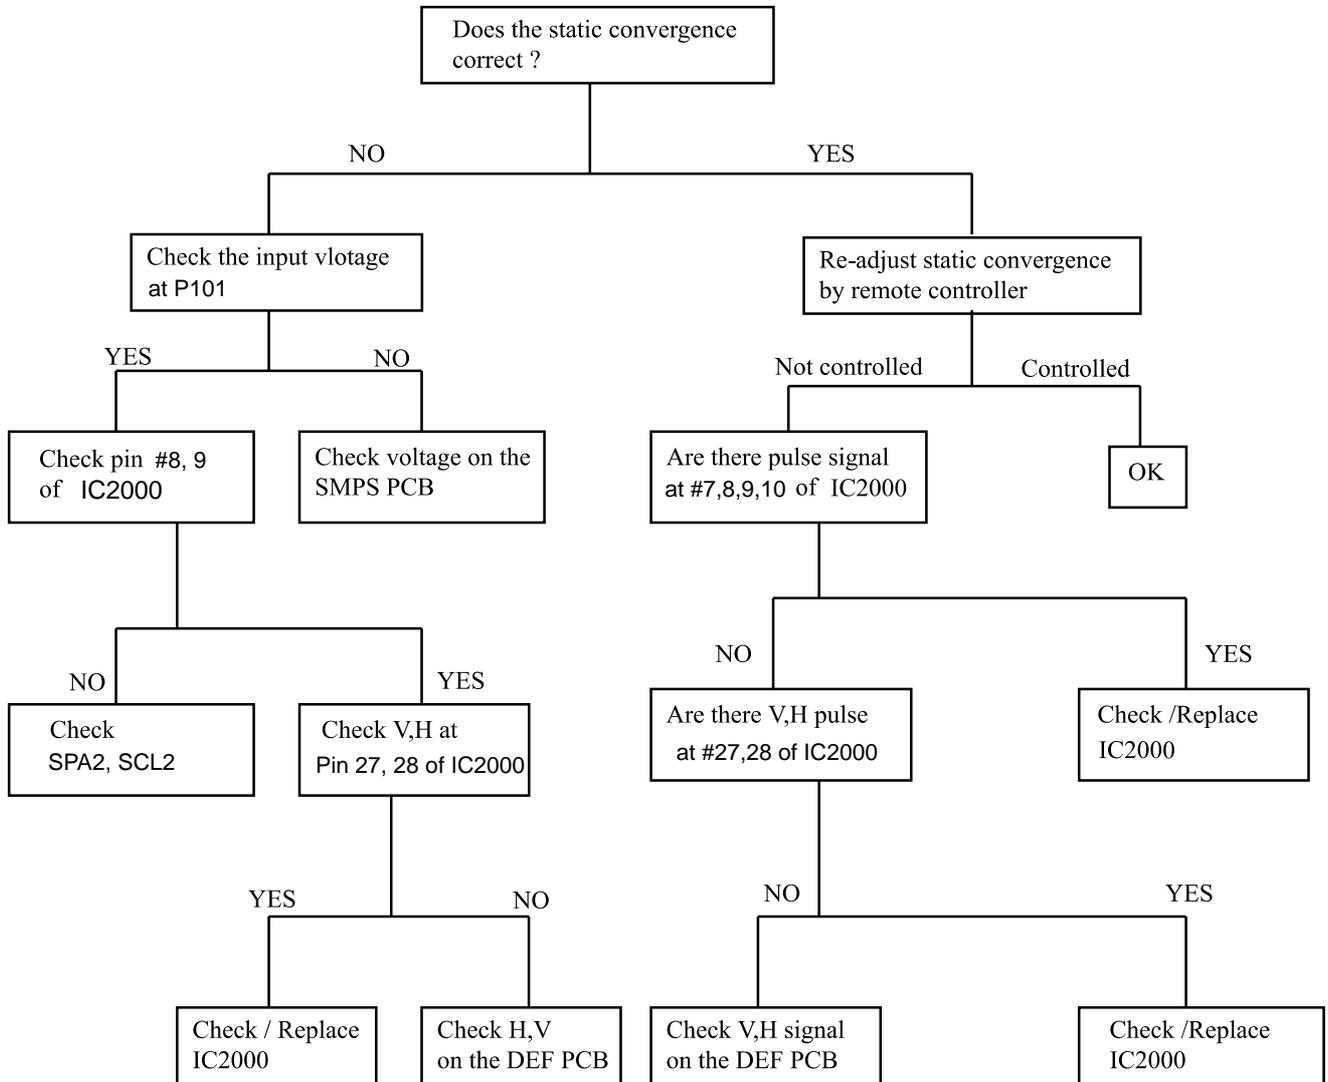


BLOCK DIAGRAM

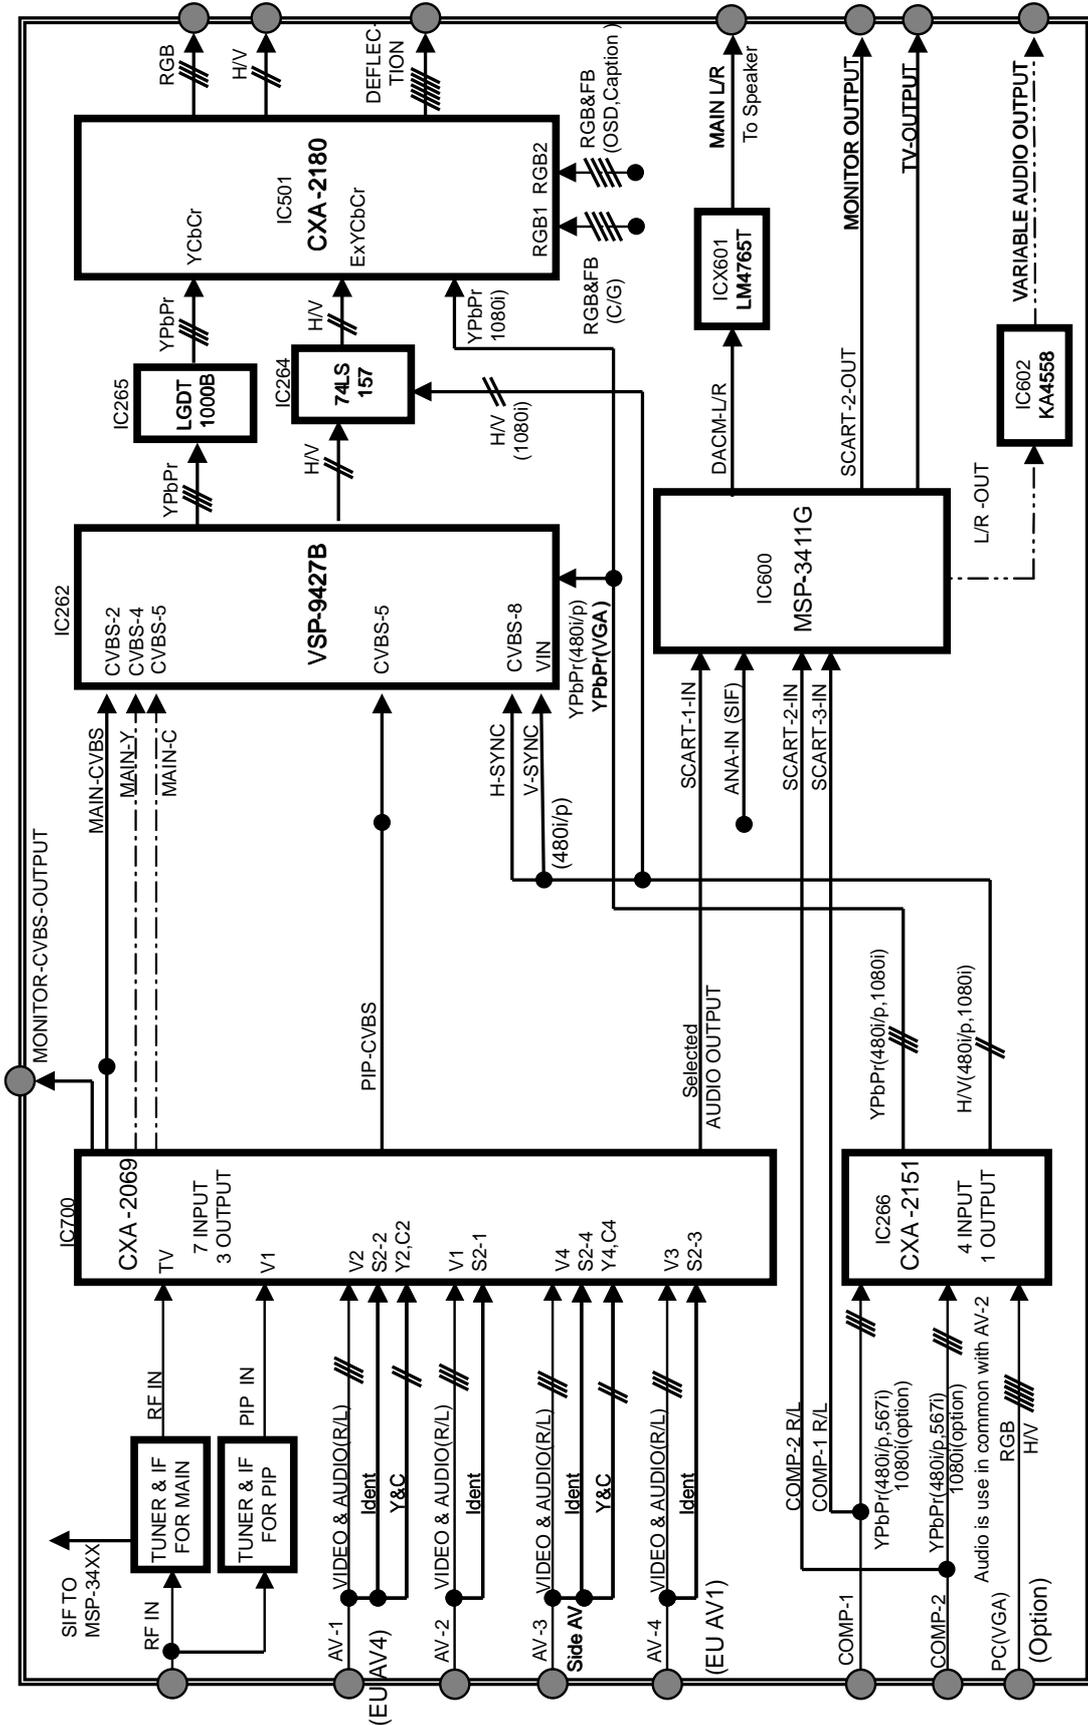


PRINTED CIRCUIT BOARD

MAIN1 (TOP)

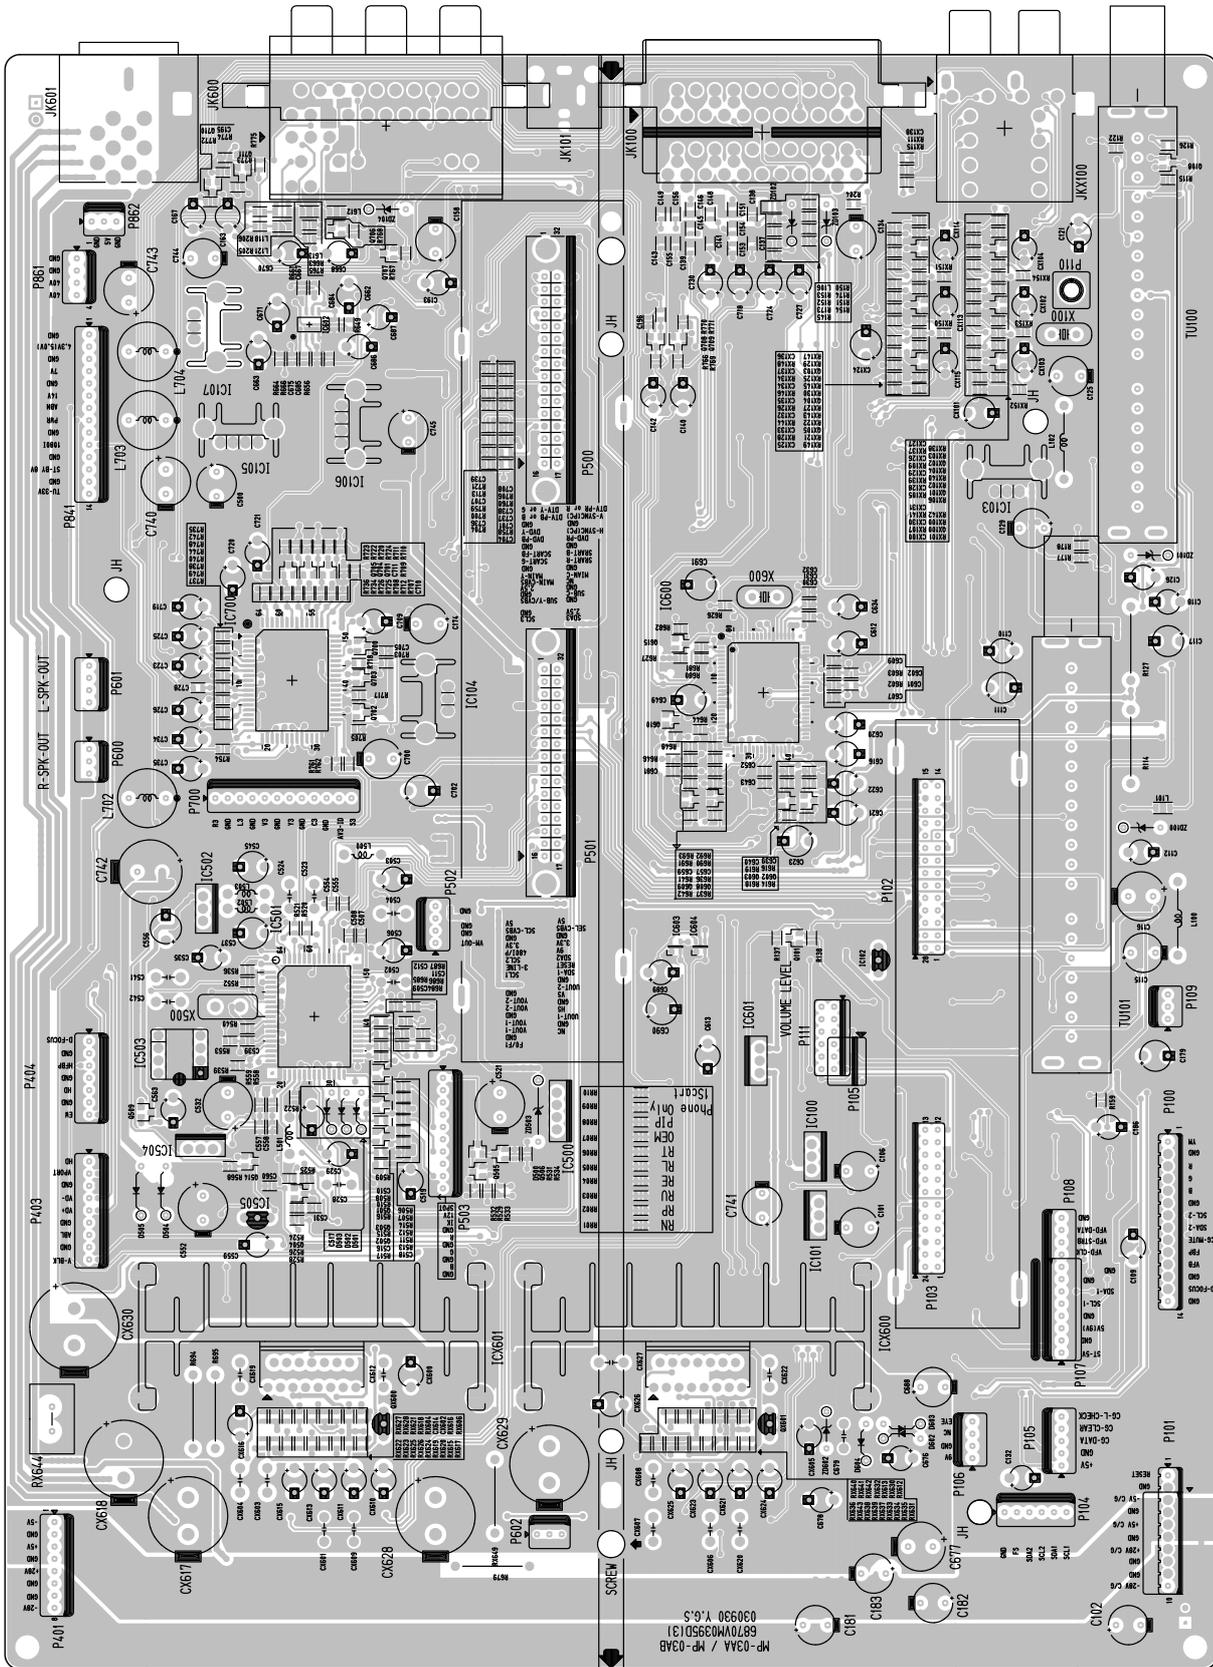


MAIN1 (BOTTOM)

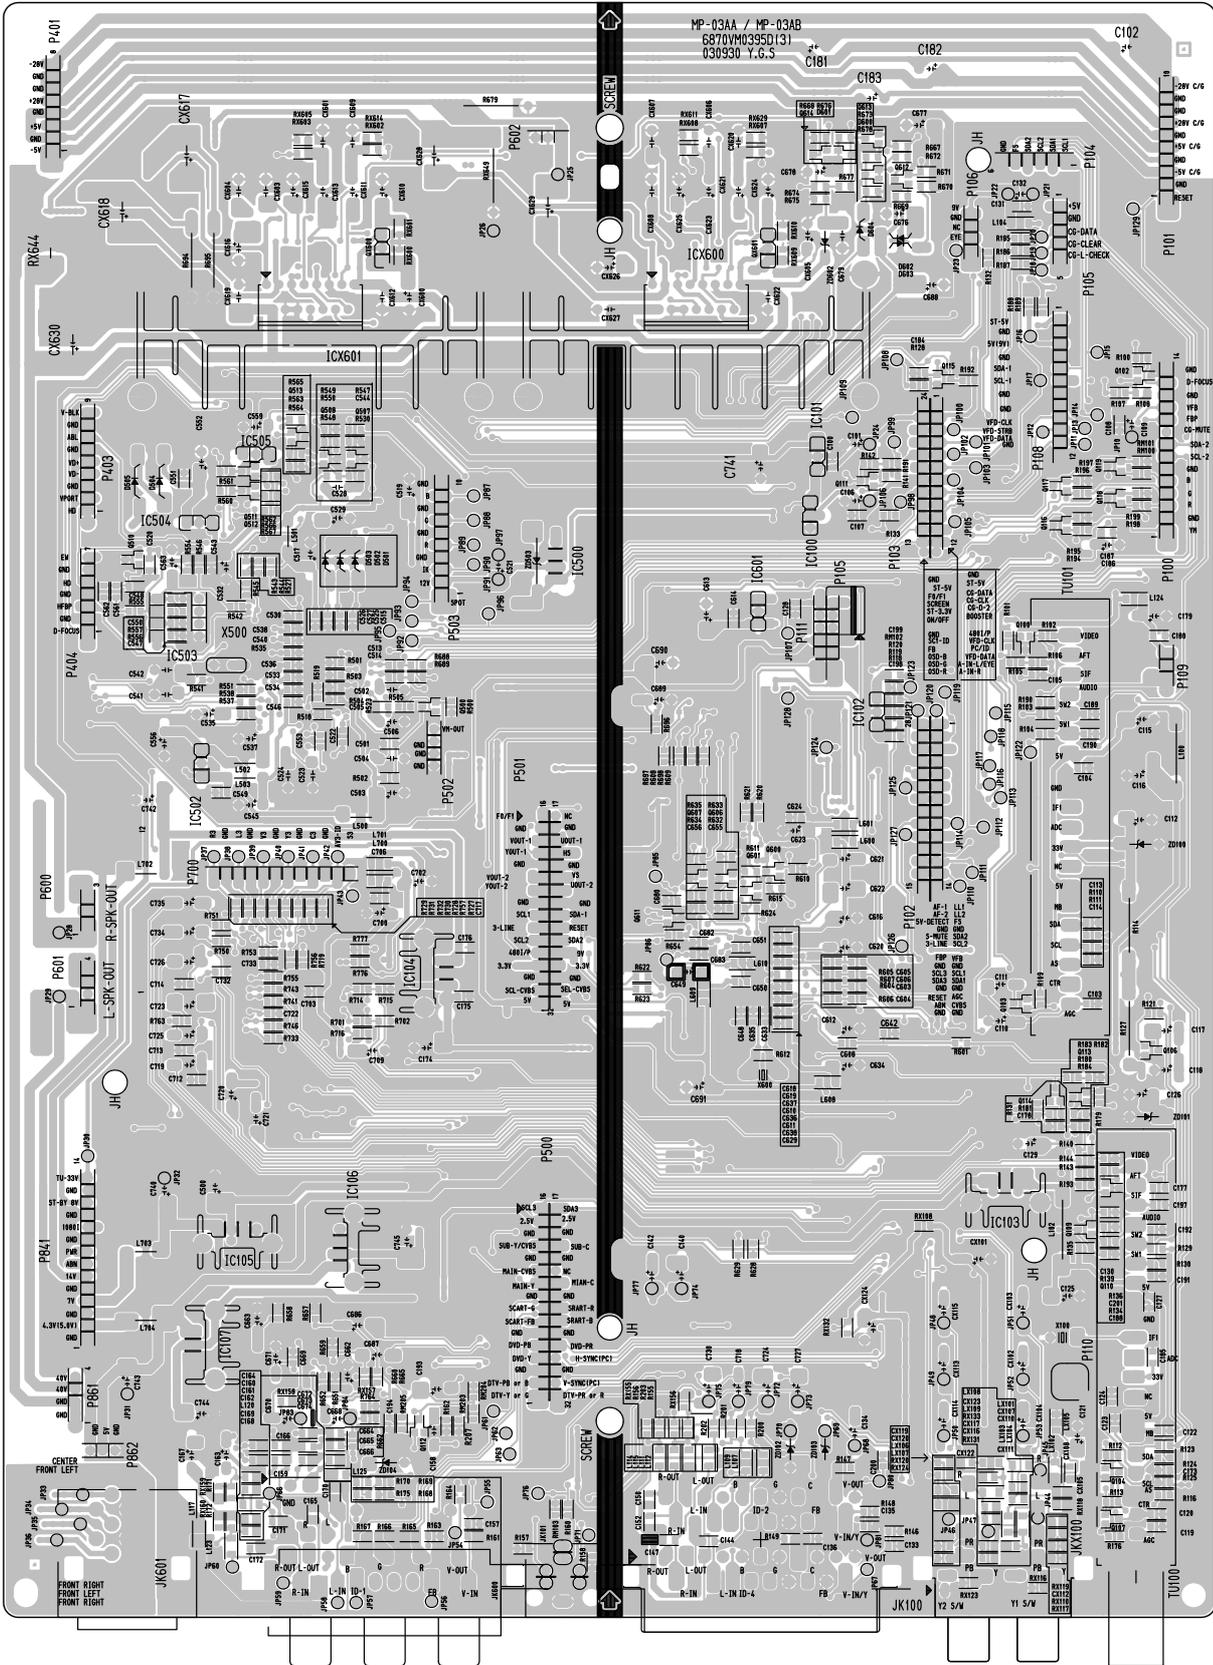


COMPONENT LOCATION GUIDE(MAIN2)

| | | | | | | | |
|-------------|-------------|--------------|-------------|--------------|-------------|-------------|--------------|
| C401.....E2 | C830.....C5 | D488.....D2 | J421.....G3 | J862.....C2 | Q410.....G4 | R465.....F2 | R897.....C2 |
| C403.....F2 | C831.....A4 | D803.....C5 | J423.....G3 | J863.....B2 | Q413.....F4 | R466.....G2 | R898.....B1 |
| C405.....F5 | C832.....A4 | D804.....C4 | J425.....G3 | JP1.....B5 | Q416.....D5 | R467.....D1 | R899.....C2 |
| C407.....D2 | C833.....A4 | D805.....C5 | J426.....G4 | JP2.....A5 | Q417.....E2 | R468.....F2 | R40A.....F2 |
| C409.....D2 | C834.....A1 | D810.....A4 | J428.....E3 | JP3.....A5 | Q420.....D3 | R469.....D1 | R40C.....D3 |
| C410.....G4 | C841.....A3 | D811.....A5 | J429.....F2 | JP4.....B5 | Q423.....G4 | R470.....D5 | R40D.....C3 |
| C411.....D2 | C842.....A2 | D812.....A5 | J430.....F2 | JP5.....B5 | Q424.....E3 | R473.....F1 | R40E.....D3 |
| C412.....G4 | C851.....A2 | D813.....A5 | J431.....F2 | JP6.....A5 | Q428.....G4 | R474.....D3 | R40F.....D3 |
| C413.....G1 | C852.....A2 | D831.....A4 | J432.....F2 | JP7.....A5 | Q432.....E2 | R476.....F4 | R40G.....B1 |
| C414.....G1 | C853.....A2 | D832.....A1 | J434.....E2 | JP8.....A4 | Q802.....A4 | R477.....F2 | R40H.....B1 |
| C415.....D2 | C854.....A1 | D833.....A4 | J435.....E2 | JP9.....C5 | Q831.....A4 | R478.....F4 | R40I.....G4 |
| C416.....E2 | C861.....A2 | D841.....A3 | J436.....D2 | JP10.....C5 | Q832.....A3 | R479.....E4 | R40J.....G4 |
| C417.....F3 | C862.....A2 | D842.....A1 | J437.....F1 | JP11.....C1 | Q872.....B1 | R480.....F4 | R40K.....C3 |
| C419.....G2 | C863.....B2 | D851.....A3 | J438.....F1 | JP12.....C1 | Q891.....C2 | R481.....F5 | R40L.....D3 |
| C418.....D3 | C866.....A1 | D852.....A1 | J439.....F1 | JP13.....C1 | Q46A.....G1 | R482.....F5 | R40M.....D3 |
| C420.....F2 | C871.....B3 | D853.....A1 | J445.....E1 | JP14.....B2 | R400.....F2 | R483.....G3 | R40N.....F2 |
| C421.....D3 | C872.....B3 | D861.....B2 | J446.....E1 | JP15.....B2 | R401.....C2 | R484.....G3 | R40P.....G4 |
| C423.....G1 | C873.....B2 | D862.....B2 | J447.....E1 | JP16.....C3 | R402.....G4 | R485.....E4 | R40Q.....F2 |
| C424.....D1 | C874.....B2 | D863.....A1 | J448.....E1 | JP17.....D2 | R403.....C2 | R486.....D5 | R40T.....G2 |
| C425.....D1 | C876.....A1 | D864.....B1 | J450.....D1 | JP18.....E2 | R404.....C1 | R487.....D2 | R40U.....G2 |
| C426.....D1 | C881.....B3 | D873.....B1 | J451.....D1 | JP19.....E2 | R405.....F4 | R488.....D2 | R40V.....F2 |
| C429.....E4 | C882.....B2 | D874.....B1 | J453.....D2 | JP20.....F3 | R406.....F3 | R489.....E4 | R40W.....G2 |
| C430.....F3 | C884.....C2 | D876.....B1 | J454.....D2 | JP21.....G2 | R407.....F4 | R490.....G3 | R40X.....E1 |
| C432.....E2 | C888.....B1 | D881.....B3 | J456.....D3 | JP22.....G2 | R408.....G4 | R491.....E4 | R40Y.....F3 |
| C433.....E2 | C889.....C2 | D891.....B2 | J458.....E3 | JP23.....G2 | R409.....G4 | R492.....F2 | R40Z.....D2 |
| C435.....E2 | C891.....B2 | D892.....C3 | J459.....D3 | JP24.....G2 | R410.....C4 | R493.....F3 | R41A.....E1 |
| C436.....D2 | C892.....B2 | FB402.....D2 | J460.....D3 | JP25.....G2 | R411.....G4 | R494.....E4 | R41B.....E1 |
| C437.....F2 | C893.....C2 | FB403.....F3 | J461.....E4 | JP26.....G2 | R412.....G4 | R495.....F2 | R41C.....C2 |
| C443.....G4 | C895.....C3 | FB801.....B5 | J462.....E3 | JP27.....G3 | R413.....F5 | R496.....F2 | R41D.....G4 |
| C444.....G4 | C896.....C3 | FB802.....B4 | J463.....E4 | JP29.....C5 | R414.....C3 | R497.....F2 | R41E.....C2 |
| C446.....G4 | C897.....C3 | FB805.....B4 | J464.....D4 | L401.....D2 | R415.....C3 | R498.....D5 | R41K.....E3 |
| C448.....G3 | C898.....C3 | FB841.....A3 | J465.....D5 | L403.....F3 | R416.....F5 | R499.....G2 | R41L.....E3 |
| C449.....G3 | C899.....C1 | FB851.....A3 | J466.....D5 | L404.....D4 | R417.....F5 | R802.....C4 | R41M.....E1 |
| C451.....G2 | C42A.....F2 | FB852.....A2 | J467.....E5 | L405.....F3 | R418.....G2 | R803.....B4 | R41N.....E1 |
| C452.....G3 | C46A.....G1 | FB861.....A3 | J469.....E4 | L852.....A1 | R419.....G5 | R804.....B4 | R41P.....C2 |
| C455.....G4 | C46C.....G2 | FB871.....B3 | J803.....C4 | L861.....B2 | R420.....G3 | R805.....A4 | R41R.....C2 |
| C461.....E4 | C46D.....G3 | FB872.....B3 | J804.....C4 | L891.....C2 | R421.....G4 | R806.....C5 | R42A.....F2 |
| C462.....F5 | C46E.....G4 | FB881.....B3 | J805.....A4 | L892.....C3 | R422.....F4 | R807.....C4 | R46A.....G2 |
| C464.....E5 | C46H.....E1 | FB882.....C1 | J806.....B5 | P415.....G2 | R423.....F4 | R808.....C4 | R46B.....G1 |
| C466.....F2 | C46J.....G2 | FB891.....B3 | J807.....B5 | P416.....G3 | R425.....F3 | R811.....A5 | R46D.....G3 |
| C467.....F2 | C46K.....F4 | FB892.....B3 | J831.....A2 | P417.....F5 | R426.....E2 | R815.....A5 | SCR1.....F2 |
| C468.....D5 | C49A.....G1 | IC401.....F2 | J832.....A1 | P420.....G2 | R428.....E2 | R817.....A5 | SCR2.....E3 |
| C469.....F2 | C49B.....F1 | IC402.....G3 | J833.....A1 | P421.....F5 | R429.....F2 | R818.....A5 | SG401.....F5 |
| C470.....F4 | D401.....G3 | IC403.....G2 | J834.....A1 | P804.....C5 | R430.....D5 | R819.....A5 | SG402.....G5 |
| C471.....F2 | D402.....B1 | IC404.....E1 | J835.....A1 | P805.....C5 | R431.....E2 | R820.....A5 | T401.....D1 |
| C472.....F4 | D403.....G3 | IC405.....G4 | J836.....A1 | P401A.....G1 | R432.....G4 | R821.....A5 | T402.....F5 |
| C474.....F3 | D404.....B1 | IC408.....G2 | J837.....B1 | P403A.....E1 | R433.....D3 | R827.....A5 | T403.....E4 |
| C475.....E3 | D406.....G3 | IC409.....F1 | J838.....B1 | P404A.....E1 | R434.....E2 | R828.....A5 | T405.....F3 |
| C476.....F5 | D408.....E3 | IC410.....G1 | J839.....B2 | P405A.....F3 | R435.....E2 | R829.....A5 | T406.....G5 |
| C477.....F3 | D409.....G2 | IC801.....C4 | J840.....B1 | P406A.....C1 | R436.....F1 | R830.....C4 | T801.....B3 |
| C478.....D3 | D410.....F3 | IC802.....A5 | J841.....C1 | P410A.....D2 | R437.....G4 | R831.....A4 | T805.....A5 |
| C481.....G2 | D414.....E4 | IC831.....A4 | J842.....C1 | P410C.....E2 | R438.....G3 | R832.....A4 | VR401.....G2 |
| C484.....G4 | D415.....E4 | IC832.....A4 | J843.....C1 | P410E.....E2 | R439.....G4 | R833.....A4 | ZD401.....G3 |
| C486.....F3 | D416.....E5 | IC833.....B3 | J844.....B1 | P410F.....E2 | R440.....G3 | R834.....A4 | ZD404.....G3 |
| C491.....G1 | D417.....F5 | IC851.....A2 | J845.....B1 | P42A.....F5 | R441.....E1 | R835.....A3 | ZD405.....G3 |
| C493.....G1 | D418.....F4 | IC881.....B2 | J846.....C1 | P42B.....F5 | R442.....G4 | R836.....A3 | ZD406.....G3 |
| C802.....B5 | D419.....F2 | IC891.....C3 | J847.....C2 | P42C.....F5 | R443.....G4 | R837.....A1 | ZD407.....G3 |
| C803.....B4 | D420.....F2 | J403.....F1 | J848.....B3 | P801A.....B5 | R449.....G3 | R838.....A1 | ZD410.....E2 |
| C804.....C5 | D421.....G4 | J404.....F1 | J849.....C3 | P801B.....B5 | R450.....G3 | R839.....A4 | ZD411.....D1 |
| C805.....C5 | D422.....E2 | J407.....F1 | J850.....C3 | P801C.....B5 | R451.....G3 | R840.....A1 | ZD412.....G4 |
| C806.....C4 | D423.....E3 | J409.....G2 | J851.....C2 | P801D.....B5 | R452.....G3 | R851.....A1 | ZD413.....E2 |
| C807.....C5 | D424.....E3 | J410.....G4 | J853.....C2 | P841A.....B1 | R454.....E3 | R861.....B1 | ZD415.....E1 |
| C808.....B4 | D425.....F2 | J411.....F4 | J854.....C2 | P861A.....A1 | R457.....G4 | R871.....B1 | ZD831.....A4 |
| C809.....B4 | D427.....D3 | J412.....G4 | J855.....C3 | Q402.....D1 | R458.....G3 | R872.....B2 | ZD46A.....F1 |
| C810.....B4 | D430.....G4 | J414.....F3 | J856.....C3 | Q403.....D2 | R459.....G3 | R887.....C2 | |
| C811.....A5 | D431.....F4 | J415.....F2 | J857.....B2 | Q405.....G5 | R460.....G2 | R891.....C3 | |
| C812.....A5 | D434.....G4 | J416.....F2 | J858.....B3 | Q406.....G5 | R461.....G3 | R892.....C3 | |
| C813.....A5 | D435.....F4 | J417.....F2 | J859.....A2 | Q407.....G3 | R462.....G2 | R893.....C3 | |
| C816.....A4 | D437.....G2 | J418.....F2 | J860.....A2 | Q408.....G3 | R463.....G2 | R894.....C3 | |
| C829.....C4 | D440.....F3 | J419.....G2 | J861.....C1 | Q409.....G4 | R464.....G2 | R895.....C2 | |


DIGITAL (TOP)

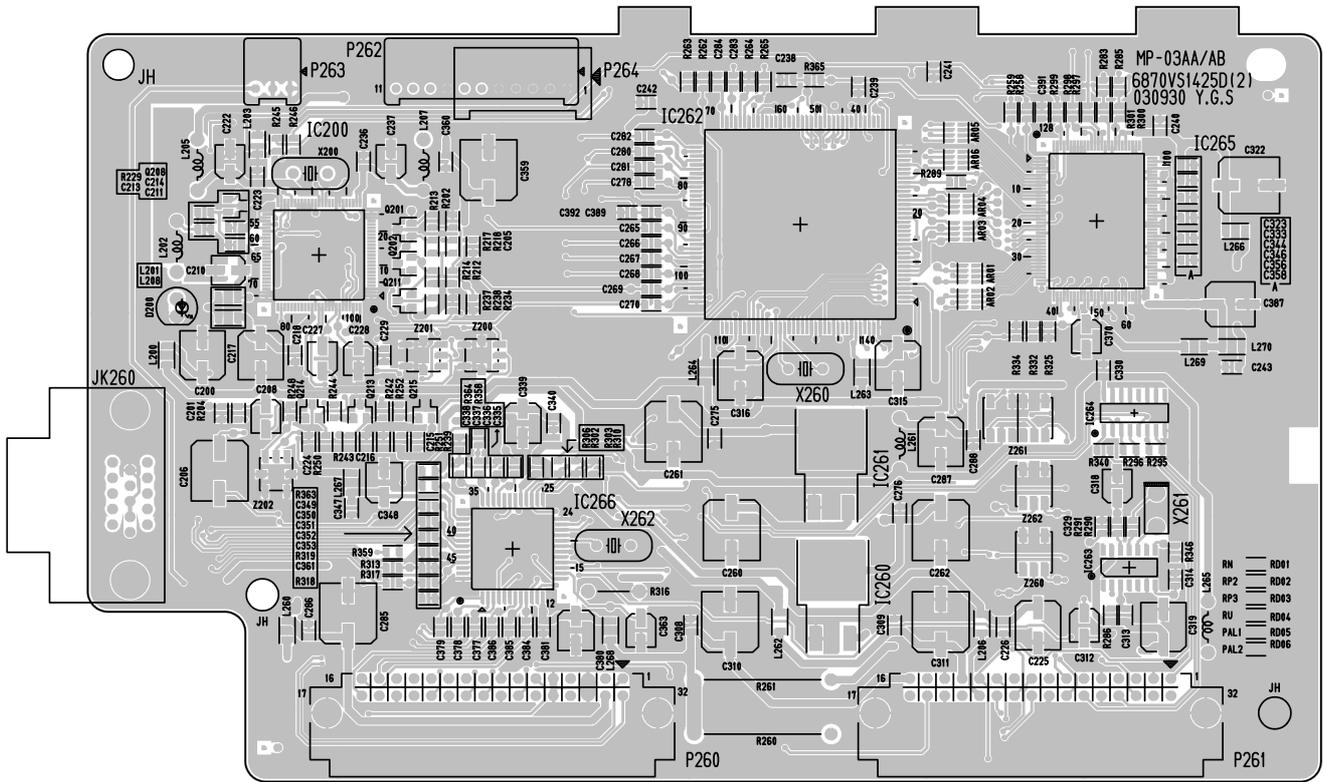


DIGITAL (BOTTOM)

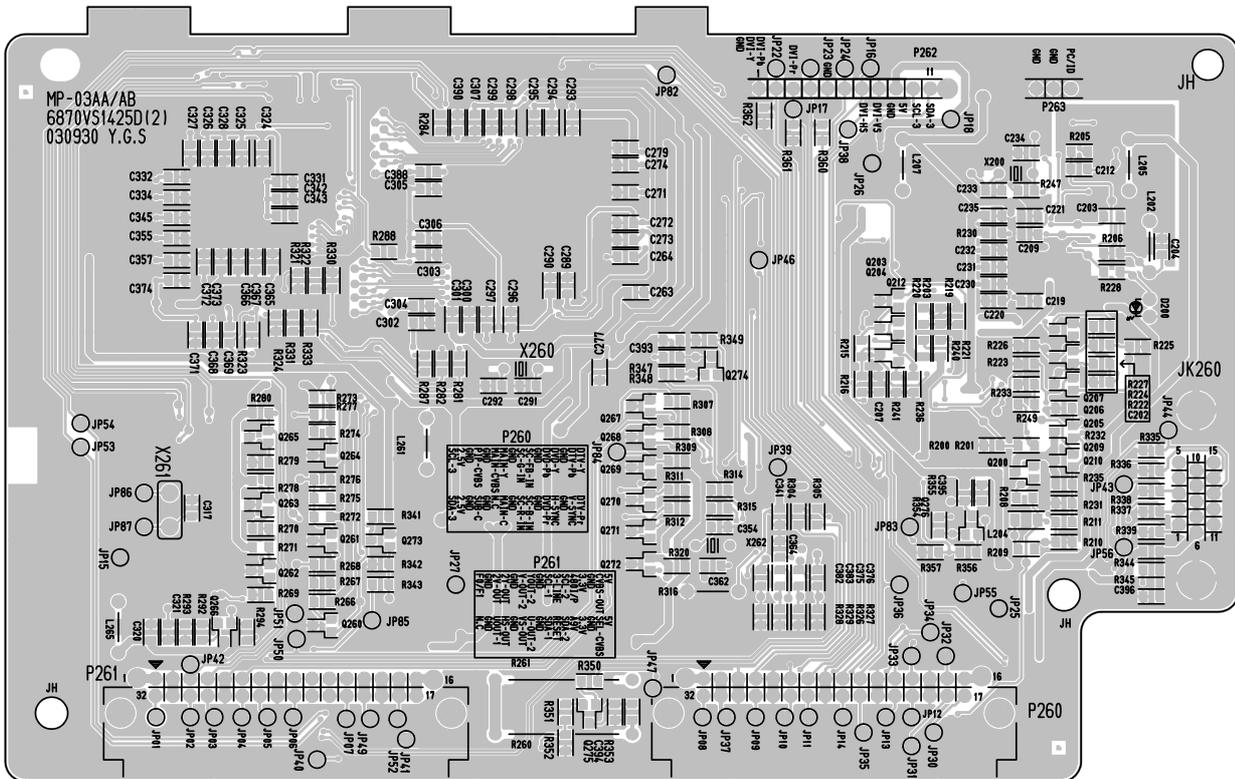


MICOM (TOP)

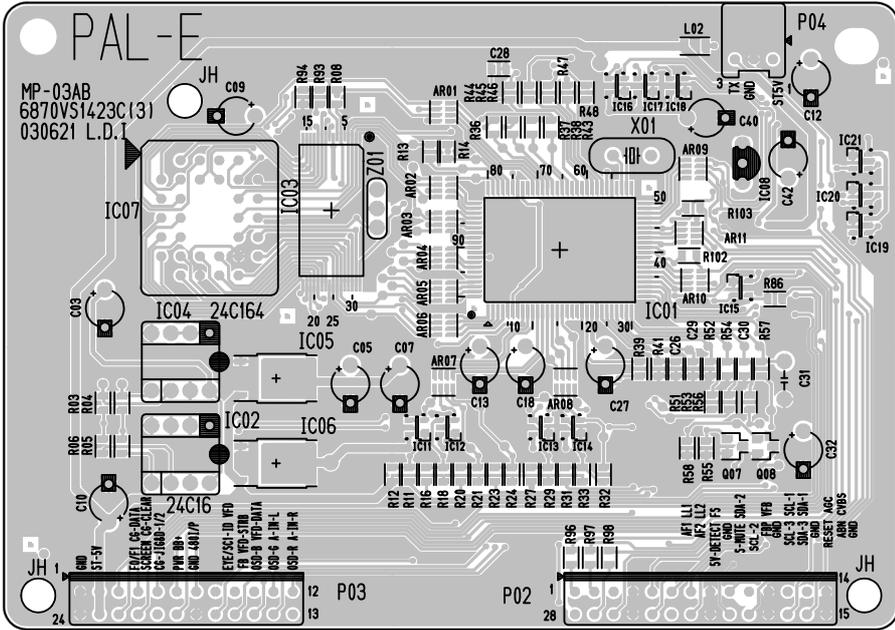


MICOM (BOTTOM)

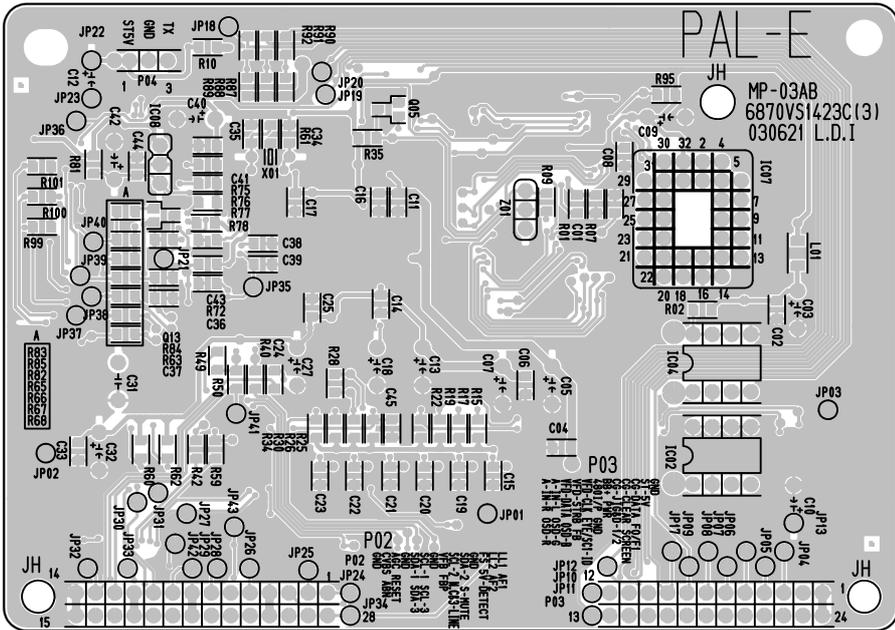


INTERFACE

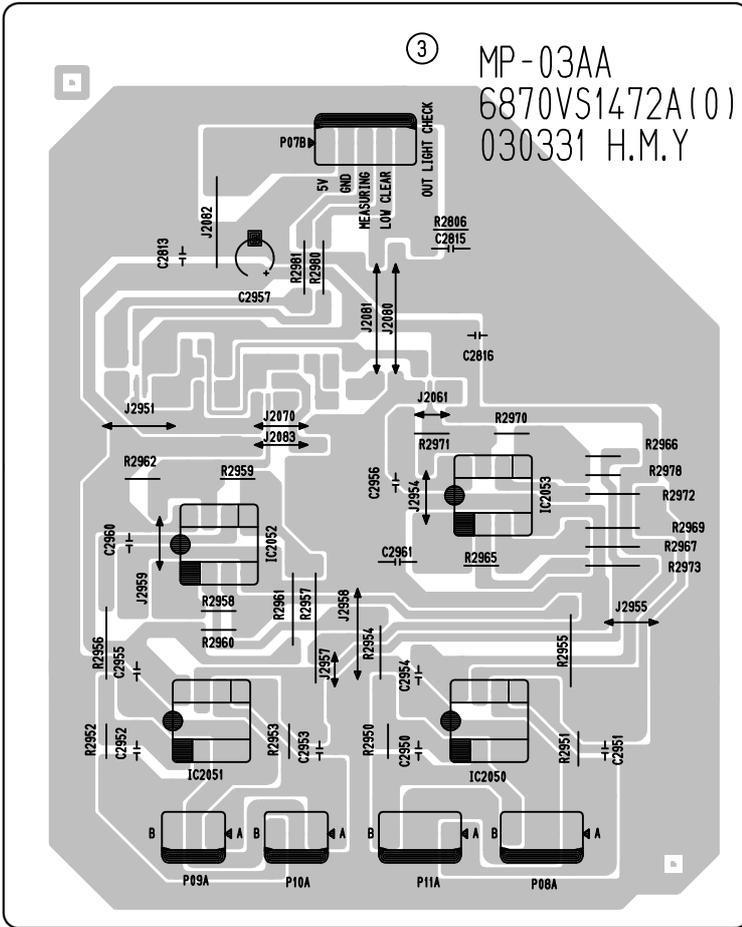


POWER S/W

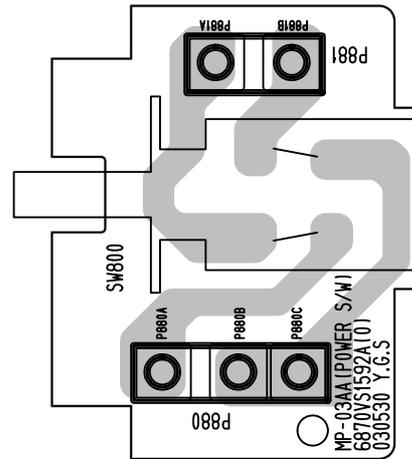

SIDE AV

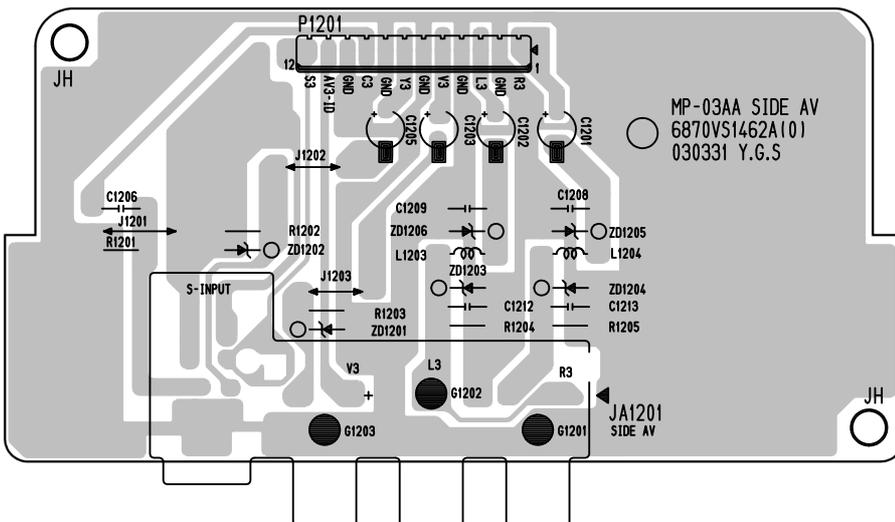


PRE-AMP

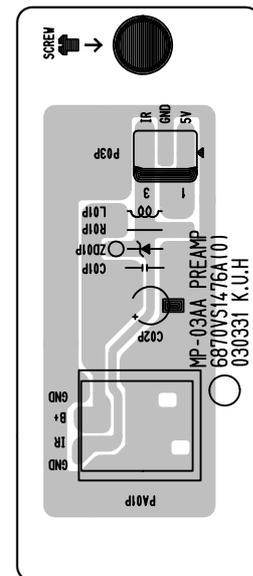

MEMO

EXPLODED VIEW

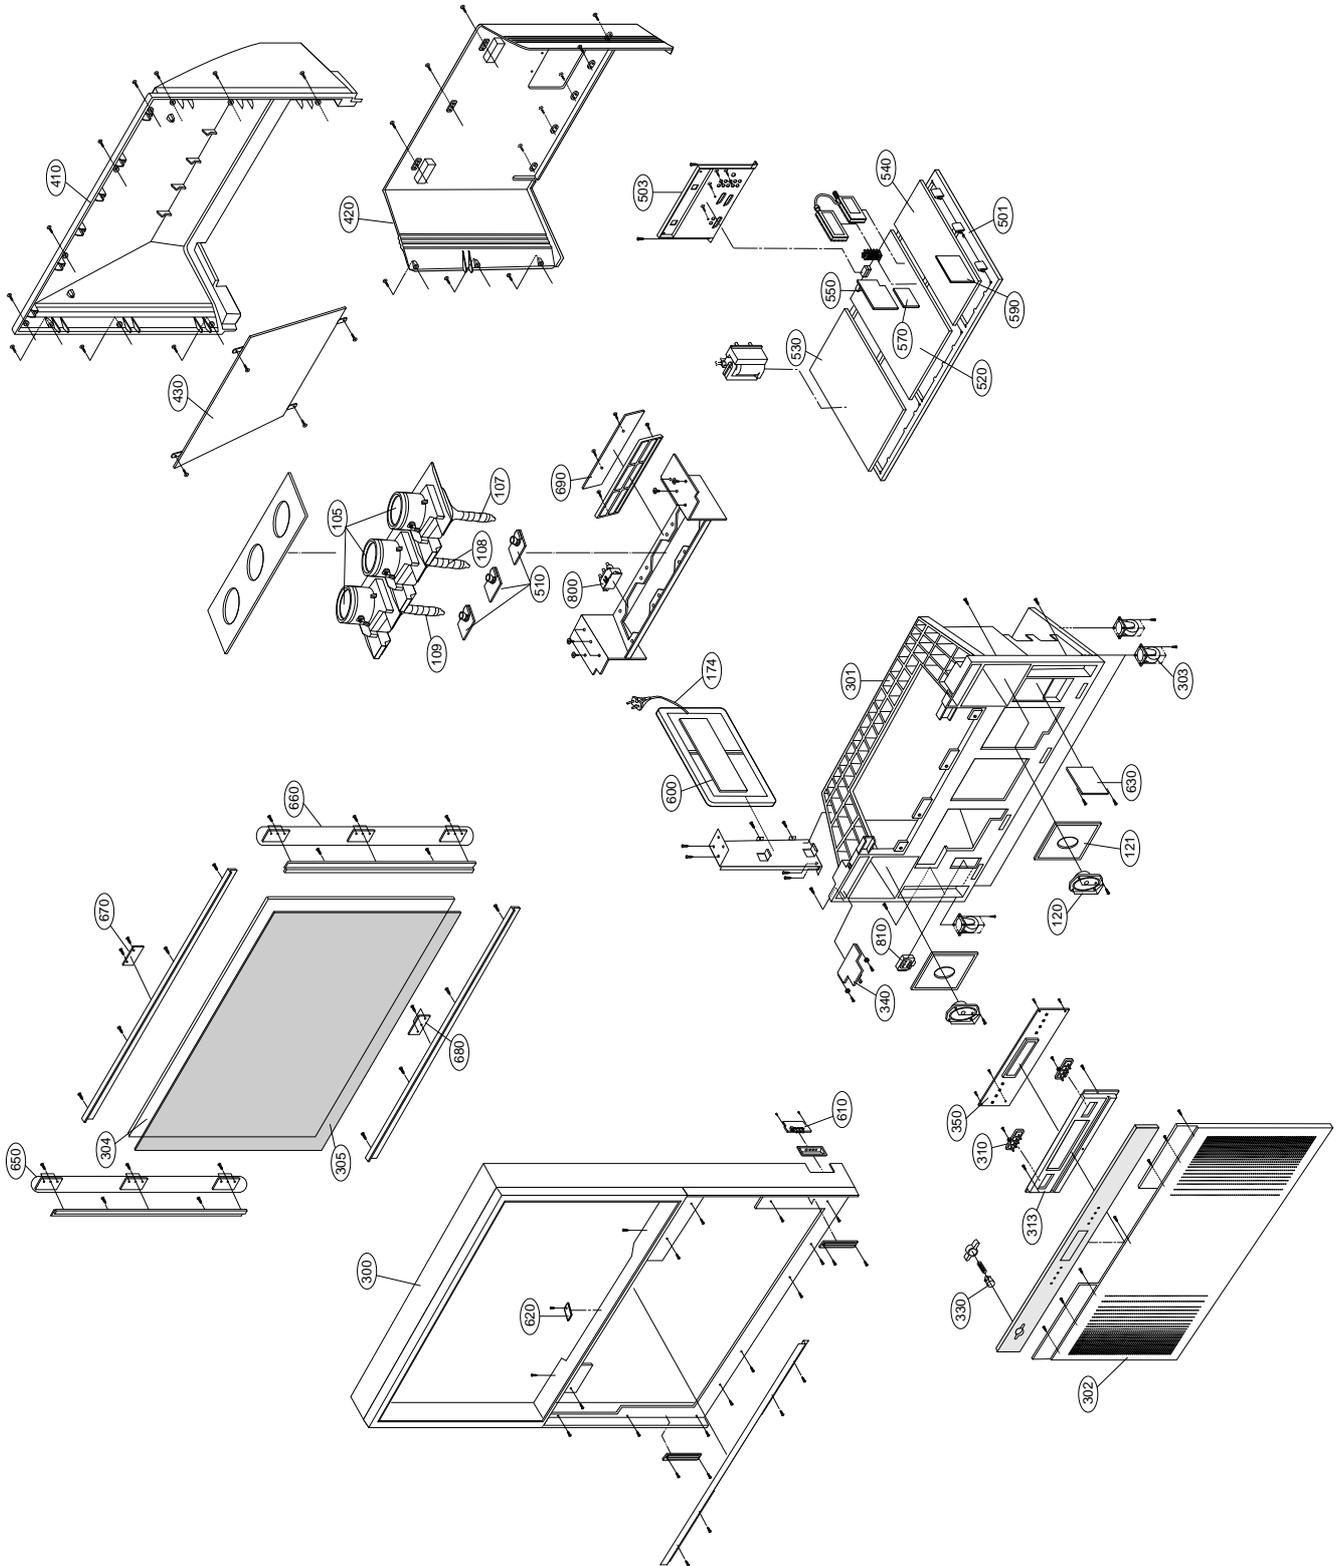

EXPLODED VIEW PARTS LIST

| No. | Part No. | Description |
|-----|-------------|--|
| 105 | 3680V00031A | LENS, SEKINOS LENS SSM-650 _39,40"(W) |
| 107 | 4810V00897J | BRACKET, PRT ASSY RT-40NZ60RB MP03AB NON SEKINOS SSM-65 B CLENS+COUPLER+CPT |
| 108 | 4810V00897H | BRACKET, PRT ASSY RT-40NZ60RB MP03AB NON SEKINOS SSM-65 G CLENS+COUPLER+CPT |
| 109 | 4810V00897G | BRACKET, PRT ASSY RT-40NZ60RB MP03AB NON SEKINOS SSM-65 R CLENS+COUPLER+CPT |
| 120 | 120-D38E | SPEAKER,MID-RANGE LG FOSTER 8 OHM 15/25W 87DB 128X77MM |
| 121 | 4810V00697A | BRACKET, SPEAKER RN-39NZ40 SP02PA HIPS 51SF . |
| 153 | 6150Z-1100E | DY(DEFLECTION YOKE), 2.5H 38KHZ L 400MM 07 LGPLD RN-39NZ33H 6150Z-1100B |
| 174 | 6410VBH007B | POWER CORD, MP5004SC(13A)FILTER VOLEX BSI 2400MM HOUSING(L1 400MM) BLACK |
| 300 | 3091V00469D | CABINET ASSEMBLY, RE-39NZ40RB.ABMLKX NON MP03AB . |
| 301 | 3091V00470L | CABINET ASSEMBLY, RE-39NZ43RB STEREO MP03AB . |
| 302 | 3211V00100Q | FRAME ASSEMBLY, FRONT LOWER RE-39NZ43RB . |
| 303 | 4778V00079A | LEG, ROLLER CASTER RN-39NZ40 NON . |
| 304 | 3350V00039A | SCREEN, DNP NON R3 39(W) - SS ENG (26A) |
| 305 | 3790V00717A | WINDOW, FILTER DIATECH ACRYL R3_39(W) GLARE(CLEAR) |
| 310 | 5020V00739A | BUTTON, CONTROL RN-39NZ40 ABS, HF-380 4KEY . |
| 313 | 4810V00696A | BRACKET,CONTROL RN-39NZ40 SP02PA HIPS 51SF . |
| 330 | 5020V00758A | BUTTON, POWER ASSY ABS, HF-380 NON RN-56NZ30H |
| 340 | 6871VSMW38A | PWB(PCB) ASSEMBLY,SUB PSW MP03AA M/I POWER-S/W 40NZ60/39NZ43/39NZ45 |
| 350 | 6871VSMW95B | PWB(PCB) ASSEMBLY,SUB CONT MP03AB M/I CONTROL RE-39NZ43RB |
| 410 | 3809V00318B | BACK COVER ASSEMBLY, RE-39NZ40RB NON . |
| 420 | 3809V00319A | BACK COVER ASSEMBLY, LOWER,RN-39NZ40H NON . |
| 430 | 5018V00050B | MIRROR, PROJECTION AHSUNG Mirror R3 39(WIDE) FILM MIRROR |
| 501 | 4810V00752C | BRACKET, MAIN RU-40NZ60 MP03AA HIPS 407AF . |
| 503 | 4810V00874B | BRACKET REAR AV RE-39NZ60RB MP03AB HIPS 60HR . |
| 510 | 6871VSMV08B | PWB(PCB) ASSEMBLY,SUB CPT MP03AB M/I EXPORT NO HIGH VOLTAGE LABEL |
| 520 | 6871VMN672F | PWB(PCB) ASSEMBLY,MAIN MP03AB M/I PAL-EU AUTO-CVG (U.K) RE-39NZ43RB |
| 530 | 6871VDM904A | PWB(PCB) ASSEMBLY,DEFLECTION MAIN2 MP03AB M/I 16:9, NARROW, 100MM EUROPE |
| 540 | 6871VSMC16A | PWB(PCB) ASSEMBLY,SUB CVG MP03AB CONV-OUT M/I (PAL 2MODE) |
| 550 | 6871VSMV80A | PWB(PCB) ASSEMBLY,SUB DIGITAL MP03AB M/I PAL (W/O PC, W/ 1080I-ADJ) RE-44NA14T |
| 570 | 6871VSMY14F | PWB(PCB) ASSEMBLY,SUB MICOM MP03AB M/I PAL W/ TXT, A/C (U.K) RE-39NZ43RB |
| 590 | 6871VSMC17A | PWB(PCB) ASSEMBLY,SUB CVG MP03AB D-CON M/I |
| 600 | 6871VPM27A | PWB(PCB) ASSEMBLY,POWER SUB MP-03AB AC-INPUT M/I EUROPE |
| 610 | 6871VSMV11P | PWB(PCB) ASSEMBLY,SUB S/IN MP03AB SIDE-AV EU+ASIA 1000MM (WHITE+BEIGE) RE-49NZ23RB |
| 620 | 6871VSMX20A | PWB(PCB) ASSEMBLY,SUB MP03AB PRE-AMP M/I |
| 630 | 6871VSMC13A | PWB(PCB) ASSEMBLY,SUB INTER MP03AA CVG-INTERFACE M/I |
| 650 | 6871VSMU27B | PWB(PCB) ASSEMBLY,SUB CVG SP02PC RN-39NZ40 RIGHT SENSOR ASSY |
| 660 | 6871VSMU27A | PWB(PCB) ASSEMBLY,SUB CVG SP02PC RN-39NZ40 LEFT SENSOR ASSY |
| 670 | 6871VSMU27C | PWB(PCB) ASSEMBLY,SUB CVG SP02PC RN-39NZ40 TOP SENSOR ASSY |
| 680 | 6871VSMU27D | PWB(PCB) ASSEMBLY,SU CVG SP02PC RN-39NZ40 BOTTOM SENSOR ASSY |
| 690 | 6871VSMV58B | PWB(PCB) ASSEMBLY,SUB VM MP03AB EU,PAL |
| 800 | 4410Z-A001L | FBT (FLY BACK TRANSFORMER), 4410Z-A001K 44 JW VE TYPE |
| 810 | 180-836K | FOCUS PACK, W18-601-02 YINYANG 180-836H |

REPLACEMENT PARTS LIST

| LOCA. NO | PART NO | DESCRIPTION | LOCA. NO | PART NO | DESCRIPTION |
|-----------|-------------|--|-------------------|-------------|---|
| IC | | | | | |
| D861 | 0ISK100300A | SLA1003 SIP12 BK DIODE MODULE | IC409 | 0ISS790500C | KA7905 POWER INTEGRATION TO220 BK |
| IC01 | 0ISM555000A | SDA5550 MQFP100 BK MICOM TXT MC006A | IC410 | 0IKE780500Q | KIA7805API 3P TO-220 ST 5V(=KIA7805PI) |
| IC02 | 0IAL241610B | AT24C16A-10PI-2.7 8PIN DIP ST EEPROM NON | IC500 | 0ISH122100B | PQ12RD21 4SIP ST REGULATOR |
| IC03 | 0ISS610082A | K6T1008V2E-TB(F)70 [K6T1008BLT-7L] 32-TSOP | IC501 | 0IMCRSO013B | CXA2180Q SONY 64P QFP TRAY BACK-END IC |
| IC04 | 0IMCRAL003B | AT24C164-10PI-2.7 ATMEL 8P PDIP ST EEPROM 164K | IC502 | 0IKE780500Q | KIA7805API 3P TO-220 ST 5V(=KIA7805PI) |
| IC05 | 0IPMGSG017A | LD1117DT25CTR STM 3P 2.5V 0.8A | IC503 | 0ISS393000G | KA393 COMPARATOR 8DIP BK OP AMP |
| IC06 | 0ISG111733A | LD1117DT3C-TR 3, TP ROW DROP 3.3V,2.5K/REEL | IC504 | 0IKE780900M | KIA7809API TO220 ST 3P 9V REGULATOR |
| IC07 | 0IZVA0078B | M27W201 32P PLCC ST MICOM(PAL) 128TXT | IC505 | 0IKE780500P | KIA78L05BP(AT) 3P 5V,150MA |
| IC08 | 0IFA752700A | KA75270Z 3 TP RE-SET IC MC-007 | IC600 | 0IMCRMN001C | MSP3411G QA B8 V3 MICRONAS 80P QFP |
| IC101 | 0IKE780500Q | KIA7805API 3P TO-220 ST 5V(=KIA7805PI) | IC601 | 0IKE780800J | KIA7808API 3 ST REGULATOR |
| IC102 | 0IFA754207A | KA75420ZTA(KA7542ZTA) 3P,TO-92 TP 4.2V | IC602 | 0ISS455880A | KA4558D 8SOP OP AMP |
| IC103 | 0IKE780500Q | KIA7805API 3P TO-220 ST 5V(=KIA7805PI) | IC700 | 0ISO206900A | CXA2069Q QFP64 BK I2C BUS AV S/W |
| IC103 | 0IKE780500Q | KIA7805API 3P TO-220 ST 5V(=KIA7805PI) | IC801 | 0ISK665813A | STR-F6658B(LF1352) 5PIN SIP BK STR PN-43A3Y |
| IC104 | 0IKE780900M | KIA7809API TO220 ST 3P 9V REGULATOR | IC802 | 0IPMGSK003A | STR-A6351 SANKEN 8 DIP ST SMPS 1 CHIP |
| IC105 | 0ISH052100C | PQ05RD21 4SIP ST REGULATOR - | IC831 | 0ILI817000G | LTV817M-VB 4P,DIP BK PHOTO COUPLER |
| IC106 | 0ISH323422A | PQ3RF23 4P(TO-220) 3.3V REGUL | IC832 | 0ILI817000G | LTV817M-VB 4P,DIP BK PHOTO COUPLER |
| IC107 | 0ISG111725B | LD1117V25 3 SIP ST REGULATOR MC006A | IC833 | 0ILI817000G | LTV817M-VB 4P,DIP BK PHOTO COUPLER |
| IC2000 | 0ICTMSG001A | STV2050A SGS-THOMSON 80PIN TQFP | IC851 | 0IMO257633A | LM2576TV-3.3 5PIN ST REGULATOR HN-61A40R |
| IC2003 | 0ITI347000A | LF347D 14P,SOP TP QUAD OPERATIONAL AMP | IC881 | 0IKE782400C | KIA7824API 3 ST REGULATOR . |
| IC2004 | 0ITI347000A | LF347D 14P,SOP TP QUAD OPERATIONAL AMP | IC891 | 0ISK105000A | SE105N 105V ERROR AMP(NO.12) |
| IC2005 | 0IAL241610B | AT24C16A-10PI-2.7 8PIN DIP ST EEPROM NON | IC901 | 0IZZVF0018C | STK396-130 11P ST SCAN VELOCITY MODU. |
| IC2006 | 0IMCRAL003B | AT24C164-10PI-2.7 ATMEL 8P | IC901B | 0IPH611190A | TDA6111Q 9SIP RGB AMP |
| IC2007 | 0ISG111733B | LD1117V33C 3SIP ST REGULATOR - | IC901G | 0IPH611190A | TDA6111Q 9SIP RGB AMP |
| IC2020 | 0IMCRAL003B | AT24C164-10PI-2.7 ATMEL 8P | IC901R | 0IPH611190A | TDA6111Q 9SIP RGB AMP |
| IC2021 | 0IPRPTO002A | TC7S14F(T5L,T) TOSHIBA 5P | IC902 | 0IKE781200P | KIA7812API TO220 ST 3P 12V REGULATOR |
| IC2022 | 0IPRPTO003A | TC7SZ08F TOSHIBA 5P SOP TP AND GATE | ICT01 | 0IMCRMIO02A | M62320P MITSUBISHI 16DIP ST I/O EXPANDER |
| IC2023 | 0IPRPTO004A | TC7W74F TOSHIBA 8P SOP TP D TYPE FLIP FLOP | ICT02 | 0IMCRMIO02A | M62320P MITSUBISHI 16DIP ST I/O EXPANDER |
| IC2025 | 0IMCRAL003C | AT24C164-10SI-2.7 ATMEL 8P SOIC R/TP EEPROM | ICX601 | 0IMCRNS006A | LM4765T NATIONAL SEMICONDUCTOR 15P |
| IC2025 | 0IPRPTO002A | TC7S14F(T5L,T) TOSHIBA 5P SOP | SD01 | 0IPRPTD001A | BCS5030G1 TDK 2P SMD R/TP SENSOR |
| IC2026 | 0IMCRAL003C | AT24C164-10SI-2.7 ATMEL 8P SOIC R/TP EEPROM | SD02 | 0IPRPTD001A | BCS5030G1 TDK 2P SMD R/TP SENSOR |
| IC2027 | 0IMCRAL003C | AT24C164-10SI-2.7 ATMEL 8P SOIC R/TP EEPROM | SD03 | 0IPRPTD001A | BCS5030G1 TDK 2P SMD R/TP SENSOR |
| IC2050 | 0IMCRNS003A | LMC6482IN NATIONAL SEMICONDUCTOR 8P | SD04 | 0IPRPTD001A | BCS5030G1 TDK 2P SMD R/TP SENSOR |
| IC2051 | 0IMCRNS003A | LMC6482IN NATIONAL SEMICONDUCTOR 8P | SD05 | 0IPRPTD001A | BCS5030G1 TDK 2P SMD R/TP SENSOR |
| IC2052 | 0ISS290300A | KA2903 8P,DIP BK DUAL COMPARATOR | SD06 | 0IPRPTD001A | BCS5030G1 TDK 2P SMD R/TP SENSOR |
| IC2053 | 0ISS290300A | KA2903 8P,DIP BK DUAL COMPARATOR | SD07 | 0IPRPTD001A | BCS5030G1 TDK 2P SMD R/TP SENSOR |
| IC2060 | 0IFA752700A | KA75270Z 3 TP RE-SET IC MC-007 | SD08 | 0IPRPTD001A | BCS5030G1 TDK 2P SMD R/TP SENSOR |
| IC260 | 0IPMGSG016A | LD1086D2T18TR STM 3P D2PAK 1.8V 1.5A | SD09 | 0IPRPTD001A | BCS5030G1 TDK 2P SMD R/TP SENSOR |
| IC261 | 0IPMGSG016A | LD1086D2T18TR STM 3P D2PAK 1.8V 1.5A | SD10 | 0IPRPTD001A | BCS5030G1 TDK 2P SMD R/TP SENSOR |
| IC262 | 0IMCRMN016B | VSP9427B-XZ-C3 MICRONAS 144P QFP | SD11 | 0IPRPTD001A | BCS5030G1 TDK 2P SMD R/TP SENSOR |
| IC263 | 0ISA721700C | LA7217M MFP14 TP SYNC SEPARATOR ML-00BA | SD12 | 0IPRPTD001A | BCS5030G1 TDK 2P SMD R/TP SENSOR |
| IC264 | 0IMCRFA012A | DM74LS157MX FAIRCHILD 16P SOIC | SD13 | 0IPRPTD001A | BCS5030G1 TDK 2P SMD R/TP SENSOR |
| IC265 | 0ICTMLG010A | LGDT1000B LG IC QFP 128P TRAY DRP2 | SD14 | 0IPRPTD001A | BCS5030G1 TDK 2P SMD R/TP SENSOR |
| IC266 | 0IMCRSO008A | CXA2151Q SONY 48P QFP TRAY 60LCD | SD15 | 0IPRPTD001A | BCS5030G1 TDK 2P SMD R/TP SENSOR |
| IC2701 | 0ISA392120A | STK392-120 18P,SIP BK | SD16 | 0IPRPTD001A | BCS5030G1 TDK 2P SMD R/TP SENSOR |
| IC2702 | 0ISA392120A | STK392-120 18P,SIP BK | TRANSISTOR | | |
| IC401 | 0IKE358000A | KIA358P DIP8 DUAL OP-AMP BK | IC11 | 0TR830009BA | BSS83 TP PHILIPS NON N-CHANNEL S/W TR |
| IC402 | 0ISS393000G | KA393 COMPARATOR 8DIP BK OP AMP | IC12 | 0TR830009BA | BSS83 TP PHILIPS NON N-CHANNEL S/W TR |
| IC403 | 0IKE781200P | KIA7812API TO220 ST 3P 12V REGULATOR | IC13 | 0TR830009BA | BSS83 TP PHILIPS NON N-CHANNEL S/W TR |
| IC404 | 0ISA784600A | 7846 SIP,10P BK V-OUT IC | IC14 | 0TR830009BA | BSS83 TP PHILIPS NON N-CHANNEL S/W TR |
| IC405 | 0IFA754207A | KA75420ZTA(KA7542ZTA) 3P,TO-92 TP 4.2V | IC15 | 0TR830009BA | BSS83 TP PHILIPS NON N-CHANNEL S/W TR |
| IC408 | 0IKE358000A | KIA358P DIP8 DUAL OP-AMP BK | IC16 | 0TR830009BA | BSS83 TP PHILIPS NON N-CHANNEL S/W TR |
| | | | IC17 | 0TR830009BA | BSS83 TP PHILIPS NON N-CHANNEL S/W TR |

| LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|---------------------------------------|
| IC18 | 0TR830009BA | BSS83 TP PHILIPS NON N-CHANNEL S/W TR |
| IC19 | 0TR830009BA | BSS83 TP PHILIPS NON N-CHANNEL S/W TR |
| IC20 | 0TR830009BA | BSS83 TP PHILIPS NON N-CHANNEL S/W TR |
| IC21 | 0TR830009BA | BSS83 TP PHILIPS NON N-CHANNEL S/W TR |
| Q07 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q08 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q100 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q100 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q101 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q101 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q102 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q104 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q107 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q108 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q110 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q111 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q112 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q113 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q114 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q115 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q116 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q117 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q118 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q119 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q13 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q200 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q2001 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q2002 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q2003 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q2004 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q2005 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q2013 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q2014 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q2015 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q2016 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q2201 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q2202 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q2203 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q2204 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q2205 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q2206 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q2207 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q2208 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q2209 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q2210 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q2211 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q2212 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q2213 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q260 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q261 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q262 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q263 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |

| LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|---|
| Q264 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q265 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q266 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q267 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q268 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q269 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q270 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q2700 | 0TR319809AA | KTC3198(KTC1815) KEC TP TO92 50V 150MA |
| Q2701 | 0TR319809AA | KTC3198(KTC1815) KEC TP TO92 50V 150MA |
| Q2702 | 0TR319809AA | KTC3198(KTC1815) KEC TP TO92 50V 150MA |
| Q2703 | 0TR126609AA | KTA1266-Y(KTA1015) KEC TP TO92 50V 150MA |
| Q271 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q272 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q273 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q274 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q275 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q276 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q402 | 0TF630000CB | FAIRCHILD IRFS630B ST TO220F 200V 6.5A |
| Q403 | 0TRTH10007A | 2SC5858 TOSHIBA ST TO3P VCBO 1700V IC 22A |
| Q405 | 0TR126609AA | KTA1266-Y(KTA1015) KEC TP TO92 50V 150MA |
| Q405 | 0TR126609AA | KTA1266-Y(KTA1015) KEC TP TO92 50V 150MA |
| Q406 | 0TRFC10001A | FAIRCHILD KSC5042F-YDTU ST TO220F 1500V 100MA |
| Q407 | 0TR126609AA | KTA1266-Y(KTA1015) KEC TP TO92 50V 150MA |
| Q408 | 0TR319809AA | KTC3198(KTC1815) KEC TP TO92 50V 150MA |
| Q409 | 0TR319809AA | KTC3198(KTC1815) KEC TP TO92 50V 150MA |
| Q410 | 0TR126609AA | KTA1266-Y(KTA1015) KEC TP TO92 50V 150MA |
| Q411 | 0TR205900AB | KTD2059-Y TO-220IS KEC |
| Q413 | 0TF630000CB | FAIRCHILD IRFS630B ST TO220F 200V 6.5A |
| Q416 | 0TR187900AA | 2SD1879 BK SANYO |
| Q416 | 0TF630000CB | FAIRCHILD IRFS630B ST TO220F 200V 6.5A |
| Q417 | 0TR319809AA | KTC3198(KTC1815) KEC TP TO92 50V 150MA |
| Q420 | 0TR421009CB | BF421L(AMMO)TO-92 TP PHILIPS |
| Q423 | 0TR319809AA | KTC3198(KTC1815) KEC TP TO92 50V 150MA |
| Q424 | 0TR126609AA | KTA1266-Y(KTA1015) KEC TP TO92 50V 150MA |
| Q428 | 0TR322709AA | KTC3227-Y,TP(KTC1627A),KEC |
| Q432 | 0TR126609AA | KTA1266-Y(KTA1015) KEC TP TO92 50V 150MA |
| Q500 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q501 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q502 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q503 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q504 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q505 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q506 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q507 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q508 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q509 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q510 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q511 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q512 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q513 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q514 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q600 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |

| LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|--|
| Q601 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q602 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q603 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q606 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q607 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q608 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q609 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q610 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q611 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q612 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| Q613 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q614 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q615 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q700 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q700 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q701 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q702 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q703 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q703 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q704 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q705 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q706 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q707 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q708 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q709 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q710 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q711 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| Q802 | 0TR322709AA | KTC3227-Y,TP(KTC1627A),KEC |
| Q831 | 0TR319809AA | KTC3198(KTC1815) KEC TP TO92 50V 150MA |
| Q832 | 0TR319809AA | KTC3198(KTC1815) KEC TP TO92 50V 150MA |
| Q872 | 0TR319809AA | KTC3198(KTC1815) KEC TP TO92 50V 150MA |
| Q891 | 0TR319809AA | KTC3198(KTC1815) KEC TP TO92 50V 150MA |
| Q901B | 0TR437000BA | KTC4370A-Y TO-220IS KEC |
| Q901G | 0TR437000BA | KTC4370A-Y TO-220IS KEC |
| Q901R | 0TR437000BA | KTC4370A-Y TO-220IS KEC |
| Q902B | 0TR319809AA | KTC3198(KTC1815) KEC TP TO92 50V 150MA |
| Q902G | 0TR319809AA | KTC3198(KTC1815) KEC TP TO92 50V 150MA |
| Q902R | 0TR319809AA | KTC3198(KTC1815) KEC TP TO92 50V 150MA |
| Q905G | 0TR126609AA | KTA1266-Y(KTA1015) KEC TP TO92 50V 150MA |
| QT01 | 0TR319809AA | KTC3198(KTC1815) KEC TP TO92 50V 150MA |
| QT02 | 0TR319809AA | KTC3198(KTC1815) KEC TP TO92 50V 150MA |
| QT03 | 0TR319809AA | KTC3198(KTC1815) KEC TP TO92 50V 150MA |
| QT04 | 0TR319809AA | KTC3198(KTC1815) KEC TP TO92 50V 150MA |
| QT05 | 0TR319809AA | KTC3198(KTC1815) KEC TP TO92 50V 150MA |
| QT06 | 0TR319809AA | KTC3198(KTC1815) KEC TP TO92 50V 150MA |
| QX100 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| QX101 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| QX102 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| QX103 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| QX104 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| QX105 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| QX600 | 0TR322709AA | KTC3227-Y,TP(KTC1627A),KEC |

| LOCA. NO | PART NO | DESCRIPTION |
|--------------|-------------|---|
| DIODE | | |
| D2701 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D2702 | 0DR210009AC | BAV21 TP PHILIPS DO35 200V 0.2A 1A 50SEC 100A |
| D2703 | 0DR210009AC | BAV21 TP PHILIPS DO35 200V 0.2A 1A 50SEC 100A |
| D2801 | 0DD184009AA | KDS184S CHIP 85V 300MA KEC TP |
| D401 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D402 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D403 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D404 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D406 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D409 | 0DR210009AC | BAV21 TP PHILIPS DO35 200V 0.2A 1A 50SEC 100A |
| D410 | 0DD200009AH | RU2AMV(1) TP SANKEN |
| D414 | 0DR150509BA | PR1505G TP LITEON 250NSEC 5UA |
| D415 | 0DR150509BA | PR1505G TP LITEON 250NSEC 5UA |
| D416 | 0DD340009EA | BYW34 TP (2A/400V) TELEFUNKEN |
| D417 | 0DD340009EA | BYW34 TP (2A/400V) TELEFUNKEN |
| D418 | 0DD340009EA | BYW34 TP (2A/400V) TELEFUNKEN |
| D419 | 0DD200009AH | RU2AMV(1) TP SANKEN |
| D420 | 0DD200009AH | RU2AMV(1) TP SANKEN |
| D421 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D422 | 0DD150009CE | GP15J TP GULF SEMICONDUCTOR LTD. - 600V |
| D423 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D424 | 0DD100009AQ | RP1HV(1) TP SANKEN TP SANKEN |
| D425 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D430 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D431 | 0DR149379AA | 1N4937G TP LITEON 200NSEC 5UA |
| D434 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D435 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D437 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D440 | 0DD200009AH | RU2AMV(1) TP SANKEN |
| D488 | 0DD140009AA | EK14 V(1) TP E/EO-TMD 40V 1.5A 40A 0.2US 5MA |
| D500 | 0DD184009AA | KDS184S CHIP 85V 300MA KEC TP |
| D501 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D502 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D503 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D504 | 0DD100009AU | EU1AV(1) TP SANKEN TP SANKEN |
| D505 | 0DD100009AU | EU1AV(1) TP SANKEN TP SANKEN |
| D600 | 0DD184009AA | KDS184S CHIP 85V 300MA KEC TP |
| D601 | 0DD184009AA | KDS184S CHIP 85V 300MA KEC TP |
| D602 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D603 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D604 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D803 | 0DD100009AM | EU1ZV(1) TP SANKEN |
| D804 | 0DD100009AM | EU1ZV(1) TP SANKEN |
| D805 | 0DD100009AM | EU1ZV(1) TP SANKEN |
| D805 | 0DD100009AM | EU1ZV(1) TP SANKEN |
| D806 | 0DR010009AA | EG01C TP SANKEN - 1000V 0.5A 10A 100NSEC 50UA |
| D810 | 0DD100009AM | EU1ZV(1) TP SANKEN |
| D811 | 0DD100009AM | EU1ZV(1) TP SANKEN |
| D812 | 0DD100009AM | EU1ZV(1) TP SANKEN |
| D813 | 0DR010009AA | EG01C TP SANKEN 1000V 0.5A 10A 100NSEC 50UA |

| | | |
|--|---|--|
| For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows; | CC, CX, CK, CN : Ceramic CQ : Polyester CE : Electrolytic | RD : Carbon Film RS : Metal Oxide Film RN : Metal Film RF : Fusible |
|--|---|--|

| LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|--|
| D81A | 0DD606000AA | RBV606 SANKEN BK NA 600V 6A 150A NA 10UA |
| D81D | 0DD110009DB | RM11CV(1) TP SANKEN TP SANKEN |
| D81F | 0DRSA00121A | FMM-26S(LF664) SANKEN ST TO-220FM 600V 10A |
| D831 | 0DD420000BB | D4L20U SHINDENGEN |
| D832 | 0DZ240009DC | MTZJ2.4B TP ROHM-K DO34 0.5W 2 |
| D841 | 0DD420000BB | D4L20U SHINDENGEN |
| D842 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D851 | 0DD420000BB | D4L20U SHINDENGEN |
| D852 | 0DR460009AA | RK46 TP DO-214AC 60V 3.5A 70A 100SEC 3MA |
| D853 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D862 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D863 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D864 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D873 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D874 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D876 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D881 | 0DD100009AM | EU1ZV(1) TP SANKEN |
| D891 | 0DD410000AD | RU4AM,LF-L1 SANKEN SANKEN |
| D892 | 0DD410000AD | RU4AM,LF-L1 SANKEN SANKEN |
| D901 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D901B | 0DR210009AC | BAV21 TP PHILIPS DO35 200V 0.2A 1A 50SEC 100A |
| D901G | 0DR210009AC | BAV21 TP PHILIPS DO35 200V 0.2A 1A 50SEC 100A |
| D901R | 0DR210009AC | BAV21 TP PHILIPS DO35 200V 0.2A 1A 50SEC 100A |
| D902 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| D902B | 0DD060009AC | TVR06J GENERAL TP 600V 250NSEC |
| D902G | 0DD060009AC | TVR06J GENERAL TP 600V 250NSEC |
| D902R | 0DD060009AC | TVR06J GENERAL TP 600V 250NSEC |
| D903 | 0DD060009AC | TVR06J GENERAL TP 600V 250NSEC |
| D903B | 0DR210009AC | BAV21 TP DO35 200V 0.2A 1A 50SEC 100A |
| D903G | 0DR210009AC | BAV21 TP DO35 200V 0.2A 1A 50SEC 100A |
| D903R | 0DR210009AC | BAV21 TP DO35 200V 0.2A 1A 50SEC 100A |
| D904B | 0DR210009AC | BAV21 TP DO35 200V 0.2A 1A 50SEC 100A |
| D904G | 0DR210009AC | BAV21 TP DO35 200V 0.2A 1A 50SEC 100A |
| D904R | 0DR210009AC | BAV21 TP DO35 200V 0.2A 1A 50SEC 100A |
| D905B | 0DR210009AC | BAV21 TP DO35 200V 0.2A 1A 50SEC 100A |
| D905G | 0DR210009AC | BAV21 TP DO35 200V 0.2A 1A 50SEC 100A |
| D905R | 0DR210009AC | BAV21 TP DO35 200V 0.2A 1A 50SEC 100A |
| D908B | 0DR210009AC | BAV21 TP DO35 200V 0.2A 1A 50SEC 100A |
| D908G | 0DR210009AC | BAV21 TP DO35 200V 0.2A 1A 50SEC 100A |
| D908R | 0DR210009AC | BAV21 TP DO35 200V 0.2A 1A 50SEC 100A |
| D911B | 0DR210009AC | BAV21 TP DO35 200V 0.2A 1A 50SEC 100A |
| D911G | 0DR210009AC | BAV21 TP DO35 200V 0.2A 1A 50SEC 100A |
| D911R | 0DR210009AC | BAV21 TP DO35 200V 0.2A 1A 50SEC 100A |
| Q403 | 0DR500000CA | FMQ-G5GS BK TO3P 1700V 10A 50A 500USEC 500UA |
| Q411 | 0DR360000AA | FMG-36S BK SANKEN - 2.2V - - 100NSEC 1.0MA |
| ZD100 | 0DZ330009DF | MTZJ33B TP ROHM-K DO34 0.5W 33V 5UA - |
| ZD100 | 0DZ330009DF | MTZJ33B TP ROHM-K DO34 0.5W 33V 5UA - |
| ZD101 | 0DZ330009DF | MTZJ33B TP ROHM-K DO34 0.5W 33V 5UA - |
| ZD2610 | 0DZRM00178A | UDZS TE-17 5.1B ROHM R/TP SMD 0.2W 5.1V 5MA PF |
| ZD2611 | 0DZRM00178A | UDZS TE-17 5.1B ROHM R/TP SMD 0.2W 5.1V 5MA PF |
| ZD2612 | 0DZRM00178A | UDZS TE-17 5.1B ROHM R/TP SMD 0.2W 5.1V 5MA PF |
| ZD2805 | 0DZ240009DC | MTZJ2.4B TP ROHM-K DO34 0.5W 2 |

| LOCA. NO | PART NO | DESCRIPTION |
|------------------|-------------|---------------------------------------|
| ZD401 | 0DZ910009AJ | MTZJ9.1B TP ROHM-K DO34 0.5W 9.1V 5UA |
| ZD404 | 0DZ240009DC | MTZJ2.4B TP ROHM-K DO34 0.5W 2 |
| ZD405 | 0DZ510009DB | MTZJ5.1B TP ROHM-K DO34 - 5.1V 5UA |
| ZD406 | 0DZ510009DB | MTZJ5.1B TP ROHM-K DO34 - 5.1V 5UA |
| ZD407 | 0DZ820009AH | MTZJ8.2B TP ROHM-K DO34 - 8.2V 5UA |
| ZD410 | 0DZ560009CF | MTZJ5.6B TP ROHM-K DO34 0.5W 5.6V 5UA |
| ZD411 | 0DZ130009CJ | MTZJ13B TP ROHM-K DO34 0.5W 13V 5UA |
| ZD412 | 0DZ130009CJ | MTZJ13B TP ROHM-K DO34 0.5W 13V 5UA |
| ZD503 | 0DZ910009AJ | MTZJ9.1B TP ROHM-K DO34 0.5W 9.1V 5UA |
| ZD831 | 0DZ620009BB | MTZJ6.2B TP ROHM-K DO34 0.5W 6.2V 5UA |
| ZD901B | 0DZ560009CF | MTZJ5.6B TP ROHM-K DO34 0.5W 5.6V 5UA |
| ZD901G | 0DZ560009CF | MTZJ5.6B TP ROHM-K DO34 0.5W 5.6V 5UA |
| ZD901R | 0DZ560009CF | MTZJ5.6B TP ROHM-K DO34 0.5W 5.6V 5UA |
| ZD902B | 0DZ110009AD | MTZJ11B TP ROHM-K DO34 - 11V 5UA |
| ZD902G | 0DZ110009AD | MTZJ11B TP ROHM-K DO34 - 11V 5UA |
| ZD902R | 0DZ110009AD | MTZJ11B TP ROHM-K DO34 - 11V 5UA |
| CAPACITOR | | |
| C01P | 0CN1030F679 | 10000P 16V M Y TA52 |
| C02P | 0CE476DD618 | 47UF STD 10V 20% FL TP 5 |
| C03 | 0CE476DD618 | 47UF STD 10V 20% FL TP 5 |
| C04 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C05 | 0CE476DD618 | 47UF STD 10V 20% FL TP 5 |
| C06 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C07 | 0CE476DD618 | 47UF STD 10V 20% FL TP 5 |
| C09 | 0CE107DD618 | 100UF STD 10V M FL TP5 |
| C10 | 0CE107DD618 | 100UF STD 10V M FL TP5 |
| C101 | 0CE227DF618 | 220UF STD 16V M FL TP5 |
| C110 | 0CE225DK618 | 2.2UF STD 50V 20% FL TP 5 |
| C112 | 0CE106DK618 | 10UF STD 50V M FL TP5 |
| C112 | 0CE106DK618 | 10UF STD 50V M FL TP5 |
| C115 | 0CE477DD618 | 470UF STD 10V M FL TP5 |
| C115 | 0CE477DD618 | 470UF STD 10V M FL TP5 |
| C116 | 0CE108DD618 | 1000UF STD 10V M FL TP5 |
| C118 | 0CE225DK618 | 2.2UF STD 50V 20% FL TP 5 |
| C1201 | 0CE475DK618 | 4.7UF STD 50V 20% FL TP 5 |
| C1202 | 0CE475DK618 | 4.7UF STD 50V 20% FL TP 5 |
| C1203 | 0CE475DK618 | 4.7UF STD 50V 20% FL TP 5 |
| C1205 | 0CE475DK618 | 4.7UF STD 50V 20% FL TP 5 |
| C1206 | 0CN1040K949 | 0.1M 50V Z F TA52 |
| C1208 | 0CN2210K519 | 220P 50V K B TA52 |
| C1209 | 0CN2210K519 | 220P 50V K B TA52 |
| C121 | 0CE106DF618 | 10UF STD 16V M FL TP5 |
| C125 | 0CE477DD618 | 470UF STD 10V M FL TP5 |
| C126 | 0CE106DK618 | 10UF STD 50V M FL TP5 |
| C129 | 0CE477DD618 | 470UF STD 10V M FL TP5 |
| C13 | 0CE476DD618 | 47UF STD 10V 20% FL TP 5 |
| C134 | 0CE227DF618 | 220UF STD 16V M FL TP5 |
| C140 | 0CE106DF618 | 10UF STD 16V M FL TP5 |
| C142 | 0CE106DF618 | 10UF STD 16V M FL TP5 |
| C158 | 0CE227DF618 | 220UF STD 16V M FL TP5 |
| C163 | 0CE106DF618 | 10UF STD 16V M FL TP5 |

| | | |
|--|--------------------------|-----------------------|
| For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows; | CC, CX, CK, CN : Ceramic | RD : Carbon Film |
| | CQ : Polyester | RS : Metal Oxide Film |
| | CE : Electrolytic | RN : Metal Film |
| | | RF : Fusible |

| LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|-------------------------------|
| C167 | 0CE106DF618 | 10UF STD 16V M FL TP5 |
| C174 | 0CE227DF618 | 220UF STD 16V M FL TP5 |
| C178 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C18 | 0CE476DD618 | 47UF STD 10V 20% FL TP 5 |
| C184 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C186 | 0CE476DF618 | 47UF STD 16V M FL TP5 |
| C193 | 0CE106DF618 | 10UF STD 16V M FL TP5 |
| C195 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C196 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C198 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C199 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C2032 | 0CC3310K405 | 330P 50V J SL TS |
| C2033 | 0CC3310K405 | 330P 50V J SL TS |
| C2034 | 0CC3310K405 | 330P 50V J SL TS |
| C2035 | 0CC3310K405 | 330P 50V J SL TS |
| C2036 | 0CC3310K405 | 330P 50V J SL TS |
| C2037 | 0CE108DJ618 | 1000UF STD 35V M FL TP5 |
| C2038 | 0CE108DJ618 | 1000UF STD 35V M FL TP5 |
| C2050 | 0CE108DJ618 | 1000UF STD 35V M FL TP5 |
| C2052 | 0CE107DF618 | 100UF STD 16V M FL TP5 |
| C2054 | 0CE107DF618 | 100UF STD 16V M FL TP5 |
| C2056 | 0CE107DF618 | 100UF STD 16V M FL TP5 |
| C2060 | 0CE108DJ618 | 1000UF STD 35V M FL TP5 |
| C2061 | 0CE108DJ618 | 1000UF STD 35V M FL TP5 |
| C2063 | 0CK1030K945 | 0.01UF 50V Z F TR |
| C2064 | 0CK1030K945 | 0.01UF 50V Z F TR |
| C2065 | 0CK1030K945 | 0.01UF 50V Z F TR |
| C2066 | 0CK1030K945 | 0.01UF 50V Z F TR |
| C2067 | 0CK1030K945 | 0.01UF 50V Z F TR |
| C2069 | 0CK1030K945 | 0.01UF 50V Z F TR |
| C2070 | 0CE477DD618 | 470UF STD 10V M FL TP5 |
| C2071 | 0CE477DD618 | 470UF STD 10V M FL TP5 |
| C2072 | 0CE477DD618 | 470UF STD 10V M FL TP5 |
| C2073 | 0CE477DD618 | 470UF STD 10V M FL TP5 |
| C2074 | 0CK1030K945 | 0.01UF 50V Z F TR |
| C2075 | 0CK1030K945 | 0.01UF 50V Z F TR |
| C2080 | 0CK1030K945 | 0.01UF 50V Z F TR |
| C2081 | 0CK1030K945 | 0.01UF 50V Z F TR |
| C2082 | 0CK1030K945 | 0.01UF 50V Z F TR |
| C2094 | 0CK1030K945 | 0.01UF 50V Z F TR |
| C2095 | 0CK1030K945 | 0.01UF 50V Z F TR |
| C2096 | 0CK1030K945 | 0.01UF 50V Z F TR |
| C2142 | 0CE107DF618 | 100UF STD 16V M FL TP5 |
| C2143 | 0CE107DF618 | 100UF STD 16V M FL TP5 |
| C2170 | 0CE475DK618 | 4.7UF STD 50V 20% FL TP 5 |
| C2202 | 0CE476DF618 | 47UF STD 16V M FL TP5 |
| C2207 | 0CE476DF618 | 47UF STD 16V M FL TP5 |
| C2210 | 0CE476DF618 | 47UF STD 16V M FL TP5 |
| C2215 | 0CE476DF618 | 47UF STD 16V M FL TP5 |
| C225 | 0CE476VF6DC | 47UF MV 16V 20% R/TP(SMD) SMD |
| C226 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C2406 | 0CE476DF618 | 47UF STD 16V M FL TP5 |

| LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|--------------------------------|
| C2409 | 0CE476DF618 | 47UF STD 16V M FL TP5 |
| C2410 | 0CE476DF618 | 47UF STD 16V M FL TP5 |
| C2413 | 0CE476DF618 | 47UF STD 16V M FL TP5 |
| C26 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C260 | 0CE227VF6DC | 220UF MV 16V 20% R/TP(SMD) SMD |
| C2605 | 0CE107DF618 | 100UF STD 16V M FL TP5 |
| C2606 | 0CE107DF618 | 100UF STD 16V M FL TP5 |
| C261 | 0CE227VF6DC | 220UF MV 16V 20% R/TP(SMD) SMD |
| C262 | 0CE227VF6DC | 220UF MV 16V 20% R/TP(SMD) SMD |
| C2621 | 0CE106DF618 | 10UF STD 16V M FL TP5 |
| C2623 | 0CE227DF618 | 220UF STD 16V M FL TP5 |
| C263 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C27 | 0CE476DD618 | 47UF STD 10V 20% FL TP 5 |
| C2700 | 0CC3310K405 | 330P 50V J SL TS |
| C2701 | 0CE108DJ618 | 1000UF STD 35V M FL TP5 |
| C2702 | 0CE108DJ618 | 1000UF STD 35V M FL TP5 |
| C2703 | 0CE108DJ618 | 1000UF STD 35V M FL TP5 |
| C2704 | 0CE225DK618 | 2.2UF STD 50V 20% FL TP 5 |
| C2705 | 0CE225DK618 | 2.2UF STD 50V 20% FL TP 5 |
| C2706 | 0CK1510K515 | 150P 50V K B TS |
| C2707 | 0CK1510K515 | 150P 50V K B TS |
| C2708 | 0CK1510K515 | 150P 50V K B TS |
| C2709 | 0CK1510K515 | 150P 50V K B TS |
| C271 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C2710 | 0CK1510K515 | 150P 50V K B TS |
| C2711 | 0CK1510K515 | 150P 50V K B TS |
| C2712 | 0CK1030K945 | 0.01UF 50V Z F TR |
| C2713 | 0CK1030K945 | 0.01UF 50V Z F TR |
| C272 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C273 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C274 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C275 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C276 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C277 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C2786 | 0CN1040K949 | 0.1M 50V Z F TA52 |
| C279 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C2813 | 0CK1030K945 | 0.01UF 50V Z F TR |
| C2815 | 0CN1010K519 | 100P 50V K B TA52 |
| C285 | 0CE227VF6DC | 220UF MV 16V 20% R/TP(SMD) SMD |
| C286 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C287 | 0CE107VF6DC | 100UF MV 16V 20% R/TP(SMD) SMD |
| C288 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C289 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C29 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C290 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C293 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C294 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C295 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C2950 | 0CK5610K515 | 560P 50V K B TS |
| C2951 | 0CK1220K515 | 1200P 50V K B TS |
| C2952 | 0CK5610K515 | 560P 50V K B TS |
| C2953 | 0CK1220K515 | 1200P 50V K B TS |

| | | |
|--|---|--|
| For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows; | CC, CX, CK, CN : Ceramic CQ : Polyester CE : Electrolytic | RD : Carbon Film RS : Metal Oxide Film RN : Metal Film RF : Fusible |
|--|---|--|

| LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|--------------------------------|
| C2954 | 0CK1030K945 | 0.01UF 50V Z F TR |
| C2955 | 0CK1030K945 | 0.01UF 50V Z F TR |
| C2956 | 0CK1030K945 | 0.01UF 50V Z F TR |
| C2957 | 0CE476DF618 | 47UF STD 16V M FL TP5 |
| C296 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C2960 | 0CK1030K945 | 0.01UF 50V Z F TR |
| C2961 | 0CE227DD618 | 220UF STD 10V M FL TP5 |
| C297 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C298 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C299 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C300 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C301 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C302 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C303 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C304 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C305 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C306 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C307 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C308 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C309 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C310 | 0CE227VF6DC | 220UF MV 16V 20% R/TP(SMD) SMD |
| C311 | 0CE227VF6DC | 220UF MV 16V 20% R/TP(SMD) SMD |
| C312 | 0CE105SK6DC | 1UF MVG 50V M SMD R/TP |
| C312 | 0CE105VK6DC | 1UF MV 50V 20% R/TP(SMD) SMD |
| C315 | 0CE107VF6DC | 100UF MV 16V 20% R/TP(SMD) SMD |
| C316 | 0CE107VF6DC | 100UF MV 16V 20% R/TP(SMD) SMD |
| C318 | 0CE105SK6DC | 1UF MVG 50V M SMD R/TP |
| C318 | 0CE105VK6DC | 1UF MV 50V 20% R/TP(SMD) SMD |
| C319 | 0CE476VF6DC | 47UF MV 16V 20% R/TP(SMD) SMD |
| C32 | 0CE476DD618 | 47UF STD 10V 20% FL TP 5 |
| C320 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C322 | 0CE227VF6DC | 220UF MV 16V 20% R/TP(SMD) SMD |
| C324 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C325 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C327 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C328 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C328 | 0CE105VK6DC | 1UF MV 50V 20% R/TP(SMD) SMD |
| C330 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C331 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C332 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C333 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C334 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C339 | 0CE226SF6DC | 22UF MVG 16V M SMD R/TP |
| C340 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C342 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C343 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C344 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C345 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C345 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C346 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C347 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C348 | 0CE226SF6DC | 22UF MVG 16V M SMD R/TP |

| LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|-----------------------------------|
| C355 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C355 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C356 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C357 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C358 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C362 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C363 | 0CE105SK6DC | 1UF MVG 50V M SMD R/TP |
| C365 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C366 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C367 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C368 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C370 | 0CE106VF6DC | 10UF MV 16V 20% R/TP(SMD) SMD |
| C371 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C372 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C373 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C374 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C380 | 0CE226SF6DC | 22UF MVG 16V M SMD R/TP |
| C381 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C387 | 0CE476VF6DC | 47UF MV 16V 20% R/TP(SMD) SMD |
| C40 | 0CE476DD618 | 47UF STD 10V 20% FL TP 5 |
| C401 | 0CE6851K652 | 6.8UF SM,SA 50V 20% FM7.5 BP(S) |
| C403 | 0CK47101515 | 470P 1KV K B TS |
| C405 | 0CE107DK618 | 100UF STD 50V M FL TP5 |
| C406 | 181-013Y | MPP 0.82UF 400V 5%,-5% FM |
| C407 | 181-010S | 0.0033UF 800V 5%,-5% FM PP |
| C409 | 181-009R | PP 200V 0.022UF K |
| C410 | 0CQ6821N509 | 0.0068UF D 100V 10% PE TP5 |
| C410 | 0CQ1041N509 | 0.1UF D 100V 10% PE TP5 |
| C411 | 181-091G | DEHR33D471KN3A 470PF 2KV 10%,-10% |
| C412 | 0CE107DK618 | 100UF STD 50V M FL TP5 |
| C412 | 0CE107DK618 | 100UF STD 50V M FL TP5 |
| C413 | 0CE477DF618 | 470UF STD 16V 20% FL TP 5 |
| C414 | 0CE477DF618 | 470UF STD 16V 20% FL TP 5 |
| C415 | 181-091G | DEHR33D471KN3A 470PF 2KV 10%,-10% |
| C416 | 0CQ3341N401 | 0.33UF D 100V 5% PE FM5 |
| C417 | 0CE106DR618 | 10UF STD 250V M FL TP5 |
| C418 | 0CE107DF618 | 100UF STD 16V M FL TP5 |
| C419 | 0CE227DD618 | 220UF STD 10V M FL TP5 |
| C42 | 0CE106DF618 | 10UF STD 16V M FL TP5 |
| C420 | 0CE107DK618 | 100UF STD 50V M FL TP5 |
| C421 | 0CE106DK618 | 10UF STD 50V M FL TP5 |
| C421 | 0CE106DK618 | 10UF STD 50V M FL TP5 |
| C421 | 0CE106DK618 | 10UF STD 50V M FL TP5 |
| C423 | 0CE107DK618 | 100UF STD 50V M FL TP5 |
| C424 | 0CK3320W515 | 3300P 500V K B TS |
| C425 | 0CE107DK618 | 100UF STD 50V M FL TP5 |
| C426 | 0CE107DK618 | 100UF STD 50V M FL TP5 |
| C427 | 181-091Q | R 470PF 1KV 10%,-10% R/TP TP5 |
| C42A | 0CE475DK618 | 4.7UF STD 50V 20% FL TP 5 |
| C430 | 0CK47101515 | 470P 1KV K B TS |
| C432 | 0CN1020K519 | 1000P 50V K B TA52 |
| C433 | 0CN1020K519 | 1000P 50V K B TA52 |
| C435 | 0CQ1042K439 | 0.1UF S 50V 5% M/PE NI TP5 |

| | | |
|--|--------------------------|-----------------------|
| For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows; | CC, CX, CK, CN : Ceramic | RD : Carbon Film |
| | CQ : Polyester | RS : Metal Oxide Film |
| | CE : Electrolytic | RN : Metal Film |
| | | RF : Fusible |

| LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|-------------------------------------|
| C436 | 181-015J | MPP 1600V 0.0086UF H |
| C437 | 0CN6810K519 | 680P 50V K B TA52 |
| C438 | 0CQ1041N509 | 0.1UF D 100V 10% PE TP5 |
| C440 | 0CK56101515 | 560P 1KV K B TS |
| C443 | 0CC1010K415 | 100P 50V J NP0 TS |
| C444 | 0CQ3321N509 | 0.0033UF D 100V 10% PE TP5 |
| C446 | 0CN1040K949 | 0.1M 50V Z F TA52 |
| C448 | 0CQ1031N509 | 0.01UF D 100V 10% PE TP5 |
| C449 | 0CE105DK618 | 1UF STD 50V M FL TP5 |
| C45 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C451 | 0CQ2721N409 | 0.0027UF D 100V 5% PE TP5 |
| C452 | 0CE105DK618 | 1UF STD 50V M FL TP5 |
| C455 | 0CQ1042K439 | 0.1UF S 50V 5% M/PE NI TP5 |
| C461 | 0CK47202510 | 4700P 2KV K B S |
| C462 | 0CE226CR618 | 22UF SHL,SD 250V M FL TP 5 |
| C464 | 181-015D | MPP 1600V 0.0062UF H |
| C466 | 0CE227DK618 | 220UF STD 50V M FL TP5 |
| C467 | 0CE227DK618 | 220UF STD 50V M FL TP5 |
| C468 | 181-009V | PP 200V 0.047UF K |
| C469 | 181-007D | MPE ECQ-V1H154JL3(TR), 50V 0.15UF J |
| C46D | 0CE107DF618 | 100UF STD 16V M FL TP5 |
| C46H | 0CN1040K949 | 0.1M 50V Z F TA52 |
| C46K | 0CE106DK618 | 10UF STD 50V M FL TP5 |
| C470 | 0CK3320W515 | 3300P 500V K B TS |
| C471 | 181-091Q | R 470PF 1KV 10%,-10% R/TP TP5 |
| C472 | 181-091Q | R 470PF 1KV 10%,-10% R/TP TP5 |
| C474 | 0CE107DK618 | 100UF STD 50V M FL TP5 |
| C475 | 181-014N | MPP 1600V 0.01UF J |
| C476 | 181-014N | MPP 1600V 0.01UF J |
| C477 | 0CK1810W515 | 180P 500V K B TS |
| C478 | 0CE227BP650 | 220UF KME TYPE 160V 20% FM7.5 BULK |
| C478 | 0CE227BP650 | 220UF KME TYPE 160V 20% FM7.5 BULK |
| C481 | 0CN6810K519 | 680P 50V K B TA52 |
| C481 | 0CN6810K519 | 680P 50V K B TA52 |
| C484 | 0CE476DK618 | 47UF STD 50V M FL TP5 |
| C486 | 0CE105DK618 | 1UF STD 50V M FL TP5 |
| C491 | 0CN1040K949 | 0.1M 50V Z F TA52 |
| C493 | 0CN1040K949 | 0.1M 50V Z F TA52 |
| C49A | 0CE106DK618 | 10UF STD 50V M FL TP5 |
| C49B | 0CE106DK618 | 10UF STD 50V M FL TP5 |
| C500 | 0CE477DD618 | 470UF STD 10V M FL TP5 |
| C502 | 181-007H | MPE ECQ-V1H474JL3(TR), 50V 0.47UF J |
| C503 | 0CE476DD618 | 47UF STD 10V 20% FL TP 5 |
| C504 | 181-007H | MPE ECQ-V1H474JL3(TR), 50V 0.47UF J |
| C506 | 0CE475DK618 | 4.7UF STD 50V 20% FL TP 5 |
| C507 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C508 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C509 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C510 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C511 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C512 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C513 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |

| LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|-------------------------------------|
| C514 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C515 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C516 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C517 | 0CE476DF618 | 47UF STD 16V M FL TP5 |
| C518 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C519 | 0CE476DF618 | 47UF STD 16V M FL TP5 |
| C521 | 0CE477DH618 | 470UF STD 25V M FL TP5 |
| C522 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C523 | 181-442Z | PE,ECQ-B1H104KF3(TR) |
| C524 | 181-442Z | PE,ECQ-B1H104KF3(TR) |
| C525 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C527 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C528 | 181-007H | MPE ECQ-V1H474JL3(TR), 50V 0.47UF J |
| C529 | 0CE226DF618 | 22UF STD 16V M FL TP5 |
| C530 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C532 | 0CE227DF618 | 220UF STD 16V M FL TP5 |
| C535 | 0CE106DK618 | 10UF STD 50V M FL TP5 |
| C537 | 0CE476DD618 | 47UF STD 10V 20% FL TP 5 |
| C539 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C541 | 0CQ4721N509 | 0.0047UF D 100V 10% PE TP5 |
| C542 | 181-007H | MPE ECQ-V1H474JL3(TR), 50V 0.47UF J |
| C545 | 0CE107DF618 | 100UF STD 16V M FL TP5 |
| C546 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C547 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C549 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C550 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C552 | 0CE108BF618 | 1000UF KME 16V M FL TP5 |
| C552 | 0CE108DF618 | 1000UF STD 16V M FL TP5 |
| C553 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C554 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C555 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C556 | 0CE107DF618 | 100UF STD 16V M FL TP5 |
| C557 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C558 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C559 | 0CE107DF618 | 100UF STD 16V M FL TP5 |
| C560 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C563 | 0CE476DF618 | 47UF STD 16V M FL TP5 |
| C612 | 0CE106DF618 | 10UF STD 16V M FL TP5 |
| C613 | 0CE476DF618 | 47UF STD 16V M FL TP5 |
| C614 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C616 | 0CE476DF618 | 47UF STD 16V M FL TP5 |
| C618 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C619 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C620 | 0CE335DK618 | 3.3UF STD 50V 20% FL TP 5 |
| C621 | 0CE106DF618 | 10UF STD 16V M FL TP5 |
| C622 | 0CE106DF618 | 10UF STD 16V M FL TP5 |
| C623 | 0CE107DF618 | 100UF STD 16V M FL TP5 |
| C624 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C629 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |
| C634 | 0CE476DF618 | 47UF STD 16V M FL TP5 |
| C649 | 0CE107DF618 | 100UF STD 16V M FL TP5 |
| C651 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R |

| | | |
|--|---|--|
| For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows; | CC, CX, CK, CN : Ceramic CQ : Polyester CE : Electrolytic | RD : Carbon Film RS : Metal Oxide Film RN : Metal Film RF : Fusible |
|--|---|--|

| LOCA. NO | PART NO | DESCRIPTION | LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|-----------------------------------|----------|-------------|------------------------------------|
| C662 | 0CE226DF618 | 22UF STD 16V M FL TP5 | C813 | 181-010K | PP 0.01UF 630V 5% FM 7.5MM |
| C663 | 0CE226DF618 | 22UF STD 16V M FL TP5 | C816 | 181-091Q | R 470PF 1KV 10%,-10% R/TP TP5 |
| C668 | 0CE475DK618 | 4.7UF STD 50V 20% FL TP 5 | C81B | 0CQZVBK002B | A.C 275V 0.15UF K (S=22.5) |
| C670 | 0CE475DK618 | 4.7UF STD 50V 20% FL TP 5 | C81D | 181-001K | CE 450V 220UF M LUG(105) |
| C671 | 0CE105DK618 | 1UF STD 50V M FL TP5 | C82A | 0CK10202510 | 1000P 2KV K B S |
| C676 | 0CE106DF618 | 10UF STD 16V M FL TP5 | C82B | 0CK10202510 | 1000P 2KV K B S |
| C676 | 0CE105DK618 | 1UF STD 50V M FL TP5 | C82C | 181-120P | 470 PF 4KV K JE R FL 10 |
| C677 | 0CE477DF618 | 470UF STD 16V 20% FL TP 5 | C82H | 0CK10202510 | 1000P 2KV K B S |
| C678 | 0CE105DK618 | 1UF STD 50V M FL TP5 | C82J | 0CK10202510 | 1000P 2KV K B S |
| C678 | 0CE475DK618 | 4.7UF STD 50V 20% FL TP 5 | C830 | 181-120K | 2200PF 4KV M E FMTW LEAD 4.5 |
| C679 | 181-442Z | PE,ECQ-B1H104KF3(TR) | C832 | 0CE337DF618 | 330UF STD 16V M FL TP5 |
| C686 | 0CE106DK618 | 10UF STD 50V M FL TP5 | C833 | 0CK10201515 | 1000P 1KV K B TS |
| C687 | 0CE106DK618 | 10UF STD 50V M FL TP5 | C834 | 0CE475DK618 | 4.7UF STD 50V 20% FL TP 5 |
| C688 | 0CE227DF618 | 220UF STD 16V M FL TP5 | C841 | 181-091Q | R 470PF 1KV 10%,-10% R/TP TP5 |
| C688 | 0CE227DH618 | 220UF STD 25V M FL TP5 | C842 | 0CE228DF618 | 2200UF STD 16V M FL TP5 |
| C690 | 0CE227DD618 | 220UF STD 10V M FL TP5 | C851 | 181-091Q | R 470PF 1KV 10%,-10% R/TP TP5 |
| C691 | 0CE227DD618 | 220UF STD 10V M FL TP5 | C852 | 0CE2286H61A | 2200UF SMS,SG 25V 20% FL TP 7.5 |
| C700 | 0CE227DF618 | 220UF STD 16V M FL TP5 | C853 | 0CE108DF618 | 1000UF STD 16V M FL TP5 |
| C702 | 0CE227DF618 | 220UF STD 16V M FL TP5 | C854 | 0CE108DF618 | 1000UF STD 16V M FL TP5 |
| C703 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R | C861 | 181-091Q | R 470PF 1KV 10%,-10% R/TP TP5 |
| C709 | 0CE476DF618 | 47UF STD 16V M FL TP5 | C862 | 0CE228CL611 | 2200UF SHL,SD 63V M FL BK7.5 |
| C711 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R | C863 | 0CE228CL611 | 2200UF SHL,SD 63V M FL BK7.5 |
| C718 | 0CE105DK618 | 1UF STD 50V M FL TP5 | C866 | 0CE475CK636 | 4.7UF SHL,SD 50V 20% FM5 BP(D) TP |
| C719 | 0CE105DK618 | 1UF STD 50V M FL TP5 | C871 | 181-091Q | R 470PF 1KV 10%,-10% R/TP TP5 |
| C720 | 0CE475CK636 | 4.7UF SHL,SD 50V 20% FM5 BP(D) TP | C872 | 181-091Q | R 470PF 1KV 10%,-10% R/TP TP5 |
| C721 | 0CE475CK636 | 4.7UF SHL,SD 50V 20% FM5 BP(D) TP | C873 | 0CE228BK650 | 2200UF KME TYPE 50V 20% FM7.5 BULK |
| C723 | 0CE105DK618 | 1UF STD 50V M FL TP5 | C874 | 0CE228BK650 | 2200UF KME TYPE 50V 20% FM7.5 BULK |
| C724 | 0CE105DK618 | 1UF STD 50V M FL TP5 | C876 | 0CE105DK618 | 1UF STD 50V M FL TP5 |
| C725 | 0CE105DK618 | 1UF STD 50V M FL TP5 | C881 | 181-091Q | R 470PF 1KV 10%,-10% R/TP TP5 |
| C726 | 0CE105DK618 | 1UF STD 50V M FL TP5 | C882 | 0CE337DK618 | 330UF STD 50V M FL TP5 |
| C727 | 0CE105DK618 | 1UF STD 50V M FL TP5 | C884 | 0CE337DK618 | 330UF STD 50V M FL TP5 |
| C728 | 0CK104DK56A | 0.1UF 2012 50V 10% R/TP X7R | C888 | 0CE475BP618 | 4.7UF KME TYPE 160V 20% FL TP 5 |
| C730 | 0CE105DK618 | 1UF STD 50V M FL TP5 | C889 | 0CN1030F679 | 10000P 16V M Y TA52 |
| C734 | 0CE105DK618 | 1UF STD 50V M FL TP5 | C891 | 181-091R | R 1000PF 1KV 10%,-10% R/TP TP5 |
| C735 | 0CE105DK618 | 1UF STD 50V M FL TP5 | C892 | 0CE227BP650 | 220UF KME TYPE 160V 20% FM7.5 BULK |
| C740 | 0CE108DF618 | 1000UF STD 16V M FL TP5 | C893 | 0CE227BP650 | 220UF KME TYPE 160V 20% FM7.5 BULK |
| C741 | 0CE227DF618 | 220UF STD 16V M FL TP5 | C895 | 181-091R | R 1000PF 1KV 10%,-10% R/TP TP5 |
| C742 | 0CE108DH618 | 1000UF STD 25V M FL TP5 | C896 | 0CE227BP650 | 220UF KME TYPE 160V 20% FM7.5 BULK |
| C743 | 0CE108DF618 | 1000UF STD 16V M FL TP5 | C897 | 0CE107CP618 | 100U SHL 160V M FL TP5 |
| C744 | 0CE477DD618 | 470UF STD 10V M FL TP5 | C898 | 0CQ1041N509 | 0.1UF D 100V 10% PE TP5 |
| C745 | 0CE477DD618 | 470UF STD 10V M FL TP5 | C899 | 0CE475BP618 | 4.7UF KME TYPE 160V 20% FL TP 5 |
| C802 | 0CE3366W650 | 33UF SMS,SG 500V 20% FM7.5 BULK | C901 | 0CE106BK618 | 10UF KME 50V M FL TP5 |
| C803 | 181-001K | CE 450V 220UF M LUG(105) | C901B | 0CE107DF618 | 100UF STD 16V M FL TP5 |
| C804 | 181-011E | MPP 0.0033UF 1.6KV 5%,-5% FM PP | C901G | 0CE107DF618 | 100UF STD 16V M FL TP5 |
| C805 | 0CE476DK618 | 47UF STD 50V M FL TP5 | C901R | 0CE107DF618 | 100UF STD 16V M FL TP5 |
| C805 | 0CE476BK618 | 47UF KME 50V M FL TP5 | C902 | 0CE106DH618 | 10UF STD 25V M FL TP5 |
| C806 | 0CK8210K515 | 820P 50V K B TS | C902B | 0CE475DK618 | 4.7UF STD 50V 20% FL TP 5 |
| C807 | 181-091R | R 1000PF 1KV 10%,-10% R/TP TP5 | C902G | 0CE475DK618 | 4.7UF STD 50V 20% FL TP 5 |
| C80A | 0CQZVBK002B | A.C 275V 0.15UF K (S=22.5) | C902R | 0CE475DK618 | 4.7UF STD 50V 20% FL TP 5 |
| C810 | 0CE476DK618 | 47UF STD 50V M FL TP5 | C903 | 0CE107DH618 | 100UF STD 25V M FL TP5 |
| C811 | 0CE476DK618 | 47UF STD 50V M FL TP5 | C903B | 0CK1030K945 | 0.01UF 50V Z F TR |
| C812 | 0CK8210K515 | 820P 50V K B TS | C903G | 0CK1030K945 | 0.01UF 50V Z F TR |

| | | |
|--|---|--|
| For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows; | CC, CX, CK, CN : Ceramic CQ : Polyester CE : Electrolytic | RD : Carbon Film RS : Metal Oxide Film RN : Metal Film RF : Fusible |
|--|---|--|

| LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|------------------------------------|
| C903R | 0CK1030K945 | 0.01UF 50V Z F TR |
| C904 | 0CE107DF618 | 100UF STD 16V M FL TP5 |
| C904B | 0CK1030K945 | 0.01UF 50V Z F TR |
| C904G | 0CK1030K945 | 0.01UF 50V Z F TR |
| C904R | 0CK1030K945 | 0.01UF 50V Z F TR |
| C905 | 0CE107DH618 | 100UF STD 25V M FL TP5 |
| C905B | 0CC0500K115 | 5P 50V D NP0 TS |
| C905G | 0CC0500K115 | 5P 50V D NP0 TS |
| C905R | 0CC0200K115 | 2PF D 50V 0.5 PF NP0 TR |
| C906 | 0CE106DP618 | 10UF STD 160V M FL TP5 |
| C906B | 0CE476DR618 | 47UF STD 250V 20% FL TP 5 |
| C906G | 0CE476DR618 | 47UF STD 250V 20% FL TP 5 |
| C906R | 0CE476DR618 | 47UF STD 250V 20% FL TP 5 |
| C907B | 0CE106DR618 | 10UF STD 250V M FL TP5 |
| C907G | 0CE106DR618 | 10UF STD 250V M FL TP5 |
| C907R | 0CE106DR618 | 10UF STD 250V M FL TP5 |
| C908 | 0CE107DF618 | 100UF STD 16V M FL TP5 |
| C908B | 0CK5610W515 | 560P 500V K B TS |
| C908G | 0CK5610W515 | 560P 500V K B TS |
| C908R | 0CK5610W515 | 560P 500V K B TS |
| C909 | 0CE107DK618 | 100UF STD 50V M FL TP5 |
| C909B | 0CK22202515 | 2200PF 2KV K B TR |
| C909G | 0CK22202515 | 2200PF 2KV K B TR |
| C909R | 0CK22202515 | 2200PF 2KV K B TR |
| C910 | 0CQ1031N509 | 0.01UF D 100V 10% PE TP5 |
| C910B | 0CN1040K949 | 0.1M 50V Z F TA52 |
| C910G | 0CN1040K949 | 0.1M 50V Z F TA52 |
| C910R | 0CN1040K949 | 0.1M 50V Z F TA52 |
| C911 | 181-007C | MPE ECQ-V1H104JL3(TR), 50V 0.1UF J |
| C911B | 0CQZVBK002A | A.C 275V 0.1UF M (S=15) |
| C911G | 0CQZVBK002A | A.C 275V 0.1UF M (S=15) |
| C911R | 0CQZVBK002A | A.C 275V 0.1UF M (S=15) |
| C912 | 181-007C | MPE ECQ-V1H104JL3(TR), 50V 0.1UF J |
| C912B | 0CK1030W510 | 0.01U 500V K B S |
| C912G | 0CK1030W510 | 0.01U 500V K B S |
| C912R | 0CK1030W510 | 0.01U 500V K B S |
| C913 | 0CC1510K405 | 150PF 50V J SL TR |
| C914 | 0CN1040K949 | 0.1M 50V Z F TA52 |
| C915 | 181-091N | SL 100PF 1KV 10%,-10% R/TP TP5 |
| C916 | 181-091N | SL 100PF 1KV 10%,-10% R/TP TP5 |
| C917 | 0CK1030W510 | 0.01U 500V K B S |
| C917G | 0CN4710K519 | 470P 50V K B TA52 |
| C936 | 0CE107BP61A | 100UF KME 160V M FL TP7.5 |
| C941 | 0CK1030W510 | 0.01U 500V K B S |
| CT01 | 0CN1040K949 | 0.1M 50V Z F TA52 |
| CT02 | 0CX6800K409 | 68P 50V J SL TA52 |
| CT03 | 0CX6800K409 | 68P 50V J SL TA52 |
| CT04 | 0CN1040K949 | 0.1M 50V Z F TA52 |
| CT05 | 0CE1074F618 | 100UF SRA 16V M FL TP5 |
| CT06 | 0CX6800K409 | 68P 50V J SL TA52 |
| CT07 | 0CX6800K409 | 68P 50V J SL TA52 |
| CT08 | 0CN1040K949 | 0.1M 50V Z F TA52 |

| LOCA. NO | PART NO | DESCRIPTION |
|-----------------------------|-------------|---|
| CT09 | 0CE1074F618 | 100UF SRA 16V M FL TP5 |
| CT10 | 0CE4763F618 | 47UF SRE 16V M FL TP5 |
| CT11 | 0CE4763F618 | 47UF SRE 16V M FL TP5 |
| CT12 | 0CE4763F618 | 47UF SRE 16V M FL TP5 |
| CX101 | 0CE107DF618 | 100UF STD 16V M FL TP5 |
| CX102 | 0CE106DF618 | 10UF STD 16V M FL TP5 |
| CX103 | 0CE106DF618 | 10UF STD 16V M FL TP5 |
| CX104 | 0CE106DF618 | 10UF STD 16V M FL TP5 |
| CX113 | 0CE106DF618 | 10UF STD 16V M FL TP5 |
| CX114 | 0CE106DF618 | 10UF STD 16V M FL TP5 |
| CX115 | 0CE106DF618 | 10UF STD 16V M FL TP5 |
| CX124 | 0CE107DF618 | 100UF STD 16V M FL TP5 |
| CX600 | 0CE226DK618 | 22UF STD 50V M FL TP5 |
| CX600 | 0CE475DK618 | 4.7UF STD 50V 20% FL TP 5 |
| CX601 | 0CQ1831N509 | 0.018UF D 100V 10% PE TP5 |
| CX603 | 181-442Z | PE,ECQ-B1H104KF3(TR) |
| CX604 | 181-442Z | PE,ECQ-B1H104KF3(TR) |
| CX609 | 0CQ1831N509 | 0.018UF D 100V 10% PE TP5 |
| CX610 | 0CE104DK618 | 0.1000UF STD 50V M FL TP5 |
| CX611 | 0CE106DK618 | 10UF STD 50V M FL TP5 |
| CX612 | 181-442Z | PE,ECQ-B1H104KF3(TR) |
| CX613 | 0CE106DK618 | 10UF STD 50V M FL TP5 |
| CX615 | 0CE226DK618 | 22UF STD 50V M FL TP5 |
| CX616 | 0CE226DK618 | 22UF STD 50V M FL TP5 |
| CX617 | 0CE108DK61A | 1000UF STD 50V M FL TP7.5 |
| CX618 | 0CE108DK61A | 1000UF STD 50V M FL TP7.5 |
| CX619 | 181-442Z | PE,ECQ-B1H104KF3(TR) |
| CX630 | 0CE228DK650 | 2200UF STD 50V M FM7.5 BULK |
| J81J | 0CK10202510 | 1000P 2KV K B S |
| J81K | 0CK10202510 | 1000P 2KV K B S |
| R41L | 0CN1020K519 | 1000P 50V K B TA52 |
| R41L | 0CN1020K519 | 1000P 50V K B TA52 |
| ZD01P | 0CN1020K519 | 1000P 50V K B TA52 |
| COIL&TRANSFORMER | | |
| L01P | 0LA0102K119 | INDUCTOR,10UH K 2.3*3.4 TP |
| L100 | 0LA0102K139 | INDUCTOR,10UH K 4*10.5 TP |
| L100 | 0LA0102K139 | INDUCTOR,10UH K 4*10.5 TP |
| L102 | 0LA0102K139 | INDUCTOR,10UH K 4*10.5 TP |
| L105 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| L107 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| L109 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| L110 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| L111 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| L112 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| L113 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| L114 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| L115 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| L116 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| L118 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| L119 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| L120 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |

| LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|---|
| L1203 | 0LA0472K119 | INDUCTOR,47UH K 2.3*3.4 TP |
| L1204 | 0LA0472K119 | INDUCTOR,47UH K 2.3*3.4 TP |
| L121 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| L122 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| L123 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| L261 | 0LA0102K119 | INDUCTOR,10UH K 2.3*3.4 TP |
| L265 | 0LA0102K119 | INDUCTOR,10UH K 2.3*3.4 TP |
| L2700 | 150-C02F | 82UH PHY TURN |
| L2701 | 150-C02F | 82UH PHY TURN |
| L2702 | 150-C02F | 82UH PHY TURN |
| L2703 | 150-C02F | 82UH PHY TURN |
| L2704 | 0LA0101K119 | INDUCTOR,AXIAL LEAD1.0UH K 2.3*3.4 TP |
| L2705 | 0LA0101K119 | INDUCTOR,AXIAL LEAD1.0UH K 2.3*3.4 TP |
| L2706 | 0LA0101K119 | INDUCTOR,AXIAL LEAD1.0UH K 2.3*3.4 TP |
| L2707 | 0LA0101K119 | INDUCTOR,AXIAL LEAD1.0UH K 2.3*3.4 TP |
| L2708 | 0LA0101K119 | INDUCTOR,AXIAL LEAD1.0UH K 2.3*3.4 TP |
| L2709 | 0LA0101K119 | INDUCTOR,AXIAL LEAD1.0UH K 2.3*3.4 TP |
| L2711 | 0LA0102K139 | INDUCTOR,AXIAL LEAD10UH K 4*10.5 TP |
| L2712 | 0LA0102K139 | INDUCTOR,AXIAL LEAD10UH K 4*10.5 TP |
| L401 | 150-717J | CHOKE 560UH (E/W) |
| L402 | 6140VE0001Z | 27.5TURN YL-9N 20-20 C:8.5 RUBBER PAD |
| L404 | 0LA1001K139 | INDUCTOR,LEAD1000UH 10% A 4.0 X 10.5 TA52 |
| L405 | 150-717K | 1.1UH PHY TURN |
| L405 | 150-717J | CHOKE 560UH (E/W) |
| L500 | 0LA0222K119 | INDUCTOR, LEAD22UH K 2.3*3.4 TP |
| L501 | 0LA0102K119 | INDUCTOR, LEAD10UH K 2.3*3.4 TP |
| L502 | 0LA0222K119 | INDUCTOR, LEAD22UH K 2.3*3.4 TP |
| L503 | 0LA0102K119 | INDUCTOR, LEAD10UH K 2.3*3.4 TP |
| L612 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| L613 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| L702 | 150-C02F | 82UH PHY TURN |
| L703 | 150-C02F | 82UH PHY TURN |
| L704 | 150-C02F | 82UH PHY TURN |
| L852 | 6170VZ0005A | TRANSFORMER, IRON-15 120UH LM2576 |
| L861 | 150-C02F | 82UH PHY TURN |
| L891 | 150-C02F | 82UH PHY TURN |
| L892 | 150-C02F | 82UH PHY TURN |
| L901 | 150-C02F | 82UH PHY TURN |
| L902 | 150-C02F | 82UH PHY TURN |
| LT01 | 0LA0102K119 | INDUCTOR,AXIAL LEAD10UH K 2.3*3.4 TP |
| LT02 | 0LA0102K119 | INDUCTOR,AXIAL LEAD10UH K 2.3*3.4 TP |
| LX101 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| LX102 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| LX103 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| LX104 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| LX106 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| LX107 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| LX108 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| LX109 | 0LC1032101A | INDUCTOR,10UH 10% 3216 R/TC FI-C3216-103KJT |
| T401 | 6170VC0009A | TRANSFORMER,EI-2519 8700UH MP03AA |
| T401 | 151-515A | TRANSFORMER,EI 2519 4.5MH CF201 |
| T402 | 6170VC0009A | TRANSFORMER,EI-2519 8700UH MP03AA |

| LOCA. NO | PART NO | DESCRIPTION |
|------------------|-------------|--|
| T405 | 6170VMCA13R | TRANSFORMER,SMPS[COIL]JEER4215 1.2UUh |
| T406 | 151-E06A | TRANSFORMER,POWEEER2834 0UH |
| T801 | 6170VMCC01F | TRANSFORMER,SMPS[COIL]JEER5345 220UUh |
| T805 | 6170VS0004B | TRANSFORMER,STAND-BYEE2229 2200UUh |
| T81A | 6170VZ0008A | TRANSFORMER,TS4841 30500UH |
| T81B | 6170VZ0008A | TRANSFORMER,TS4841 30500UH REACTOR TRANS |
| CONNECTOR | | |
| GND2B | 366-009D | 2.36PAI 1P . K/M AUTO |
| GND2G | 366-009D | 2.36PAI 1P . K/M AUTO |
| GND2R | 366-009D | 2.36PAI 1P . K/M AUTO |
| GND3B | 366-009D | 2.36PAI 1P . K/M AUTO |
| GND3G | 366-009D | 2.36PAI 1P . K/M AUTO |
| GND3R | 366-009D | 2.36PAI 1P . K/M AUTO |
| GND4B | 366-009D | 2.36PAI 1P . K/M AUTO |
| GND4G | 366-009D | 2.36PAI 1P . K/M AUTO |
| GND4R | 366-009D | 2.36PAI 1P . K/M AUTO |
| GND7B | 366-009D | 2.36PAI 1P . K/M AUTO |
| GND8B | 366-009D | 2.36PAI 1P . K/M AUTO |
| GND8G | 366-009D | 2.36PAI 1P . K/M AUTO |
| GND8R | 366-009D | 2.36PAI 1P . K/M AUTO |
| GND9B | 366-009D | 2.36PAI 1P . K/M AUTO |
| P001A | 366-043H | ASSY,PLUG (4P) |
| P003B | 366-921G | 2.5MM 8P GIL-G LG CABLE . |
| P005B | 366-921N | WAFER IL-G 14(2.5S) |
| P00B | 366-043D | ASSY,PLUG(4P) |
| P00G | 366-043D | ASSY,PLUG(4P) |
| P00R | 366-043D | ASSY,PLUG(4P) |
| P01A | 366-173G | 2.5MM 8*2P AEPH-254 A/K R/A |
| P02 | 366-173N | AEPH254-D28R(14*2) |
| P03 | 366-173L | 2.5MM 12*2P AEPH-254 A/K R/N |
| P03A | 366-173G | 2.5MM 8*2P AEPH-254 A/K R/A |
| P03P | 366-921B | 2.5MM 3P GIL-G LG CABLE . |
| P04 | 366-922B | 2.5MM 3P GIL-G LG CABLE R/A (B TO C) |
| P07B | 366-921D | 2.5MM 5P GIL-G LG CABLE . |
| P08A | 366-932C | 2.5MM 4P GIL-G LG CABLE S (STICK) |
| P09A | 366-932B | 2.5MM 3P GIL-G LG CABLE S (STICK) |
| P100 | 6631V25A04A | 14P 2.5MM 100MM H-B UL1007AWG26 |
| P101 | 387-A08A | 8P 2.5MM 100MM H-B UL1007AWG26 |
| P104 | 366-932E | 2.5MM 6P GIL-G LG CABLE S (STICK) |
| P105 | 366-932D | 2.5MM 5P GIL-G LG CABLE S (STICK) |
| P107 | 366-921G | 2.5MM 8P GIL-G LG CABLE . |
| P107 | 366-921L | 2.5MM 12P GIL-G LG CABLE . |
| P10A | 366-932B | 2.5MM 3P GIL-G LG CABLE S (STICK) |
| P110 | 366-009D | 2.36PAI 1P . K/M AUTO |
| P11A | 366-932C | 2.5MM 4P GIL-G LG CABLE S (STICK) |
| P1201 | 366-921L | 2.5MM 12P GIL-G LG CABLE . |
| P2001 | 366-173L | 2.5MM 12*2P AEPH-254 A/K R/N |
| P2002 | 6602V25002C | 2.5MM 4P EH-A JST . |
| P2003 | 6602V25002C | 2.5MM 4P EH-A JST . |
| P2004 | 6602V25002C | 2.5MM 4P EH-A JST . |
| P260 | 6630V600932 | DIN41612-B49-ML32 REXCONN 32P 2.54MM |

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;

| | |
|--------------------------|-----------------------|
| CC, CX, CK, CN : Ceramic | RD : Carbon Film |
| CQ : Polyester | RS : Metal Oxide Film |
| CE : Electrolytic | RN : Metal Film |
| | RF : Fusible |

| LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|---|
| P261 | 6630V600932 | DIN41612-B49-ML32 REXCONN 32P 2.54MM |
| P401 | 366-921G | 2.5MM 8P GIL-G LG CABLE . |
| P401A | 387-A08A | 8P 2.5MM 100MM H-B UL1007AWG26 |
| P403 | 366-921H | 2.5MM 9P GIL-G LG CABLE . |
| P403A | 387-A09A | 9P 2.5MM 100MM H-B UL1007AWG26 |
| P404 | 366-173E | 2.5MM 6*2P AEPH-254 A/K R/A |
| P404 | 366-921F | 2.5MM 7P GIL-G LG CABLE . |
| P404A | 387-A07A | 7P 2.5MM 100MM H-B UL 1007 AWG 26 |
| P405A | 366-932D | 2.5MM 5P GIL-G LG CABLE S (STICK) |
| P406A | 366-932E | 2.5MM 6P GIL-G LG CABLE S (STICK) |
| P410A | 366-043H | ASSY,PLUG (4P) |
| P411A | 387-A06J | 6P 2.5MM 500MM H-B UL1007AWG26 |
| P415 | 366-009D | 2.36PAI 1P . K/M AUTO |
| P416 | 366-009D | 2.36PAI 1P . K/M AUTO |
| P417 | 366-009D | 2.36PAI 1P . K/M AUTO |
| P420 | 366-932B | 2.5MM 3P GIL-G LG CABLE S (STICK) |
| P421 | 366-009D | 2.36PAI 1P . K/M AUTO |
| P42A | 366-009D | 2.36PAI 1P . K/M AUTO |
| P42B | 366-009D | 2.36PAI 1P . K/M AUTO |
| P42C | 366-009D | 2.36PAI 1P . K/M AUTO |
| P500 | 6630N600132 | DIN41612-B49-FL32 32P 2.54MM FEMALE B-B |
| P501 | 6630N600132 | DIN41612-B49-FL32 32P 2.54MM FEMALE B-B |
| P502 | 366-932C | 2.5MM 4P GIL-G LG CABLE S (STICK) |
| P502 | 387-B04H | ASSY,4P SHIELD WIRE (L=450) |
| P503 | 366-921J | 2.5MM 10P GIL-G LG CABLE . |
| P600 | 366-932B | 2.5MM 3P GIL-G LG CABLE S (STICK) |
| P601 | 366-932C | 2.5MM 4P GIL-G LG CABLE S (STICK) |
| P700 | 366-921L | 2.5MM 12P GIL-G LG CABLE . |
| P801A | 366-009D | 2.36PAI 1P . K/M AUTO |
| P801B | 366-009D | 2.36PAI 1P . K/M AUTO |
| P801C | 366-009D | 2.36PAI 1P . K/M AUTO |
| P801D | 366-009D | 2.36PAI 1P . K/M AUTO |
| P804 | 366-009D | 2.36PAI 1P . K/M AUTO |
| P805 | 366-009D | 2.36PAI 1P . K/M AUTO |
| P810 | 366-009D | 2.36PAI 1P . K/M AUTO |
| P811B | 366-009D | 2.36PAI 1P . K/M AUTO |
| P811C | 366-009D | 2.36PAI 1P . K/M AUTO |
| P81A | 366-009D | 2.36PAI 1P . K/M AUTO |
| P81B | 366-009D | 2.36PAI 1P . K/M AUTO |
| P81C | 366-009D | 2.36PAI 1P . K/M AUTO |
| P81D | 366-009D | 2.36PAI 1P . K/M AUTO |
| P82A | 366-009D | 2.36PAI 1P . K/M AUTO |
| P82B | 366-009D | 2.36PAI 1P . K/M AUTO |
| P82C | 366-009D | 2.36PAI 1P . K/M AUTO |
| P83A | 366-009D | 2.36PAI 1P . K/M AUTO |
| P83B | 366-009D | 2.36PAI 1P . K/M AUTO |
| P841 | 366-921N | WAFER IL-G 14(2.5S) |
| P841A | 6631V25A04A | 14P 2.5MM 100MM H-B UL1007 AWG26 |
| P84A | 366-009D | 2.36PAI 1P . K/M AUTO |
| P84B | 366-009D | 2.36PAI 1P . K/M AUTO |
| P84C | 366-009D | 2.36PAI 1P . K/M AUTO |
| P84D | 366-009D | 2.36PAI 1P . K/M AUTO |

| LOCA. NO | PART NO | DESCRIPTION |
|-----------------|-------------|--------------------------------------|
| P861 | 366-932C | 2.5MM 4P GIL-G LG CABLE S (STICK) |
| P861A | 387-A04A | 4P 2.5MM 100MM H-B UL1007AWG26 |
| P880A | 366-009D | 2.36PAI 1P . K/M AUTO |
| P880B | 366-009D | 2.36PAI 1P . K/M AUTO |
| P880C | 366-009D | 2.36PAI 1P . K/M AUTO |
| P881A | 366-009D | 2.36PAI 1P . K/M AUTO |
| P881B | 366-009D | 2.36PAI 1P . K/M AUTO |
| P901B | 366-921J | 2.5MM 10P GIL-G LG CABLE . |
| P902B | 366-921D | 2.5MM 5P GIL-G LG CABLE . |
| P903B | 366-921H | 2.5MM 9P GIL-G LG CABLE . |
| P904B | 366-921H | 2.5MM 9P GIL-G LG CABLE . |
| PSVM1A | 366-932B | 2.5MM 3P GIL-G LG CABLE S (STICK) |
| PSVM2A | 366-932B | 2.5MM 3P GIL-G LG CABLE S (STICK) |
| PSVM3A | 366-932B | 2.5MM 3P GIL-G LG CABLE S (STICK) |
| PSVM4 | 366-932C | 2.5MM 4P GIL-G LG CABLE S (STICK) |
| PSVM5A | 366-932B | 2.5MM 3P GIL-G LG CABLE S (STICK) |
| PSVM5B | 366-932B | 2.5MM 3P GIL-G LG CABLE S (STICK) |
| PSVM7 | 366-932C | 2.5MM 4P GIL-G LG CABLE S (STICK) |
| PT01 | 366-922G | 2.5MM 8P GIL-G LG CABLE R/A (B TO C) |
| SP01 | 6630VJ00203 | 15004WS-03 YEONHO 3P 1.5MM |
| SP02 | 6630VJ00203 | 15004WS-03 YEONHO 3P 1.5MM |
| SP03 | 6630VJ00203 | 15004WS-03 YEONHO 3P 1.5MM |
| SP04 | 6630VJ00203 | 15004WS-03 YEONHO 3P 1.5MM |
| SP05 | 6630VJ00203 | 15004WS-03 YEONHO 3P 1.5MM |
| SP06 | 6630VJ00204 | 15004WS-04 YEONHO 4P 1.5MM |
| SP07 | 6630VJ00204 | 15004WS-04 YEONHO 4P 1.5MM |
| SP08 | 6630VJ00204 | 15004WS-04 YEONHO 4P 1.5MM |
| SP09 | 6630VJ00203 | 15004WS-03 YEONHO 3P 1.5MM |
| SP10 | 6630VJ00203 | 15004WS-03 YEONHO 3P 1.5MM |
| SP11 | 6630VJ00203 | 15004WS-03 YEONHO 3P 1.5MM |
| SP12 | 6630VJ00203 | 15004WS-03 YEONHO 3P 1.5MM |
| SP13 | 6630VJ00203 | 15004WS-03 YEONHO 3P 1.5MM |
| SP14 | 6630VJ00203 | 15004WS-03 YEONHO 3P 1.5MM |
| RESISTOR | | |
| AR01 | 0RRZVTA001A | MNR-14-E0A-J-101 R OHM 100 OHM 5% |
| AR01 | 0RRZVTA001A | MNR-14-E0A-J-101 R OHM 100 OHM 5% |
| AR02 | 0RRZVTA001A | MNR-14-E0A-J-101 R OHM 100 OHM 5% |
| AR02 | 0RRZVTA001A | MNR-14-E0A-J-101 R OHM 100 OHM 5% |
| AR03 | 0RRZVTA001A | MNR-14-E0A-J-101 R OHM 100 OHM 5% |
| AR03 | 0RRZVTA001A | MNR-14-E0A-J-101 R OHM 100 OHM 5% |
| AR04 | 0RRZVTA001A | MNR-14-E0A-J-101 R OHM 100 OHM 5% |
| AR04 | 0RRZVTA001A | MNR-14-E0A-J-101 R OHM 100 OHM 5% |
| AR05 | 0RRZVTA001A | MNR-14-E0A-J-101 R OHM 100 OHM 5% |
| AR05 | 0RRZVTA001A | MNR-14-E0A-J-101 R OHM 100 OHM 5% |
| AR06 | 0RRZVTA001A | MNR-14-E0A-J-101 R OHM 100 OHM 5% |
| AR06 | 0RRZVTA001A | MNR-14-E0A-J-101 R OHM 100 OHM 5% |
| AR07 | 0RRZVTA001A | MNR-14-E0A-J-101 R OHM 100 OHM 5% |
| AR08 | 0RRZVTA001A | MNR-14-E0A-J-101 R OHM 100 OHM 5% |
| AR09 | 0RRZVTA001A | MNR-14-E0A-J-101 R OHM 100 OHM 5% |
| AR10 | 0RRZVTA001A | MNR-14-E0A-J-101 R OHM 100 OHM 5% |
| AR11 | 0RRZVTA001A | MNR-14-E0A-J-101 R OHM 100 OHM 5% |

| | | |
|--|---|--|
| For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows; | CC, CX, CK, CN : Ceramic CQ : Polyester CE : Electrolytic | RD : Carbon Film RS : Metal Oxide Film RN : Metal Film RF : Fusible |
|--|---|--|

| LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|---------------------------|
| L204 | 0RN1001G509 | 1K OHM 1/4 W 2.00% TA52 |
| L403 | 0RF0111K607 | 1.1 OHM 2 W 5.00% TA62 |
| R114 | 0RD2201H609 | 2.2K OHM 1/2 W 5.00% TA52 |
| R114 | 0RD2201H609 | 2.2K OHM 1/2 W 5.00% TA52 |
| R1201 | 0RD0752F609 | 75 OHM 1/6 W 5.00% TA52 |
| R1202 | 0RD0752F609 | 75 OHM 1/6 W 5.00% TA52 |
| R1203 | 0RD0752F609 | 75 OHM 1/6 W 5.00% TA52 |
| R1204 | 0RD2403F609 | 240K OHM 1/6 W 5.00% TA52 |
| R1205 | 0RD2403F609 | 240K OHM 1/6 W 5.00% TA52 |
| R127 | 0RD2201H609 | 2.2K OHM 1/2 W 5.00% TA52 |
| R2095 | 0RF0470K607 | 0.47 OHM 2 W 5.00% TA62 |
| R2096 | 0RF0470K607 | 0.47 OHM 2 W 5.00% TA62 |
| R260 | 0RS0102K607 | 10 OHM 2 W 5.00% TA62 |
| R261 | 0RS0102K607 | 10 OHM 2 W 5.00% TA62 |
| R2700 | 0RS2200K607 | 220 OHM 2 W 5.00% TA62 |
| R2703 | 0RD2701F609 | 2.7K OHM 1/6 W 5% TA52 |
| R2704 | 0RD2701F609 | 2.7K OHM 1/6 W 5% TA52 |
| R2705 | 0RD2701F609 | 2.7K OHM 1/6 W 5% TA52 |
| R2706 | 0RD2701F609 | 2.7K OHM 1/6 W 5% TA52 |
| R2707 | 0RD2701F609 | 2.7K OHM 1/6 W 5% TA52 |
| R2708 | 0RD2701F609 | 2.7K OHM 1/6 W 5% TA52 |
| R2709 | 0RD3301F609 | 3.3K OHM 1/6 W 5.00% TA52 |
| R2710 | 0RD3301F609 | 3.3K OHM 1/6 W 5.00% TA52 |
| R2711 | 0RD3301F609 | 3.3K OHM 1/6 W 5.00% TA52 |
| R2712 | 0RD3301F609 | 3.3K OHM 1/6 W 5.00% TA52 |
| R2713 | 0RD3301F609 | 3.3K OHM 1/6 W 5.00% TA52 |
| R2714 | 0RD3301F609 | 3.3K OHM 1/6 W 5.00% TA52 |
| R2715 | 0RD4701F609 | 4.7K OHM 1/6 W 5% TA52 |
| R2716 | 0RD4701F609 | 4.7K OHM 1/6 W 5% TA52 |
| R2717 | 0RD2702F609 | 27K OHM 1/6 W 5.00% TA52 |
| R2718 | 0RD2702F609 | 27K OHM 1/6 W 5.00% TA52 |
| R2719 | 0RD4702F609 | 47K OHM 1/6 W 5% TA52 |
| R2720 | 0RD4702F609 | 47K OHM 1/6 W 5% TA52 |
| R2721 | 0RD4702F609 | 47K OHM 1/6 W 5% TA52 |
| R2722 | 0RD4702F609 | 47K OHM 1/6 W 5% TA52 |
| R2723 | 0RD4702F609 | 47K OHM 1/6 W 5% TA52 |
| R2724 | 0RD4702F609 | 47K OHM 1/6 W 5% TA52 |
| R2725 | 0RS0391K607 | 3.9 OHM 2 W 5.00% TA62 |
| R2726 | 0RS0391K607 | 3.9 OHM 2 W 5.00% TA62 |
| R2727 | 0RS0391K607 | 3.9 OHM 2 W 5.00% TA62 |
| R2728 | 0RS0391K607 | 3.9 OHM 2 W 5.00% TA62 |
| R2729 | 0RS0391K607 | 3.9 OHM 2 W 5.00% TA62 |
| R2730 | 0RS0391K607 | 3.9 OHM 2 W 5.00% TA62 |
| R2731 | 0RS0391K607 | 3.9 OHM 2 W 5.00% TA62 |
| R2732 | 0RS0391K607 | 3.9 OHM 2 W 5.00% TA62 |
| R2733 | 0RS0391K607 | 3.9 OHM 2 W 5.00% TA62 |
| R2734 | 0RS0391K607 | 3.9 OHM 2 W 5.00% TA62 |
| R2735 | 0RS0391K607 | 3.9 OHM 2 W 5.00% TA62 |
| R2736 | 0RS0391K607 | 3.9 OHM 2 W 5.00% TA62 |
| R2737 | 0RS2200K607 | 220 OHM 2 W 5.00% TA62 |
| R2738 | 0RS2200K607 | 220 OHM 2 W 5.00% TA62 |
| R2739 | 0RS2200K607 | 220 OHM 2 W 5.00% TA62 |

| LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|---------------------------|
| R2740 | 0RS2200K607 | 220 OHM 2 W 5.00% TA62 |
| R2741 | 0RS2200K607 | 220 OHM 2 W 5.00% TA62 |
| R2742 | 0RS2200K607 | 220 OHM 2 W 5.00% TA62 |
| R2743 | 0RS2200K607 | 220 OHM 2 W 5.00% TA62 |
| R2744 | 0RS2200K607 | 220 OHM 2 W 5.00% TA62 |
| R2745 | 0RS2200K607 | 220 OHM 2 W 5.00% TA62 |
| R2746 | 0RS2200K607 | 220 OHM 2 W 5.00% TA62 |
| R2747 | 0RS2200K607 | 220 OHM 2 W 5.00% TA62 |
| R2748 | 0RD1000F609 | 100 OHM 1/6 W 5% TA52 |
| R2780 | 0RD1601F609 | 1.6K OHM 1/6 W 5.00% TA52 |
| R2781 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| R2782 | 0RD1601F609 | 1.6K OHM 1/6 W 5.00% TA52 |
| R2783 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| R2784 | 0RD1601F609 | 1.6K OHM 1/6 W 5.00% TA52 |
| R2785 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| R2786 | 0RD1601F609 | 1.6K OHM 1/6 W 5.00% TA52 |
| R2787 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| R2788 | 0RD1601F609 | 1.6K OHM 1/6 W 5.00% TA52 |
| R2789 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| R2790 | 0RD1601F609 | 1.6K OHM 1/6 W 5.00% TA52 |
| R2791 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| R2792 | 0RD1002F609 | 10K OHM 1/6 W 5% TA52 |
| R2793 | 0RD4701F609 | 4.7K OHM 1/6 W 5% TA52 |
| R2794 | 0RD4701F609 | 4.7K OHM 1/6 W 5% TA52 |
| R2795 | 0RD4701F609 | 4.7K OHM 1/6 W 5% TA52 |
| R2796 | 0RD2201F609 | 2.2K OHM 1/6 W 5.00% TA52 |
| R2797 | 0RD4701F609 | 4.7K OHM 1/6 W 5% TA52 |
| R2798 | 0RD1002F609 | 10K OHM 1/6 W 5% TA52 |
| R2806 | 0RD2701F609 | 2.7K OHM 1/6 W 5% TA52 |
| R2950 | 0RD1004F609 | 1M OHM 1/6 W 5% TA52 |
| R2951 | 0RD4703F609 | 470K OHM 1/6 W 5.00% TA52 |
| R2952 | 0RD1004F609 | 1M OHM 1/6 W 5% TA52 |
| R2953 | 0RD4703F609 | 470K OHM 1/6 W 5.00% TA52 |
| R2954 | 0RD1002F609 | 10K OHM 1/6 W 5% TA52 |
| R2955 | 0RD1002F609 | 10K OHM 1/6 W 5% TA52 |
| R2956 | 0RD1002F609 | 10K OHM 1/6 W 5% TA52 |
| R2957 | 0RD1002F609 | 10K OHM 1/6 W 5% TA52 |
| R2958 | 0RD1004F609 | 1M OHM 1/6 W 5% TA52 |
| R2959 | 0RD1004F609 | 1M OHM 1/6 W 5% TA52 |
| R2960 | 0RD3003F609 | 300K OHM 1/6 W 5.00% TA52 |
| R2961 | 0RD3003F609 | 300K OHM 1/6 W 5.00% TA52 |
| R2962 | 0RD5101F609 | 5.1K OHM 1/6 W 5.00% TA52 |
| R2965 | 0RD1002F609 | 10K OHM 1/6 W 5% TA52 |
| R2965 | 0RD1004F609 | 1M OHM 1/6 W 5% TA52 |
| R2966 | 0RD1002F609 | 10K OHM 1/6 W 5% TA52 |
| R2967 | 0RD1004F609 | 1M OHM 1/6 W 5% TA52 |
| R2969 | 0RD1002F609 | 10K OHM 1/6 W 5% TA52 |
| R2969 | 0RD1004F609 | 1M OHM 1/6 W 5% TA52 |
| R2970 | 0RD1004F609 | 1M OHM 1/6 W 5% TA52 |
| R2971 | 0RD5101F609 | 5.1K OHM 1/6 W 5.00% TA52 |
| R2972 | 0RD1002F609 | 10K OHM 1/6 W 5% TA52 |
| R2973 | 0RD1002F609 | 10K OHM 1/6 W 5% TA52 |

| | | |
|--|---|--|
| For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows; | CC, CX, CK, CN : Ceramic CQ : Polyester CE : Electrolytic | RD : Carbon Film RS : Metal Oxide Film RN : Metal Film RF : Fusible |
|--|---|--|

| LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|-------------------------------------|
| R2978 | 0RD1004F609 | 1M OHM 1/6 W 5% TA52 |
| R2980 | 0RD0102F609 | 10 OHM 1/6 W 5% TA52 |
| R2981 | 0RD0102F609 | 10 OHM 1/6 W 5% TA52 |
| R316 | 0RN1002F409 | 10K OHM 1/6 W 1.00% TA52 |
| R400 | 0RF0470H609 | 0.47 OHM 1/2 W 5.00% TA52 |
| R401 | 0RD1200H609 | 120 OHM 1/2 W 5.00% TA52 |
| R402 | 0RD3301F609 | 3.3K OHM 1/6 W 5.00% TA52 |
| R403 | 0RD1200H609 | 120 OHM 1/2 W 5.00% TA52 |
| R403 | 0RS2200K607 | 220 OHM 2 W 5.00% TA62 |
| R404 | 0RD6200F609 | 620 OHM 1/6 W 5.00% TA52 |
| R405 | 0RS3902K607 | 39K OHM 2 W 5.00% TA62 |
| R405 | 0RS3902K607 | 39K OHM 2 W 5.00% TA62 |
| R406 | 0RS3902K607 | 39K OHM 2 W 5.00% TA62 |
| R407 | 0RS3902K607 | 39K OHM 2 W 5.00% TA62 |
| R408 | 0RD1000H609 | 100 OHM 1/2 W 5.00% TA52 |
| R409 | 0RS5101H609 | 5.1K OHM 1/2 W 5.00% TA52 |
| R40A | 0RD4702F609 | 47K OHM 1/6 W 5% TA52 |
| R40C | 0RD7501F609 | 7.5K OHM 1/6 W 5.00% TA52 |
| R40C | 0RD7501F609 | 7.5K OHM 1/6 W 5.00% TA52 |
| R40D | 0RD1800F609 | 180 OHM 1/6 W 5.00% TA52 |
| R40E | 0RD7502H609 | 75K OHM 1/2 W 5.00% TA52 |
| R40F | 0RS1002H609 | 10K OHM 1/2 W 5.00% TA52 |
| R40F | 0RS1002H609 | 10K OHM 1/2 W 5.00% TA52 |
| R40G | 0RD0682F609 | 68 OHM 1/6 W 5.00% TA52 |
| R40H | 0RD3300F609 | 330 OHM 1/6 W 5.00% TA52 |
| R40I | 0RD4701F609 | 4.7K OHM 1/6 W 5% TA52 |
| R40J | 0RD4701F609 | 4.7K OHM 1/6 W 5% TA52 |
| R40K | 0RD2403H609 | 240K OHM 1/2 W 5.00% TA52 |
| R40L | 0RD1501F609 | 1.5K OHM 1/6 W 5% TA52 |
| R40M | 0RD2001H609 | 2K OHM 1/2 W 5.00% TA52 |
| R40N | 0RF0470H609 | 0.47 OHM 1/2 W 5.00% TA52 |
| R40P | 0RD2201F609 | 2.2K OHM 1/6 W 5.00% TA52 |
| R40Q | 0RD3301F609 | 3.3K OHM 1/6 W 5.00% TA52 |
| R40Q | 0RD3301F609 | 3.3K OHM 1/6 W 5.00% TA52 |
| R40T | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| R40T | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| R40U | 0RD1602F609 | 16K OHM 1/6 W 5.00% TA52 |
| R40V | 0RD2401F609 | 2.4K OHM 1/6 W 5.00% TA52 |
| R40W | 0RD2002F609 | 20K OHM 1/6 W 5.00% TA52 |
| R40W | 0RD2002F609 | 20K OHM 1/6 W 5.00% TA52 |
| R40X | 0RD0102F609 | 10 OHM 1/6 W 5% TA52 |
| R40Y | 0RF0470H609 | 0.47 OHM 1/2 W 5.00% TA52 |
| R40Z | 0RD4700H609 | 470 OHM 1/2 W 5.00% TA52 |
| R410 | 0RS6801K607 | 6.8K OHM 2 W 5.00% TA62 |
| R411 | 0RD1502H609 | 15K OHM 1/2 W 5.00% TA52 |
| R412 | 0RD1801H609 | 1.8K OHM 1/2 W 5.00% TA52 |
| R413 | 0RS3902K607 | 39K OHM 2 W 5.00% TA62 |
| R414 | 0RF0201K607 | 2 OHM 2 W 5.00% TA62 |
| R415 | 0RF0201K607 | 2 OHM 2 W 5.00% TA62 |
| R416 | 180-C02M | 5.6K OHM 1/2 W 10% TA52 ERC12GK562V |
| R417 | 0RD1501H609 | 1.5K OHM 1/2 W 5.00% TA52 |
| R418 | 0RD1002F609 | 10K OHM 1/6 W 5% TA52 |

| LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|---------------------------|
| R419 | 0RS0221H609 | 2.2 OHM 1/2 W 5.00% TA52 |
| R41A | 0RD1000F609 | 100 OHM 1/6 W 5% TA52 |
| R41B | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| R41C | 0RD1200H609 | 120 OHM 1/2 W 5.00% TA52 |
| R41D | 0RD1002F609 | 10K OHM 1/6 W 5% TA52 |
| R41E | 0RD1200H609 | 120 OHM 1/2 W 5.00% TA52 |
| R41G | 0RD2200H609 | 220 OHM 1/2 W 5.00% TA52 |
| R41K | 0RD8202F609 | 82K OHM 1/6 W 5.00% TA52 |
| R41P | 0RD1200H609 | 120 OHM 1/2 W 5.00% TA52 |
| R41R | 0RD1200H609 | 120 OHM 1/2 W 5.00% TA52 |
| R420 | 0RD3302F609 | 33K OHM 1/6 W 5% TA52 |
| R421 | 0RD0102F609 | 10 OHM 1/6 W 5% TA52 |
| R423 | 0RS1500K607 | 150 OHM 2 W 5.00% TA62 |
| R425 | 0RF0141K607 | 1.4 OHM 2 W 5.00% TA62 |
| R425 | 0RF0111K607 | 1.1 OHM 2 W 5.00% TA62 |
| R426 | 0RF0141K607 | 1.4 OHM 2 W 5.00% TA62 |
| R428 | 0RN5601F409 | 5.6K OHM 1/6 W 1.00% TA52 |
| R429 | 0RD1303F609 | 130K OHM 1/6 W 5.00% TA52 |
| R42A | 0RD4701F609 | 4.7K OHM 1/6 W 5% TA52 |
| R430 | 0RS4702H609 | 47K OHM 1/2 W 5.00% TA52 |
| R431 | 0RS0101H609 | 1 OHM 1/2 W 5.00% TA52 |
| R432 | 0RD4700H609 | 470 OHM 1/2 W 5.00% TA52 |
| R432 | 0RD4700H609 | 470 OHM 1/2 W 5.00% TA52 |
| R433 | 0RF0561K607 | 5.6 OHM 2 W 5.00% TA62 |
| R434 | 0RF0141K607 | 1.4 OHM 2 W 5.00% TA62 |
| R435 | 0RN5601F409 | 5.6K OHM 1/6 W 1.00% TA52 |
| R436 | 0RD1102F609 | 11K OHM 1/6 W 5.00% TA52 |
| R437 | 0RD2201F609 | 2.2K OHM 1/6 W 5.00% TA52 |
| R438 | 0RD2001F609 | 2K OHM 1/6 W 5% TA52 |
| R439 | 0RD2201F609 | 2.2K OHM 1/6 W 5.00% TA52 |
| R440 | 0RD1501F609 | 1.5K OHM 1/6 W 5% TA52 |
| R441 | 0RD1102F609 | 11K OHM 1/6 W 5.00% TA52 |
| R442 | 0RD5101F609 | 5.1K OHM 1/6 W 5.00% TA52 |
| R443 | 0RD0472F609 | 47 OHM 1/6 W 5% TA52 |
| R445 | 0RD1000H609 | 100 OHM 1/2 W 5.00% TA52 |
| R449 | 0RD1002F609 | 10K OHM 1/6 W 5% TA52 |
| R450 | 0RD1501F609 | 1.5K OHM 1/6 W 5% TA52 |
| R451 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| R452 | 0RD1501F609 | 1.5K OHM 1/6 W 5% TA52 |
| R453 | 0RD1000H609 | 100 OHM 1/2 W 5.00% TA52 |
| R454 | 0RD1000H609 | 100 OHM 1/2 W 5.00% TA52 |
| R454 | 0RS0470H609 | 0.47 OHM 1/2 W 5.00% TA52 |
| R455 | 0RD1000H609 | 100 OHM 1/2 W 5.00% TA52 |
| R457 | 0RD1000F609 | 100 OHM 1/6 W 5% TA52 |
| R458 | 0RD3003F609 | 300K OHM 1/6 W 5.00% TA52 |
| R459 | 0RD1002F609 | 10K OHM 1/6 W 5% TA52 |
| R460 | 0RD2702F609 | 27K OHM 1/6 W 5.00% TA52 |
| R461 | 0RD1002F609 | 10K OHM 1/6 W 5% TA52 |
| R463 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| R464 | 0RD2001F609 | 2K OHM 1/6 W 5% TA52 |
| R465 | 0RD4700F609 | 470 OHM 1/6 W 0.05 TA52 |
| R466 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |

For Capacitor & Resistors,
the characters at 2nd and 3rd
digit in the P/No. means as
follows;

CC, CX, CK, CN : Ceramic
CQ : Polyester
CE : Electrolytic

RD : Carbon Film
RS : Metal Oxide Film
RN : Metal Film
RF : Fusible

| LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|----------------------------------|
| R467 | 0RD1000F609 | 100 OHM 1/6 W 5% TA52 |
| R468 | 0RD4700F609 | 470 OHM 1/6 W 0.05 TA52 |
| R468 | 0RD4700F609 | 470 OHM 1/6 W 0.05 TA52 |
| R469 | 0RS3900K607 | 390 OHM 2 W 5.00% TA62 |
| R46A | 0RD2201F609 | 2.2K OHM 1/6 W 5.00% TA52 |
| R46D | 0RD3301F609 | 3.3K OHM 1/6 W 5.00% TA52 |
| R470 | 0RS2002H609 | 20K OHM 1/2 W 5.00% TA52 |
| R473 | 0RD3301F609 | 3.3K OHM 1/6 W 5.00% TA52 |
| R474 | 0RD2701H609 | 2.7K OHM 1/2 W 5.00% TA52 |
| R475 | 0RD2200H609 | 220 OHM 1/2 W 5.00% TA52 |
| R476 | 0RS3900K607 | 390 OHM 2 W 5.00% TA62 |
| R477 | 0RD2201F609 | 2.2K OHM 1/6 W 5.00% TA52 |
| R478 | 0RS2001K607 | 2K OHM 2 W 5.00% TA62 |
| R479 | 0RD5601F609 | 5.6K OHM 1/6 W 5% TA52 |
| R480 | 0RS2001K607 | 2K OHM 2 W 5.00% TA62 |
| R481 | 0RS3902K607 | 39K OHM 2 W 5.00% TA62 |
| R482 | 0RS3902K607 | 39K OHM 2 W 5.00% TA62 |
| R483 | 0RN2002F409 | 20K OHM 1/6 W 1.00% TA52 |
| R484 | 0RN9102F409 | 91K OHM 1/6 W 1.00% TA52 |
| R485 | 0RS0561K607 | 5.6 OHM 2 W 5.00% TA62 |
| R486 | 0RS1002H609 | 10K OHM 1/2 W 5.00% TA52 |
| R487 | 0RS0202K607 | 20 OHM 2 W 5.00% TA62 |
| R487 | 0RS0561K607 | 5.6 OHM 2 W 5.00% TA62 |
| R488 | 180-A01E | 2 W RW ROUND G 2W 0.33J TA31(63) |
| R488 | 180-A01B | RW ROUND G 2W 0.11 K TA31(63) |
| R489 | 0RD0472F609 | 47 OHM 1/6 W 5% TA52 |
| R490 | 0RN2202F409 | 22K OHM 1/6 W 1.00% TA52 |
| R491 | 180-A01B | RW ROUND G 2W 0.11 K TA31(63) |
| R492 | 0RD1303F609 | 130K OHM 1/6 W 5.00% TA52 |
| R493 | 0RF0470H609 | 0.47 OHM 1/2 W 5.00% TA52 |
| R494 | 0RF0121H609 | 1.2 OHM 1/2 W 5.00% TA52 |
| R495 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| R496 | 0RD1602F609 | 16K OHM 1/6 W 5.00% TA52 |
| R497 | 0RD7501F609 | 7.5K OHM 1/6 W 5.00% TA52 |
| R498 | 0RS2702H609 | 27K OHM 1/2 W 5.00% TA52 |
| R499 | 0RD2002F609 | 20K OHM 1/6 W 5.00% TA52 |
| R694 | 0RD1001H609 | 1K OHM 1/2 W 5.00% TA52 |
| R695 | 0RD1001H609 | 1K OHM 1/2 W 5.00% TA52 |
| R802 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| R803 | 180-A01D | RW ROUND G 2W 0.16 J TA31(63) |
| R804 | 180-A01D | RW ROUND G 2W 0.16 J TA31(63) |
| R805 | 0RD0562H609 | 56 OHM 1/2 W 5.00% TA52 |
| R807 | 0RD4701F609 | 4.7K OHM 1/6 W 5% TA52 |
| R808 | 0RD3301F609 | 3.3K OHM 1/6 W 5.00% TA52 |
| R811 | 0RD1802F609 | 18K OHM 1/6 W 5.00% TA52 |
| R815 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| R817 | 0RD1003H609 | 100K OHM 1/2 W 5.00% TA52 |
| R818 | 0RD1003H609 | 100K OHM 1/2 W 5.00% TA52 |
| R819 | 0RS0470H609 | 0.47 OHM 1/2 W 5.00% TA52 |
| R81A | 0RKZVTA001K | 0.47M OHM 1/2 W 5% TA52 PILKOR |
| R820 | 0RS1203K607 | 120K OHM 2 W 5.00% TA62 |
| R821 | 0RS0331H609 | 3.3 OHM 1/2 W 5.00% TA52 |

| LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|-------------------------------|
| R827 | 0RD0681H609 | 6.8 OHM 1/2 W 5.00% TA52 |
| R828 | 0RD2001H609 | 2K OHM 1/2 W 5.00% TA52 |
| R829 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| R830 | 180-C02J | ERC12GK106V(RC 1/2W 10M K TA) |
| R831 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| R832 | 0RD4701F609 | 4.7K OHM 1/6 W 5% TA52 |
| R833 | 0RD4701F609 | 4.7K OHM 1/6 W 5% TA52 |
| R834 | 0RD7500F609 | 750 OHM 1/6 W 5% TA52 |
| R835 | 0RD9100F609 | 910 OHM 1/6 W 5.00% TA52 |
| R837 | 0RD2201F609 | 2.2K OHM 1/6 W 5.00% TA52 |
| R839 | 0RD1501F609 | 1.5K OHM 1/6 W 5% TA52 |
| R840 | 0RD1002F609 | 10K OHM 1/6 W 5% TA52 |
| R851 | 0RD9100F609 | 910 OHM 1/6 W 5.00% TA52 |
| R851 | 0RD1501F609 | 1.5K OHM 1/6 W 5% TA52 |
| R861 | 180-777H | RWR 7W 910 J VERT |
| R871 | 0RD4302F609 | 43K OHM 1/6 W 5.00% TA52 |
| R872 | 0RD5602F609 | 56K OHM 1/6 W 5% TA52 |
| R887 | 0RD4701F609 | 4.7K OHM 1/6 W 5% TA52 |
| R891 | 0RN1201F409 | 1.2K OHM 1/6 W 1.00% TA52 |
| R892 | 0RN1801F409 | 1.8K OHM 1/6 W 1.00% TA52 |
| R893 | 0RD4701F609 | 4.7K OHM 1/6 W 5% TA52 |
| R894 | 0RD2001F609 | 2K OHM 1/6 W 5% TA52 |
| R895 | 0RD4701F609 | 4.7K OHM 1/6 W 5% TA52 |
| R897 | 0RS3301K607 | 3.3K OHM 2 W 5.00% TA62 |
| R898 | 0RS3301K607 | 3.3K OHM 2 W 5.00% TA62 |
| R899 | 0RS0161K607 | 1.6 OHM 2 W 5.00% TA62 |
| R901 | 0RD2200F609 | 220 OHM 1/6 W 5.00% TA52 |
| R901B | 0RD1000F609 | 100 OHM 1/6 W 5% TA52 |
| R901G | 0RD1000F609 | 100 OHM 1/6 W 5% TA52 |
| R901R | 0RD1000F609 | 100 OHM 1/6 W 5% TA52 |
| R902 | 0RD2200F609 | 220 OHM 1/6 W 5.00% TA52 |
| R902B | 0RD5101F609 | 5.1K OHM 1/6 W 5.00% TA52 |
| R902G | 0RD5101F609 | 5.1K OHM 1/6 W 5.00% TA52 |
| R902R | 0RD5101F609 | 5.1K OHM 1/6 W 5.00% TA52 |
| R903 | 0RD1200F609 | 120 OHM 1/6 W 5.00% TA52 |
| R903B | 0RN3001F409 | 3K OHM 1/6 W 1.00% TA52 |
| R903G | 0RN3001F409 | 3K OHM 1/6 W 1.00% TA52 |
| R903R | 0RN3001F409 | 3K OHM 1/6 W 1.00% TA52 |
| R904 | 0RD1002F609 | 10K OHM 1/6 W 5% TA52 |
| R904B | 0RD6200F609 | 620 OHM 1/6 W 5.00% TA52 |
| R904G | 0RD6200F609 | 620 OHM 1/6 W 5.00% TA52 |
| R904R | 0RD6200F609 | 620 OHM 1/6 W 5.00% TA52 |
| R905 | 0RD4700F609 | 470 OHM 1/6 W 0.05 TA52 |
| R905 | 0RD2200F609 | 220 OHM 1/6 W 5.00% TA52 |
| R905B | 0RD0102F609 | 10 OHM 1/6 W 5% TA52 |
| R905G | 0RD0102F609 | 10 OHM 1/6 W 5% TA52 |
| R905R | 0RD0102F609 | 10 OHM 1/6 W 5% TA52 |
| R906 | 0RD0622F609 | 62 OHM 1/6 W 5.00% TA52 |
| R906B | 0RD2701F609 | 2.7K OHM 1/6 W 5% TA52 |
| R906G | 0RD2701F609 | 2.7K OHM 1/6 W 5% TA52 |
| R906R | 0RD2701F609 | 2.7K OHM 1/6 W 5% TA52 |
| R907 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |

| | | |
|--|---|--|
| For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows; | CC, CX, CK, CN : Ceramic CQ : Polyester CE : Electrolytic | RD : Carbon Film RS : Metal Oxide Film RN : Metal Film RF : Fusible |
|--|---|--|

| LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|--------------------------------|
| R907B | 0RD1203F609 | 120K OHM 1/6 W 5.00% TA52 |
| R907G | 0RD1203F609 | 120K OHM 1/6 W 5.00% TA52 |
| R907R | 0RD1203F609 | 120K OHM 1/6 W 5.00% TA52 |
| R908 | 0RD0472F609 | 47 OHM 1/6 W 5% TA52 |
| R908B | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| R908G | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| R908R | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| R909B | 0RS4702K607 | 47K OHM 2 W 5.00% TA62 |
| R909G | 0RS4702K607 | 47K OHM 2 W 5.00% TA62 |
| R909R | 0RS4702K607 | 47K OHM 2 W 5.00% TA62 |
| R910B | 180-C02P | 220OHM 1/2 W 5% TA52 |
| R910G | 180-C02P | 220OHM 1/2 W 5% TA52 |
| R910R | 180-C02P | 220OHM 1/2 W 5% TA52 |
| R911 | 0RS4700K607 | 470 OHM 2 W 5.00% TA62 |
| R911B | 0RD1002H609 | 10K OHM 1/2 W 5.00% TA52 |
| R911G | 0RD1002H609 | 10K OHM 1/2 W 5.00% TA52 |
| R911R | 0RD1002H609 | 10K OHM 1/2 W 5.00% TA52 |
| R912 | 0RS4700K607 | 470 OHM 2 W 5.00% TA62 |
| R912B | 0RD1004H609 | 1M OHM 1/2 W 5.00% TA52 |
| R912G | 0RD1004H609 | 1M OHM 1/2 W 5.00% TA52 |
| R912R | 0RD1004H609 | 1M OHM 1/2 W 5.00% TA52 |
| R913 | 0RS4700K607 | 470 OHM 2 W 5.00% TA62 |
| R913B | 0RF0820H609 | 0.82 OHM 1/2 W 5.00% TA52 |
| R913G | 0RF0820H609 | 0.82 OHM 1/2 W 5.00% TA52 |
| R913R | 0RF0820H609 | 0.82 OHM 1/2 W 5.00% TA52 |
| R914B | 0RKZVTA001K | 0.47M OHM 1/2 W 5% TA52 PILKOR |
| R914G | 0RKZVTA001K | 0.47M OHM 1/2 W 5% TA52 PILKOR |
| R914R | 0RKZVTA001K | 0.47M OHM 1/2 W 5% TA52 PILKOR |
| R915B | 0RD1003H609 | 100K OHM 1/2 W 5.00% TA52 |
| R915G | 0RD1003H609 | 100K OHM 1/2 W 5.00% TA52 |
| R915R | 0RD1003H609 | 100K OHM 1/2 W 5.00% TA52 |
| R916B | 0RD3900F609 | 390 OHM 1/6 W 5% TA52 |
| R916G | 0RD3900F609 | 390 OHM 1/6 W 5% TA52 |
| R916R | 0RD3900F609 | 390 OHM 1/6 W 5% TA52 |
| R918G | 0RD1002F609 | 10K OHM 1/6 W 5% TA52 |
| R919B | 0RD6201F609 | 6.2K OHM 1/6 W 5.00% TA52 |
| R919G | 0RD6201F609 | 6.2K OHM 1/6 W 5.00% TA52 |
| R919R | 0RD6201F609 | 6.2K OHM 1/6 W 5.00% TA52 |
| R920B | 0RD1101F609 | 1.1K OHM 1/6 W 5.00% TA52 |
| R920G | 0RD1101F609 | 1.1K OHM 1/6 W 5.00% TA52 |
| R920R | 0RD1101F609 | 1.1K OHM 1/6 W 5.00% TA52 |
| R921B | 0RD2001F609 | 2K OHM 1/6 W 5% TA52 |
| R921G | 0RD2001F609 | 2K OHM 1/6 W 5% TA52 |
| R921R | 0RD2001F609 | 2K OHM 1/6 W 5% TA52 |
| R922B | 0RF0102K607 | 10 2W 5% TA62 |
| R922G | 0RF0102K607 | 10 2W 5% TA62 |
| R922R | 0RF0102K607 | 10 2W 5% TA62 |
| R923B | 0RCZVTA002E | 4.7K OHM 1/2 W 10% TA52 . |
| R923G | 0RCZVTA002E | 4.7K OHM 1/2 W 10% TA52 . |
| R923R | 0RCZVTA002E | 4.7K OHM 1/2 W 10% TA52 . |
| R925B | 0RD1002F609 | 10K OHM 1/6 W 5% TA52 |
| R925G | 0RD1002F609 | 10K OHM 1/6 W 5% TA52 |

| LOCA. NO | PART NO | DESCRIPTION |
|---------------|-------------|--------------------------------|
| R926B | 180-C02P | 220OHM 1/2 W 5% TA52 |
| R926B | 180-C02Q | 330OHM 1/2 W 5% TA52 |
| R926G | 180-C02P | 220OHM 1/2 W 5% TA52 |
| R926G | 180-C02Q | 330OHM 1/2 W 5% TA52 |
| R926R | 180-C02P | 220OHM 1/2 W 5% TA52 |
| R926R | 180-C02Q | 330OHM 1/2 W 5% TA52 |
| RT02 | 0RD1002F609 | 10K OHM 1/6 W 5% TA52 |
| RT04 | 0RD4700F609 | 470 OHM 1/6 W 0.05 TA52 |
| RT07 | 0RD1000F609 | 100 OHM 1/6 W 5% TA52 |
| RT08 | 0RD1000F609 | 100 OHM 1/6 W 5% TA52 |
| RT09 | 0RD1000F609 | 100 OHM 1/6 W 5% TA52 |
| RT10 | 0RD1000F609 | 100 OHM 1/6 W 5% TA52 |
| RT11 | 0RD1000F609 | 100 OHM 1/6 W 5% TA52 |
| RT12 | 0RD4701F609 | 4.7K OHM 1/6 W 5% TA52 |
| RT13 | 0RD4701F609 | 4.7K OHM 1/6 W 5% TA52 |
| RT14 | 0RD4701F609 | 4.7K OHM 1/6 W 5% TA52 |
| RT15 | 0RD1000F609 | 100 OHM 1/6 W 5% TA52 |
| RT16 | 0RD1000F609 | 100 OHM 1/6 W 5% TA52 |
| RT17 | 0RD1000F609 | 100 OHM 1/6 W 5% TA52 |
| RT18 | 0RD1000F609 | 100 OHM 1/6 W 5% TA52 |
| RT19 | 0RD4701F609 | 4.7K OHM 1/6 W 5% TA52 |
| RT20 | 0RD4701F609 | 4.7K OHM 1/6 W 5% TA52 |
| RT21 | 0RD4701F609 | 4.7K OHM 1/6 W 5% TA52 |
| RT22 | 0RD4701F609 | 4.7K OHM 1/6 W 5% TA52 |
| RT23 | 0RD0332H609 | 33 OHM 1/2 W 5.00% TA52 |
| RT24 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| RT25 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| RT26 | 0RD0332H609 | 33 OHM 1/2 W 5.00% TA52 |
| RT27 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| RT28 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| RT29 | 0RD0332H609 | 33 OHM 1/2 W 5.00% TA52 |
| RT30 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| RT31 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| RT32 | 0RD0332H609 | 33 OHM 1/2 W 5.00% TA52 |
| RT33 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| RT34 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| RT35 | 0RD0332H609 | 33 OHM 1/2 W 5.00% TA52 |
| RT36 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| RT37 | 0RD1001F609 | 1K OHM 1/6 W 5% TA52 |
| RT38 | 0RD1000F609 | 100 OHM 1/6 W 5% TA52 |
| RT39 | 0RD1000F609 | 100 OHM 1/6 W 5% TA52 |
| RT40 | 0RD4700F609 | 470 OHM 1/6 W 0.05 TA52 |
| RT42 | 0RD3001F609 | 3K OHM 1/6 W 5.00% TA52 |
| RX644 | 180-777H | RWR 7W 910 J VERT |
| VR401 | 0RV1103D550 | 10K OHM 6 AG L3P5, 2.5 |
| SWITCH | | |
| SW800 | 140-289A | POWER SDDF3PASP013 LG C&D UL/C |
| SWT1 | 140-313B | TACT 2LEAD 160G(TA) LG C&D NON |
| SWT2 | 140-313B | TACT 2LEAD 160G(TA) LG C&D NON |
| SWT3 | 140-313B | TACT 2LEAD 160G(TA) LG C&D NON |
| SWT4 | 140-313B | TACT 2LEAD 160G(TA) LG C&D NON |







For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;

| | |
|--------------------------|-----------------------|
| CC, CX, CK, CN : Ceramic | RD : Carbon Film |
| CQ : Polyester | RS : Metal Oxide Film |
| CE : Electrolytic | RN : Metal Film |
| | RF : Fusible |


| LOCA. NO | PART NO | DESCRIPTION |
|-----------------------------|-------------|---|
| SWT5 | 140-313B | TACT 2LEAD 160G(TA) LG C&D NON |
| SWT6 | 140-313B | TACT 2LEAD 160G(TA) LG C&D NON |
| SWT7 | 140-313B | TACT 2LEAD 160G(TA) LG C&D NON |
| SWT8 | 140-313B | TACT 2LEAD 160G(TA) LG C&D NON |
| FILTER & CRYSTAL | | |
| FB2000 | 125-022K | FERRITE 1UH TAPING |
| FB2001 | 125-022K | FERRITE 1UH TAPING |
| FB2002 | 125-022K | FERRITE 1UH TAPING |
| FB2003 | 125-022K | FERRITE 1UH TAPING |
| FB2004 | 125-022K | FERRITE 1UH TAPING |
| FB2005 | 125-022K | FERRITE 1UH TAPING |
| FB2006 | 125-022K | FERRITE 1UH TAPING |
| FB2007 | 125-022K | FERRITE 1UH TAPING |
| FB2008 | 125-022K | FERRITE 1UH TAPING |
| FB2009 | 125-022K | FERRITE 1UH TAPING |
| FB2010 | 125-022K | FERRITE 1UH TAPING |
| FB2011 | 125-022K | FERRITE 1UH TAPING |
| FB401 | 125-123A | FERRITE BFD3565R2F(TAPING) |
| FB402 | 125-022K | FERRITE 1UH TAPING |
| FB403 | 125-022K | FERRITE 1UH TAPING |
| FB801 | 125-022K | FERRITE 1UH TAPING |
| FB802 | 125-022K | FERRITE 1UH TAPING |
| FB803 | 125-022K | FERRITE 1UH TAPING |
| FB805 | 125-022K | FERRITE 1UH TAPING |
| FB841 | 125-022K | FERRITE 1UH TAPING |
| FB851 | 125-022K | FERRITE 1UH TAPING |
| FB852 | 125-123A | FERRITE BFD3565R2F(TAPING) |
| FB861 | 125-022K | FERRITE 1UH TAPING |
| FB871 | 125-123A | FERRITE BFD3565R2F(TAPING) |
| FB872 | 125-123A | FERRITE BFD3565R2F(TAPING) |
| FB881 | 125-123A | FERRITE BFD3565R2F(TAPING) |
| FB882 | 125-123A | FERRITE BFD3565R2F(TAPING) |
| FB891 | 125-022K | FERRITE 1UH TAPING |
| FB892 | 125-022K | FERRITE 1UH TAPING |
| FB901B | 125-123A | FERRITE BFD3565R2F(TAPING) |
| FB901G | 125-123A | FERRITE BFD3565R2F(TAPING) |
| FB901R | 125-123A | FERRITE BFD3565R2F(TAPING) |
| FB905B | 125-123A | FERRITE BFD3565R2F(TAPING) |
| FB905G | 125-123A | FERRITE BFD3565R2F(TAPING) |
| FB905R | 125-123A | FERRITE BFD3565R2F(TAPING) |
| FB931 | 125-022K | FERRITE 1UH TAPING |
| FB932 | 125-022K | FERRITE 1UH TAPING |
| FB933 | 125-022K | FERRITE 1UH TAPING |
| FB934 | 125-022K | FERRITE 1UH TAPING |
| FB935 | 125-022K | FERRITE 1UH TAPING |
| FB936 | 125-022K | FERRITE 1UH TAPING |
| L01 | 6210VC0006A | FBMH3216 HM501NT TAIYOYUDEN 3.2X1.6X1.6MM |
| L101 | 6210VC0006A | FBMH3216 HM501NT TAIYOYUDEN 3.2X1.6X1.6MM |
| L106 | 6210VC0006A | FBMH3216 HM501NT TAIYOYUDEN 3.2X1.6X1.6MM |
| L108 | 6210VC0006A | FBMH3216 HM501NT TAIYOYUDEN 3.2X1.6X1.6MM |
| L117 | 6210VC0006A | FBMH3216 HM501NT TAIYOYUDEN 3.2X1.6X1.6MM |

| LOCA. NO | PART NO | DESCRIPTION |
|--------------|-------------|--|
| L2007 | 6210TCT002B | ACB2012M-300-T TDK , CHIP BEAD,LCD |
| L2008 | 6210TCT002B | ACB2012M-300-T TDK , CHIP BEAD,LCD |
| L2009 | 6210TCT002B | ACB2012M-300-T TDK , CHIP BEAD,LCD |
| L2010 | 6210TCT002B | ACB2012M-300-T TDK , CHIP BEAD,LCD |
| L2011 | 6210TCT002B | ACB2012M-300-T TDK , CHIP BEAD,LCD |
| L2012 | 6210TCT002B | ACB2012M-300-T TDK , CHIP BEAD,LCD |
| L2013 | 6210TCT002B | ACB2012M-300-T TDK , CHIP BEAD,LCD |
| L2014 | 6210TCT002B | ACB2012M-300-T TDK , CHIP BEAD,LCD |
| L2018 | 6210TCT002B | ACB2012M-300-T TDK , CHIP BEAD,LCD |
| L2021 | 6210TCT002B | ACB2012M-300-T TDK , CHIP BEAD,LCD |
| L2027 | 125-022K | FERRITE 1UH TAPING |
| L2028 | 6210TCT002B | ACB2012M-300-T TDK , CHIP BEAD,LCD |
| L205 | 6210TCT002B | ACB2012M-300-T TDK , CHIP BEAD,LCD |
| L206 | 6210TCT002B | ACB2012M-300-T TDK , CHIP BEAD,LCD |
| L206 | 6210VC0006A | FBMH3216 HM501NT 3.2X1.6X1.6MM R/TP |
| L260 | 6210VC0006A | FBMH3216 HM501NT 3.2X1.6X1.6MM R/TP |
| L262 | 6210VC0006A | FBMH3216 HM501NT 3.2X1.6X1.6MM R/TP |
| L263 | 6210VC0006A | FBMH3216 HM501NT 3.2X1.6X1.6MM R/TP |
| L264 | 6210VC0006A | FBMH3216 HM501NT 3.2X1.6X1.6MM R/TP |
| L266 | 6210VC0006A | FBMH3216 HM501NT 3.2X1.6X1.6MM R/TP |
| L267 | 6210VC0006A | FBMH3216 HM501NT 3.2X1.6X1.6MM R/TP |
| L268 | 6210VC0006A | FBMH3216 HM501NT 3.2X1.6X1.6MM R/TP |
| L269 | 6210VC0006A | FBMH3216 HM501NT 3.2X1.6X1.6MM R/TP |
| L270 | 6210VC0006A | FBMH3216 HM501NT 3.2X1.6X1.6MM R/TP |
| L600 | 6210VC0006A | FBMH3216 HM501NT 3.2X1.6X1.6MM R/TP |
| L601 | 6210VC0006A | FBMH3216 HM501NT 3.2X1.6X1.6MM R/TP |
| L608 | 6210VC0006A | FBMH3216 HM501NT 3.2X1.6X1.6MM R/TP |
| L609 | 6210VC0006A | FBMH3216 HM501NT 3.2X1.6X1.6MM R/TP |
| L610 | 6210VC0006A | FBMH3216 HM501NT 3.2X1.6X1.6MM R/TP |
| L700 | 6210VC0006A | FBMH3216 HM501NT 3.2X1.6X1.6MM R/TP |
| L701 | 6210VC0006A | FBMH3216 HM501NT 3.2X1.6X1.6MM R/TP |
| L81A | 150-F06T | SQE3535 20MH PHY TURN |
| L81B | 150-F06T | SQE3535 20MH PHY TURN |
| L81C | 150-F06T | SQE3535 20MH PHY TURN |
| LX100 | 6210VC0006A | FBMH3216 HM501NT 3.2X1.6X1.6MM R/TP |
| LX105 | 6210VC0006A | FBMH3216 HM501NT 3.2X1.6X1.6MM R/TP |
| X01 | 156-A01L | RESONATOR,CRYSTAL HC49U 6.000MHZ 30PPM |
| X260 | 6202VDB007B | RESONATOR,CRYSTA LHC49U 20.250MHZ 30PPM |
| X261 | 166-E02F | RESONATOR,CERAMIC CSBLA500KECZF09-B0 |
| X262 | 156-A01E | RESONATOR,CRYSTAL HC49U 4.000MHZ 30PPM |
| X500 | 6212BA2002C | RESONATOR, CSALA2M69G4ZF01-B0 2.69MHZ +/- 15 PPM |
| X600 | 156-A02R | RESONATOR,CRYSTAL HC49U 18.432MHZ 30PPM 16PF BK |
| Z260 | 6200VKR001A | FILTER(CIRC),BAND PASSLPF 1EA SMD H354LAI-K5206 |
| Z261 | 6200VKR001B | FILTER(CIRC),BAND PASSLPF 2EA SMD TH355LSK-K5214 |
| Z262 | 6200VKR001A | FILTER(CIRC),BAND PASSLPF 1EA SMD H354LAI-K5206 |
| SPARK | | |
| SG401 | 6918VAX002B | SSA-102N-A1 1000V 30% 5MM AXIAL TP |
| SG402 | 6918VAX002B | SSA-102N-A1 1000V 30% 5MM AXIAL TP |
| SG901B | 6918VAX002D | WSP-301M 300V 20% AXIAL TYPE 5MM |
| SG901G | 6918VAX002D | WSP-301M 300V 20% AXIAL TYPE 5MM |
| SG901R | 6918VAX002D | WSP-301M 300V 20% AXIAL TYPE 5MM |


MAIN BOARD
MP03AA/MP03AB

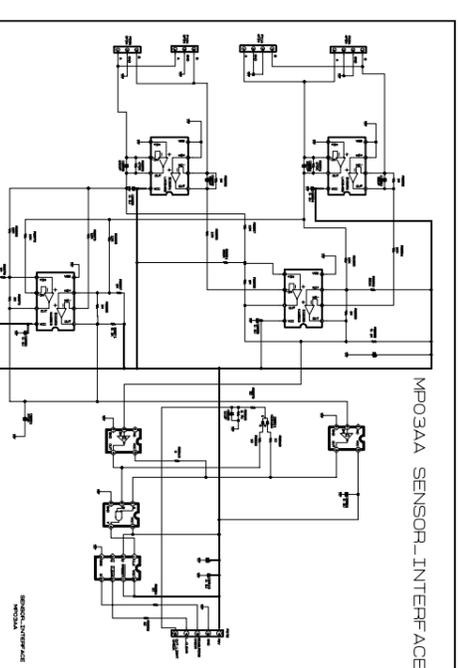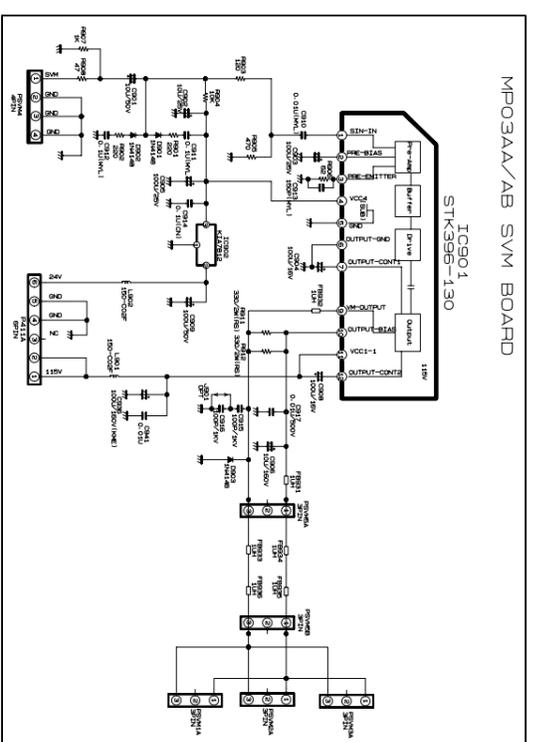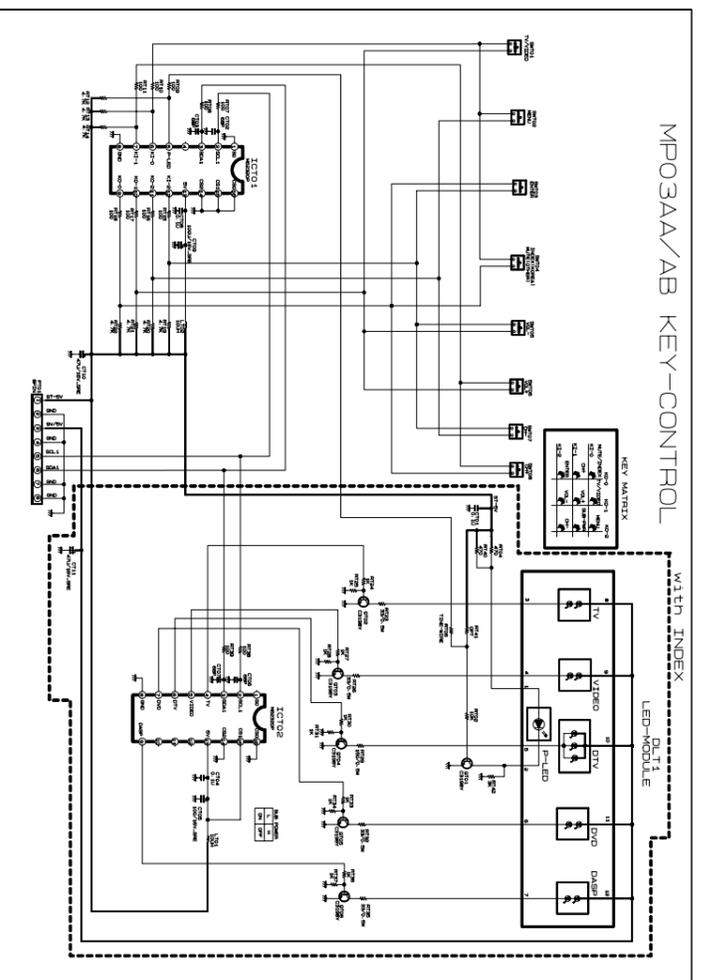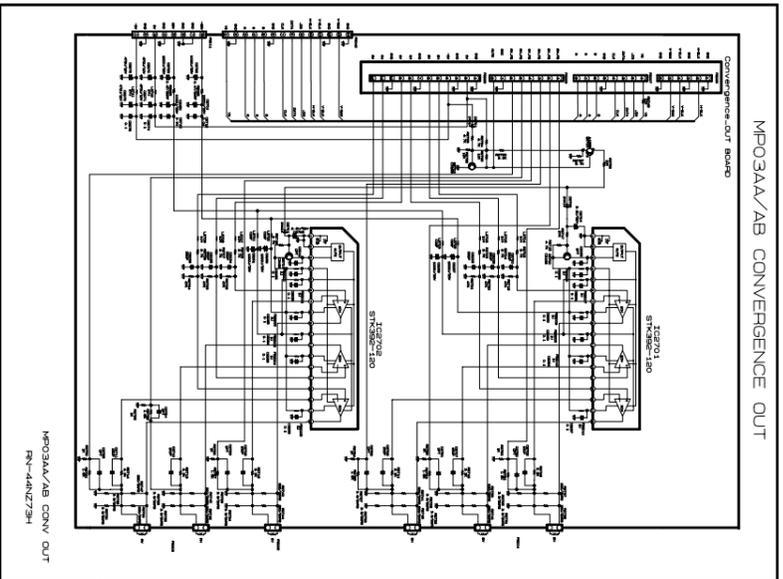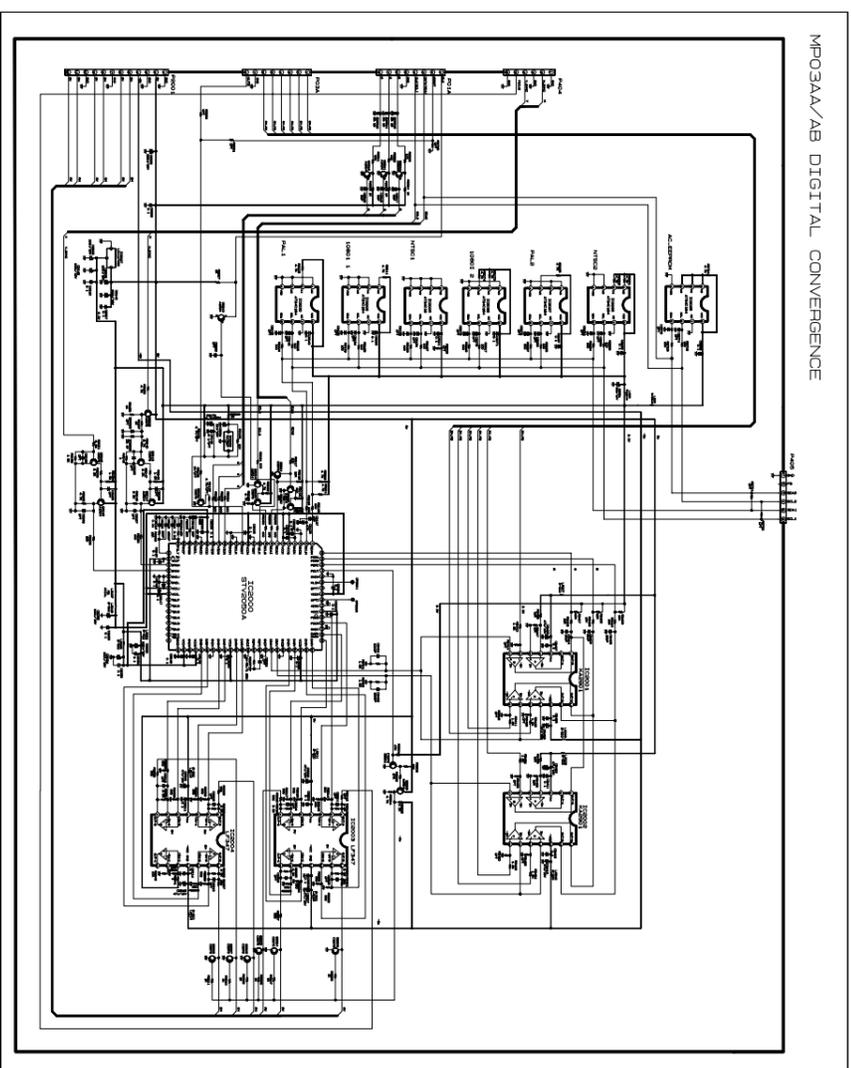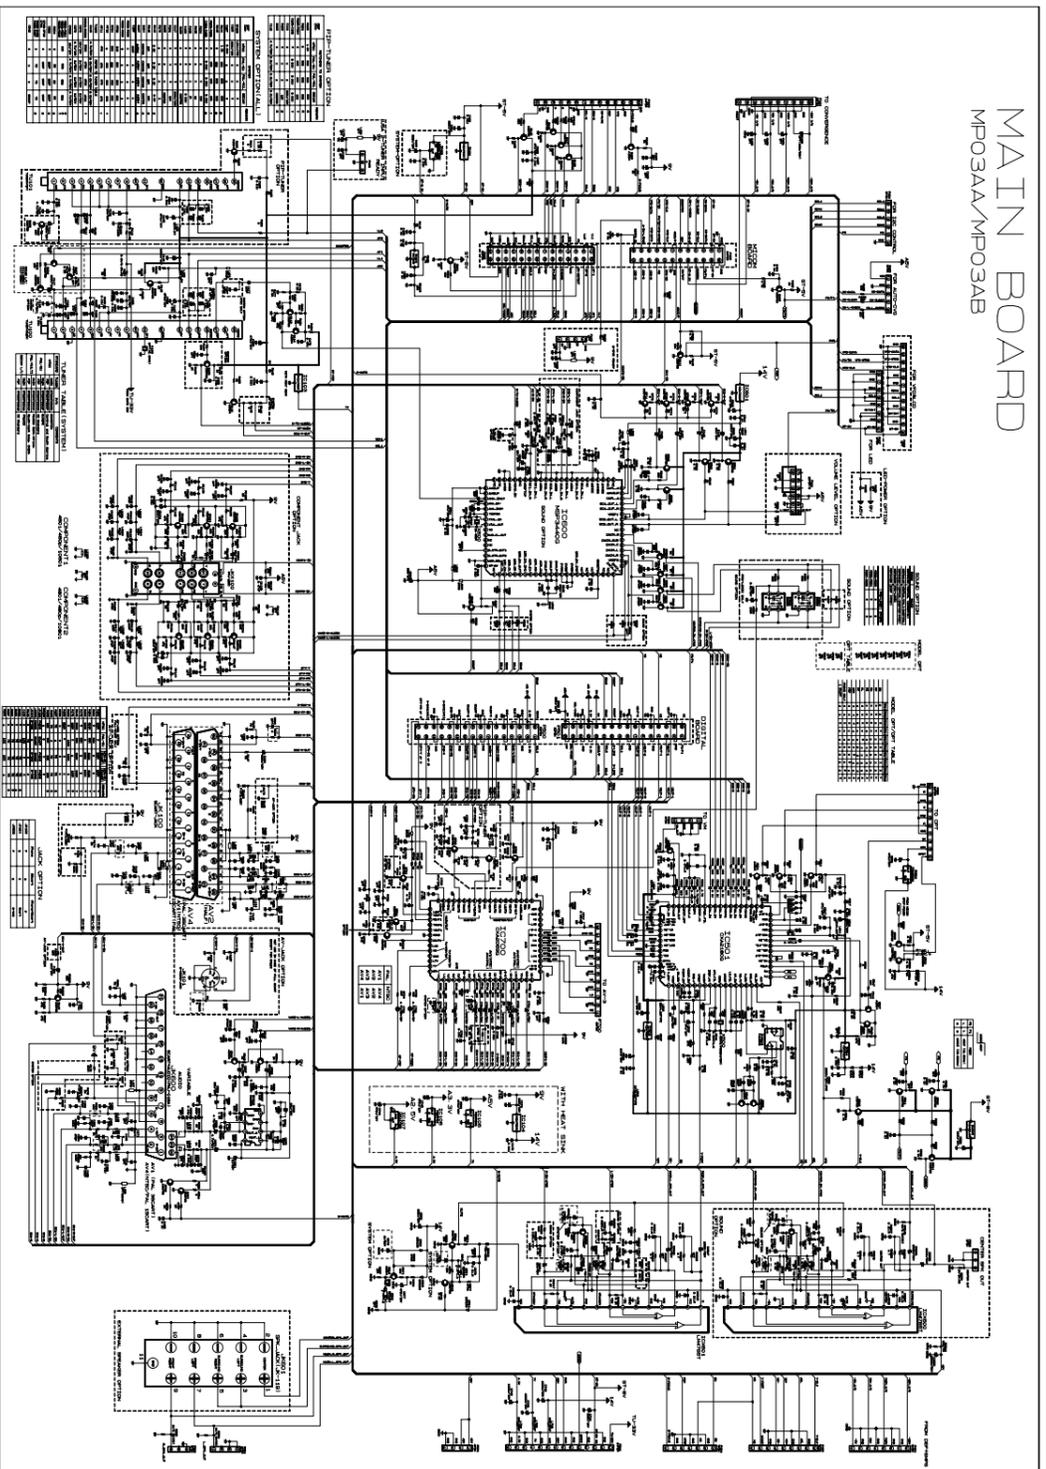


DIGITAL BOARD
MP03AA/MP03AB

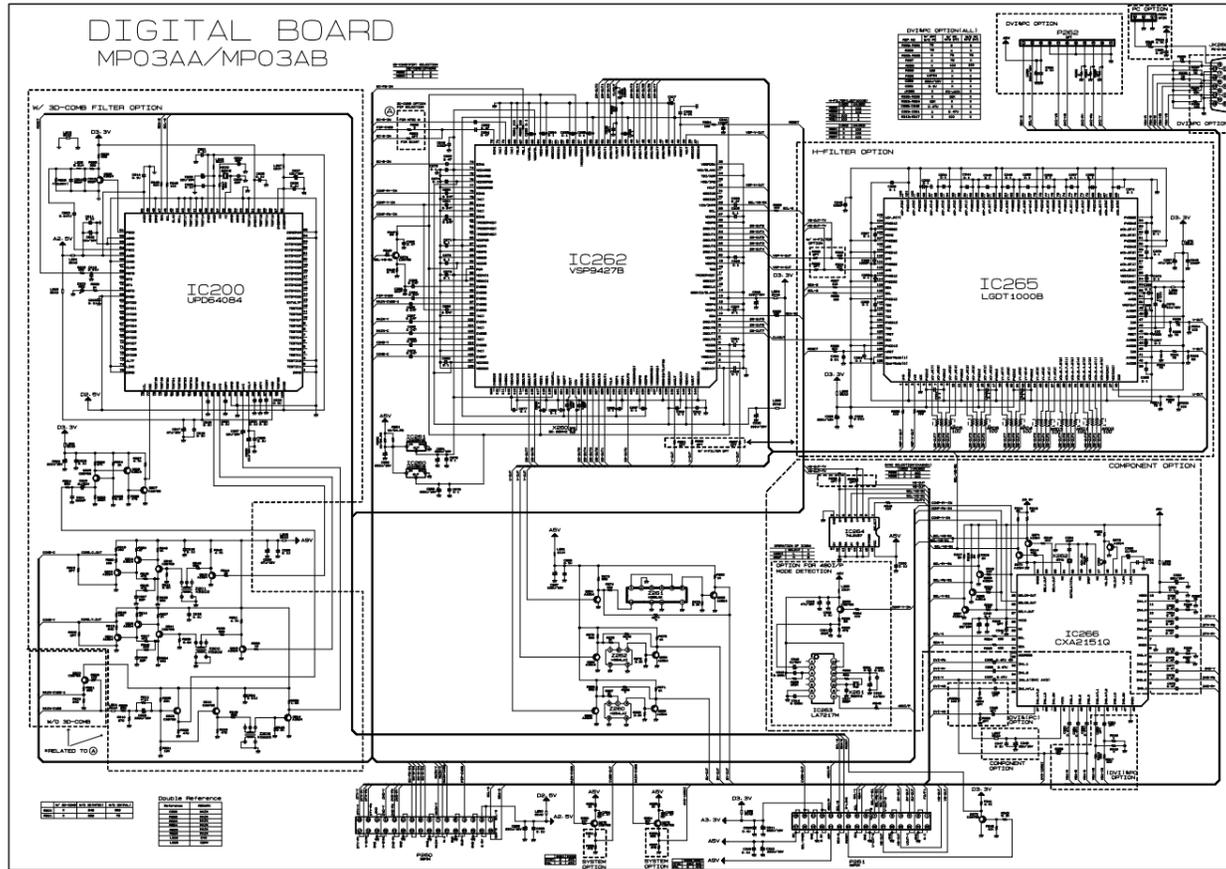


SMPS+DEF B/D MP-03AA/AB

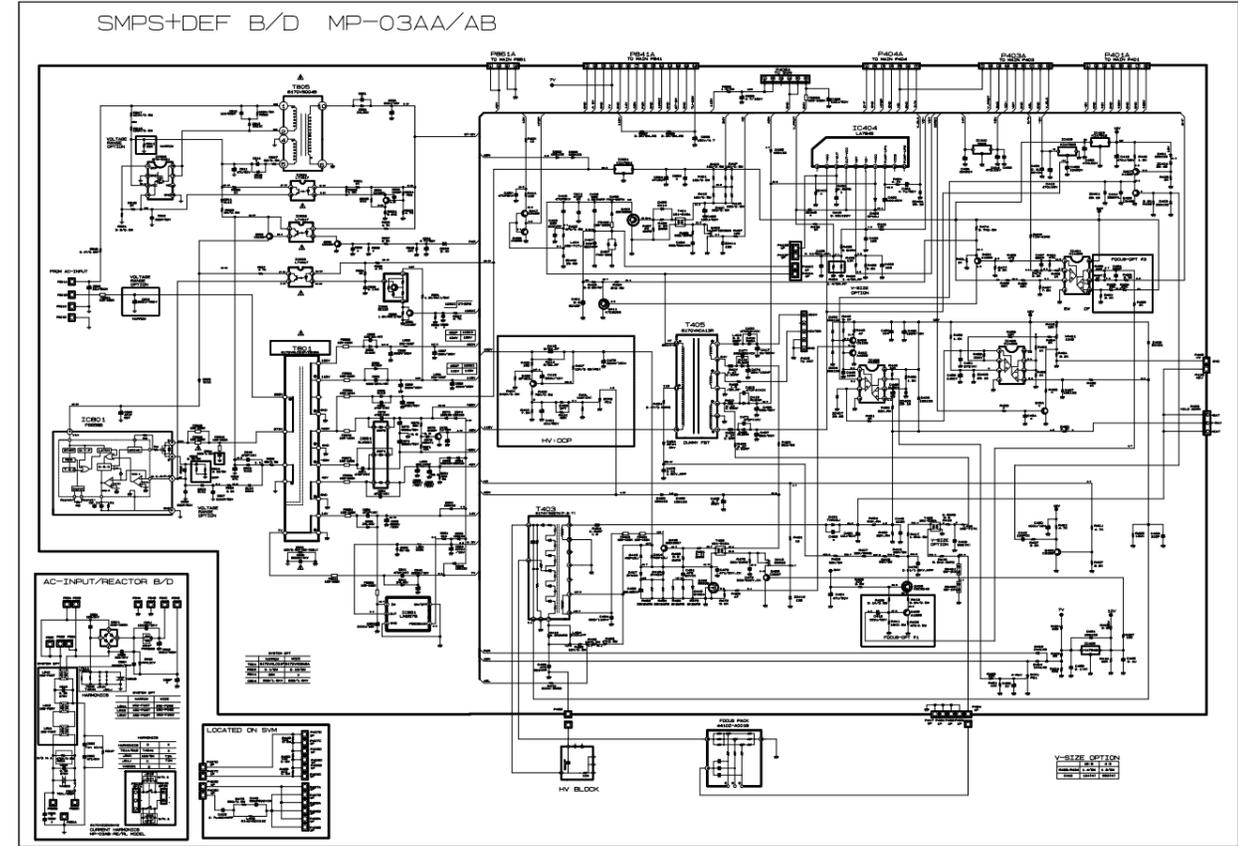


MICOM BOARD
MP-03AB PAL

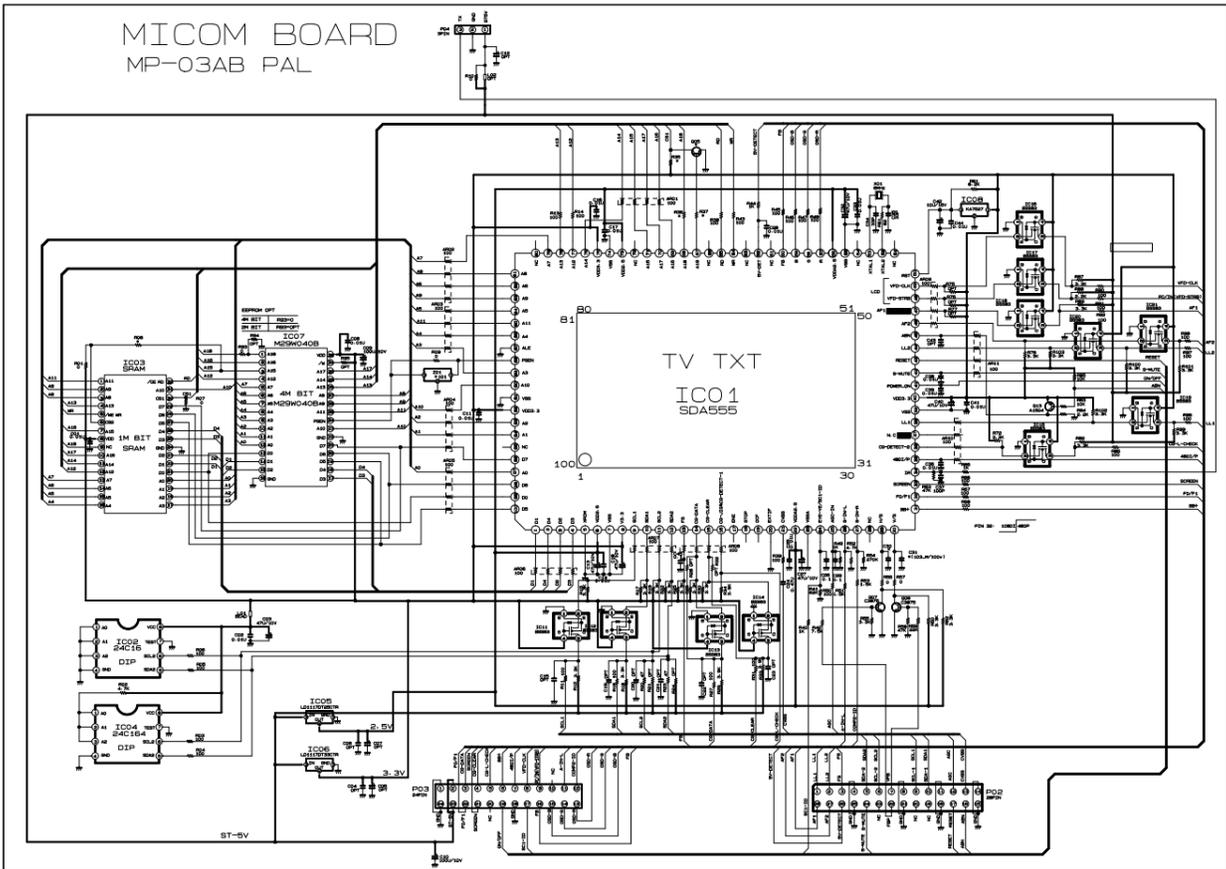

MP03AA/AB CPT BOARD

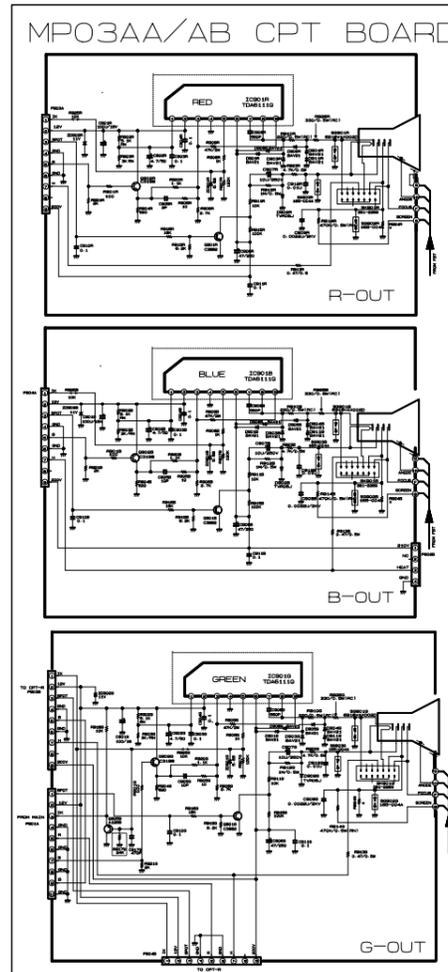

MP03AA/MP03AB SIDE-AV. PRE-AMP BOARD

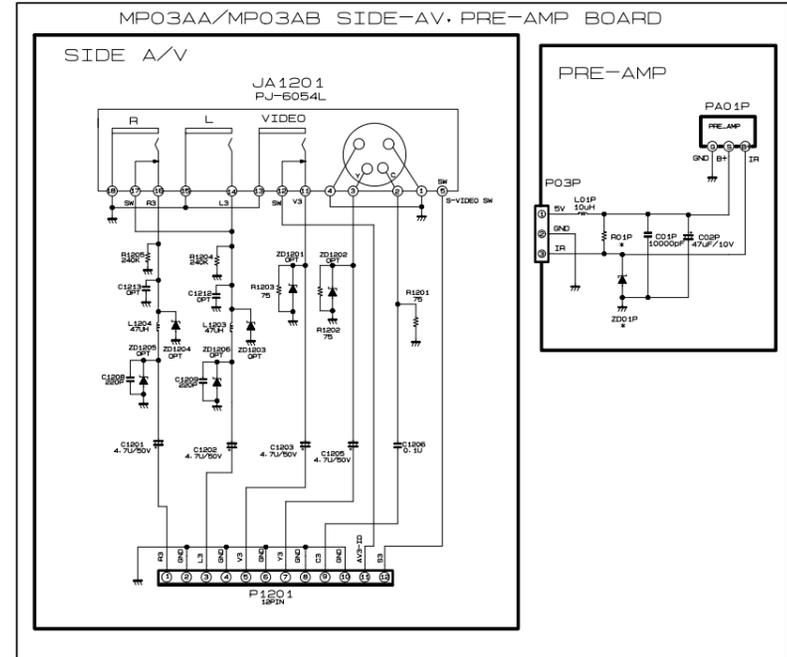

4. Dati regolazione immagine (IC:CXA21802)

| Menu | Descrizione | PAL |
|-------|---|-----|
| R-Y R | R-Y axis + (R-Y) Impostazione component | 07 |
| R-Y B | R-Y axis + (B-Y) Impostazione component | 0A |
| G-Y R | G-Y axis + (R-Y) Impostazione component | 08 |
| G-Y B | G-Y axis + (B-Y) Impostazione component | 06 |
| UP-BL | VBLK controllo posizione top immagine, quando VBLK_SW = 1 | 00 |
| LO-BL | VBLK controllo posizione inferiore immagine, quando VBLK_SW=1 | 00 |
| EW-DC | EW_DRV commutatore livello basso segnale DC | 00 |
| UP-UP | regolazione compensazione posizione distorsione orizzontale pin per il bordo estremo superiore dell'immagine | 00 |
| LO-UP | regolazione compensazione posizione distorsione orizzontale pin per il bordo estremo inferiore dell'immagine | 00 |
| UP-UG | regolazione compensazione ammontare distorsione orizzontale pin per il bordo inferiore dell'immagine | 00 |
| LO-UG | regolazione compensazione ammontare distorsione orizzontale pin per il bordo superiore dell'immagine | 00 |
| UC-PO | regolazione compensazione di polarità distorsione orizzontale pin per i bordi inferiore e superiore dell'immagine | 00 |
| VB-SW | VBLK Commutatore impostazione modo periodo | 00 |
| CLP-S | Impostazione fase periodo dell'impulso clamp interno | 00 |
| NON-I | Commutatore modo Interlaccio/progressivo | 00 |
| AFC-M | loop di controllo guadagno AFC | 01 |
| L-BLK | HBLK controllo ampiezza parte sinistra immagine quando HBLK_SW =1 | 39 |
| R-BLK | HBLK controllo ampiezza parte destra immagine quando HBLK_SW =1 | 0F |
| CLP-P | Controllo fase impulso internal clamp | 00 |
| CLP-G | Switch for gating internal clamp pulse with input HSYNC | 00 |
| HB-SW | HBLK Controllo ampiezza commutatore ON/OFF durante software 4:3 nel modo visione totale di immagine sul CRT 16:9 | 01 |
| ZOOSW | Modo zoom commutatore ON/OFF per CRT 16:9 | 00 |
| JMPSW | Modo riferimento jump pulse commutatore ON/OFF | 00 |
| VFREQ | Impostazione frequenza verticale | 02 |
| VCOMP | Impostazione ammontare della compensazione fluttuazione alta tensione dimensione verticale dell'immagine | 00 |
| HCOMP | Impostazione ammontare della compensazione fluttuazione alta tensione dimensione orizzontale dell'immagine | 00 |
| AKBTM | AKB Impostazione tempo impulso di riferimento Bch | 07 |
| BLK-O | Commutatore Blanking ON/OFF Quando AKBOFF=1 | 00 |
| AKBOF | Impostazione cut-off automatico/ cut-off automatico | 00 |

5. CXA2151Q Oggetto di regolazione

| Menu | Description | PAL |
|-------|---|-----|
| INPUT | Selezione i quattro sistemi di ingresso IN1 a IN4 | 0 |
| MAT-O | Selezione il tipo di matrice di conversione | 0 |
| VFREQ | Selezione la frequenza del sincronismo dummy in uscita al SELV_OUT(pin23) | 0 |
| SELS1 | Selezione il tipo di segnale in ingresso al IN1_H/L1(pin36) and IN1_V/L2(pin37) | 0 |
| SELS2 | Selezione il tipo di segnale in ingresso al IN1_H/L1(pin44) and IN1_V/L2(pin45) | 1 |
| FIX-S | Commuta il modo del circuito di identificazione del sincronismo | 0 |
| V-TC | Imposta la costante di tempo di separazione del sincronismo V | 0 |
| H-WID | Imposta l'ampiezza dell'impulso in uscita SELH_OUT (pin22) | 0 |
| HSEPS | Imposta il metodo di separazione del sincronismo. (Valido per ingresso YG_IN(Pin16)) | 0 |
| HD-DC | Imposta il costante di tempo di separazione del sincronismo H all'ingresso YG_IN (Pin16) | 0 |
| HYSW | Commuta il segnale in uscita al YG_OUT (Pin 15) | 0 |
| HS-MA | Imposta quando sommare il H-sync con il V-sync al SELH_OUT(Pin22) | 0 |
| MACRO | Commuta per eliminare il segnale macrovision dal segnale 525P al SELH_OUT (Pin22). Questo è valido solo quando HFREQ =1 | 0 |
| SELDU | Questo commutatore imposta quando inviare in uscita il segnale di sincronismo separato o il sincronismo dummy al SELH_OUT (Pin22) e SELV_OUT(Pin23) | 0 |
| CLK-S | Questo commutatore seleziona il clock per il contatore di sincronismo | 0 |
| G-SEL | Questo commutatore imposta il guadagno o il mute del segnale in uscita al SELCR_OUT (Pin25), SELCB_OUT(Pin26) e SELV_OUT (pin27) | 1 |
| CBGAI | SELCB_OUT(Pin26) Controllo guadagno | 0 |
| CRGAI | SELCR_OUT(Pin25) Controllo guadagno | 0 |
| YGAIN | SELV_OUT(Pin27) Controllo guadagno | 0 |
| HFREQ | Selezione la frequenza dell'uscita del sincronismo dummy SELH_OUT(Pin22) | 1 |

6. Regolazione dati OPZIONALI
Opzione 1

| No | Item | Specification | Remark |
|----|---------|--|---|
| 1 | 200PR | 1 : 200 PROGRAM (SOLO CINA) 0 : 100 PROGRAM (OTHER CONTRIES) | 1 : LIST no operazione 0 : LIST operazione |
| 2 | TSEAR | 1 : CON RICERCA TURBO 0 : SENZA RICERCA TURBO (FRANCIA) | 1 : RT/ RE 2 : RL |
| 3 | I/II SR | 1 : SALVA CONDIZIONE DOPPIO SUONO (RT) 0 : NON SALVA CONDIZ. DOPPIO SUONO(RE/RL) | 1 : NON - EU 2 : EU |
| 4 | TOP | 1 : TOP + FLOF TEXT 0 : FLOF TEXT | 1 : Dutch/ Swiss/ Austria/ Sweden/ Norway/ Finland/ Poland/ Italy/ Spain/ Benelux 2 : ALTRI |
| 5 | Eye | 1 : CON DIGITAL EYE 0 : SENZA DIGITAL EYE | |
| 6 | A2 ST | 1 : CON FM STEREO 0 : SENZA FM STEREO | 1 : ALL 0 : |
| 7 | SYS | 0 : BG/ I/ DK (RE MODELIO) 1 : BG/ L (RL MODELLO) 2 : BG/ I/ DK/ M (RT MODELLO) 3 : RISERVATO | 0 : BG/ I/ DK 1 : 2 : 3 : |

Opzione 2

| No | oggetto | Specificazione | Annotazione |
|----|---------|---|--|
| 1 | ACMS | 1 : VISUALIZZAZIONE NOME CANALE 0 : SENZA VISUALIZZAZIONE NOME CANALE | 1 : TUTTI I PAESI ECCETTO AUSTRALIA 0 : AUSTRALIA |
| 2 | VOL | 1 : CURVA AUDIO PESATA (ASIA, MIDDLE EAST ASIA) 0 : CURVA AUDIO STANDARD (ALTRI PAESI) | |
| 3 | Wide | 1 : 16 : 9 0 : 4 : 3 | 1 : NZ TOOL 2 : NA TOOL |
| 4 | EU | 1 : RE/RL MODELLO 0 : RT MODELLO | AV MODE decisione sequenza |
| 5 | Compo | 1 : CON INGRESSO COMPONENT 0 : SENZA INGRESSO COMPONENT | |
| 6 | 1080i | 1 : CON INGRESSO1080i 0 : SENZA INGRESSO 1080i | |
| 7 | PC | 1 : CON INGRESSO PC VGA 0 : SENZA INGRESSO PC VGA | |
| 8 | DRP | 1 : CON FILTRO H 0 : SENZA FILTRO H | |

Opzione 3

| No | oggetto | Specificazione | Annotazione |
|----|---------|---|--|
| 1 | PIP | 1 : CON PIP 0 : SENZA PIP | |
| 2 | INDEX | 1 : CON INDEX 0 : SENZA INDEX | |
| 3 | HDEV | 1 : MODULAZIONE AD ALTA DEVIATIONE (CINA) 0 : MODULAZIONE SUONO RF NORMALE (ALTRI) | 1 : China/ Saudi/ Indo/ Indonesia 0 : |
| 4 | D - PRO | 1 : CON DOLBY PRO LOGIC 0 : SENZA DOLBY PRO LOGIC | 1 : 0 : ALL Model |
| 5 | D - VIR | 1 : CON DOLBY VIRTUAL SURROUND 0 : SENZA DOLBY VIRTUAL SURROUND | 1 : 0 : '4' SOLO MODELLO SERIE |
| 6 | TEXT | 1 : CON TELETEXT 0 : SENZA TELETEXT | |
| 7 | SCART | 1 : RF 54% INGRESSO MODULAZIONE 0 : RF 100% INGRESSO MODULAZIONE | |
| 8 | CH + AU | 1 : CINA + AUSTRALIA TAVOLA CANALI 0 : ALTRI PAESI TAVOLA CANALI | |

Opzione 4

| No | Item | Specification | Remark |
|----|---------|---|--|
| 1 | AV4 - S | 1 : CON TIPO SCART 0 : CON TIPO PHONE | 1 : SCART -> over 1 0 : PHONE ONLY |
| 2 | BOOSTER | 1 : CON BOOSTER 0 : SENZA BOOSTER | |
| 3 | AV SV | 1 : SALVA L'ULTIMO AV 0 : NON SALVA L'ULTIMO AV | |
| 4 | SAV4 | 1 : CON SAV4 (RE, RL) 0 : SENZA SAV4 (RT) | 1 : 3 SCART area S-JACK 0 : 3 SCART except EU |
| 5 | EZ-AV | 1 : CON EZ-AV 0 : SENZA EZ-AV | 1 : RT 0 : Scart jack (RE/RL) |
| 6 | B - DEF | 1 : BOOSTER DEFAULT ON DOPO RICERCA CANALI 0 : BOOSTER DEFAULT OFF DOPO RICERCA CANALI | 1 : DEFAULT "1" 0 : |

Opzione 5

| No. | Stato | Lingua | Funzione |
|------------------|--------------|-----------------|--|
| 1 | LINGUA | 0:ENG solo | English |
| | | 1:EU 5EA | English/German/French/Italy/Spanish |
| | | 2:EU ETC | Pol./Hungary/Czech/Russia/Eng |
| | | 3:GREECE | English/ Greece |
| | | 4:PARSI | English/Parsi (Iran) |
| | | 5:ARAB URDU | English/French/Arab+Urdu |
| | | 6:English+Hindi | English/Hindi |
| | | 7:English+I+M+V | English/Indonesian/Malaysian/Vietnamese |
| | | 8:English+THAI | English/Thai |
| | | 9:English+China | English/China |
| | | 0:West Europe | English/French/Swedish/Czech/German/Spanish/Italian |
| | | 1:East Europe | Polish/French/Swedish/Czech/German/Slovenian/Italian/Rumanian |
| | | 2:Turkey EU | English/French/Swedish/Turkish/German/Spanish/Italian |
| | | 3:EAST EU2 | English/Hungarian/Serbian/Czech/German/Polish/Spanish/Italian/ Rumanian |
| | | 4:Cyrillic 1 | |
| | | 5:Cyrillic 2 | |
| 6:Cyrillic 3 | Russia | | |
| 7:Turkey/Greek 1 | | | |
| 8:Turkey/Greek 2 | | | |
| 9:Turkey/Greek 3 | Eng./ Greece | | |
| 10:Arab/France | | | |
| 11:Arab/English | | | |
| 12:Arab/Hebrew 1 | | | |
| 13:Arab/Hebrew 2 | | | |
| 14:Farsi/English | | | |
| 15:Farsi/France | | | |
| 16:Farsi all | | | |

SVC. SHEET : 3854VA0124A-S1



P/NO : 3828VD0133U

Nov, 2003
Printed in Korea