

## SECTION 5

### EXPLODED VIEWS

NOTE:

- The mechanical parts with no reference number in the exploded views are not supplied.
- Items marked “\*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- Abbreviation  
AUS : Australian model

- -XX and -X mean standardized parts, so they may have some difference from the original one.
- Color Indication of Appearance Parts  
Example :  


KNOB, BALANCE (WHITE) ... (RED)
 

↑  
Parts Color

↑  
Cabinet's Color
- Accessories are given in the last of this parts list.


The components identified by mark  or dotted line with mark  are critical for safety.  
Replace only with part number specified.

## 5-1. CASE SECTION

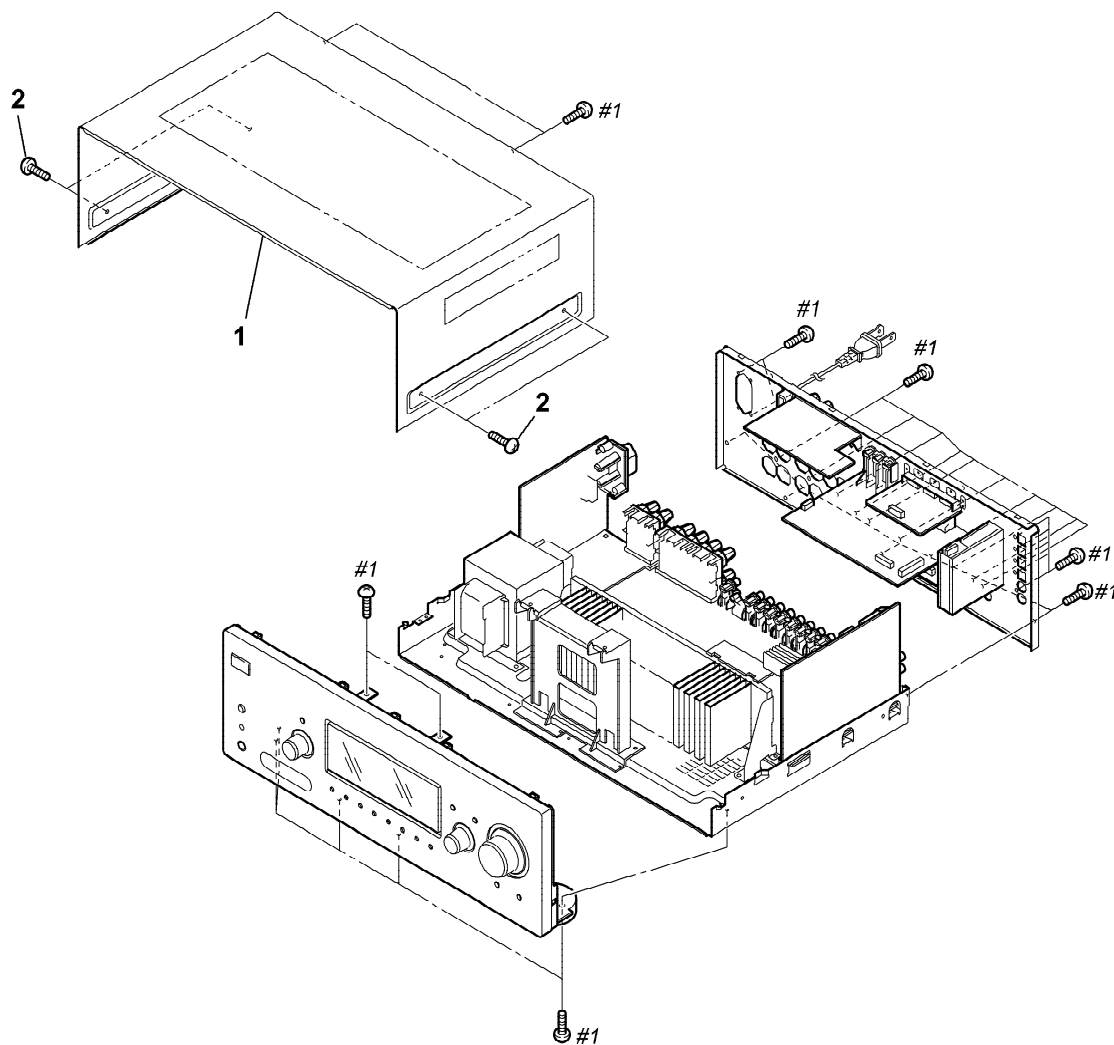


| <u>Ref. No.</u> | <u>Part No.</u> | <u>Description</u>                   | <u>Remark</u> | <u>Ref. No.</u> | <u>Part No.</u> | <u>Description</u>                     | <u>Remark</u> |
|-----------------|-----------------|--------------------------------------|---------------|-----------------|-----------------|----------------------------------------|---------------|
| 1               | 2-661-145-11    | CASE (BLACK)...(BLACK)               |               | 2               | 3-363-099-11    | SCREW (CASE 3 TP2) (SILVER)...(SILVER) |               |
| 1               | 2-661-145-31    | CASE (SILVER)...(SILVER)             |               | #1              | 7-685-646-79    | SCREW +BVTP 3X8 TYPE2 IT-3             |               |
| 2               | 3-363-099-02    | SCREW (CASE 3 TP2) (BLACK)...(BLACK) |               |                 |                 |                                        |               |

## 5-2. FRONT PANEL SECTION

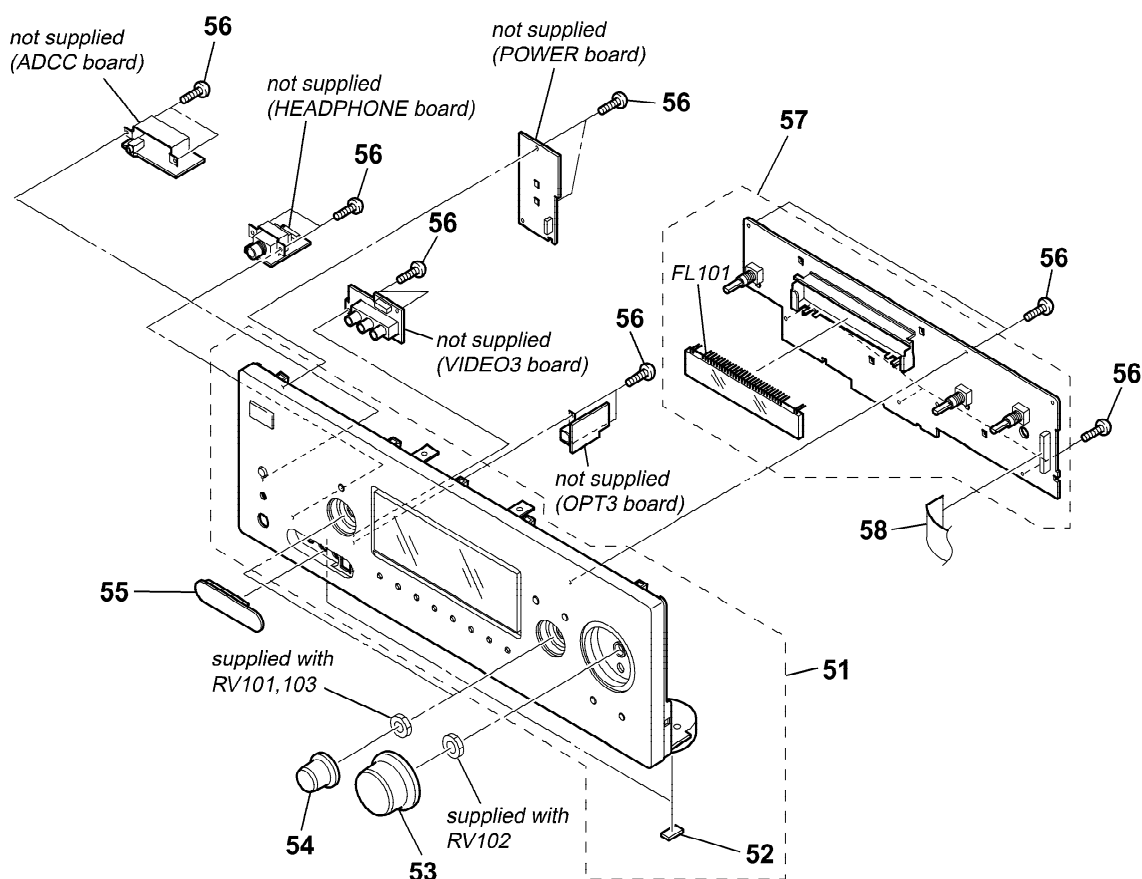


| Ref. No. | Part No.     | Description                              | Remark   | Ref. No. | Part No.     | Description                     | Remark |
|----------|--------------|------------------------------------------|----------|----------|--------------|---------------------------------|--------|
| 51       | X-2109-280-1 | FRONT PANEL ASSY (BLACK)...(BLACK)       | (AEP,UK) | 54       | 2-661-141-01 | KNOB (MENU) (BLACK)...(BLACK)   |        |
| 51       | X-2109-281-1 | FRONT PANEL ASSY (SILVER)...(SILVER)     | (AEP,UK) | 54       | 2-661-141-11 | KNOB (MENU) (SILVER)...(SILVER) |        |
| 51       | X-2109-285-1 | FRONT PANEL ASSY (BLACK)...(BLACK) (AUS) |          | 55       | 2-666-844-01 | LID (BLACK)...(BLACK)           |        |
| 52       | 4-977-358-01 | CUSHION                                  |          | 55       | 2-666-844-11 | LID (SILVER)...(SILVER)         |        |
| 53       | 2-661-142-01 | KNOB (VOLUME) (BLACK)...(BLACK)          |          | 56       | 3-087-053-01 | +BVTP 2.6 (3CR)                 |        |
| 53       | 2-661-142-11 | KNOB (VOLUME) (SILVER)...(SILVER)        |          | 57       | A-1181-226-A | DISPLAY BOARD, COMPLETE         |        |
|          |              |                                          |          | 58       | 1-829-023-11 | WIRE (FLAT TYPE) (23 CORE)      |        |
|          |              |                                          |          | FL101    | 1-519-866-01 | VACUUM FLUORESCENT DISPLAY      |        |

5-3. BACK PANEL SECTION

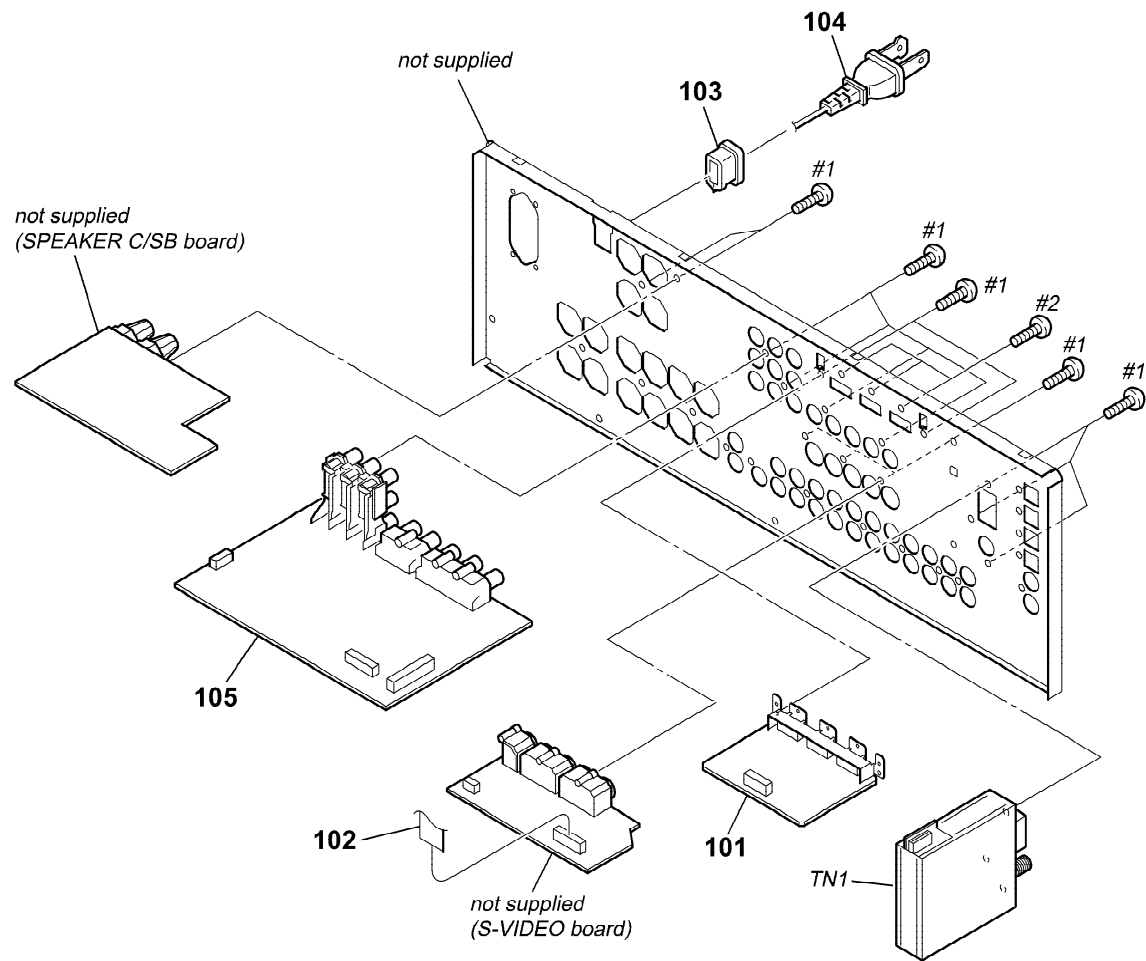

| Ref. No. | Part No.     | Description                | Remark | Ref. No. | Part No.     | Description                   | Remark |
|----------|--------------|----------------------------|--------|----------|--------------|-------------------------------|--------|
| 101      | A-1158-394-A | HDMI SW BOARD, COMPLETE    |        | 105      | A-1181-229-A | VIDEO BOARD, COMPLETE         |        |
| 102      | 1-828-973-11 | WIRE (FLAT TYPE) (13 CORE) |        | TN1      | 1-693-676-11 | TUNER PACK (ANTENNA) (AEP,UK) |        |
| * 103    | 3-703-244-00 | BUSHING (2104), CORD       |        | TN1      | 1-693-678-11 | TUNER PACK (ANTENNA) (AUS)    |        |
| △ 104    | 1-777-071-83 | CORD, POWER (AEP,UK)       |        | #1       | 7-685-646-79 | SCREW +BVTP 3X8 TYPE2 IT-3    |        |
| △ 104    | 1-827-295-22 | CORD, POWER (AUS)          |        | #2       | 7-685-871-01 | SCREW +BVTT 3X6 (S)           |        |

## 5-4. CHASSIS SECTION

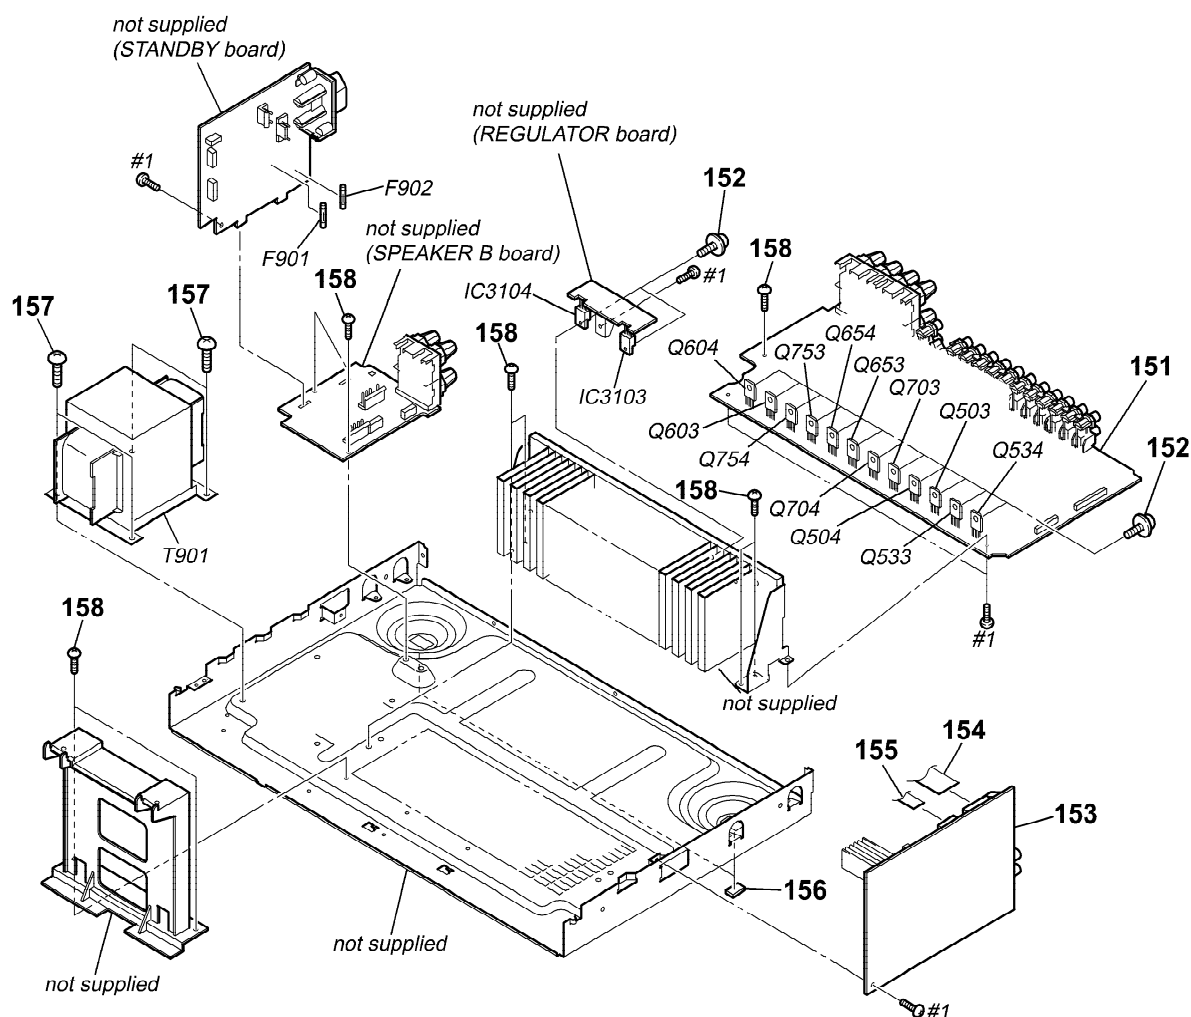

| Ref. No. | Part No.     | Description                         | Remark | Ref. No. | Part No.     | Description                | Remark |
|----------|--------------|-------------------------------------|--------|----------|--------------|----------------------------|--------|
| 151      | A-1181-223-A | MAIN BOARD, COMPLETE                |        | Q503     | 6-702-390-01 | TRANSISTOR MN2488-OPY-MK   |        |
| 152      | 3-905-609-01 | SCREW (TRANSISTOR)                  |        | Q504     | 6-702-391-01 | TRANSISTOR MP1620-OPY-MK   |        |
| 153      | A-1181-228-A | DIGITAL BOARD, COMPLETE (AEP,UK)    |        | Q533     | 6-702-390-01 | TRANSISTOR MN2488-OPY-MK   |        |
| 153      | A-1181-376-A | DIGITAL BOARD, COMPLETE (AUS)       |        | Q534     | 6-702-391-01 | TRANSISTOR MP1620-OPY-MK   |        |
| 154      | 1-829-013-11 | WIRE (FLAT TYPE) (21 CORE)          |        | Q603     | 6-702-390-01 | TRANSISTOR MN2488-OPY-MK   |        |
| 155      | 1-828-963-11 | WIRE (FLAT TYPE) (11 CORE) (AUS)    |        | Q604     | 6-702-391-01 | TRANSISTOR MP1620-OPY-MK   |        |
| 155      | 1-828-980-11 | WIRE (FLAT TYPE) (15 CORE) (AEP,UK) |        | Q653     | 6-702-390-01 | TRANSISTOR MN2488-OPY-MK   |        |
| 156      | 4-977-358-01 | CUSHION                             |        | Q654     | 6-702-391-01 | TRANSISTOR MP1620-OPY-MK   |        |
| 157      | 4-249-675-01 | +BV SUMITITE S 4X6 ROUND            |        | Q703     | 6-702-390-01 | TRANSISTOR MN2488-OPY-MK   |        |
| 158      | 3-077-331-21 | +BV 3 (3-CR)                        |        | Q704     | 6-702-391-01 | TRANSISTOR MP1620-OPY-MK   |        |
| △ F901   | 1-532-464-33 | FUSE (T2.5AL/250V)                  |        | Q753     | 6-702-390-01 | TRANSISTOR MN2488-OPY-MK   |        |
| △ F902   | 1-532-464-33 | FUSE (T2.5AL/250V)                  |        | Q754     | 6-702-391-01 | TRANSISTOR MP1620-OPY-MK   |        |
| IC3103   | 8-759-071-48 | IC TA7807S                          |        | △ T901   | 1-439-550-21 | TRANSFORMER, POWER (MAIN)  |        |
| IC3104   | 8-759-071-47 | IC TA79007S                         |        | #1       | 7-685-646-79 | SCREW +BVTP 3X8 TYPE2 IT-3 |        |

SECTION 6  
ELECTRICAL PARTS LIST

NOTE:

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- -XX and -X mean standardized parts, so they may have some difference from the original one.
- RESISTORS  
All resistors are in ohms.  
METAL: Metal-film resistor.  
METAL OXIDE: Metal oxide-film resistor.  
F: nonflammable
- Items marked “\*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

- SEMICONDUCTORS  
In each case, u :  $\mu$ , for example:  
uA.. :  $\mu$ A.. uPA.. :  $\mu$ PA..  
uPB.. :  $\mu$ PB.. uPC.. :  $\mu$ PC.. uPD.. :  $\mu$ PD..
- CAPACITORS  
uF :  $\mu$ F
- COILS  
uH :  $\mu$ H
- Abbreviation  
AUS : Australian model

The components identified by mark  $\Delta$  or dotted line with mark  $\Delta$  are critical for safety.  
Replace only with part number specified.

When indicating parts by reference number, please include the board.

| Ref. No.      | Part No.     | Description                      | Remark  |     |      |  |
|---------------|--------------|----------------------------------|---------|-----|------|--|
| ADCC BOARD    |              |                                  |         |     |      |  |
| *****         |              |                                  |         |     |      |  |
| < CAPACITOR > |              |                                  |         |     |      |  |
| C2001         | 1-128-809-11 | CERAMIC                          | 100PF   | 5%  | 50V  |  |
| C2002         | 1-126-160-11 | ELECT                            | 1uF     | 20% | 50V  |  |
| C2003         | 1-127-882-31 | CERAMIC                          | 0.033uF | 10% | 50V  |  |
| C2005         | 1-128-803-11 | CERAMIC                          | 33PF    | 5%  | 50V  |  |
| C2006         | 1-126-160-11 | ELECT                            | 1uF     | 20% | 50V  |  |
|               |              |                                  |         |     |      |  |
| C2008         | 1-128-806-11 | CERAMIC                          | 56PF    | 5%  | 50V  |  |
| C2010         | 1-127-882-31 | CERAMIC                          | 0.033uF | 10% | 50V  |  |
| C2011         | 1-127-880-11 | CERAMIC                          | 0.022uF | 10% | 50V  |  |
| C2012         | 1-127-880-11 | CERAMIC                          | 0.022uF | 10% | 50V  |  |
| C2013         | 1-126-160-11 | ELECT                            | 1uF     | 20% | 50V  |  |
|               |              |                                  |         |     |      |  |
| C2014         | 1-124-465-00 | ELECT                            | 0.47uF  | 20% | 50V  |  |
| C2018         | 1-127-888-11 | CERAMIC                          | 0.1uF   | 10% | 50V  |  |
| < CONNECTOR > |              |                                  |         |     |      |  |
| CNP2000       | 1-784-921-11 | PIN, CONNECTOR 4P                |         |     |      |  |
| < DIODE >     |              |                                  |         |     |      |  |
| D2013         | 8-719-991-33 | DIODE 1SS133T-77                 |         |     |      |  |
| D2014         | 8-719-991-33 | DIODE 1SS133T-77                 |         |     |      |  |
| < IC >        |              |                                  |         |     |      |  |
| IC2000        | 8-759-167-88 | IC NJM4565D                      |         |     |      |  |
| < JACK >      |              |                                  |         |     |      |  |
| J2000         | 1-820-056-11 | JACK (SMALL TYPE) (AUTO CAL MIC) |         |     |      |  |
| < RESISTOR >  |              |                                  |         |     |      |  |
| R2000         | 1-247-831-11 | CARBON                           | 1K      | 5%  | 1/4W |  |
| R2001         | 1-249-429-11 | CARBON                           | 10K     | 5%  | 1/4W |  |
| R2003         | 1-249-429-11 | CARBON                           | 10K     | 5%  | 1/4W |  |
| R2005         | 1-247-903-00 | CARBON                           | 1M      | 5%  | 1/4W |  |
| R2006         | 1-247-831-11 | CARBON                           | 1K      | 5%  | 1/4W |  |
|               |              |                                  |         |     |      |  |
| R2007         | 1-249-429-11 | CARBON                           | 10K     | 5%  | 1/4W |  |
| R2008         | 1-247-897-11 | CARBON                           | 560K    | 5%  | 1/4W |  |
| R2010         | 1-249-429-11 | CARBON                           | 10K     | 5%  | 1/4W |  |
| R2015         | 1-249-435-11 | CARBON                           | 33K     | 5%  | 1/4W |  |
| R2016         | 1-249-431-11 | CARBON                           | 15K     | 5%  | 1/4W |  |
|               |              |                                  |         |     |      |  |
| R2017         | 1-249-421-11 | CARBON                           | 2.2K    | 5%  | 1/4W |  |
| R2018         | 1-249-418-11 | CARBON                           | 1.2K    | 5%  | 1/4W |  |

| Ref. No.      | Part No.     | Description                      | Remark |        |      |
|---------------|--------------|----------------------------------|--------|--------|------|
| R2019         | 1-249-421-11 | CARBON                           | 2.2K   | 5%     | 1/4W |
| *****         |              |                                  |        |        |      |
|               |              |                                  |        |        |      |
| A-1181-228-A  |              | DIGITAL BOARD, COMPLETE (AEP,UK) |        |        |      |
| A-1181-376-A  |              | DIGITAL BOARD, COMPLETE (AUS)    |        |        |      |
| *****         |              |                                  |        |        |      |
|               |              |                                  |        |        |      |
| 7-685-646-79  |              | SCREW +BVTP 3X8 TYPE2 IT-3       |        |        |      |
|               |              |                                  |        |        |      |
| < CAPACITOR > |              |                                  |        |        |      |
|               |              |                                  |        |        |      |
| C1001         | 1-126-925-11 | ELECT                            | 470uF  | 20%    | 10V  |
| C1002         | 1-100-566-11 | CERAMIC CHIP                     | 0.1uF  | 10%    | 25V  |
| C1004         | 1-100-566-11 | CERAMIC CHIP                     | 0.1uF  | 10%    | 25V  |
| C1005         | 1-100-566-11 | CERAMIC CHIP                     | 0.1uF  | 10%    | 25V  |
| C1021         | 1-100-566-11 | CERAMIC CHIP                     | 0.1uF  | 10%    | 25V  |
|               |              |                                  |        |        |      |
| C1022         | 1-126-925-11 | ELECT                            | 470uF  | 20%    | 10V  |
| C1031         | 1-100-566-11 | CERAMIC CHIP                     | 0.1uF  | 10%    | 25V  |
| C1032         | 1-126-925-11 | ELECT                            | 470uF  | 20%    | 10V  |
| C1045         | 1-162-905-11 | CERAMIC CHIP                     | 1PF    | 0.25PF | 50V  |
| C1046         | 1-100-566-11 | CERAMIC CHIP                     | 0.1uF  | 10%    | 25V  |
|               |              |                                  |        |        |      |
| C1047         | 1-104-662-11 | ELECT                            | 22uF   | 20%    | 25V  |
| C1063         | 1-100-566-11 | CERAMIC CHIP                     | 0.1uF  | 10%    | 25V  |
| (AEP,UK)      |              |                                  |        |        |      |
| C1064         | 1-126-947-11 | ELECT                            | 47uF   | 20%    | 35V  |
| (AEP,UK)      |              |                                  |        |        |      |
| C1100         | 1-100-566-11 | CERAMIC CHIP                     | 0.1uF  | 10%    | 25V  |
| C1102         | 1-100-566-11 | CERAMIC CHIP                     | 0.1uF  | 10%    | 25V  |
|               |              |                                  |        |        |      |
| C1103         | 1-126-947-11 | ELECT                            | 47uF   | 20%    | 35V  |
| C1104         | 1-216-864-11 | SHORT CHIP                       | 0      |        |      |
| C1105         | 1-216-864-11 | SHORT CHIP                       | 0      |        |      |
| C1107         | 1-100-566-11 | CERAMIC CHIP                     | 0.1uF  | 10%    | 25V  |
| C1108         | 1-100-566-11 | CERAMIC CHIP                     | 0.1uF  | 10%    | 25V  |
|               |              |                                  |        |        |      |
| C1118         | 1-100-566-11 | CERAMIC CHIP                     | 0.1uF  | 10%    | 25V  |
| C1119         | 1-100-566-11 | CERAMIC CHIP                     | 0.1uF  | 10%    | 25V  |
| C1120         | 1-162-974-11 | CERAMIC CHIP                     | 0.01uF |        | 50V  |
| C1121         | 1-100-566-11 | CERAMIC CHIP                     | 0.1uF  | 10%    | 25V  |
| C1122         | 1-100-566-11 | CERAMIC CHIP                     | 0.1uF  | 10%    | 25V  |
|               |              |                                  |        |        |      |
| C1123         | 1-100-566-11 | CERAMIC CHIP                     | 0.1uF  | 10%    | 25V  |
| C1124         | 1-100-566-11 | CERAMIC CHIP                     | 0.1uF  | 10%    | 25V  |
| C1125         | 1-162-923-11 | CERAMIC CHIP                     | 47PF   | 5%     | 50V  |
| C1128         | 1-100-566-11 | CERAMIC CHIP                     | 0.1uF  | 10%    | 25V  |
| C1129         | 1-162-974-11 | CERAMIC CHIP                     | 0.01uF |        | 50V  |
|               |              |                                  |        |        |      |
| C1130         | 1-162-974-11 | CERAMIC CHIP                     | 0.01uF |        | 50V  |
| C1131         | 1-162-974-11 | CERAMIC CHIP                     | 0.01uF |        | 50V  |
| C1132         | 1-162-974-11 | CERAMIC CHIP                     | 0.01uF |        | 50V  |
| C1133         | 1-100-566-11 | CERAMIC CHIP                     | 0.1uF  | 10%    | 25V  |

| Ref. No. | Part No.     | Description  | Remark          | Ref. No. | Part No.     | Description  | Remark           |
|----------|--------------|--------------|-----------------|----------|--------------|--------------|------------------|
| C1134    | 1-126-947-11 | ELECT        | 47uF 20% 35V    | C1423    | 1-162-961-11 | CERAMIC CHIP | 330PF 10% 50V    |
| C1137    | 1-162-970-11 | CERAMIC CHIP | 0.01uF 10% 25V  | C1428    | 1-126-964-11 | ELECT        | 10uF 20% 50V     |
| C1138    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1432    | 1-162-963-11 | CERAMIC CHIP | 680PF 10% 50V    |
| C1139    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1433    | 1-162-961-11 | CERAMIC CHIP | 330PF 10% 50V    |
| C1140    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1438    | 1-126-964-11 | ELECT        | 10uF 20% 50V     |
| C1141    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1441    | 1-162-963-11 | CERAMIC CHIP | 680PF 10% 50V    |
| C1142    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1442    | 1-162-961-11 | CERAMIC CHIP | 330PF 10% 50V    |
| C1144    | 1-162-974-11 | CERAMIC CHIP | 0.01uF 50V      | C1448    | 1-126-964-11 | ELECT        | 10uF 20% 50V     |
| C1145    | 1-162-974-11 | CERAMIC CHIP | 0.01uF 50V      | C1450    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V    |
| C1146    | 1-162-974-11 | CERAMIC CHIP | 0.01uF 50V      | C1451    | 1-162-963-11 | CERAMIC CHIP | 680PF 10% 50V    |
| C1149    | 1-162-960-11 | CERAMIC CHIP | 220PF 10% 50V   | C1453    | 1-162-961-11 | CERAMIC CHIP | 330PF 10% 50V    |
| C1171    | 1-162-974-11 | CERAMIC CHIP | 0.01uF 50V      | C1454    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V    |
| C1172    | 1-162-974-11 | CERAMIC CHIP | 0.01uF 50V      | C1457    | 1-126-964-11 | ELECT        | 10uF 20% 50V     |
| C1251    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1458    | 1-126-964-11 | ELECT        | 10uF 20% 50V     |
| C1252    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1460    | 1-126-964-11 | ELECT        | 10uF 20% 50V     |
| C1253    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1462    | 1-162-963-11 | CERAMIC CHIP | 680PF 10% 50V    |
| C1254    | 1-162-960-11 | CERAMIC CHIP | 220PF 10% 50V   | C1463    | 1-162-961-11 | CERAMIC CHIP | 330PF 10% 50V    |
| C1255    | 1-162-960-11 | CERAMIC CHIP | 220PF 10% 50V   | C1468    | 1-126-964-11 | ELECT        | 10uF 20% 50V     |
| C1299    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1472    | 1-162-963-11 | CERAMIC CHIP | 680PF 10% 50V    |
| C1301    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1473    | 1-162-961-11 | CERAMIC CHIP | 330PF 10% 50V    |
| C1302    | 1-162-974-11 | CERAMIC CHIP | 0.01uF 50V      | C1478    | 1-126-964-11 | ELECT        | 10uF 20% 50V     |
| C1303    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1481    | 1-162-961-11 | CERAMIC CHIP | 330PF 10% 50V    |
| C1304    | 1-110-563-11 | CERAMIC CHIP | 0.068uF 10% 16V | C1483    | 1-162-963-11 | CERAMIC CHIP | 680PF 10% 50V    |
| C1305    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1487    | 1-162-966-11 | CERAMIC CHIP | 0.0022uF 10% 50V |
| C1306    | 1-126-947-11 | ELECT        | 47uF 20% 35V    | C1488    | 1-126-964-11 | ELECT        | 10uF 20% 50V     |
| C1308    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1491    | 1-126-964-11 | ELECT        | 10uF 20% 50V     |
| C1309    | 1-162-918-11 | CERAMIC CHIP | 18PF 5% 50V     | C1494    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V    |
| C1310    | 1-162-918-11 | CERAMIC CHIP | 18PF 5% 50V     | C1495    | 1-162-960-11 | CERAMIC CHIP | 220PF 10% 50V    |
| C1312    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1501    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V    |
| C1313    | 1-162-927-11 | CERAMIC CHIP | 100PF 5% 50V    | C1502    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V    |
| C1314    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1503    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V    |
| C1315    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1504    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V    |
| C1316    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1505    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V    |
| C1317    | 1-126-925-11 | ELECT        | 470uF 20% 10V   | C1506    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V    |
| C1351    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1507    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V    |
| C1352    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1508    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V    |
| C1353    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1509    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V    |
| C1354    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1510    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V    |
| C1355    | 1-104-662-11 | ELECT        | 22uF 20% 25V    | C1511    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V    |
| C1357    | 1-162-905-11 | CERAMIC CHIP | 1PF 0.25PF 50V  | C1513    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V    |
| C1358    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1514    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V    |
| C1359    | 1-126-916-11 | ELECT        | 1000uF 20% 6.3V | C1515    | 1-126-925-11 | ELECT        | 470uF 20% 10V    |
| C1360    | 1-162-923-11 | CERAMIC CHIP | 47PF 5% 50V     | C1516    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V    |
| C1361    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1517    | 1-126-925-11 | ELECT        | 470uF 20% 10V    |
| C1362    | 1-162-974-11 | CERAMIC CHIP | 0.01uF 50V      | C1518    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V    |
| C1401    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1519    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V    |
| C1402    | 1-126-947-11 | ELECT        | 47uF 20% 35V    | C1520    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V    |
| C1403    | 1-126-964-11 | ELECT        | 10uF 20% 50V    | C1521    | 1-162-920-11 | CERAMIC CHIP | 27PF 5% 50V      |
| C1404    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1522    | 1-162-920-11 | CERAMIC CHIP | 27PF 5% 50V      |
| C1405    | 1-162-962-11 | CERAMIC CHIP | 470PF 10% 50V   | C1525    | 1-126-925-11 | ELECT        | 470uF 20% 10V    |
| C1406    | 1-126-963-11 | ELECT        | 4.7uF 20% 50V   | C1547    | 1-162-966-11 | CERAMIC CHIP | 0.0022uF 10% 50V |
| C1407    | 1-126-963-11 | ELECT        | 4.7uF 20% 50V   | C1557    | 1-162-966-11 | CERAMIC CHIP | 0.0022uF 10% 50V |
| C1408    | 1-162-962-11 | CERAMIC CHIP | 470PF 10% 50V   | C1566    | 1-162-966-11 | CERAMIC CHIP | 0.0022uF 10% 50V |
| C1409    | 1-100-566-11 | CERAMIC CHIP | 0.1uF 10% 25V   | C1567    | 1-162-966-11 | CERAMIC CHIP | 0.0022uF 10% 50V |
| C1411    | 1-162-963-11 | CERAMIC CHIP | 680PF 10% 50V   | C1568    | 1-162-966-11 | CERAMIC CHIP | 0.0022uF 10% 50V |
| C1413    | 1-162-961-11 | CERAMIC CHIP | 330PF 10% 50V   | C1569    | 1-162-966-11 | CERAMIC CHIP | 0.0022uF 10% 50V |
| C1418    | 1-126-964-11 | ELECT        | 10uF 20% 50V    | C1601    | 1-162-974-11 | CERAMIC CHIP | 0.01uF 50V       |
| C1422    | 1-162-963-11 | CERAMIC CHIP | 680PF 10% 50V   | C1602    | 1-162-927-11 | CERAMIC CHIP | 100PF 5% 50V     |

## DIGITAL

| Ref. No.         | Part No.     | Description                   | Remark |     |     |  | Ref. No.            | Part No.     | Description                             | Remark                 |     |       |  |
|------------------|--------------|-------------------------------|--------|-----|-----|--|---------------------|--------------|-----------------------------------------|------------------------|-----|-------|--|
| C1604            | 1-100-566-11 | CERAMIC CHIP                  | 0.1uF  | 10% | 25V |  | IC1101              | 6-806-528-01 | IC MB90488BPF-G-195E1                   |                        |     |       |  |
| C1605            | 1-100-566-11 | CERAMIC CHIP                  | 0.1uF  | 10% | 25V |  | IC1103              | 8-759-242-70 | IC TC7WU04F                             |                        |     |       |  |
| C1620            | 1-100-566-11 | CERAMIC CHIP                  | 0.1uF  | 10% | 25V |  | IC1111              | 6-702-913-01 | IC S-80929CNMC-G8ZT2G                   |                        |     |       |  |
| C1905            | 1-100-566-11 | CERAMIC CHIP                  | 0.1uF  | 10% | 25V |  | IC1131              | 6-705-866-01 | IC BR24L16FJ-WE2                        |                        |     |       |  |
| C1906            | 1-126-925-11 | ELECT                         | 470uF  | 20% | 10V |  | IC1301              | 6-805-692-01 | IC LC890561W                            |                        |     |       |  |
| C1908            | 1-126-925-11 | ELECT                         | 470uF  | 20% | 10V |  | IC1302              | 8-759-595-15 | IC TC74ACT153F(EL)                      |                        |     |       |  |
| C1913            | 1-100-566-11 | CERAMIC CHIP                  | 0.1uF  | 10% | 25V |  | IC1303              | 8-759-242-70 | IC TC7WU04F                             |                        |     |       |  |
| C1914            | 1-126-947-11 | ELECT                         | 47uF   | 20% | 35V |  | IC1351              | 6-600-466-01 | IC TORX147L (DIGITAL VIDEO 2 IN         | (OPTICAL))             |     |       |  |
| C2216            | 1-100-566-11 | CERAMIC CHIP                  | 0.1uF  | 10% | 25V |  | IC1352              | 6-600-466-01 | IC TORX147L (DIGITAL MD/TAPE IN         | (OPTICAL))             |     |       |  |
| C2217            | 1-100-566-11 | CERAMIC CHIP                  | 0.1uF  | 10% | 25V |  | IC1353              | 6-600-461-11 | IC TOTX147L(RED) (DIGITAL MD/TAPE OUT   | (OPTICAL))             |     |       |  |
| C2218            | 1-126-947-11 | ELECT                         | 47uF   | 20% | 35V |  | IC1354              | 6-600-466-01 | IC TORX147L (DIGITAL VIDEO 1 IN         | (OPTICAL))             |     |       |  |
| < CONNECTOR >    |              |                               |        |     |     |  |                     |              |                                         |                        |     |       |  |
| CNP503           | 1-784-922-11 | PIN, CONNECTOR 5P             |        |     |     |  | IC1401              | 8-759-560-56 | IC PCM1800E/2K                          |                        |     |       |  |
| CNP504           | 1-784-923-11 | PIN, CONNECTOR 7P             |        |     |     |  | IC1403              | 8-759-710-97 | IC NJM4565M-D                           |                        |     |       |  |
| CNP505           | 1-784-925-11 | PIN, CONNECTOR 10P            |        |     |     |  | IC1404              | 8-759-710-97 | IC NJM4565M-D                           |                        |     |       |  |
| CNS501           | 1-573-829-11 | CONNECTOR, BOARD TO BOARD 15P |        |     |     |  | IC1405              | 8-759-710-97 | IC NJM4565M-D                           |                        |     |       |  |
| CNS502           | 1-766-719-41 | CONNECTOR, BOARD TO BOARD 10P |        |     |     |  | IC1406              | 8-759-710-97 | IC NJM4565M-D                           |                        |     |       |  |
| CNS504           | 1-568-828-11 | CONNECTOR, FFC 9P             |        |     |     |  | IC1452              | 6-708-785-01 | IC PCM1609APT                           |                        |     |       |  |
| CNS505           | 1-784-784-11 | CONNECTOR, FFC 23P            |        |     |     |  | IC1501              | 6-705-900-01 | IC CXD9718BQ                            |                        |     |       |  |
| CNS508           | 1-568-830-11 | CONNECTOR, FFC 11P (AUS)      |        |     |     |  | IC1502              | 6-709-278-01 | IC IS61WV6416BLL-12TLI                  |                        |     |       |  |
| CNS508           | 1-784-776-11 | CONNECTOR, FFC 15P (AEP,UK)   |        |     |     |  | IC1503              | 8-759-546-74 | IC TC7WH157FU(TE12R)                    |                        |     |       |  |
| CNS509           | 1-568-838-11 | CONNECTOR, FFC 21P            |        |     |     |  | IC1601              | 8-759-268-29 | IC SN74HC595ANS                         |                        |     |       |  |
| < DIODE >        |              |                               |        |     |     |  | IC1602              | 8-759-268-29 | IC SN74HC595ANS                         |                        |     |       |  |
| D1001            | 8-719-053-18 | DIODE 1SR154-400TE-25         |        |     |     |  | IC1901              | 6-701-887-02 | IC SI-3004KWF                           |                        |     |       |  |
| D1003            | 8-719-049-09 | DIODE 1SS367-T3SONY           |        |     |     |  | IC1902              | 6-703-550-01 | IC TA7809LS                             |                        |     |       |  |
| D1004            | 8-719-049-09 | DIODE 1SS367-T3SONY           |        |     |     |  | IC1904              | 6-705-463-01 | IC BA33BC0T                             |                        |     |       |  |
| D1107            | 8-719-988-61 | DIODE 1SS355TE-17             |        |     |     |  | < JACK >            |              |                                         |                        |     |       |  |
| D1108            | 8-719-988-61 | DIODE 1SS355TE-17             |        |     |     |  | J1301               | 1-818-314-11 | JACK, PIN 2P (DIGITAL DVD IN (COAXIAL), | SA-CD/CD IN (COAXIAL)) |     |       |  |
| D1110            | 8-719-988-61 | DIODE 1SS355TE-17             |        |     |     |  | < JUMPER RESISTOR > |              |                                         |                        |     |       |  |
| D1111            | 8-719-988-61 | DIODE 1SS355TE-17             |        |     |     |  | JR1007              | 1-216-864-11 | SHORT CHIP                              | 0                      |     |       |  |
| D1301            | 8-719-988-61 | DIODE 1SS355TE-17             |        |     |     |  | JR1015              | 1-211-950-11 | SHORT CHIP                              | 0                      |     |       |  |
| D1302            | 8-719-988-61 | DIODE 1SS355TE-17             |        |     |     |  | JR1016              | 1-211-950-11 | SHORT CHIP                              | 0                      |     |       |  |
| D1501            | 8-719-049-09 | DIODE 1SS367-T3SONY           |        |     |     |  | JR1019              | 1-100-566-11 | CERAMIC CHIP                            | 0.1uF                  | 10% | 25V   |  |
| D1502            | 8-719-049-09 | DIODE 1SS367-T3SONY           |        |     |     |  | JR1020              | 1-216-864-11 | SHORT CHIP                              | 0                      |     |       |  |
| D1503            | 8-719-049-09 | DIODE 1SS367-T3SONY           |        |     |     |  | JR1104              | 1-216-864-11 | SHORT CHIP                              | 0                      |     |       |  |
| D1504            | 8-719-049-09 | DIODE 1SS367-T3SONY           |        |     |     |  | JR1202              | 1-216-864-11 | SHORT CHIP                              | 0 (AUS)                |     |       |  |
| < FERRITE BEAD > |              |                               |        |     |     |  | JR1207              | 1-211-950-11 | SHORT CHIP                              | 0                      |     |       |  |
| FB1101           | 1-400-862-11 | BEAD, FERRITE                 |        |     |     |  | JR1511              | 1-400-862-11 | BEAD, FERRITE                           |                        |     |       |  |
| FB1302           | 1-400-862-11 | BEAD, FERRITE                 |        |     |     |  | < RESISTOR >        |              |                                         |                        |     |       |  |
| FB1305           | 1-400-862-11 | BEAD, FERRITE                 |        |     |     |  | R1010               | 1-216-809-11 | METAL CHIP                              | 100                    | 5%  | 1/10W |  |
| FB1306           | 1-400-862-11 | BEAD, FERRITE                 |        |     |     |  | R1011               | 1-216-809-11 | METAL CHIP                              | 100                    | 5%  | 1/10W |  |
| FB1308           | 1-400-862-11 | BEAD, FERRITE                 |        |     |     |  | R1012               | 1-216-809-11 | METAL CHIP                              | 100                    | 5%  | 1/10W |  |
| FB1309           | 1-400-862-11 | BEAD, FERRITE                 |        |     |     |  | R1013               | 1-216-809-11 | METAL CHIP                              | 100                    | 5%  | 1/10W |  |
| FB1405           | 1-400-862-11 | BEAD, FERRITE                 |        |     |     |  | R1014               | 1-216-809-11 | METAL CHIP                              | 100                    | 5%  | 1/10W |  |
| FB1452           | 1-400-862-11 | BEAD, FERRITE                 |        |     |     |  | R1015               | 1-216-809-11 | METAL CHIP                              | 100                    | 5%  | 1/10W |  |
| FB1453           | 1-400-862-11 | BEAD, FERRITE                 |        |     |     |  | R1016               | 1-216-809-11 | METAL CHIP                              | 100                    | 5%  | 1/10W |  |
| FB1501           | 1-400-862-11 | BEAD, FERRITE                 |        |     |     |  | R1017               | 1-216-809-11 | METAL CHIP                              | 100                    | 5%  | 1/10W |  |
| FB1502           | 1-400-862-11 | BEAD, FERRITE                 |        |     |     |  | R1035               | 1-216-825-11 | METAL CHIP                              | 2.2K                   | 5%  | 1/10W |  |
| FB1503           | 1-400-862-11 | BEAD, FERRITE                 |        |     |     |  | R1039               | 1-216-833-11 | METAL CHIP                              | 10K                    | 5%  | 1/10W |  |
| FB2034           | 1-400-862-11 | BEAD, FERRITE                 |        |     |     |  | R1041               | 1-216-809-11 | METAL CHIP                              | 100                    | 5%  | 1/10W |  |
| < IC >           |              |                               |        |     |     |  | R1042               | 1-216-809-11 | METAL CHIP                              | 100                    | 5%  | 1/10W |  |
| IC1001           | 8-759-231-53 | IC TA7805S                    |        |     |     |  | R1044               | 1-216-809-11 | METAL CHIP                              | 100                    | 5%  | 1/10W |  |
| IC1031           | 6-705-464-01 | IC BA50BC0T                   |        |     |     |  |                     |              |                                         |                        |     |       |  |
| IC1071           | 6-702-771-01 | IC TA78033LS (AEP,UK)         |        |     |     |  |                     |              |                                         |                        |     |       |  |

| Ref. No. | Part No.     | Description |      |    | Remark            | Ref. No. | Part No.     | Description |      |    | Remark            |
|----------|--------------|-------------|------|----|-------------------|----------|--------------|-------------|------|----|-------------------|
| R1049    | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W             | R1134    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             |
| R1055    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1135    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             |
| R1056    | 1-216-854-11 | METAL CHIP  | 560K | 5% | 1/10W             | R1136    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             |
| R1057    | 1-216-837-11 | METAL CHIP  | 22K  | 5% | 1/10W             | R1137    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             |
| R1058    | 1-216-813-11 | METAL CHIP  | 220  | 5% | 1/10W<br>(AEP,UK) | R1140    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             |
| R1059    | 1-216-813-11 | METAL CHIP  | 220  | 5% | 1/10W<br>(AEP,UK) | R1142    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             |
| R1060    | 1-216-821-11 | METAL CHIP  | 1K   | 5% | 1/10W             | R1143    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             |
| R1061    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1144    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             |
| R1062    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1149    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             |
| R1063    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1150    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             |
| R1065    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1151    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             |
| R1066    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1152    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             |
| R1067    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1153    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             |
| R1068    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1154    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             |
| R1072    | 1-216-827-11 | METAL CHIP  | 3.3K | 5% | 1/10W             | R1155    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             |
| R1073    | 1-216-827-11 | METAL CHIP  | 3.3K | 5% | 1/10W             | R1156    | 1-216-864-11 | SHORT CHIP  | 0    |    |                   |
| R1076    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1157    | 1-216-864-11 | SHORT CHIP  | 0    |    |                   |
| R1077    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1159    | 1-216-827-11 | METAL CHIP  | 3.3K | 5% | 1/10W             |
| R1078    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1160    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             |
| R1081    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1161    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             |
| R1082    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1162    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             |
| R1083    | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W             | R1171    | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W             |
| R1085    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1172    | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W             |
| R1086    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1175    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             |
| R1088    | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W             |          |              |             |      |    | (AEP,UK)          |
| R1094    | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W<br>(AUS)    | R1179    | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W             |
| R1095    | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W<br>(AUS)    | R1180    | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W             |
| R1096    | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W             | R1181    | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W             |
| R1097    | 1-216-845-11 | METAL CHIP  | 100K | 5% | 1/10W             | R1182    | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W             |
| R1103    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1183    | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W             |
| R1105    | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W             | R1184    | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W             |
| R1106    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1185    | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W             |
| R1107    | 1-216-825-11 | METAL CHIP  | 2.2K | 5% | 1/10W             | R1186    | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W             |
| R1108    | 1-216-825-11 | METAL CHIP  | 2.2K | 5% | 1/10W             | R1187    | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W             |
| R1109    | 1-216-825-11 | METAL CHIP  | 2.2K | 5% | 1/10W             | R1188    | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W             |
| R1110    | 1-216-825-11 | METAL CHIP  | 2.2K | 5% | 1/10W             | R1189    | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W             |
| R1111    | 1-216-825-11 | METAL CHIP  | 2.2K | 5% | 1/10W             | R1190    | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W             |
| R1112    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1191    | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W             |
| R1113    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1192    | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W             |
| R1114    | 1-216-825-11 | METAL CHIP  | 2.2K | 5% | 1/10W             | R1193    | 1-216-829-11 | METAL CHIP  | 4.7K | 5% | 1/10W<br>(AUS)    |
| R1115    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1193    | 1-216-841-11 | METAL CHIP  | 47K  | 5% | 1/10W<br>(AEP,UK) |
| R1116    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1194    | 1-216-825-11 | METAL CHIP  | 2.2K | 5% | 1/10W<br>(AEP,UK) |
| R1117    | 1-216-821-11 | METAL CHIP  | 1K   | 5% | 1/10W             | R1194    | 1-216-841-11 | METAL CHIP  | 47K  | 5% | 1/10W<br>(AUS)    |
| R1118    | 1-216-821-11 | METAL CHIP  | 1K   | 5% | 1/10W             | R1202    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             |
| R1119    | 1-216-821-11 | METAL CHIP  | 1K   | 5% | 1/10W             | R1203    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             |
| R1120    | 1-216-821-11 | METAL CHIP  | 1K   | 5% | 1/10W             | R1251    | 1-216-840-11 | METAL CHIP  | 39K  | 5% | 1/10W             |
| R1121    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1252    | 1-216-840-11 | METAL CHIP  | 39K  | 5% | 1/10W             |
| R1122    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1260    | 1-216-821-11 | METAL CHIP  | 1K   | 5% | 1/10W             |
| R1123    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1261    | 1-216-821-11 | METAL CHIP  | 1K   | 5% | 1/10W             |
| R1124    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1301    | 1-216-830-11 | METAL CHIP  | 5.6K | 5% | 1/10W             |
| R1125    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1303    | 1-216-864-11 | SHORT CHIP  | 0    |    |                   |
| R1126    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1304    | 1-216-813-11 | METAL CHIP  | 220  | 5% | 1/10W             |
| R1127    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1305    | 1-216-819-11 | METAL CHIP  | 680  | 5% | 1/10W             |
| R1128    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1306    | 1-216-801-11 | METAL CHIP  | 22   | 5% | 1/10W             |
| R1129    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             | R1307    | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W             |



## DIGITAL

| Ref. No. | Part No.     | Description | Remark |      |       | Ref. No.             | Part No.     | Description                      | Remark |      |       |
|----------|--------------|-------------|--------|------|-------|----------------------|--------------|----------------------------------|--------|------|-------|
| R1308    | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R1484                | 1-216-864-11 | SHORT CHIP                       | 0      |      |       |
| R1309    | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R1486                | 1-216-821-11 | METAL CHIP                       | 1K     | 5%   | 1/10W |
| R1310    | 1-216-857-11 | METAL CHIP  | 1M     | 5%   | 1/10W | R1490                | 1-218-867-11 | METAL CHIP                       | 6.8K   | 0.5% | 1/10W |
| R1311    | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R1491                | 1-218-867-11 | METAL CHIP                       | 6.8K   | 0.5% | 1/10W |
| R1312    | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R1492                | 1-218-867-11 | METAL CHIP                       | 6.8K   | 0.5% | 1/10W |
| R1313    | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R1493                | 1-218-867-11 | METAL CHIP                       | 6.8K   | 0.5% | 1/10W |
| R1314    | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W | R1494                | 1-218-867-11 | METAL CHIP                       | 6.8K   | 0.5% | 1/10W |
| R1315    | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R1495                | 1-218-867-11 | METAL CHIP                       | 6.8K   | 0.5% | 1/10W |
| R1316    | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R1501                | 1-216-809-11 | METAL CHIP                       | 100    | 5%   | 1/10W |
| R1318    | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W | R1502                | 1-216-809-11 | METAL CHIP                       | 100    | 5%   | 1/10W |
| R1319    | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R1503                | 1-216-813-11 | METAL CHIP                       | 220    | 5%   | 1/10W |
| R1320    | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W | R1504                | 1-216-809-11 | METAL CHIP                       | 100    | 5%   | 1/10W |
| R1322    | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R1505                | 1-216-809-11 | METAL CHIP                       | 100    | 5%   | 1/10W |
| R1351    | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R1506                | 1-216-809-11 | METAL CHIP                       | 100    | 5%   | 1/10W |
| R1352    | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R1507                | 1-216-809-11 | METAL CHIP                       | 100    | 5%   | 1/10W |
| R1353    | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R1508                | 1-216-809-11 | METAL CHIP                       | 100    | 5%   | 1/10W |
| R1354    | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R1509                | 1-216-809-11 | METAL CHIP                       | 100    | 5%   | 1/10W |
| R1355    | 1-218-285-11 | METAL CHIP  | 75     | 5%   | 1/10W | R1510                | 1-216-809-11 | METAL CHIP                       | 100    | 5%   | 1/10W |
| R1356    | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W | R1511                | 1-216-809-11 | METAL CHIP                       | 100    | 5%   | 1/10W |
| R1357    | 1-216-837-11 | METAL CHIP  | 22K    | 5%   | 1/10W | R1512                | 1-216-821-11 | METAL CHIP                       | 1K     | 5%   | 1/10W |
| R1358    | 1-216-854-11 | METAL CHIP  | 560K   | 5%   | 1/10W | R1513                | 1-216-833-11 | METAL CHIP                       | 10K    | 5%   | 1/10W |
| R1359    | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R1514                | 1-216-833-11 | METAL CHIP                       | 10K    | 5%   | 1/10W |
| R1360    | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R1515                | 1-216-857-11 | METAL CHIP                       | 1M     | 5%   | 1/10W |
| R1361    | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R1523                | 1-216-813-11 | METAL CHIP                       | 220    | 5%   | 1/10W |
| R1362    | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R1524                | 1-216-864-11 | SHORT CHIP                       | 0      |      |       |
| R1366    | 1-218-285-11 | METAL CHIP  | 75     | 5%   | 1/10W | R1530                | 1-216-845-11 | METAL CHIP                       | 100K   | 5%   | 1/10W |
| R1401    | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W | R1541                | 1-216-813-11 | METAL CHIP                       | 220    | 5%   | 1/10W |
| R1402    | 1-216-825-11 | METAL CHIP  | 2.2K   | 5%   | 1/10W | R1555                | 1-216-813-11 | METAL CHIP                       | 220    | 5%   | 1/10W |
| R1403    | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W | R1556                | 1-216-809-11 | METAL CHIP                       | 100    | 5%   | 1/10W |
| R1407    | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R1557                | 1-216-813-11 | METAL CHIP                       | 220    | 5%   | 1/10W |
| R1414    | 1-218-867-11 | METAL CHIP  | 6.8K   | 0.5% | 1/10W | R1570                | 1-216-833-11 | METAL CHIP                       | 10K    | 5%   | 1/10W |
| R1416    | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W | R1571                | 1-216-833-11 | METAL CHIP                       | 10K    | 5%   | 1/10W |
| R1420    | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R1572                | 1-216-833-11 | METAL CHIP                       | 10K    | 5%   | 1/10W |
| R1421    | 1-218-867-11 | METAL CHIP  | 6.8K   | 0.5% | 1/10W | R1573                | 1-216-833-11 | METAL CHIP                       | 10K    | 5%   | 1/10W |
| R1424    | 1-218-867-11 | METAL CHIP  | 6.8K   | 0.5% | 1/10W | R1574                | 1-216-833-11 | METAL CHIP                       | 10K    | 5%   | 1/10W |
| R1425    | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R1635                | 1-216-825-11 | METAL CHIP                       | 2.2K   | 5%   | 1/10W |
| R1426    | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W | R1636                | 1-216-825-11 | METAL CHIP                       | 2.2K   | 5%   | 1/10W |
| R1434    | 1-218-867-11 | METAL CHIP  | 6.8K   | 0.5% | 1/10W | < NETWORK RESISTOR > |              |                                  |        |      |       |
| R1435    | 1-216-864-11 | SHORT CHIP  | 0      |      |       | RB1500               | 1-233-576-11 | RES, CHIP NETWORK 100X4 (3216)   |        |      |       |
| R1436    | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W | RB1501               | 1-233-576-11 | RES, CHIP NETWORK 100X4 (3216)   |        |      |       |
| R1444    | 1-218-867-11 | METAL CHIP  | 6.8K   | 0.5% | 1/10W | RB1502               | 1-233-576-11 | RES, CHIP NETWORK 100X4 (3216)   |        |      |       |
| R1445    | 1-216-864-11 | SHORT CHIP  | 0      |      |       | RB1503               | 1-233-576-11 | RES, CHIP NETWORK 100X4 (3216)   |        |      |       |
| R1446    | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W | RB1504               | 1-233-576-11 | RES, CHIP NETWORK 100X4 (3216)   |        |      |       |
| R1454    | 1-218-867-11 | METAL CHIP  | 6.8K   | 0.5% | 1/10W | RB1506               | 1-233-576-11 | RES, CHIP NETWORK 100X4 (3216)   |        |      |       |
| R1455    | 1-216-864-11 | SHORT CHIP  | 0      |      |       | RB1507               | 1-233-576-11 | RES, CHIP NETWORK 100X4 (3216)   |        |      |       |
| R1460    | 1-216-864-11 | SHORT CHIP  | 0      |      |       | RB1508               | 1-233-576-11 | RES, CHIP NETWORK 100X4 (3216)   |        |      |       |
| R1461    | 1-216-864-11 | SHORT CHIP  | 0      |      |       | < VIBRATOR >         |              |                                  |        |      |       |
| R1463    | 1-218-867-11 | METAL CHIP  | 6.8K   | 0.5% | 1/10W | X1101                | 1-813-448-21 | PIEZOELECTRIC OSCILLATOR (24MHz) |        |      |       |
| R1464    | 1-216-864-11 | SHORT CHIP  | 0      |      |       | X1301                | 1-795-126-21 | VIBRATOR, CRYSTAL (12.288MHz)    |        |      |       |
| R1466    | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W | X1502                | 1-813-276-21 | QUARTZ, CRYSTAL (13.9MHz)        |        |      |       |
| R1470    | 1-218-867-11 | METAL CHIP  | 6.8K   | 0.5% | 1/10W | *****                |              |                                  |        |      |       |
| R1471    | 1-216-864-11 | SHORT CHIP  | 0      |      |       |                      |              |                                  |        |      |       |
| R1472    | 1-216-864-11 | SHORT CHIP  | 0      |      |       |                      |              |                                  |        |      |       |
| R1473    | 1-218-867-11 | METAL CHIP  | 6.8K   | 0.5% | 1/10W |                      |              |                                  |        |      |       |
| R1474    | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |                      |              |                                  |        |      |       |
| R1475    | 1-216-864-11 | SHORT CHIP  | 0      |      |       |                      |              |                                  |        |      |       |
| R1476    | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W |                      |              |                                  |        |      |       |
| R1483    | 1-218-867-11 | METAL CHIP  | 6.8K   | 0.5% | 1/10W |                      |              |                                  |        |      |       |

| Ref. No.                                      | Part No.     | Description                                    | Remark | Ref. No.                                      | Part No.     | Description                                  | Remark |
|-----------------------------------------------|--------------|------------------------------------------------|--------|-----------------------------------------------|--------------|----------------------------------------------|--------|
| A-1181-226-A DISPLAY BOARD, COMPLETE<br>***** |              |                                                |        | < RESISTOR >                                  |              |                                              |        |
| < CAPACITOR >                                 |              |                                                |        | R101                                          | 1-249-409-11 | CARBON 220 5% 1/4W                           |        |
| C100                                          | 1-127-888-11 | CERAMIC 0.1uF 10% 50V                          |        | R102                                          | 1-249-411-11 | CARBON 330 5% 1/4W                           |        |
| C101                                          | 1-127-888-11 | CERAMIC 0.1uF 10% 50V                          |        | R103                                          | 1-249-413-11 | CARBON 470 5% 1/4W                           |        |
| C104                                          | 1-127-888-11 | CERAMIC 0.1uF 10% 50V                          |        | R104                                          | 1-249-415-11 | CARBON 680 5% 1/4W                           |        |
| C106                                          | 1-127-868-11 | CERAMIC 0.0022uF 10% 50V                       |        | R105                                          | 1-247-831-11 | CARBON 1K 5% 1/4W                            |        |
| C107                                          | 1-127-868-11 | CERAMIC 0.0022uF 10% 50V                       |        | R106                                          | 1-249-419-11 | CARBON 1.5K 5% 1/4W                          |        |
| C108                                          | 1-127-888-11 | CERAMIC 0.1uF 10% 50V                          |        | R107                                          | 1-249-421-11 | CARBON 2.2K 5% 1/4W                          |        |
| C109                                          | 1-127-888-11 | CERAMIC 0.1uF 10% 50V                          |        | R108                                          | 1-249-409-11 | CARBON 220 5% 1/4W                           |        |
| C110                                          | 1-162-286-31 | CERAMIC 220PF 10% 50V                          |        | R109                                          | 1-249-411-11 | CARBON 330 5% 1/4W                           |        |
| C111                                          | 1-162-286-31 | CERAMIC 220PF 10% 50V                          |        | R110                                          | 1-249-413-11 | CARBON 470 5% 1/4W                           |        |
| C112                                          | 1-162-286-31 | CERAMIC 220PF 10% 50V                          |        | R111                                          | 1-249-415-11 | CARBON 680 5% 1/4W                           |        |
| C114                                          | 1-135-798-11 | CERAMIC 0.22uF 50V                             |        | R115                                          | 1-247-807-31 | CARBON 100 5% 1/4W                           |        |
| C115                                          | 1-126-795-11 | ELECT 10uF 20% 50V                             |        | R116                                          | 1-247-807-31 | CARBON 100 5% 1/4W                           |        |
| C132                                          | 1-162-286-31 | CERAMIC 220PF 10% 50V                          |        | R117                                          | 1-247-807-31 | CARBON 100 5% 1/4W                           |        |
| C133                                          | 1-162-286-31 | CERAMIC 220PF 10% 50V                          |        | R118                                          | 1-249-440-11 | CARBON 82K 5% 1/4W                           |        |
| C134                                          | 1-162-286-31 | CERAMIC 220PF 10% 50V                          |        | R119                                          | 1-247-807-31 | CARBON 100 5% 1/4W                           |        |
| C135                                          | 1-162-286-31 | CERAMIC 220PF 10% 50V                          |        | R121                                          | 1-249-393-11 | CARBON 10 5% 1/4W                            | F      |
| C136                                          | 1-162-286-31 | CERAMIC 220PF 10% 50V                          |        | R122                                          | 1-247-804-11 | CARBON 75 5% 1/4W                            |        |
| C137                                          | 1-162-286-31 | CERAMIC 220PF 10% 50V                          |        | R123                                          | 1-249-429-11 | CARBON 10K 5% 1/4W                           |        |
| C138                                          | 1-162-286-31 | CERAMIC 220PF 10% 50V                          |        | R131                                          | 1-249-421-11 | CARBON 2.2K 5% 1/4W                          |        |
| C139                                          | 1-162-286-31 | CERAMIC 220PF 10% 50V                          |        | R198                                          | 1-249-381-11 | CARBON 1 5% 1/4W                             | F      |
| C140                                          | 1-162-286-31 | CERAMIC 220PF 10% 50V                          |        | R199                                          | 1-249-381-11 | CARBON 1 5% 1/4W                             | F      |
| C141                                          | 1-162-286-31 | CERAMIC 220PF 10% 50V                          |        | < ROTARY ENCODER >                            |              |                                              |        |
| C142                                          | 1-162-286-31 | CERAMIC 220PF 10% 50V                          |        | RV101                                         | 1-418-817-11 | ENCODER, ROTARY (INPUT SELECTOR)             |        |
| C143                                          | 1-162-286-31 | CERAMIC 220PF 10% 50V                          |        | RV102                                         | 1-418-725-41 | ENCODER, ROTARY (12 TYPE)<br>(MASTER VOLUME) |        |
| C144                                          | 1-127-888-11 | CERAMIC 0.1uF 10% 50V                          |        | RV103                                         | 1-418-817-11 | ENCODER, ROTARY (TUNING +/-)                 |        |
| C145                                          | 1-127-888-11 | CERAMIC 0.1uF 10% 50V                          |        | < SWITCH >                                    |              |                                              |        |
| C146                                          | 1-126-795-11 | ELECT 10uF 20% 50V                             |        | S101                                          | 1-771-410-21 | SWITCH, TACTILE (DIRECT)                     |        |
| C147                                          | 1-162-286-31 | CERAMIC 220PF 10% 50V                          |        | S102                                          | 1-771-410-21 | SWITCH, TACTILE (MULTI CH IN)                |        |
| C148                                          | 1-162-286-31 | CERAMIC 220PF 10% 50V                          |        | S103                                          | 1-771-410-21 | SWITCH, TACTILE (INPUT MODE)                 |        |
| C149                                          | 1-162-286-31 | CERAMIC 220PF 10% 50V                          |        | S104                                          | 1-771-410-21 | SWITCH, TACTILE (DISPLAY)                    |        |
| C150                                          | 1-127-888-11 | CERAMIC 0.1uF 10% 50V                          |        | S105                                          | 1-771-410-21 | SWITCH, TACTILE (MOVIE)                      |        |
| C151                                          | 1-127-888-11 | CERAMIC 0.1uF 10% 50V                          |        | S106                                          | 1-771-410-21 | SWITCH, TACTILE (A.F.D.)                     |        |
| C152                                          | 1-127-888-11 | CERAMIC 0.1uF 10% 50V                          |        | S107                                          | 1-771-410-21 | SWITCH, TACTILE (2CH)                        |        |
| < CONNECTOR >                                 |              |                                                |        | S108                                          | 1-771-410-21 | SWITCH, TACTILE (MEMORY/ENTER)               |        |
| CNS100                                        | 1-784-784-11 | CONNECTOR, FFC 23P                             |        | S109                                          | 1-771-410-21 | SWITCH, TACTILE (SLEEP)                      |        |
| < DIODE >                                     |              |                                                |        | S110                                          | 1-771-410-21 | SWITCH, TACTILE (DIMMER)                     |        |
| D105                                          | 6-500-647-01 | LED SEL5E20C-STP15<br>(MULTI CHANNEL DECODING) |        | S111                                          | 1-771-410-21 | SWITCH, TACTILE (SUR BACK DECODING)          |        |
| < VACUUM FLUORESCENT DISPLAY >                |              |                                                |        | S112                                          | 1-771-410-21 | SWITCH, TACTILE (TUNING MODE)                |        |
| FL101                                         | 1-519-866-01 | VACUUM FLUORESCENT DISPLAY                     |        | S124                                          | 1-771-410-21 | SWITCH, TACTILE (MUSIC)                      |        |
| < IC >                                        |              |                                                |        | *****                                         |              |                                              |        |
| IC100                                         | 8-759-643-83 | IC uPD16315GB-3BS                              |        | A-1158-394-A HDMI SW BOARD, COMPLETE<br>***** |              |                                              |        |
| IC101                                         | 8-759-243-51 | IC TC74ACT08P                                  |        | < CAPACITOR >                                 |              |                                              |        |
| IC102                                         | 6-600-174-01 | IC RPM7240-H4 (IR)                             |        | C5001                                         | 1-107-826-11 | CERAMIC CHIP 0.1uF 10% 16V                   |        |
| < TRANSISTOR >                                |              |                                                |        | C5002                                         | 1-162-970-11 | CERAMIC CHIP 0.01uF 10% 25V                  |        |
| Q110                                          | 8-729-119-78 | TRANSISTOR 2SC2785-HFE                         |        | C5003                                         | 1-162-970-11 | CERAMIC CHIP 0.01uF 10% 25V                  |        |
|                                               |              |                                                |        | C5004                                         | 1-162-970-11 | CERAMIC CHIP 0.01uF 10% 25V                  |        |
|                                               |              |                                                |        | C5005                                         | 1-162-970-11 | CERAMIC CHIP 0.01uF 10% 25V                  |        |
|                                               |              |                                                |        | C5006                                         | 1-162-970-11 | CERAMIC CHIP 0.01uF 10% 25V                  |        |
|                                               |              |                                                |        | C5007                                         | 1-162-970-11 | CERAMIC CHIP 0.01uF 10% 25V                  |        |
|                                               |              |                                                |        | C5008                                         | 1-162-970-11 | CERAMIC CHIP 0.01uF 10% 25V                  |        |

## STR-DG700

HDMI SW

HEADPHONE

MAIN

| Ref. No.         | Part No.     | Description                                        |        |      | Remark |
|------------------|--------------|----------------------------------------------------|--------|------|--------|
| C5009            | 1-162-970-11 | CERAMIC CHIP                                       | 0.01uF | 10%  | 25V    |
| C5010            | 1-162-970-11 | CERAMIC CHIP                                       | 0.01uF | 10%  | 25V    |
| C5011            | 1-162-970-11 | CERAMIC CHIP                                       | 0.01uF | 10%  | 25V    |
| C5012            | 1-117-681-11 | ELECT CHIP                                         | 100uF  | 20%  | 16V    |
| C5013            | 1-128-934-11 | CERAMIC CHIP                                       | 0.33uF | 20%  | 10V    |
| C5014            | 1-126-246-11 | ELECT CHIP                                         | 220uF  | 20%  | 4V     |
| C5015            | 1-128-994-21 | ELECT CHIP                                         | 47uF   | 20%  | 10V    |
| C5016            | 1-162-970-11 | CERAMIC CHIP                                       | 0.01uF | 10%  | 25V    |
| C5017            | 1-115-467-11 | CERAMIC CHIP                                       | 0.22uF | 10%  | 10V    |
| C5018            | 1-115-467-11 | CERAMIC CHIP                                       | 0.22uF | 10%  | 10V    |
| C5019            | 1-107-826-11 | CERAMIC CHIP                                       | 0.1uF  | 10%  | 16V    |
| C5020            | 1-107-826-11 | CERAMIC CHIP                                       | 0.1uF  | 10%  | 16V    |
| C5021            | 1-117-681-11 | ELECT CHIP                                         | 100uF  | 20%  | 16V    |
| C5022            | 1-162-970-11 | CERAMIC CHIP                                       | 0.01uF | 10%  | 25V    |
| C5023            | 1-162-970-11 | CERAMIC CHIP                                       | 0.01uF | 10%  | 25V    |
| C5024            | 1-128-934-11 | CERAMIC CHIP                                       | 0.33uF | 20%  | 10V    |
| C5027            | 1-128-994-21 | ELECT CHIP                                         | 47uF   | 20%  | 10V    |
| < CONNECTOR >    |              |                                                    |        |      |        |
| CN5001           | 1-818-086-41 | CONNECTOR, HDMI 19P (HDMI DVD IN (ASSIGNABLE))     |        |      |        |
| CN5002           | 1-818-086-41 | CONNECTOR, HDMI 19P (HDMI VIDEO 2 IN (ASSIGNABLE)) |        |      |        |
| CN5003           | 1-818-086-41 | CONNECTOR, HDMI 19P (HDMI MONITOR OUT)             |        |      |        |
| * CN5004         | 1-770-470-21 | PIN, CONNECTOR (PC BOARD) 6P                       |        |      |        |
| < IC >           |              |                                                    |        |      |        |
| IC5001           | 6-709-221-01 | IC TMDS341PFCR                                     |        |      |        |
| IC5002           | 6-705-337-01 | IC TK11150CSC-LG                                   |        |      |        |
| IC5003           | 6-705-468-01 | IC BA33BC0FP-E2                                    |        |      |        |
| IC5004           | 6-704-351-01 | IC SN74LVC2G08DCUR                                 |        |      |        |
| IC5005           | 6-707-207-01 | IC SN74LVC1G3157DCKR                               |        |      |        |
| IC5006           | 6-706-740-01 | IC BA00BC0WFP-E2                                   |        |      |        |
| < FERRITE BEAD > |              |                                                    |        |      |        |
| L5013            | 1-400-862-11 | BEAD, FERRITE                                      |        |      |        |
| < RESISTOR >     |              |                                                    |        |      |        |
| R5001            | 1-218-861-11 | METAL CHIP                                         | 3.9K   | 0.5% | 1/10W  |
| R5002            | 1-218-844-11 | METAL CHIP                                         | 750    | 0.5% | 1/10W  |
| R5003            | 1-216-833-11 | METAL CHIP                                         | 10K    | 5%   | 1/10W  |
| R5004            | 1-216-864-11 | SHORT CHIP                                         | 0      |      |        |
| R5005            | 1-216-864-11 | SHORT CHIP                                         | 0      |      |        |
| R5006            | 1-216-864-11 | SHORT CHIP                                         | 0      |      |        |
| R5007            | 1-216-864-11 | SHORT CHIP                                         | 0      |      |        |
| R5008            | 1-216-864-11 | SHORT CHIP                                         | 0      |      |        |
| R5009            | 1-216-864-11 | SHORT CHIP                                         | 0      |      |        |
| R5010            | 1-216-864-11 | SHORT CHIP                                         | 0      |      |        |
| R5011            | 1-216-864-11 | SHORT CHIP                                         | 0      |      |        |
| R5014            | 1-216-864-11 | SHORT CHIP                                         | 0      |      |        |
| R5015            | 1-216-821-11 | METAL CHIP                                         | 1K     | 5%   | 1/10W  |
| R5016            | 1-216-864-11 | SHORT CHIP                                         | 0      |      |        |
| R5017            | 1-216-864-11 | SHORT CHIP                                         | 0      |      |        |
| R5018            | 1-216-821-11 | METAL CHIP                                         | 1K     | 5%   | 1/10W  |
| R5019            | 1-216-864-11 | SHORT CHIP                                         | 0      |      |        |
| R5020            | 1-216-864-11 | SHORT CHIP                                         | 0      |      |        |
| R5022            | 1-216-833-11 | METAL CHIP                                         | 10K    | 5%   | 1/10W  |
| R5024            | 1-216-864-11 | SHORT CHIP                                         | 0      |      |        |

| Ref. No. | Part No.     | Description | Remark |    |       |
|----------|--------------|-------------|--------|----|-------|
| R5025    | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R5026    | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R5027    | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W |
| R5028    | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W |
| R5029    | 1-216-841-11 | METAL CHIP  | 47K    | 5% | 1/10W |
| R5030    | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W |
| R5042    | 1-216-829-11 | METAL CHIP  | 4.7K   | 5% | 1/10W |
| R5043    | 1-216-829-11 | METAL CHIP  | 4.7K   | 5% | 1/10W |
| R5047    | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R5048    | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R5049    | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R5050    | 1-216-821-11 | METAL CHIP  | 1K     | 5% | 1/10W |
| R5051    | 1-216-823-11 | METAL CHIP  | 1.5K   | 5% | 1/10W |
| R5052    | 1-216-841-11 | METAL CHIP  | 47K    | 5% | 1/10W |
| R5053    | 1-216-825-11 | METAL CHIP  | 2.2K   | 5% | 1/10W |
| R5054    | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W |
| R5055    | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W |
| R5056    | 1-216-821-11 | METAL CHIP  | 1K     | 5% | 1/10W |
| R5060    | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R5061    | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R5068    | 1-216-845-11 | METAL CHIP  | 100K   | 5% | 1/10W |
| R5069    | 1-216-845-11 | METAL CHIP  | 100K   | 5% | 1/10W |
| R5072    | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R5073    | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R5074    | 1-216-825-11 | METAL CHIP  | 2.2K   | 5% | 1/10W |

\*\*\*\*\*

## HEADPHONE BOARD

\*\*\*\*\*

## &lt; CAPACITOR &gt;

|      |              |         |       |     |     |
|------|--------------|---------|-------|-----|-----|
| C790 | 1-127-888-11 | CERAMIC | 0.1uF | 10% | 50V |
| C791 | 1-127-888-11 | CERAMIC | 0.1uF | 10% | 50V |

## &lt; CONNECTOR &gt;

|        |              |                           |  |  |  |
|--------|--------------|---------------------------|--|--|--|
| CNP791 | 1-691-766-11 | PLUG (MICRO CONNECTOR) 4P |  |  |  |
|--------|--------------|---------------------------|--|--|--|

## &lt; JACK &gt;

|      |              |               |  |  |  |
|------|--------------|---------------|--|--|--|
| J791 | 1-815-314-21 | JACK (PHONES) |  |  |  |
|------|--------------|---------------|--|--|--|

## &lt; LEAD WIRE &gt;

|         |              |                       |  |  |  |
|---------|--------------|-----------------------|--|--|--|
| * TP701 | 1-690-880-31 | LEAD (WITH CONNECTOR) |  |  |  |
|---------|--------------|-----------------------|--|--|--|

\*\*\*\*\*

## A-1181-223-A MAIN BOARD, COMPLETE

\*\*\*\*\*

## 7-685-646-79 SCREW +BVTP 3X8 TYPE2 IT-3

## &lt; CAPACITOR &gt;

|      |              |         |          |     |     |
|------|--------------|---------|----------|-----|-----|
| C310 | 1-127-868-11 | CERAMIC | 0.0022uF | 10% | 50V |
| C400 | 1-127-868-11 | CERAMIC | 0.0022uF | 10% | 50V |
| C403 | 1-127-868-11 | CERAMIC | 0.0022uF | 10% | 50V |
| C408 | 1-126-963-11 | ELECT   | 4.7uF    | 20% | 50V |
| C409 | 1-126-963-11 | ELECT   | 4.7uF    | 20% | 50V |
| C444 | 1-127-868-11 | CERAMIC | 0.0022uF | 10% | 50V |
| C445 | 1-127-868-11 | CERAMIC | 0.0022uF | 10% | 50V |
| C453 | 1-162-286-31 | CERAMIC | 220PF    | 10% | 50V |
| C458 | 1-126-963-11 | ELECT   | 4.7uF    | 20% | 50V |

| Ref. No. | Part No.     | Description | Remark  |        |      | Ref. No. | Part No.     | Description  | Remark  |        |      |
|----------|--------------|-------------|---------|--------|------|----------|--------------|--------------|---------|--------|------|
| C459     | 1-126-963-11 | ELECT       | 4.7uF   | 20%    | 50V  | C655     | 1-102-233-00 | CERAMIC      | 33PF    | 10%    | 500V |
| C463     | 1-162-286-31 | CERAMIC     | 220PF   | 10%    | 50V  | C656     | 1-162-282-31 | CERAMIC      | 100PF   | 10%    | 50V  |
| C464     | 1-127-888-11 | CERAMIC     | 0.1uF   | 10%    | 50V  | C657     | 1-162-282-31 | CERAMIC      | 100PF   | 10%    | 50V  |
| C468     | 1-162-282-31 | CERAMIC     | 100PF   | 10%    | 50V  | C660     | 1-126-947-11 | ELECT        | 47uF    | 20%    | 35V  |
| C469     | 1-162-282-31 | CERAMIC     | 100PF   | 10%    | 50V  | C661     | 1-136-157-00 | FILM         | 0.022uF | 5%     | 50V  |
| C471     | 1-126-963-11 | ELECT       | 4.7uF   | 20%    | 50V  | C666     | 1-162-815-11 | CERAMIC      | 47PF    | 5%     | 500V |
| C472     | 1-126-963-11 | ELECT       | 4.7uF   | 20%    | 50V  | C669     | 1-162-815-11 | CERAMIC      | 47PF    | 5%     | 500V |
| C481     | 1-126-964-11 | ELECT       | 10uF    | 20%    | 50V  | C670     | 1-162-286-31 | CERAMIC      | 220PF   | 10%    | 50V  |
| C484     | 1-126-964-11 | ELECT       | 10uF    | 20%    | 50V  | C680     | 1-126-964-11 | ELECT        | 10uF    | 20%    | 50V  |
| C485     | 1-126-964-11 | ELECT       | 10uF    | 20%    | 50V  | C681     | 1-127-876-11 | CERAMIC      | 0.01uF  | 10%    | 50V  |
| C488     | 1-127-888-11 | CERAMIC     | 0.1uF   | 10%    | 50V  | C691     | 1-127-888-11 | CERAMIC      | 0.1uF   | 10%    | 50V  |
| C490     | 1-126-964-11 | ELECT       | 10uF    | 20%    | 50V  | C701     | 1-126-963-11 | ELECT        | 4.7uF   | 20%    | 50V  |
| C492     | 1-126-964-11 | ELECT       | 10uF    | 20%    | 50V  | C702     | 1-126-964-11 | ELECT        | 10uF    | 20%    | 50V  |
| C493     | 1-126-964-11 | ELECT       | 10uF    | 20%    | 50V  | C703     | 1-165-722-11 | ELECT        | 100uF   | 20%    | 10V  |
| C495     | 1-126-964-11 | ELECT       | 10uF    | 20%    | 50V  | C704     | 1-107-583-11 | CERAMIC      | 3PF     | 0.25PF | 500V |
| C499     | 1-162-286-31 | CERAMIC     | 220PF   | 10%    | 50V  | C705     | 1-102-233-00 | CERAMIC      | 33PF    | 10%    | 500V |
| C501     | 1-126-963-11 | ELECT       | 4.7uF   | 20%    | 50V  | C706     | 1-162-282-31 | CERAMIC      | 100PF   | 10%    | 50V  |
| C503     | 1-104-658-11 | ELECT       | 100uF   | 20%    | 10V  | C707     | 1-162-282-31 | CERAMIC      | 100PF   | 10%    | 50V  |
| C504     | 1-107-585-11 | CERAMIC     | 5PF     | 0.25PF | 500V | C710     | 1-126-947-11 | ELECT        | 47uF    | 20%    | 35V  |
| C505     | 1-102-233-00 | CERAMIC     | 33PF    | 10%    | 500V | C711     | 1-136-157-00 | FILM         | 0.022uF | 5%     | 50V  |
| C506     | 1-162-282-31 | CERAMIC     | 100PF   | 10%    | 50V  | C716     | 1-162-815-11 | CERAMIC      | 47PF    | 5%     | 500V |
| C507     | 1-162-282-31 | CERAMIC     | 100PF   | 10%    | 50V  | C717     | 1-162-815-11 | CERAMIC      | 47PF    | 5%     | 500V |
| C510     | 1-126-947-11 | ELECT       | 47uF    | 20%    | 35V  | C720     | 1-162-286-31 | CERAMIC      | 220PF   | 10%    | 50V  |
| C511     | 1-136-157-00 | FILM        | 0.022uF | 5%     | 50V  | C721     | 1-126-923-11 | ELECT        | 220uF   | 20%    | 10V  |
| C516     | 1-162-815-11 | CERAMIC     | 47PF    | 5%     | 500V | C722     | 1-126-964-11 | ELECT        | 10uF    | 20%    | 50V  |
| C517     | 1-162-815-11 | CERAMIC     | 47PF    | 5%     | 500V | C732     | 1-128-582-11 | ELECT        | 10uF    | 20%    | 100V |
| C519     | 1-162-286-31 | CERAMIC     | 220PF   | 10%    | 50V  | C733     | 1-128-582-11 | ELECT        | 10uF    | 20%    | 100V |
| C531     | 1-136-157-00 | FILM        | 0.022uF | 5%     | 50V  | C740     | 1-126-964-11 | ELECT        | 10uF    | 20%    | 50V  |
| C539     | 1-162-286-31 | CERAMIC     | 220PF   | 10%    | 50V  | C741     | 1-128-579-11 | ELECT        | 2.2uF   | 20%    | 100V |
| C540     | 1-126-964-11 | ELECT       | 10uF    | 20%    | 50V  | C742     | 1-127-876-11 | CERAMIC      | 0.01uF  | 10%    | 50V  |
| C541     | 1-127-876-11 | CERAMIC     | 0.01uF  | 10%    | 50V  | C743     | 1-128-579-11 | ELECT        | 2.2uF   | 20%    | 100V |
| C553     | 1-104-658-11 | ELECT       | 100uF   | 20%    | 10V  | C744     | 1-128-579-11 | ELECT        | 2.2uF   | 20%    | 100V |
| C554     | 1-107-585-11 | CERAMIC     | 5PF     | 0.25PF | 500V | C750     | 1-126-964-11 | ELECT        | 10uF    | 20%    | 50V  |
| C561     | 1-126-963-11 | ELECT       | 4.7uF   | 20%    | 50V  | C751     | 1-126-963-11 | ELECT        | 4.7uF   | 20%    | 50V  |
| C565     | 1-102-233-00 | CERAMIC     | 33PF    | 10%    | 500V | C752     | 1-127-876-11 | CERAMIC      | 0.01uF  | 10%    | 50V  |
| C566     | 1-162-282-31 | CERAMIC     | 100PF   | 10%    | 50V  | C753     | 1-165-722-11 | ELECT        | 100uF   | 20%    | 10V  |
| C567     | 1-162-282-31 | CERAMIC     | 100PF   | 10%    | 50V  | C754     | 1-107-583-11 | CERAMIC      | 3PF     | 0.25PF | 500V |
| C570     | 1-126-947-11 | ELECT       | 47uF    | 20%    | 35V  | C755     | 1-102-233-00 | CERAMIC      | 33PF    | 10%    | 500V |
| C576     | 1-162-815-11 | CERAMIC     | 47PF    | 5%     | 500V | C756     | 1-162-282-31 | CERAMIC      | 100PF   | 10%    | 50V  |
| C577     | 1-162-815-11 | CERAMIC     | 47PF    | 5%     | 500V | C757     | 1-162-282-31 | CERAMIC      | 100PF   | 10%    | 50V  |
| C580     | 1-126-964-11 | ELECT       | 10uF    | 20%    | 50V  | C760     | 1-126-947-11 | ELECT        | 47uF    | 20%    | 35V  |
| C581     | 1-127-876-11 | CERAMIC     | 0.01uF  | 10%    | 50V  | C761     | 1-136-157-00 | FILM         | 0.022uF | 5%     | 50V  |
| C601     | 1-126-963-11 | ELECT       | 4.7uF   | 20%    | 50V  | C762     | 1-126-964-11 | ELECT        | 10uF    | 20%    | 50V  |
| C603     | 1-104-658-11 | ELECT       | 100uF   | 20%    | 10V  | C766     | 1-162-815-11 | CERAMIC      | 47PF    | 5%     | 500V |
| C604     | 1-107-583-11 | CERAMIC     | 3PF     | 0.25PF | 500V | C767     | 1-162-815-11 | CERAMIC      | 47PF    | 5%     | 500V |
| C605     | 1-102-233-00 | CERAMIC     | 33PF    | 10%    | 500V | C770     | 1-162-286-31 | CERAMIC      | 220PF   | 10%    | 50V  |
| C606     | 1-162-282-31 | CERAMIC     | 100PF   | 10%    | 50V  | C791     | 1-126-923-11 | ELECT        | 220uF   | 20%    | 10V  |
| C607     | 1-162-282-31 | CERAMIC     | 100PF   | 10%    | 50V  | C801     | 1-126-947-11 | ELECT        | 47uF    | 20%    | 35V  |
| C610     | 1-126-947-11 | ELECT       | 47uF    | 20%    | 35V  | C802     | 1-126-947-11 | ELECT        | 47uF    | 20%    | 35V  |
| C611     | 1-136-157-00 | FILM        | 0.022uF | 5%     | 50V  | C803     | 1-109-932-14 | ELECT(BLOCK) | 10000uF | 20%    | 71V  |
| C619     | 1-162-286-31 | CERAMIC     | 220PF   | 10%    | 50V  | C804     | 1-109-932-14 | ELECT(BLOCK) | 10000uF | 20%    | 71V  |
| C620     | 1-162-815-11 | CERAMIC     | 47PF    | 5%     | 500V | C805     | 1-135-851-21 | MYLAR        | 0.22uF  |        | 100V |
| C621     | 1-162-815-11 | CERAMIC     | 47PF    | 5%     | 500V | C806     | 1-135-851-21 | MYLAR        | 0.22uF  |        | 100V |
| C640     | 1-126-964-11 | ELECT       | 10uF    | 20%    | 50V  | C807     | 1-126-947-11 | ELECT        | 47uF    | 20%    | 35V  |
| C642     | 1-127-876-11 | CERAMIC     | 0.01uF  | 10%    | 50V  | C808     | 1-126-947-11 | ELECT        | 47uF    | 20%    | 35V  |
| C651     | 1-126-963-11 | ELECT       | 4.7uF   | 20%    | 50V  | C809     | 1-127-888-11 | CERAMIC      | 0.1uF   | 10%    | 50V  |
| C653     | 1-165-722-11 | ELECT       | 100uF   | 20%    | 10V  | C810     | 1-127-888-11 | CERAMIC      | 0.1uF   | 10%    | 50V  |
| C654     | 1-107-583-11 | CERAMIC     | 3PF     | 0.25PF | 500V | C811     | 1-127-888-11 | CERAMIC      | 0.1uF   | 10%    | 50V  |

## MAIN

| Ref. No.      | Part No.     | Description                      | Remark |     |     |  |
|---------------|--------------|----------------------------------|--------|-----|-----|--|
| C822          | 1-126-947-11 | ELECT                            | 47uF   | 20% | 35V |  |
| C830          | 1-127-888-11 | CERAMIC                          | 0.1uF  | 10% | 50V |  |
| C831          | 1-127-888-11 | CERAMIC                          | 0.1uF  | 10% | 50V |  |
| C832          | 1-126-936-11 | ELECT                            | 3300uF | 20% | 16V |  |
| CC01          | 1-162-282-31 | CERAMIC                          | 100PF  | 10% | 50V |  |
| CC02          | 1-162-282-31 | CERAMIC                          | 100PF  | 10% | 50V |  |
| CC04          | 1-162-282-31 | CERAMIC                          | 100PF  | 10% | 50V |  |
| CC05          | 1-162-282-31 | CERAMIC                          | 100PF  | 10% | 50V |  |
| CC06          | 1-162-282-31 | CERAMIC                          | 100PF  | 10% | 50V |  |
| CC07          | 1-162-282-31 | CERAMIC                          | 100PF  | 10% | 50V |  |
| CC08          | 1-162-282-31 | CERAMIC                          | 100PF  | 10% | 50V |  |
| CC09          | 1-162-282-31 | CERAMIC                          | 100PF  | 10% | 50V |  |
| CC11          | 1-127-876-11 | CERAMIC                          | 0.01uF | 10% | 50V |  |
| CC13          | 1-127-876-11 | CERAMIC                          | 0.01uF | 10% | 50V |  |
| CC15          | 1-127-876-11 | CERAMIC                          | 0.01uF | 10% | 50V |  |
| CC17          | 1-127-876-11 | CERAMIC                          | 0.01uF | 10% | 50V |  |
| CC31          | 1-162-286-31 | CERAMIC                          | 220PF  | 10% | 50V |  |
| CC32          | 1-162-286-31 | CERAMIC                          | 220PF  | 10% | 50V |  |
| CC33          | 1-162-286-31 | CERAMIC                          | 220PF  | 10% | 50V |  |
| CC34          | 1-162-286-31 | CERAMIC                          | 220PF  | 10% | 50V |  |
| CC35          | 1-162-286-31 | CERAMIC                          | 220PF  | 10% | 50V |  |
| CC36          | 1-162-286-31 | CERAMIC                          | 220PF  | 10% | 50V |  |
| CC51          | 1-162-282-31 | CERAMIC                          | 100PF  | 10% | 50V |  |
| CC52          | 1-162-282-31 | CERAMIC                          | 100PF  | 10% | 50V |  |
| CC54          | 1-162-282-31 | CERAMIC                          | 100PF  | 10% | 50V |  |
| CC55          | 1-162-282-31 | CERAMIC                          | 100PF  | 10% | 50V |  |
| CC56          | 1-162-282-31 | CERAMIC                          | 100PF  | 10% | 50V |  |
| CC57          | 1-162-282-31 | CERAMIC                          | 100PF  | 10% | 50V |  |
| CC58          | 1-162-282-31 | CERAMIC                          | 100PF  | 10% | 50V |  |
| CC59          | 1-162-282-31 | CERAMIC                          | 100PF  | 10% | 50V |  |
| < CONNECTOR > |              |                                  |        |     |     |  |
| CNP500        | 1-766-715-21 | CONNECTOR, BOARD TO BOARD 10P    |        |     |     |  |
| CNP501        | 1-573-847-11 | CONNECTOR, BOARD TO BOARD 15P    |        |     |     |  |
| CNP503        | 1-779-978-11 | PIN, CONNECTOR 3P                |        |     |     |  |
| * CNP801      | 1-564-104-00 | PIN, CONNECTOR (3.96mm PITCH) 3P |        |     |     |  |
| CNP802        | 1-691-767-11 | PLUG (MICRO CONNECTOR) 5P        |        |     |     |  |
| CNP806        | 1-779-978-11 | PIN, CONNECTOR 3P                |        |     |     |  |
| CNP911        | 1-779-977-11 | PIN, CONNECTOR 6P                |        |     |     |  |
| CNP912        | 1-691-766-11 | PLUG (MICRO CONNECTOR) 4P        |        |     |     |  |
| CNP913        | 1-784-922-11 | PIN, CONNECTOR 5P                |        |     |     |  |
| < DIODE >     |              |                                  |        |     |     |  |
| D505          | 8-719-991-33 | DIODE 1SS133T-77                 |        |     |     |  |
| D540          | 8-719-991-33 | DIODE 1SS133T-77                 |        |     |     |  |
| D560          | 8-719-991-33 | DIODE 1SS133T-77                 |        |     |     |  |
| D580          | 8-719-991-33 | DIODE 1SS133T-77                 |        |     |     |  |
| D585          | 8-719-991-33 | DIODE 1SS133T-77                 |        |     |     |  |
| D605          | 8-719-991-33 | DIODE 1SS133T-77                 |        |     |     |  |
| D610          | 8-719-991-33 | DIODE 1SS133T-77                 |        |     |     |  |
| D640          | 8-719-991-33 | DIODE 1SS133T-77                 |        |     |     |  |
| D665          | 8-719-991-33 | DIODE 1SS133T-77                 |        |     |     |  |
| D680          | 8-719-991-33 | DIODE 1SS133T-77                 |        |     |     |  |
| D690          | 8-719-934-21 | DIODE HZS30-1L                   |        |     |     |  |
| D691          | 8-719-991-33 | DIODE 1SS133T-77                 |        |     |     |  |
| D692          | 8-719-991-33 | DIODE 1SS133T-77                 |        |     |     |  |
| D693          | 8-719-986-54 | DIODE HZS24-1LTA                 |        |     |     |  |
| D705          | 8-719-991-33 | DIODE 1SS133T-77                 |        |     |     |  |

| Ref. No.       | Part No.     | Description                                                 | Remark |
|----------------|--------------|-------------------------------------------------------------|--------|
| D710           | 8-719-991-33 | DIODE 1SS133T-77                                            |        |
| D721           | 8-719-991-33 | DIODE 1SS133T-77                                            |        |
| D722           | 8-719-991-33 | DIODE 1SS133T-77                                            |        |
| D732           | 8-719-991-33 | DIODE 1SS133T-77                                            |        |
| D740           | 8-719-991-33 | DIODE 1SS133T-77                                            |        |
| D750           | 8-719-991-33 | DIODE 1SS133T-77                                            |        |
| D765           | 8-719-991-33 | DIODE 1SS133T-77                                            |        |
| D791           | 8-719-991-33 | DIODE 1SS133T-77                                            |        |
| D801           | 8-719-933-95 | DIODE HZS20-1L                                              |        |
| D802           | 8-719-072-05 | DIODE RBV-602LF-A                                           |        |
| D804           | 8-719-068-28 | DIODE HZ6.8BP-TK                                            |        |
| D805           | 6-500-522-11 | DIODE 10EDB40-TA2B5                                         |        |
| D806           | 6-500-522-11 | DIODE 10EDB40-TA2B5                                         |        |
| D807           | 6-500-522-11 | DIODE 10EDB40-TA2B5                                         |        |
| D808           | 6-500-522-11 | DIODE 10EDB40-TA2B5                                         |        |
| D896           | 8-719-043-76 | DIODE AK04V0                                                |        |
| < IC >         |              |                                                             |        |
| IC401          | 6-707-362-01 | IC BD3451KS                                                 |        |
| IC402          | 8-759-167-88 | IC NJM4565D                                                 |        |
| IC501          | 6-700-943-01 | IC uPC2581V-S                                               |        |
| IC601          | 6-700-943-01 | IC uPC2581V-S                                               |        |
| IC691          | 8-759-167-88 | IC NJM4565D                                                 |        |
| IC701          | 6-700-943-01 | IC uPC2581V-S                                               |        |
| IC801          | 8-759-071-48 | IC TA7807S                                                  |        |
| IC802          | 8-759-071-47 | IC TA79007S                                                 |        |
| < JACK >       |              |                                                             |        |
| J309           | 1-770-377-21 | JACK, PIN 1P (PRE OUT SUB WOOFER)                           |        |
| J310           | 1-815-045-11 | JACK, PIN 2P (PRE OUT SURROUND)                             |        |
| J400           | 1-774-411-11 | JACK, PIN 6P (MD/TAPE OUT,SA-CD/CD IN, AUX IN)              |        |
| J401           | 1-793-775-12 | JACK, PIN 6P (MULTI CH IN CENTER,SUB WOOFER,SURROUND,FRONT) |        |
| J403           | 1-770-614-11 | JACK, PIN 4P (DVD AUDIO IN,MD/TAPE IN)                      |        |
| J404           | 1-774-411-11 | JACK, PIN 6P (VIDEO 1 AUDIO IN/OUT, VIDEO 2 AUDIO IN)       |        |
| < COIL >       |              |                                                             |        |
| L601           | 1-420-872-52 | COIL, AIR-CORE                                              |        |
| L651           | 1-420-872-52 | COIL, AIR-CORE                                              |        |
| L701           | 1-420-872-52 | COIL, AIR-CORE                                              |        |
| L751           | 1-420-872-52 | COIL, AIR-CORE                                              |        |
| < TRANSISTOR > |              |                                                             |        |
| Q501           | 8-729-119-76 | TRANSISTOR 2SA1175-HFE                                      |        |
| Q502           | 8-729-141-30 | TRANSISTOR 2SC3623A-LK                                      |        |
| Q505           | 8-729-042-09 | TRANSISTOR 2SA1038S-RSE-TP                                  |        |
| Q506           | 8-729-042-09 | TRANSISTOR 2SA1038S-RSE-TP                                  |        |
| Q535           | 8-729-042-09 | TRANSISTOR 2SA1038S-RSE-TP                                  |        |
| Q536           | 8-729-042-09 | TRANSISTOR 2SA1038S-RSE-TP                                  |        |
| Q540           | 8-729-281-53 | TRANSISTOR 2SC1815-GR                                       |        |
| Q560           | 8-729-119-78 | TRANSISTOR 2SC2785-HFE                                      |        |
| Q571           | 8-729-119-76 | TRANSISTOR 2SA1175-HFE                                      |        |
| Q572           | 8-729-141-30 | TRANSISTOR 2SC3623A-LK                                      |        |
| Q580           | 8-729-281-53 | TRANSISTOR 2SC1815-GR                                       |        |
| Q601           | 8-729-119-76 | TRANSISTOR 2SA1175-HFE                                      |        |
| Q602           | 8-729-141-30 | TRANSISTOR 2SC3623A-LK                                      |        |

| Ref. No.     | Part No.     | Description                | Remark | Ref. No. | Part No.     | Description                      | Remark |
|--------------|--------------|----------------------------|--------|----------|--------------|----------------------------------|--------|
| Q605         | 8-729-042-09 | TRANSISTOR 2SA1038S-RSE-TP |        | R456     | 1-247-831-11 | CARBON 1K 5%                     | 1/4W   |
| Q606         | 8-729-042-09 | TRANSISTOR 2SA1038S-RSE-TP |        | R457     | 1-247-831-11 | CARBON 1K 5%                     | 1/4W   |
| Q610         | 8-729-119-78 | TRANSISTOR 2SC2785-HFE     |        | R458     | 1-247-831-11 | CARBON 1K 5%                     | 1/4W   |
| Q640         | 8-729-281-53 | TRANSISTOR 2SC1815-GR      |        | R459     | 1-247-831-11 | CARBON 1K 5%                     | 1/4W   |
| Q651         | 8-729-119-76 | TRANSISTOR 2SA1175-HFE     |        | R468     | 1-247-879-11 | CARBON 100K 5%                   | 1/4W   |
| Q652         | 8-729-141-30 | TRANSISTOR 2SC3623A-LK     |        | R469     | 1-247-831-11 | CARBON 1K 5%                     | 1/4W   |
| Q655         | 8-729-042-09 | TRANSISTOR 2SA1038S-RSE-TP |        | R470     | 1-247-871-11 | CARBON 47K 5%                    | 1/4W   |
| Q656         | 8-729-042-09 | TRANSISTOR 2SA1038S-RSE-TP |        | R473     | 1-249-429-11 | CARBON 10K 5%                    | 1/4W   |
| Q680         | 8-729-281-53 | TRANSISTOR 2SC1815-GR      |        | R474     | 1-249-429-11 | CARBON 10K 5%                    | 1/4W   |
| Q691         | 8-729-281-53 | TRANSISTOR 2SC1815-GR      |        | R475     | 1-249-429-11 | CARBON 10K 5%                    | 1/4W   |
| Q692         | 8-729-029-40 | TRANSISTOR DTA124ESA       |        | R476     | 1-249-429-11 | CARBON 10K 5%                    | 1/4W   |
| Q693         | 8-729-281-53 | TRANSISTOR 2SC1815-GR      |        | R480     | 1-247-871-11 | CARBON 47K 5%                    | 1/4W   |
| Q694         | 8-729-281-53 | TRANSISTOR 2SC1815-GR      |        | R499     | 1-247-871-11 | CARBON 47K 5%                    | 1/4W   |
| Q695         | 8-729-119-76 | TRANSISTOR 2SA1175-HFE     |        | R501     | 1-247-831-11 | CARBON 1K 5%                     | 1/4W   |
| Q701         | 8-729-119-76 | TRANSISTOR 2SA1175-HFE     |        | R502     | 1-249-439-11 | CARBON 68K 5%                    | 1/4W   |
| Q702         | 8-729-141-30 | TRANSISTOR 2SC3623A-LK     |        | R503     | 1-249-421-11 | CARBON 2.2K 5%                   | 1/4W   |
| Q705         | 8-729-042-09 | TRANSISTOR 2SA1038S-RSE-TP |        | R505     | 1-249-439-11 | CARBON 68K 5%                    | 1/4W   |
| Q706         | 8-729-042-09 | TRANSISTOR 2SA1038S-RSE-TP |        | R510     | 1-249-421-11 | CARBON 2.2K 5%                   | 1/4W   |
| Q710         | 8-729-119-78 | TRANSISTOR 2SC2785-HFE     |        | R511     | 1-249-440-11 | CARBON 82K 5%                    | 1/4W   |
| Q722         | 8-729-140-84 | TRANSISTOR 2SC1841-PAFAEA  |        | R513     | 1-249-414-11 | CARBON 560 5%                    | 1/4W   |
| Q723         | 8-729-119-78 | TRANSISTOR 2SC2785-HFE     |        | R514     | 1-249-399-11 | CARBON 33 5%                     | 1/4W F |
| Q725         | 8-729-042-09 | TRANSISTOR 2SA1038S-RSE-TP |        | R515     | 1-249-399-11 | CARBON 33 5%                     | 1/4W F |
| Q740         | 8-729-281-53 | TRANSISTOR 2SC1815-GR      |        | R516     | 1-234-182-11 | ENCAPSULATED COMPONENT 0.22X2 5W |        |
| Q750         | 8-729-281-53 | TRANSISTOR 2SC1815-GR      |        | R517     | 1-249-393-11 | CARBON 10 5%                     | 1/4W F |
| Q751         | 8-729-119-76 | TRANSISTOR 2SA1175-HFE     |        | R520     | 1-247-847-11 | CARBON 4.7K 5%                   | 1/4W   |
| Q752         | 8-729-141-30 | TRANSISTOR 2SC3623A-LK     |        | R521     | 1-240-855-81 | CARBON 6.2K 5%                   | 1/4W F |
| Q755         | 8-729-042-09 | TRANSISTOR 2SA1038S-RSE-TP |        | R522     | 1-249-419-11 | CARBON 1.5K 5%                   | 1/4W   |
| Q756         | 8-729-042-09 | TRANSISTOR 2SA1038S-RSE-TP |        | R523     | 1-247-871-11 | CARBON 47K 5%                    | 1/4W   |
| Q790         | 8-729-119-78 | TRANSISTOR 2SC2785-HFE     |        | R524     | 1-249-431-11 | CARBON 15K 5%                    | 1/4W   |
| Q793         | 8-729-119-78 | TRANSISTOR 2SC2785-HFE     |        | R525     | 1-249-439-11 | CARBON 68K 5%                    | 1/4W   |
| Q795         | 8-729-042-09 | TRANSISTOR 2SA1038S-RSE-TP |        | R526     | 1-234-182-11 | ENCAPSULATED COMPONENT 0.22X2 5W |        |
| Q801         | 8-729-140-97 | TRANSISTOR 2SB734-34       |        | R530     | 1-247-847-11 | CARBON 4.7K 5%                   | 1/4W   |
| < RESISTOR > |              |                            |        | R531     | 1-240-855-81 | CARBON 6.2K 5%                   | 1/4W F |
| R310         | 1-249-431-11 | CARBON 15K 5%              | 1/4W   | R532     | 1-249-429-11 | CARBON 10K 5%                    | 1/4W   |
| R311         | 1-249-414-11 | CARBON 560 5%              | 1/4W   | R533     | 1-247-871-11 | CARBON 47K 5%                    | 1/4W   |
| R320         | 1-249-431-11 | CARBON 15K 5%              | 1/4W   | R534     | 1-249-431-11 | CARBON 15K 5%                    | 1/4W   |
| R321         | 1-249-414-11 | CARBON 560 5%              | 1/4W   | R535     | 1-249-439-11 | CARBON 68K 5%                    | 1/4W   |
| R401         | 1-247-831-11 | CARBON 1K 5%               | 1/4W   | R537     | 1-249-393-11 | CARBON 10 5%                     | 1/4W F |
| R402         | 1-247-831-11 | CARBON 1K 5%               | 1/4W   | R540     | 1-247-863-11 | CARBON 22K 5%                    | 1/4W   |
| R404         | 1-247-831-11 | CARBON 1K 5%               | 1/4W   | R546     | 1-249-431-11 | CARBON 15K 5%                    | 1/4W   |
| R405         | 1-247-831-11 | CARBON 1K 5%               | 1/4W   | R553     | 1-249-421-11 | CARBON 2.2K 5%                   | 1/4W   |
| R406         | 1-247-831-11 | CARBON 1K 5%               | 1/4W   | R554     | 1-249-439-11 | CARBON 68K 5%                    | 1/4W   |
| R407         | 1-247-831-11 | CARBON 1K 5%               | 1/4W   | R555     | 1-247-847-11 | CARBON 4.7K 5%                   | 1/4W   |
| R408         | 1-247-831-11 | CARBON 1K 5%               | 1/4W   | R556     | 1-247-871-11 | CARBON 47K 5%                    | 1/4W   |
| R409         | 1-247-831-11 | CARBON 1K 5%               | 1/4W   | R557     | 1-249-431-11 | CARBON 15K 5%                    | 1/4W   |
| R428         | 1-247-831-11 | CARBON 1K 5%               | 1/4W   | R561     | 1-247-831-11 | CARBON 1K 5%                     | 1/4W   |
| R429         | 1-247-831-11 | CARBON 1K 5%               | 1/4W   | R562     | 1-249-439-11 | CARBON 68K 5%                    | 1/4W   |
| R431         | 1-247-831-11 | CARBON 1K 5%               | 1/4W   | R570     | 1-249-421-11 | CARBON 2.2K 5%                   | 1/4W   |
| R432         | 1-247-831-11 | CARBON 1K 5%               | 1/4W   | R571     | 1-249-440-11 | CARBON 82K 5%                    | 1/4W   |
| R433         | 1-247-831-11 | CARBON 1K 5%               | 1/4W   | R572     | 1-249-419-11 | CARBON 1.5K 5%                   | 1/4W   |
| R434         | 1-247-831-11 | CARBON 1K 5%               | 1/4W   | R573     | 1-247-871-11 | CARBON 47K 5%                    | 1/4W   |
| R435         | 1-247-831-11 | CARBON 1K 5%               | 1/4W   | R574     | 1-249-399-11 | CARBON 33 5%                     | 1/4W F |
| R436         | 1-247-831-11 | CARBON 1K 5%               | 1/4W   | R575     | 1-249-399-11 | CARBON 33 5%                     | 1/4W F |
| R451         | 1-247-831-11 | CARBON 1K 5%               | 1/4W   | R576     | 1-249-414-11 | CARBON 560 5%                    | 1/4W   |
| R452         | 1-247-831-11 | CARBON 1K 5%               | 1/4W   | R580     | 1-247-863-11 | CARBON 22K 5%                    | 1/4W   |
| R454         | 1-247-831-11 | CARBON 1K 5%               | 1/4W   | R585     | 1-247-847-11 | CARBON 4.7K 5%                   | 1/4W   |
| R455         | 1-247-831-11 | CARBON 1K 5%               | 1/4W   | R586     | 1-247-871-11 | CARBON 47K 5%                    | 1/4W   |
|              |              |                            |        | R587     | 1-249-431-11 | CARBON 15K 5%                    | 1/4W   |

## STR-DG700

## MAIN

| Ref. No. | Part No.     | Description                      |      |    | Remark | Ref. No. | Part No.     | Description                      |      |    | Remark |
|----------|--------------|----------------------------------|------|----|--------|----------|--------------|----------------------------------|------|----|--------|
| R588     | 1-249-431-11 | CARBON                           | 15K  | 5% | 1/4W   | R698     | 1-249-429-11 | CARBON                           | 10K  | 5% | 1/4W   |
| R601     | 1-247-831-11 | CARBON                           | 1K   | 5% | 1/4W   | R699     | 1-247-895-00 | CARBON                           | 470K | 5% | 1/4W   |
| R602     | 1-249-439-11 | CARBON                           | 68K  | 5% | 1/4W   | R700     | 1-249-429-11 | CARBON                           | 10K  | 5% | 1/4W   |
| R603     | 1-249-421-11 | CARBON                           | 2.2K | 5% | 1/4W   | R701     | 1-247-831-11 | CARBON                           | 1K   | 5% | 1/4W   |
| R604     | 1-249-439-11 | CARBON                           | 68K  | 5% | 1/4W   | R702     | 1-249-439-11 | CARBON                           | 68K  | 5% | 1/4W   |
| R610     | 1-249-421-11 | CARBON                           | 2.2K | 5% | 1/4W   | R703     | 1-249-421-11 | CARBON                           | 2.2K | 5% | 1/4W   |
| R611     | 1-249-440-11 | CARBON                           | 82K  | 5% | 1/4W   | R704     | 1-249-439-11 | CARBON                           | 68K  | 5% | 1/4W   |
| R613     | 1-249-414-11 | CARBON                           | 560  | 5% | 1/4W   | R705     | 1-247-895-00 | CARBON                           | 470K | 5% | 1/4W   |
| R614     | 1-249-399-11 | CARBON                           | 33   | 5% | 1/4W F | △ R706   | 1-215-888-00 | METAL OXIDE                      | 220  | 5% | 2W F   |
| R615     | 1-249-399-11 | CARBON                           | 33   | 5% | 1/4W F | R710     | 1-249-421-11 | CARBON                           | 2.2K | 5% | 1/4W   |
| R616     | 1-234-182-11 | ENCAPSULATED COMPONENT 0.22X2 5W |      |    |        | R711     | 1-249-440-11 | CARBON                           | 82K  | 5% | 1/4W   |
| R617     | 1-249-393-11 | CARBON                           | 10   | 5% | 1/4W F | R713     | 1-249-414-11 | CARBON                           | 560  | 5% | 1/4W   |
| R618     | 1-249-389-11 | CARBON                           | 4.7  | 5% | 1/4W F | R714     | 1-249-399-11 | CARBON                           | 33   | 5% | 1/4W F |
| R620     | 1-247-847-11 | CARBON                           | 4.7K | 5% | 1/4W   | R715     | 1-249-399-11 | CARBON                           | 33   | 5% | 1/4W F |
| R621     | 1-240-855-81 | CARBON                           | 6.2K | 5% | 1/4W F | R716     | 1-234-182-11 | ENCAPSULATED COMPONENT 0.22X2 5W |      |    |        |
| R622     | 1-249-419-11 | CARBON                           | 1.5K | 5% | 1/4W   | R717     | 1-249-393-11 | CARBON                           | 10   | 5% | 1/4W F |
| R623     | 1-247-871-11 | CARBON                           | 47K  | 5% | 1/4W   | R718     | 1-249-389-11 | CARBON                           | 4.7  | 5% | 1/4W F |
| R624     | 1-249-431-11 | CARBON                           | 15K  | 5% | 1/4W   | R719     | 1-247-847-11 | CARBON                           | 4.7K | 5% | 1/4W   |
| R625     | 1-249-439-11 | CARBON                           | 68K  | 5% | 1/4W   | R721     | 1-240-855-81 | CARBON                           | 6.2K | 5% | 1/4W F |
| R631     | 1-249-421-11 | CARBON                           | 2.2K | 5% | 1/4W   | R722     | 1-249-419-11 | CARBON                           | 1.5K | 5% | 1/4W   |
| R634     | 1-249-404-00 | CARBON                           | 82   | 5% | 1/4W F | R723     | 1-247-871-11 | CARBON                           | 47K  | 5% | 1/4W   |
| R638     | 1-249-439-11 | CARBON                           | 68K  | 5% | 1/4W   | R724     | 1-249-431-11 | CARBON                           | 15K  | 5% | 1/4W   |
| R640     | 1-247-863-11 | CARBON                           | 22K  | 5% | 1/4W   | R725     | 1-249-439-11 | CARBON                           | 68K  | 5% | 1/4W   |
| R648     | 1-249-431-11 | CARBON                           | 15K  | 5% | 1/4W   | R731     | 1-249-421-11 | CARBON                           | 2.2K | 5% | 1/4W   |
| R651     | 1-247-831-11 | CARBON                           | 1K   | 5% | 1/4W   | R732     | 1-249-381-11 | CARBON                           | 1    | 5% | 1/4W F |
| R652     | 1-249-439-11 | CARBON                           | 68K  | 5% | 1/4W   | R733     | 1-249-381-11 | CARBON                           | 1    | 5% | 1/4W F |
| R653     | 1-249-421-11 | CARBON                           | 2.2K | 5% | 1/4W   | R734     | 1-249-404-00 | CARBON                           | 82   | 5% | 1/4W F |
| R654     | 1-249-439-11 | CARBON                           | 68K  | 5% | 1/4W   | R735     | 1-249-427-11 | CARBON                           | 6.8K | 5% | 1/4W   |
| R655     | 1-247-847-11 | CARBON                           | 4.7K | 5% | 1/4W   | R736     | 1-247-831-11 | CARBON                           | 1K   | 5% | 1/4W   |
| R656     | 1-247-871-11 | CARBON                           | 47K  | 5% | 1/4W   | R737     | 1-249-436-11 | CARBON                           | 39K  | 5% | 1/4W   |
| R657     | 1-249-431-11 | CARBON                           | 15K  | 5% | 1/4W   | R740     | 1-247-863-11 | CARBON                           | 22K  | 5% | 1/4W   |
| R660     | 1-249-421-11 | CARBON                           | 2.2K | 5% | 1/4W   | R741     | 1-249-431-11 | CARBON                           | 15K  | 5% | 1/4W   |
| R661     | 1-249-440-11 | CARBON                           | 82K  | 5% | 1/4W   | R743     | 1-249-431-11 | CARBON                           | 15K  | 5% | 1/4W   |
| R663     | 1-249-414-11 | CARBON                           | 560  | 5% | 1/4W   | R744     | 1-249-431-11 | CARBON                           | 15K  | 5% | 1/4W   |
| R664     | 1-249-399-11 | CARBON                           | 33   | 5% | 1/4W F | R745     | 1-247-847-11 | CARBON                           | 4.7K | 5% | 1/4W   |
| R665     | 1-249-399-11 | CARBON                           | 33   | 5% | 1/4W F | R746     | 1-247-871-11 | CARBON                           | 47K  | 5% | 1/4W   |
| R666     | 1-234-182-11 | ENCAPSULATED COMPONENT 0.22X2 5W |      |    |        | R747     | 1-249-431-11 | CARBON                           | 15K  | 5% | 1/4W   |
| R667     | 1-249-393-11 | CARBON                           | 10   | 5% | 1/4W F | R748     | 1-249-431-11 | CARBON                           | 15K  | 5% | 1/4W   |
| R668     | 1-249-389-11 | CARBON                           | 4.7  | 5% | 1/4W F | R750     | 1-247-863-11 | CARBON                           | 22K  | 5% | 1/4W   |
| R669     | 1-247-847-11 | CARBON                           | 4.7K | 5% | 1/4W   | R751     | 1-247-831-11 | CARBON                           | 1K   | 5% | 1/4W   |
| R671     | 1-240-855-81 | CARBON                           | 6.2K | 5% | 1/4W F | R752     | 1-249-439-11 | CARBON                           | 68K  | 5% | 1/4W   |
| R672     | 1-249-419-11 | CARBON                           | 1.5K | 5% | 1/4W   | R753     | 1-249-421-11 | CARBON                           | 2.2K | 5% | 1/4W   |
| R673     | 1-247-871-11 | CARBON                           | 47K  | 5% | 1/4W   | R754     | 1-249-439-11 | CARBON                           | 68K  | 5% | 1/4W   |
| R674     | 1-249-431-11 | CARBON                           | 15K  | 5% | 1/4W   | R755     | 1-247-847-11 | CARBON                           | 4.7K | 5% | 1/4W   |
| R675     | 1-247-847-11 | CARBON                           | 4.7K | 5% | 1/4W   | R756     | 1-247-871-11 | CARBON                           | 47K  | 5% | 1/4W   |
| R676     | 1-247-871-11 | CARBON                           | 47K  | 5% | 1/4W   | R757     | 1-249-431-11 | CARBON                           | 15K  | 5% | 1/4W   |
| R677     | 1-249-431-11 | CARBON                           | 15K  | 5% | 1/4W   | R758     | 1-249-431-11 | CARBON                           | 15K  | 5% | 1/4W   |
| R680     | 1-247-863-11 | CARBON                           | 22K  | 5% | 1/4W   | R760     | 1-249-421-11 | CARBON                           | 2.2K | 5% | 1/4W   |
| R681     | 1-249-431-11 | CARBON                           | 15K  | 5% | 1/4W   | R761     | 1-249-440-11 | CARBON                           | 82K  | 5% | 1/4W   |
| R689     | 1-249-429-11 | CARBON                           | 10K  | 5% | 1/4W   | R763     | 1-249-414-11 | CARBON                           | 560  | 5% | 1/4W   |
| R690     | 1-247-887-00 | CARBON                           | 220K | 5% | 1/4W   | R764     | 1-249-399-11 | CARBON                           | 33   | 5% | 1/4W F |
| △ R691   | 1-215-888-00 | METAL OXIDE                      | 220  | 5% | 2W F   | R765     | 1-249-399-11 | CARBON                           | 33   | 5% | 1/4W F |
| △ R692   | 1-215-889-00 | METAL OXIDE                      | 330  | 5% | 2W F   | R766     | 1-234-182-11 | ENCAPSULATED COMPONENT 0.22X2 5W |      |    |        |
| R693     | 1-249-429-11 | CARBON                           | 10K  | 5% | 1/4W   | R767     | 1-249-393-11 | CARBON                           | 10   | 5% | 1/4W F |
| R694     | 1-249-429-11 | CARBON                           | 10K  | 5% | 1/4W   | R768     | 1-249-389-11 | CARBON                           | 4.7  | 5% | 1/4W F |
| R695     | 1-249-429-11 | CARBON                           | 10K  | 5% | 1/4W   | R769     | 1-247-847-11 | CARBON                           | 4.7K | 5% | 1/4W   |
| R696     | 1-247-871-11 | CARBON                           | 47K  | 5% | 1/4W   | R771     | 1-240-855-81 | CARBON                           | 6.2K | 5% | 1/4W F |
| R697     | 1-247-871-11 | CARBON                           | 47K  | 5% | 1/4W   | R772     | 1-249-419-11 | CARBON                           | 1.5K | 5% | 1/4W   |

MAIN

OPT3

POWER

REGULATOR

SPEAKER B

SPEAKER C/SB

| Ref. No.           | Part No.     | Description                                           |       |     |      | Remark | Ref. No.           | Part No.     | Description                              |             |     |      | Remark |
|--------------------|--------------|-------------------------------------------------------|-------|-----|------|--------|--------------------|--------------|------------------------------------------|-------------|-----|------|--------|
| R773               | 1-247-871-11 | CARBON                                                | 47K   | 5%  | 1/4W |        | S115               | 1-771-410-21 | SWITCH, TACTILE (SPEAKERS (OFF/A/B/A+B)) |             |     |      |        |
| R775               | 1-249-439-11 | CARBON                                                | 68K   | 5%  | 1/4W |        | *****              |              |                                          |             |     |      |        |
| R778               | 1-249-431-11 | CARBON                                                | 15K   | 5%  | 1/4W |        |                    |              |                                          |             |     |      |        |
| R780               | 1-249-429-11 | CARBON                                                | 10K   | 5%  | 1/4W |        | REGULATOR BOARD    |              |                                          |             |     |      |        |
| R791               | 1-249-421-11 | CARBON                                                | 2.2K  | 5%  | 1/4W |        | *****              |              |                                          |             |     |      |        |
| △ R792             | 1-215-868-00 | METAL OXIDE                                           | 680   | 5%  | 1W   | F      | < CAPACITOR >      |              |                                          |             |     |      |        |
| R793               | 1-249-404-00 | CARBON                                                | 82    | 5%  | 1/4W | F      |                    |              |                                          |             |     |      |        |
| △ R794             | 1-215-868-00 | METAL OXIDE                                           | 680   | 5%  | 1W   | F      | C2335              | 1-126-947-11 | ELECT                                    | 47uF        | 20% | 35V  |        |
| R802               | 1-249-409-11 | CARBON                                                | 220   | 5%  | 1/4W | F      | C2336              | 1-126-947-11 | ELECT                                    | 47uF        | 20% | 35V  |        |
| R803               | 1-249-389-11 | CARBON                                                | 4.7   | 5%  | 1/4W | F      | C2337              | 1-137-194-81 | FILM                                     | 0.47uF      | 5%  | 50V  |        |
|                    |              |                                                       |       |     |      |        | C2338              | 1-137-194-81 | FILM                                     | 0.47uF      | 5%  | 50V  |        |
| R804               | 1-249-429-11 | CARBON                                                | 10K   | 5%  | 1/4W |        | < CONNECTOR >      |              |                                          |             |     |      |        |
| R806               | 1-247-863-11 | CARBON                                                | 22K   | 5%  | 1/4W |        |                    |              |                                          |             |     |      |        |
| △ R910             | 1-240-877-11 | FUSIBLE                                               | 0.15  | 5%  | 1/2W | F      |                    |              |                                          |             |     |      |        |
| RR11               | 1-249-393-11 | CARBON                                                | 10    | 5%  | 1/4W | F      | CN3013             | 1-691-765-11 | PLUG (MICRO CONNECTOR) 3P                |             |     |      |        |
| RR12               | 1-249-393-11 | CARBON                                                | 10    | 5%  | 1/4W | F      | *****              |              |                                          |             |     |      |        |
|                    |              |                                                       |       |     |      |        | SPEAKER B BOARD    |              |                                          |             |     |      |        |
|                    |              |                                                       |       |     |      |        | *****              |              |                                          |             |     |      |        |
| < RELAY >          |              |                                                       |       |     |      |        | < CAPACITOR >      |              |                                          |             |     |      |        |
| RY560              | 1-755-267-11 | RELAY                                                 |       |     |      |        | CC20               | 1-127-876-11 | CERAMIC                                  | 0.01uF      | 10% | 50V  |        |
| RY601              | 1-755-170-11 | RELAY (12V)                                           |       |     |      |        | CC21               | 1-127-876-11 | CERAMIC                                  | 0.01uF      | 10% | 50V  |        |
| RY701              | 1-755-170-11 | RELAY (12V)                                           |       |     |      |        | < CONNECTOR >      |              |                                          |             |     |      |        |
| RY791              | 1-755-170-11 | RELAY (12V)                                           |       |     |      |        |                    |              |                                          |             |     |      |        |
| < TERMINAL BOARD > |              |                                                       |       |     |      |        | CNP600             | 1-785-103-11 | PIN, CONNECTOR (3.96mm PITCH) 5P         |             |     |      |        |
| TM601              | 1-780-364-11 | TERMINAL BOARD (8P) (SPEAKERS SURROUND,FRONT A)       |       |     |      |        | CNP601             | 1-784-921-11 | PIN, CONNECTOR 4P                        |             |     |      |        |
| *****              |              |                                                       |       |     |      |        | * CNP807           | 1-564-242-00 | PIN, CONNECTOR (3.96mm PITCH) 5P         |             |     |      |        |
|                    |              |                                                       |       |     |      |        | < DIODE >          |              |                                          |             |     |      |        |
| OPT3 BOARD         |              |                                                       |       |     |      |        | D800               | 8-719-991-33 | DIODE                                    | 1SS133T-77  |     |      |        |
| *****              |              |                                                       |       |     |      |        | D818               | 8-719-991-33 | DIODE                                    | 1SS133T-77  |     |      |        |
| < CAPACITOR >      |              |                                                       |       |     |      |        | < TRANSISTOR >     |              |                                          |             |     |      |        |
| G290               | 1-127-888-11 | CERAMIC                                               | 0.1uF | 10% | 50V  |        | Q800               | 8-729-119-78 | TRANSISTOR                               | 2SC2785-HFE |     |      |        |
| < CONNECTOR >      |              |                                                       |       |     |      |        | Q809               | 8-729-119-78 | TRANSISTOR                               | 2SC2785-HFE |     |      |        |
| CN202              | 1-779-978-21 | PIN, CONNECTOR 3P                                     |       |     |      |        | < RESISTOR >       |              |                                          |             |     |      |        |
| < IC >             |              |                                                       |       |     |      |        | R800               | 1-249-404-00 | CARBON                                   | 82          | 5%  | 1/4W | F      |
|                    |              |                                                       |       |     |      |        | R812               | 1-249-421-11 | CARBON                                   | 2.2K        | 5%  | 1/4W |        |
| IC200              | 6-600-057-01 | IC TORX141PL (VIDEO 3 IN/PORTABLE AV IN DIGITAL(OPT)) |       |     |      |        | R824               | 1-249-421-11 | CARBON                                   | 2.2K        | 5%  | 1/4W |        |
| < COIL >           |              |                                                       |       |     |      |        | R831               | 1-249-404-00 | CARBON                                   | 82          | 5%  | 1/4W | F      |
|                    |              |                                                       |       |     |      |        | RR20               | 1-249-393-11 | CARBON                                   | 10          | 5%  | 1/4W | F      |
| L290               | 1-410-517-11 | INDUCTOR                                              | 47uH  |     |      |        | RR21               | 1-249-393-11 | CARBON                                   | 10          | 5%  | 1/4W | F      |
| < RESISTOR >       |              |                                                       |       |     |      |        | < RELAY >          |              |                                          |             |     |      |        |
| R290               | 1-247-807-31 | CARBON                                                | 100   | 5%  | 1/4W |        | RY600              | 1-755-170-11 | RELAY (12V)                              |             |     |      |        |
| *****              |              |                                                       |       |     |      |        | RY801              | 1-755-013-11 | RELAY                                    |             |     |      |        |
|                    |              |                                                       |       |     |      |        | < TERMINAL BOARD > |              |                                          |             |     |      |        |
| POWER BOARD        |              |                                                       |       |     |      |        | TM600              | 1-780-215-11 | TERMINAL BOARD (4P) (SPEAKERS FRONT B)   |             |     |      |        |
| *****              |              |                                                       |       |     |      |        | *****              |              |                                          |             |     |      |        |
| < RESISTOR >       |              |                                                       |       |     |      |        | SPEAKER C/SB BOARD |              |                                          |             |     |      |        |
|                    |              |                                                       |       |     |      |        | *****              |              |                                          |             |     |      |        |
| R114               | 1-247-831-11 | CARBON                                                | 1K    | 5%  | 1/4W |        | < CAPACITOR >      |              |                                          |             |     |      |        |
| < SWITCH >         |              |                                                       |       |     |      |        | CC16               | 1-127-876-11 | CERAMIC                                  | 0.01uF      | 10% | 50V  |        |
| S100               | 1-771-410-21 | SWITCH, TACTILE (I/⏻)                                 |       |     |      |        | CC17               | 1-127-876-11 | CERAMIC                                  | 0.01uF      | 10% | 50V  |        |



## STR-DG700

SPEAKER C/SB

STANDBY

S-VIDEO

| Ref. No.           | Part No.     | Description                                            | Remark        |     |      |  |
|--------------------|--------------|--------------------------------------------------------|---------------|-----|------|--|
| < CONNECTOR >      |              |                                                        |               |     |      |  |
| * CNP503           | 1-564-241-11 | PIN, CONNECTOR (3.96mm PITCH) 4P                       |               |     |      |  |
| < DIODE >          |              |                                                        |               |     |      |  |
| D510               | 8-719-991-33 | DIODE                                                  | 1SS133T-77    |     |      |  |
| < COIL >           |              |                                                        |               |     |      |  |
| L571               | 1-420-872-52 | COIL, AIR-CORE                                         |               |     |      |  |
| L751               | 1-420-872-52 | COIL, AIR-CORE                                         |               |     |      |  |
| < TRANSISTOR >     |              |                                                        |               |     |      |  |
| Q550               | 8-729-119-78 | TRANSISTOR                                             | 2SC2785-HFE   |     |      |  |
| < RESISTOR >       |              |                                                        |               |     |      |  |
| R531               | 1-249-421-11 | CARBON                                                 | 2.2K          | 5%  | 1/4W |  |
| R534               | 1-249-404-00 | CARBON                                                 | 82            | 5%  | 1/4W |  |
| R578               | 1-249-389-11 | CARBON                                                 | 4.7           | 5%  | 1/4W |  |
| R751               | 1-249-389-11 | CARBON                                                 | 4.7           | 5%  | 1/4W |  |
| RR16               | 1-249-393-11 | CARBON                                                 | 10            | 5%  | 1/4W |  |
| RR17               | 1-249-393-11 | CARBON                                                 | 10            | 5%  | 1/4W |  |
| < RELAY >          |              |                                                        |               |     |      |  |
| RY501              | 1-755-170-11 | RELAY (12V)                                            |               |     |      |  |
| < TERMINAL BOARD > |              |                                                        |               |     |      |  |
| TM501              | 1-780-365-11 | TERMINAL BOARD (4P) (SPEAKERS<br>CENTER,SURROUND BACK) |               |     |      |  |
| *****              |              |                                                        |               |     |      |  |
| STANDBY BOARD      |              |                                                        |               |     |      |  |
| *****              |              |                                                        |               |     |      |  |
|                    | 1-533-217-41 | HOLDER, FUSE                                           |               |     |      |  |
| < CAPACITOR >      |              |                                                        |               |     |      |  |
| C913               | 1-127-888-11 | CERAMIC                                                | 0.1uF         | 10% | 50V  |  |
| C914               | 1-127-888-11 | CERAMIC                                                | 0.1uF         | 10% | 50V  |  |
| C915               | 1-126-943-11 | ELECT                                                  | 2200uF        | 20% | 25V  |  |
| C916               | 1-126-942-61 | ELECT                                                  | 1000uF        | 20% | 25V  |  |
| C920               | 1-127-888-11 | CERAMIC                                                | 0.1uF         | 10% | 50V  |  |
| C921               | 1-127-888-11 | CERAMIC                                                | 0.1uF         | 10% | 50V  |  |
| C924               | 1-126-960-11 | ELECT                                                  | 1uF           | 20% | 50V  |  |
| C950               | 1-126-936-11 | ELECT                                                  | 3300uF        | 20% | 16V  |  |
| < CONNECTOR >      |              |                                                        |               |     |      |  |
| CNP801             | 1-784-922-11 | PIN, CONNECTOR 5P                                      |               |     |      |  |
| CNP804             | 1-564-506-11 | PLUG, CONNECTOR 3P                                     |               |     |      |  |
| CNP901             | 1-564-321-00 | PIN, CONNECTOR (3.96mm PITCH) 2P                       |               |     |      |  |
| CNP902             | 1-794-577-21 | PIN, CONNECTOR (POWER) 2P                              |               |     |      |  |
| CNP903             | 1-779-977-11 | PIN, CONNECTOR 6P                                      |               |     |      |  |
| < DIODE >          |              |                                                        |               |     |      |  |
| D901               | 8-719-991-33 | DIODE                                                  | 1SS133T-77    |     |      |  |
| D910               | 6-500-522-11 | DIODE                                                  | 10EDB40-TA2B5 |     |      |  |
| D911               | 6-500-522-11 | DIODE                                                  | 10EDB40-TA2B5 |     |      |  |
| D912               | 6-500-522-11 | DIODE                                                  | 10EDB40-TA2B5 |     |      |  |
| D913               | 6-500-522-11 | DIODE                                                  | 10EDB40-TA2B5 |     |      |  |

| Ref. No.            | Part No.     | Description                          | Remark |  |  |  |
|---------------------|--------------|--------------------------------------|--------|--|--|--|
| D914                | 8-719-991-33 | DIODE 1SS133T-77                     |        |  |  |  |
| D915                | 8-719-991-33 | DIODE 1SS133T-77                     |        |  |  |  |
| D920                | 6-500-522-11 | DIODE 10EDB40-TA2B5                  |        |  |  |  |
| D921                | 6-500-522-11 | DIODE 10EDB40-TA2B5                  |        |  |  |  |
| D922                | 6-500-522-11 | DIODE 10EDB40-TA2B5                  |        |  |  |  |
| D923                | 6-500-522-11 | DIODE 10EDB40-TA2B5                  |        |  |  |  |
| < GROUND TERMINAL > |              |                                      |        |  |  |  |
| G901                | 1-537-738-21 | TERMINAL, GROUND                     |        |  |  |  |
| < AC OUTLET >       |              |                                      |        |  |  |  |
| △ J911              | 1-251-417-11 | OUTLET, A.C. (AC OUTLET) (AUS)       |        |  |  |  |
| △ J911              | 1-785-285-11 | OUTLET, AC (1P) (AC OUTLET) (AEP,UK) |        |  |  |  |
| < TRANSISTOR >      |              |                                      |        |  |  |  |
| Q901                | 8-729-119-78 | TRANSISTOR 2SC2785-HFE               |        |  |  |  |
| Q921                | 8-729-119-78 | TRANSISTOR 2SC2785-HFE               |        |  |  |  |
| < RESISTOR >        |              |                                      |        |  |  |  |
| △ R810              | 1-243-634-11 | FUSIBLE 0.22 5% 1/2W F               |        |  |  |  |
| △ R811              | 1-243-634-11 | FUSIBLE 0.22 5% 1/2W F               |        |  |  |  |
| R902                | 1-247-871-11 | CARBON 47K 5% 1/4W                   |        |  |  |  |
| R903                | 1-249-421-11 | CARBON 2.2K 5% 1/4W                  |        |  |  |  |
| R904                | 1-249-381-11 | CARBON 1 5% 1/4W F                   |        |  |  |  |
| R921                | 1-247-871-11 | CARBON 47K 5% 1/4W                   |        |  |  |  |
| R922                | 1-247-863-11 | CARBON 22K 5% 1/4W                   |        |  |  |  |
| R923                | 1-249-429-11 | CARBON 10K 5% 1/4W                   |        |  |  |  |
| < RELAY >           |              |                                      |        |  |  |  |
| △ RY901             | 1-755-541-11 | RELAY                                |        |  |  |  |
| < TRANSFORMER >     |              |                                      |        |  |  |  |
| △ T902              | 1-443-517-11 | TRANSFORMER, POWER (SUB)             |        |  |  |  |
| *****               |              |                                      |        |  |  |  |
| S-VIDEO BOARD       |              |                                      |        |  |  |  |
| *****               |              |                                      |        |  |  |  |
| < CAPACITOR >       |              |                                      |        |  |  |  |
| C2107               | 1-162-215-31 | CERAMIC 47PF 5% 50V                  |        |  |  |  |
| C2108               | 1-162-215-31 | CERAMIC 47PF 5% 50V                  |        |  |  |  |
| C2109               | 1-126-964-11 | ELECT 10uF 20% 50V                   |        |  |  |  |
| C2110               | 1-127-888-11 | CERAMIC 0.1uF 10% 50V                |        |  |  |  |
| C2111               | 1-126-964-11 | ELECT 10uF 20% 50V                   |        |  |  |  |
| C2112               | 1-127-888-11 | CERAMIC 0.1uF 10% 50V                |        |  |  |  |
| C2114               | 1-127-888-11 | CERAMIC 0.1uF 10% 50V                |        |  |  |  |
| C2115               | 1-162-215-31 | CERAMIC 47PF 5% 50V                  |        |  |  |  |
| C2116               | 1-162-215-31 | CERAMIC 47PF 5% 50V                  |        |  |  |  |
| C2117               | 1-126-964-11 | ELECT 10uF 20% 50V                   |        |  |  |  |
| C2118               | 1-127-888-11 | CERAMIC 0.1uF 10% 50V                |        |  |  |  |
| C2120               | 1-127-888-11 | CERAMIC 0.1uF 10% 50V                |        |  |  |  |
| C2121               | 1-126-947-11 | ELECT 47uF 20% 35V                   |        |  |  |  |
| C2124               | 1-126-947-11 | ELECT 47uF 20% 35V                   |        |  |  |  |
| C2125               | 1-127-888-11 | CERAMIC 0.1uF 10% 50V                |        |  |  |  |
| C2127               | 1-127-888-11 | CERAMIC 0.1uF 10% 50V                |        |  |  |  |

| Ref. No.      | Part No.                   | Description                                             | Remark |  |  |  | Ref. No. | Part No.     | Description  | Remark   |     |     |  |
|---------------|----------------------------|---------------------------------------------------------|--------|--|--|--|----------|--------------|--------------|----------|-----|-----|--|
| < CONNECTOR > |                            |                                                         |        |  |  |  |          |              |              |          |     |     |  |
| CNP2101       | 1-564-705-11               | PIN, CONNECTOR (SMALL TYPE) 3P                          |        |  |  |  | C3336    | 1-100-566-11 | CERAMIC CHIP | 0.1uF    | 10% | 25V |  |
| CNS2102       | 1-784-774-11               | CONNECTOR, FFC 13P                                      |        |  |  |  | C3404    | 1-126-964-11 | ELECT        | 10uF     | 20% | 50V |  |
| < DIODE >     |                            |                                                         |        |  |  |  |          |              |              |          |     |     |  |
| D2102         | 8-719-991-33               | DIODE 1SS133T-77                                        |        |  |  |  | C3406    | 1-126-964-11 | ELECT        | 10uF     | 20% | 50V |  |
| D2103         | 8-719-991-33               | DIODE 1SS133T-77                                        |        |  |  |  | C3408    | 1-126-964-11 | ELECT        | 10uF     | 20% | 50V |  |
| < IC >        |                            |                                                         |        |  |  |  |          |              |              |          |     |     |  |
| IC2101        | 6-701-890-01               | IC NJM2595D                                             |        |  |  |  | C3410    | 1-162-923-11 | CERAMIC CHIP | 47PF     | 5%  | 50V |  |
| IC2102        | 6-701-890-01               | IC NJM2595D                                             |        |  |  |  | C3431    | 1-126-947-11 | ELECT        | 47uF     | 20% | 35V |  |
| < CONNECTOR > |                            |                                                         |        |  |  |  |          |              |              |          |     |     |  |
| J2104         | 1-537-943-11               | CONNECTOR (DIN) 1P (MONITOR S-VIDEO OUT)                |        |  |  |  | C3432    | 1-126-947-11 | ELECT        | 47uF     | 20% | 35V |  |
| J2105         | 1-794-937-11               | CONNECTOR (DIN) 2P (DVD S-VIDEO IN, VIDEO 2 S-VIDEO IN) |        |  |  |  | C3433    | 1-100-566-11 | CERAMIC CHIP | 0.1uF    | 10% | 25V |  |
| J2106         | 1-794-937-11               | CONNECTOR (DIN) 2P (VIDEO 1 S-VIDEO OUT/IN)             |        |  |  |  | C3434    | 1-162-966-11 | CERAMIC CHIP | 0.0022uF | 10% | 50V |  |
| < RESISTOR >  |                            |                                                         |        |  |  |  |          |              |              |          |     |     |  |
| R2103         | 1-215-394-00               | METAL 75 1% 1/4W                                        |        |  |  |  | C3435    | 1-162-966-11 | CERAMIC CHIP | 0.0022uF | 10% | 50V |  |
| R2104         | 1-215-394-00               | METAL 75 1% 1/4W                                        |        |  |  |  | C3436    | 1-126-964-11 | ELECT        | 10uF     | 20% | 50V |  |
| R2105         | 1-215-394-00               | METAL 75 1% 1/4W                                        |        |  |  |  | C3438    | 1-162-927-11 | CERAMIC CHIP | 100PF    | 5%  | 50V |  |
| R2106         | 1-215-394-00               | METAL 75 1% 1/4W                                        |        |  |  |  | C3439    | 1-100-566-11 | CERAMIC CHIP | 0.1uF    | 10% | 25V |  |
| R2107         | 1-215-394-00               | METAL 75 1% 1/4W                                        |        |  |  |  | C3440    | 1-100-566-11 | CERAMIC CHIP | 0.1uF    | 10% | 25V |  |
| R2108         | 1-215-394-00               | METAL 75 1% 1/4W                                        |        |  |  |  | C3441    | 1-100-566-11 | CERAMIC CHIP | 0.1uF    | 10% | 25V |  |
| R2109         | 1-215-394-00               | METAL 75 1% 1/4W                                        |        |  |  |  | C3442    | 1-100-566-11 | CERAMIC CHIP | 0.1uF    | 10% | 25V |  |
| R2110         | 1-215-394-00               | METAL 75 1% 1/4W                                        |        |  |  |  | C3521    | 1-126-964-11 | ELECT        | 10uF     | 20% | 50V |  |
| R2111         | 1-215-394-00               | METAL 75 1% 1/4W                                        |        |  |  |  | C3522    | 1-126-964-11 | ELECT        | 10uF     | 20% | 50V |  |
| R2112         | 1-215-394-00               | METAL 75 1% 1/4W                                        |        |  |  |  | C3523    | 1-126-964-11 | ELECT        | 10uF     | 20% | 50V |  |
| R2116         | 1-215-394-00               | METAL 75 1% 1/4W                                        |        |  |  |  | C3601    | 1-162-970-11 | CERAMIC CHIP | 0.01uF   | 10% | 25V |  |
| *****         |                            |                                                         |        |  |  |  |          |              |              |          |     |     |  |
| A-1181-229-A  | VIDEO BOARD, COMPLETE      |                                                         |        |  |  |  | C3602    | 1-162-964-11 | CERAMIC CHIP | 0.001uF  | 10% | 50V |  |
| *****         |                            |                                                         |        |  |  |  |          |              |              |          |     |     |  |
| 7-685-646-79  | SCREW +BVTP 3X8 TYPE2 IT-3 |                                                         |        |  |  |  | C3603    | 1-162-970-11 | CERAMIC CHIP | 0.01uF   | 10% | 25V |  |
| < CAPACITOR > |                            |                                                         |        |  |  |  |          |              |              |          |     |     |  |
| C2335         | 1-126-947-11               | ELECT 47uF 20% 35V                                      |        |  |  |  | C3604    | 1-164-227-11 | CERAMIC CHIP | 0.022uF  | 10% | 25V |  |
| C2336         | 1-126-947-11               | ELECT 47uF 20% 35V                                      |        |  |  |  | C3605    | 1-162-970-11 | CERAMIC CHIP | 0.01uF   | 10% | 25V |  |
| C2337         | 1-100-385-11               | CERAMIC CHIP 0.47uF 25V                                 |        |  |  |  | C3606    | 1-126-964-11 | ELECT        | 10uF     | 20% | 50V |  |
| C2338         | 1-100-385-11               | CERAMIC CHIP 0.47uF 25V                                 |        |  |  |  | C3607    | 1-162-970-11 | CERAMIC CHIP | 0.01uF   | 10% | 25V |  |
| C2339         | 1-126-947-11               | ELECT 47uF 20% 35V                                      |        |  |  |  | C3608    | 1-162-970-11 | CERAMIC CHIP | 0.01uF   | 10% | 25V |  |
| C2340         | 1-100-385-11               | CERAMIC CHIP 0.47uF 25V                                 |        |  |  |  | C3609    | 1-162-970-11 | CERAMIC CHIP | 0.01uF   | 10% | 25V |  |
| C3141         | 1-100-566-11               | CERAMIC CHIP 0.1uF 10% 25V                              |        |  |  |  | C3610    | 1-162-970-11 | CERAMIC CHIP | 0.01uF   | 10% | 25V |  |
| C3275         | 1-126-964-11               | ELECT 10uF 20% 50V                                      |        |  |  |  | C3611    | 1-162-970-11 | CERAMIC CHIP | 0.01uF   | 10% | 25V |  |
| C3276         | 1-100-566-11               | CERAMIC CHIP 0.1uF 10% 25V                              |        |  |  |  | C3612    | 1-162-970-11 | CERAMIC CHIP | 0.01uF   | 10% | 25V |  |
| C3277         | 1-126-916-11               | ELECT 1000uF 20% 6.3V                                   |        |  |  |  | C3613    | 1-162-970-11 | CERAMIC CHIP | 0.01uF   | 10% | 25V |  |
| C3278         | 1-126-933-11               | ELECT 100uF 20% 16V                                     |        |  |  |  | C3614    | 1-162-970-11 | CERAMIC CHIP | 0.01uF   | 10% | 25V |  |
| C3279         | 1-126-962-11               | ELECT 3.3uF 20% 50V                                     |        |  |  |  | C3615    | 1-162-970-11 | CERAMIC CHIP | 0.01uF   | 10% | 25V |  |
| C3323         | 1-126-964-11               | ELECT 10uF 20% 50V                                      |        |  |  |  | C3616    | 1-126-933-11 | ELECT        | 100uF    | 20% | 16V |  |
| C3324         | 1-126-964-11               | ELECT 10uF 20% 50V                                      |        |  |  |  | C3617    | 1-162-970-11 | CERAMIC CHIP | 0.01uF   | 10% | 25V |  |
| C3325         | 1-126-964-11               | ELECT 10uF 20% 50V                                      |        |  |  |  | C3618    | 1-126-933-11 | ELECT        | 100uF    | 20% | 16V |  |
| C3332         | 1-126-947-11               | ELECT 47uF 20% 35V                                      |        |  |  |  | C3619    | 1-162-970-11 | CERAMIC CHIP | 0.01uF   | 10% | 25V |  |
| C3334         | 1-126-947-11               | ELECT 47uF 20% 35V                                      |        |  |  |  | C3620    | 1-162-970-11 | CERAMIC CHIP | 0.01uF   | 10% | 25V |  |
| C3335         | 1-100-566-11               | CERAMIC CHIP 0.1uF 10% 25V                              |        |  |  |  | C3621    | 1-162-917-11 | CERAMIC CHIP | 15PF     | 5%  | 50V |  |
| *****         |                            |                                                         |        |  |  |  |          |              |              |          |     |     |  |
| C3336         | 1-100-566-11               | CERAMIC CHIP 0.1uF 10% 25V                              |        |  |  |  | C3622    | 1-126-964-11 | ELECT        | 10uF     | 20% | 50V |  |
| C3337         | 1-100-566-11               | CERAMIC CHIP 0.1uF 10% 25V                              |        |  |  |  | C3623    | 1-162-970-11 | CERAMIC CHIP | 0.01uF   | 10% | 25V |  |
| C3338         | 1-100-566-11               | CERAMIC CHIP 0.1uF 10% 25V                              |        |  |  |  | C3624    | 1-162-970-11 | CERAMIC CHIP | 0.01uF   | 10% | 25V |  |
| C3339         | 1-100-566-11               | CERAMIC CHIP 0.1uF 10% 25V                              |        |  |  |  | C3631    | 1-162-917-11 | CERAMIC CHIP | 15PF     | 5%  | 50V |  |
| C3340         | 1-100-566-11               | CERAMIC CHIP 0.1uF 10% 25V                              |        |  |  |  | C3632    | 1-136-153-00 | MYLAR        | 0.01uF   | 5%  | 50V |  |
| C3341         | 1-100-566-11               | CERAMIC CHIP 0.1uF 10% 25V                              |        |  |  |  | C3634    | 1-162-970-11 | CERAMIC CHIP | 0.01uF   | 10% | 25V |  |
| C3342         | 1-100-566-11               | CERAMIC CHIP 0.1uF 10% 25V                              |        |  |  |  | C3641    | 1-126-964-11 | ELECT        | 10uF     | 20% | 50V |  |
| C3343         | 1-100-566-11               | CERAMIC CHIP 0.1uF 10% 25V                              |        |  |  |  | C3645    | 1-126-947-11 | ELECT        | 47uF     | 20% | 35V |  |
| C3344         | 1-100-566-11               | CERAMIC CHIP 0.1uF 10% 25V                              |        |  |  |  | C3646    | 1-126-947-11 | ELECT        | 47uF     | 20% | 35V |  |
| C3345         | 1-100-566-11               | CERAMIC CHIP 0.1uF 10% 25V                              |        |  |  |  | C3647    | 1-100-566-11 | CERAMIC CHIP | 0.1uF    | 10% | 25V |  |
| C3346         | 1-100-566-11               | CERAMIC CHIP 0.1uF 10% 25V                              |        |  |  |  | C3648    | 1-164-160-11 | CERAMIC CHIP | 20PF     | 5%  | 50V |  |
| C3347         | 1-100-566-11               | CERAMIC CHIP 0.1uF 10% 25V                              |        |  |  |  | C3649    | 1-100-566-11 | CERAMIC CHIP | 0.1uF    | 10% | 25V |  |
| C3348         | 1-100-566-11               | CERAMIC CHIP 0.1uF 10% 25V                              |        |  |  |  | C3651    | 1-164-227-11 | CERAMIC CHIP | 0.022uF  | 10% | 25V |  |
| C3349         | 1-100-566-11               | CERAMIC CHIP 0.1uF 10% 25V                              |        |  |  |  | C3652    | 1-164-227-11 | CERAMIC CHIP | 0.022uF  | 10% | 25V |  |
| C3350         | 1-100-566-11               | CERAMIC CHIP 0.1uF 10% 25V                              |        |  |  |  | C3653    | 1-100-566-11 | CERAMIC CHIP | 0.1uF    | 10% | 25V |  |
| C3351         | 1-100-566-11               | CERAMIC CHIP 0.1uF 10% 25V                              |        |  |  |  | C3671    | 1-126-964-11 | ELECT        | 10uF     | 20% | 50V |  |
| C3352         | 1-100-566-11               | CERAMIC CHIP 0.1uF 10% 25V                              |        |  |  |  | C3672    | 1-126-964-11 | ELECT        | 10uF     | 20% | 50V |  |
| C3353         | 1-100-566-11               | CERAMIC CHIP 0.1uF 10% 25V                              |        |  |  |  | C3673    | 1-126-964-11 | ELECT        | 10uF     | 20% | 50V |  |

## VIDEO

| Ref. No.       | Part No.     | Description           | Remark   |     |      | Ref. No.            | Part No.     | Description                                                                                    | Remark |
|----------------|--------------|-----------------------|----------|-----|------|---------------------|--------------|------------------------------------------------------------------------------------------------|--------|
| C3674          | 1-162-970-11 | CERAMIC CHIP          | 0.01uF   | 10% | 25V  | D3723               | 8-719-016-74 | DIODE 1SS352                                                                                   |        |
| C3675          | 1-126-947-11 | ELECT                 | 47uF     | 20% | 35V  | D3731               | 8-719-016-74 | DIODE 1SS352                                                                                   |        |
| C3676          | 1-126-947-11 | ELECT                 | 47uF     | 20% | 35V  | D3732               | 8-719-016-74 | DIODE 1SS352                                                                                   |        |
| C3677          | 1-162-970-11 | CERAMIC CHIP          | 0.01uF   | 10% | 25V  | D3733               | 8-719-016-74 | DIODE 1SS352                                                                                   |        |
| C3678          | 1-162-970-11 | CERAMIC CHIP          | 0.01uF   | 10% | 25V  | < FERRITE BEAD >    |              |                                                                                                |        |
| C3679          | 1-162-970-11 | CERAMIC CHIP          | 0.01uF   | 10% | 25V  | FB3252              | 1-469-152-11 | FERRITE, EMI (SMD) (2012)                                                                      |        |
| C3701          | 1-126-960-11 | ELECT                 | 1uF      | 20% | 50V  | FB3431              | 1-469-152-11 | FERRITE, EMI (SMD) (2012)                                                                      |        |
| C3702          | 1-126-960-11 | ELECT                 | 1uF      | 20% | 50V  | FB3432              | 1-469-152-11 | FERRITE, EMI (SMD) (2012)                                                                      |        |
| C3703          | 1-136-165-00 | FILM                  | 0.1uF    | 5%  | 50V  | FB3601              | 1-469-152-11 | FERRITE, EMI (SMD) (2012)                                                                      |        |
| C3704          | 1-136-165-00 | FILM                  | 0.1uF    | 5%  | 50V  | FB3602              | 1-469-152-11 | FERRITE, EMI (SMD) (2012)                                                                      |        |
| C3705          | 1-136-165-00 | FILM                  | 0.1uF    | 5%  | 50V  | FB3661              | 1-469-152-11 | FERRITE, EMI (SMD) (2012)                                                                      |        |
| C3706          | 1-136-165-00 | FILM                  | 0.1uF    | 5%  | 50V  | FB3662              | 1-469-152-11 | FERRITE, EMI (SMD) (2012)                                                                      |        |
| C3707          | 1-162-917-11 | CERAMIC CHIP          | 15PF     | 5%  | 50V  | FB3801              | 1-469-152-11 | FERRITE, EMI (SMD) (2012)                                                                      |        |
| C3708          | 1-163-231-11 | CERAMIC CHIP          | 15PF     | 5%  | 50V  | < LPF >             |              |                                                                                                |        |
| C3709          | 1-126-959-11 | ELECT                 | 0.47uF   | 20% | 50V  | FL3621              | 1-239-847-11 | FILTER, LOW PASS                                                                               |        |
| C3710          | 1-162-962-11 | CERAMIC CHIP          | 470PF    | 10% | 50V  | FL3631              | 1-239-847-11 | FILTER, LOW PASS                                                                               |        |
| C3711          | 1-162-970-11 | CERAMIC CHIP          | 0.01uF   | 10% | 25V  | < IC >              |              |                                                                                                |        |
| C3712          | 1-126-947-11 | ELECT                 | 47uF     | 20% | 35V  | IC3102              | 8-759-701-59 | IC NJM78M09FA                                                                                  |        |
| C3713          | 1-126-959-11 | ELECT                 | 0.47uF   | 20% | 50V  | IC3103              | 8-759-231-53 | IC TA7805S                                                                                     |        |
| C3714          | 1-126-960-11 | ELECT                 | 1uF      | 20% | 50V  | IC3104              | 8-759-245-79 | IC TA79005S                                                                                    |        |
| C3715          | 1-162-968-11 | CERAMIC CHIP          | 0.0047uF | 10% | 50V  | IC3141              | 8-759-491-47 | IC TC74VHCT08AFT(EL)                                                                           |        |
| C3716          | 1-136-165-00 | MYLAR                 | 0.1uF    | 5%  | 50V  | IC3253              | 8-759-822-05 | IC LA7213                                                                                      |        |
| C3717          | 1-126-959-11 | ELECT                 | 0.47uF   | 20% | 50V  | IC3321              | 8-759-663-94 | IC LA7106M-TLM                                                                                 |        |
| C3718          | 1-162-970-11 | CERAMIC CHIP          | 0.01uF   | 10% | 25V  | IC3431              | 6-704-199-01 | IC NJM2595M-TE2                                                                                |        |
| C3719          | 1-126-960-11 | ELECT                 | 1uF      | 20% | 50V  | IC3601              | 8-752-386-17 | IC CXD2064Q                                                                                    |        |
| C3720          | 1-162-927-11 | CERAMIC CHIP          | 100PF    | 5%  | 50V  | IC3651              | 8-759-300-71 | IC HD14053BFP                                                                                  |        |
| C3723          | 1-126-964-11 | ELECT                 | 10uF     | 20% | 50V  | IC3671              | 8-759-663-94 | IC LA7106M-TLM                                                                                 |        |
| C3724          | 1-126-933-11 | ELECT                 | 100uF    | 20% | 16V  | IC3701              | 8-752-109-74 | IC CXA2199Q                                                                                    |        |
| C3725          | 1-126-947-11 | ELECT                 | 47uF     | 20% | 35V  | IC3721              | 8-759-565-20 | IC TDA4665T/V5-118                                                                             |        |
| C3726          | 1-162-970-11 | CERAMIC CHIP          | 0.01uF   | 10% | 25V  | IC3731              | 8-759-822-05 | IC LA7213                                                                                      |        |
| C3731          | 1-126-962-11 | ELECT                 | 3.3uF    | 20% | 50V  | IC3751              | 8-759-300-71 | IC HD14053BFP                                                                                  |        |
| C3732          | 1-126-933-11 | ELECT                 | 100uF    | 20% | 16V  | < JACK >            |              |                                                                                                |        |
| C3733          | 1-126-916-11 | ELECT                 | 1000uF   | 20% | 6.3V | J3301               | 1-816-592-11 | JACK, PIN 9P (COMPONENT VIDEO<br>DVD IN (ASSIGNABLE),<br>VIDEO 2 IN (ASSIGNABLE), MONITOR OUT) |        |
| C3734          | 1-100-566-11 | CERAMIC CHIP          | 0.1uF    | 10% | 25V  | J3401               | 1-770-337-11 | JACK, PIN 3P (VIDEO 1 VIDEO OUT/IN,<br>MONITOR VIDEO OUT)                                      |        |
| C3751          | 1-100-566-11 | CERAMIC CHIP          | 0.1uF    | 10% | 25V  | J3402               | 1-518-043-11 | JACK, PIN 2P (DVD VIDEO IN,<br>VIDEO 2 VIDEO IN)                                               |        |
| C3752          | 1-162-966-11 | CERAMIC CHIP          | 0.0022uF | 10% | 50V  | < JUMPER RESISTOR > |              |                                                                                                |        |
| C3753          | 1-162-966-11 | CERAMIC CHIP          | 0.0022uF | 10% | 50V  | JR3401              | 1-216-864-11 | SHORT CHIP                                                                                     | 0      |
| < CONNECTOR >  |              |                       |          |     |      | JR3402              | 1-216-864-11 | SHORT CHIP                                                                                     | 0      |
| CN3002         | 1-784-921-11 | PIN, CONNECTOR 4P     |          |     |      |                     |              |                                                                                                |        |
| CNS202         | 1-784-774-11 | CONNECTOR, FFC 13P    |          |     |      |                     |              |                                                                                                |        |
| CNS509         | 1-568-838-11 | CONNECTOR, FFC 21P    |          |     |      |                     |              |                                                                                                |        |
| < DIODE >      |              |                       |          |     |      | JR3403              | 1-216-296-11 | SHORT CHIP                                                                                     | 0      |
| D3253          | 8-719-016-74 | DIODE 1SS352          |          |     |      |                     |              |                                                                                                |        |
| D3254          | 8-719-016-74 | DIODE 1SS352          |          |     |      |                     |              |                                                                                                |        |
| D3301          | 8-719-016-74 | DIODE 1SS352          |          |     |      |                     |              |                                                                                                |        |
| D3302          | 8-719-016-74 | DIODE 1SS352          |          |     |      |                     |              |                                                                                                |        |
| D3431          | 8-719-016-74 | DIODE 1SS352          |          |     |      |                     |              |                                                                                                |        |
| D3432          | 8-719-016-74 | DIODE 1SS352          |          |     |      |                     |              |                                                                                                |        |
| D3671          | 8-719-016-74 | DIODE 1SS352          |          |     |      |                     |              |                                                                                                |        |
| D3672          | 8-719-016-74 | DIODE 1SS352          |          |     |      |                     |              |                                                                                                |        |
| D3673          | 8-719-016-74 | DIODE 1SS352          |          |     |      |                     |              |                                                                                                |        |
| D3674          | 8-719-016-74 | DIODE 1SS352          |          |     |      |                     |              |                                                                                                |        |
| D3675          | 8-719-016-74 | DIODE 1SS352          |          |     |      |                     |              |                                                                                                |        |
| D3676          | 8-719-016-74 | DIODE 1SS352          |          |     |      |                     |              |                                                                                                |        |
| D3721          | 8-719-016-74 | DIODE 1SS352          |          |     |      |                     |              |                                                                                                |        |
| D3722          | 8-719-016-74 | DIODE 1SS352          |          |     |      |                     |              |                                                                                                |        |
| < TRANSISTOR > |              |                       |          |     |      | JW3601              | 1-216-864-11 | SHORT CHIP                                                                                     | 0      |
| Q3252          | 1-801-806-11 | TRANSISTOR DTC144EKA  |          |     |      |                     |              |                                                                                                |        |
| Q3301          | 8-729-230-49 | TRANSISTOR 2SC2712-YG |          |     |      |                     |              |                                                                                                |        |
| Q3302          | 8-729-230-49 | TRANSISTOR 2SC2712-YG |          |     |      |                     |              |                                                                                                |        |
| Q3304          | 8-729-230-49 | TRANSISTOR 2SC2712-YG |          |     |      |                     |              |                                                                                                |        |
| Q3601          | 8-729-230-49 | TRANSISTOR 2SC2712-YG |          |     |      |                     |              |                                                                                                |        |

| Ref. No.     | Part No.     | Description | Remark         |      |       |  | Ref. No. | Part No.     | Description | Remark |      |       |  |
|--------------|--------------|-------------|----------------|------|-------|--|----------|--------------|-------------|--------|------|-------|--|
| Q3604        | 8-729-230-49 | TRANSISTOR  | 2SC2712-YG     |      |       |  | R3605    | 1-216-827-11 | METAL CHIP  | 3.3K   | 5%   | 1/10W |  |
| Q3621        | 8-729-216-22 | TRANSISTOR  | 2SA1162-G      |      |       |  | R3606    | 1-216-825-11 | METAL CHIP  | 2.2K   | 5%   | 1/10W |  |
| Q3622        | 8-729-230-49 | TRANSISTOR  | 2SC2712-YG     |      |       |  | R3607    | 1-218-857-11 | METAL CHIP  | 2.7K   | 0.5% | 1/10W |  |
| Q3623        | 8-729-230-49 | TRANSISTOR  | 2SC2712-YG     |      |       |  | R3610    | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |  |
| Q3624        | 8-729-216-22 | TRANSISTOR  | 2SA1162-G      |      |       |  | R3611    | 1-218-847-11 | METAL CHIP  | 1K     | 0.5% | 1/10W |  |
| Q3631        | 8-729-216-22 | TRANSISTOR  | 2SA1162-G      |      |       |  | R3612    | 1-218-839-11 | METAL CHIP  | 470    | 0.5% | 1/10W |  |
| Q3632        | 8-729-230-49 | TRANSISTOR  | 2SC2712-YG     |      |       |  | R3619    | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W |  |
| Q3633        | 8-729-230-49 | TRANSISTOR  | 2SC2712-YG     |      |       |  | R3621    | 1-218-827-11 | METAL CHIP  | 150    | 0.5% | 1/10W |  |
| Q3647        | 8-729-216-22 | TRANSISTOR  | 2SA1162-G      |      |       |  | R3622    | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |  |
| Q3651        | 8-729-230-49 | TRANSISTOR  | 2SC2712-YG     |      |       |  | R3623    | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W |  |
| Q3652        | 8-729-230-49 | TRANSISTOR  | 2SC2712-YG     |      |       |  | R3624    | 1-218-289-11 | METAL CHIP  | 510    | 5%   | 1/10W |  |
| Q3653        | 8-729-230-49 | TRANSISTOR  | 2SC2712-YG     |      |       |  | R3625    | 1-216-830-11 | METAL CHIP  | 5.6K   | 5%   | 1/10W |  |
| Q3671        | 8-729-216-22 | TRANSISTOR  | 2SA1162-G      |      |       |  | R3626    | 1-216-839-11 | METAL CHIP  | 33K    | 5%   | 1/10W |  |
| Q3672        | 8-729-230-49 | TRANSISTOR  | 2SC2712-YG     |      |       |  | R3627    | 1-216-841-11 | METAL CHIP  | 47K    | 5%   | 1/10W |  |
| Q3673        | 8-729-216-22 | TRANSISTOR  | 2SA1162-G      |      |       |  | R3628    | 1-218-845-11 | METAL CHIP  | 820    | 0.5% | 1/10W |  |
| Q3674        | 8-729-230-49 | TRANSISTOR  | 2SC2712-YG     |      |       |  | R3629    | 1-218-847-11 | METAL CHIP  | 1K     | 0.5% | 1/10W |  |
| Q3675        | 8-729-216-22 | TRANSISTOR  | 2SA1162-G      |      |       |  | R3631    | 1-218-829-11 | METAL CHIP  | 180    | 0.5% | 1/10W |  |
| Q3676        | 8-729-230-49 | TRANSISTOR  | 2SC2712-YG     |      |       |  | R3632    | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |  |
| Q3677        | 8-729-027-43 | TRANSISTOR  | DTC114EKA-T146 |      |       |  | R3633    | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W |  |
| Q3678        | 8-729-027-23 | TRANSISTOR  | DTA114EKA-T146 |      |       |  | R3634    | 1-218-289-11 | METAL CHIP  | 510    | 5%   | 1/10W |  |
| Q3701        | 8-729-216-22 | TRANSISTOR  | 2SA1162-G      |      |       |  | R3635    | 1-216-830-11 | METAL CHIP  | 5.6K   | 5%   | 1/10W |  |
| Q3731        | 1-801-806-11 | TRANSISTOR  | DTC144EKA      |      |       |  | R3636    | 1-216-839-11 | METAL CHIP  | 33K    | 5%   | 1/10W |  |
| < RESISTOR > |              |             |                |      |       |  | R3637    | 1-216-841-11 | METAL CHIP  | 47K    | 5%   | 1/10W |  |
| R3275        | 1-216-825-11 | METAL CHIP  | 2.2K           | 5%   | 1/10W |  | R3638    | 1-218-847-11 | METAL CHIP  | 1K     | 0.5% | 1/10W |  |
| R3276        | 1-216-829-11 | METAL CHIP  | 4.7K           | 5%   | 1/10W |  | R3639    | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |  |
| R3277        | 1-216-847-11 | METAL CHIP  | 150K           | 5%   | 1/10W |  | R3640    | 1-218-847-11 | METAL CHIP  | 1K     | 0.5% | 1/10W |  |
| R3278        | 1-216-815-11 | METAL CHIP  | 330            | 5%   | 1/10W |  | R3641    | 1-218-855-11 | METAL CHIP  | 2.2K   | 0.5% | 1/10W |  |
| R3301        | 1-211-990-11 | METAL CHIP  | 75             | 0.5% | 1/10W |  | R3642    | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W |  |
| R3302        | 1-211-990-11 | METAL CHIP  | 75             | 0.5% | 1/10W |  | R3643    | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W |  |
| R3303        | 1-211-990-11 | METAL CHIP  | 75             | 0.5% | 1/10W |  | R3644    | 1-218-855-11 | METAL CHIP  | 2.2K   | 0.5% | 1/10W |  |
| R3304        | 1-216-825-11 | METAL CHIP  | 2.2K           | 5%   | 1/10W |  | R3645    | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |  |
| R3305        | 1-216-833-11 | METAL CHIP  | 10K            | 5%   | 1/10W |  | R3646    | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W |  |
| R3306        | 1-216-829-11 | METAL CHIP  | 4.7K           | 5%   | 1/10W |  | R3647    | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W |  |
| R3307        | 1-216-833-11 | METAL CHIP  | 10K            | 5%   | 1/10W |  | R3651    | 1-216-841-11 | METAL CHIP  | 47K    | 5%   | 1/10W |  |
| R3315        | 1-216-833-11 | METAL CHIP  | 10K            | 5%   | 1/10W |  | R3652    | 1-216-841-11 | METAL CHIP  | 47K    | 5%   | 1/10W |  |
| R3316        | 1-216-829-11 | METAL CHIP  | 4.7K           | 5%   | 1/10W |  | R3653    | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |  |
| R3318        | 1-216-864-11 | SHORT CHIP  | 0              |      |       |  | R3654    | 1-216-823-11 | METAL CHIP  | 1.5K   | 5%   | 1/10W |  |
| R3319        | 1-216-864-11 | SHORT CHIP  | 0              |      |       |  | R3655    | 1-216-817-11 | METAL CHIP  | 470    | 5%   | 1/10W |  |
| R3320        | 1-216-864-11 | SHORT CHIP  | 0              |      |       |  | R3656    | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W |  |
| R3321        | 1-216-833-11 | METAL CHIP  | 10K            | 5%   | 1/10W |  | R3657    | 1-216-823-11 | METAL CHIP  | 1.5K   | 5%   | 1/10W |  |
| R3322        | 1-216-833-11 | METAL CHIP  | 10K            | 5%   | 1/10W |  | R3658    | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W |  |
| R3323        | 1-216-833-11 | METAL CHIP  | 10K            | 5%   | 1/10W |  | R3659    | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |  |
| R3324        | 1-216-809-11 | METAL CHIP  | 100            | 5%   | 1/10W |  | R3671    | 1-216-813-11 | METAL CHIP  | 220    | 5%   | 1/10W |  |
| R3401        | 1-216-864-11 | SHORT CHIP  | 0              |      |       |  | R3672    | 1-218-841-11 | METAL CHIP  | 560    | 0.5% | 1/10W |  |
| R3402        | 1-216-864-11 | SHORT CHIP  | 0              |      |       |  | R3673    | 1-218-841-11 | METAL CHIP  | 560    | 0.5% | 1/10W |  |
| R3403        | 1-216-864-11 | SHORT CHIP  | 0              |      |       |  | R3674    | 1-216-839-11 | METAL CHIP  | 33K    | 5%   | 1/10W |  |
| R3404        | 1-216-821-11 | METAL CHIP  | 1K             | 5%   | 1/10W |  | R3675    | 1-216-841-11 | METAL CHIP  | 47K    | 5%   | 1/10W |  |
| R3405        | 1-211-990-11 | METAL CHIP  | 75             | 0.5% | 1/10W |  | R3676    | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W |  |
| R3407        | 1-211-990-11 | METAL CHIP  | 75             | 0.5% | 1/10W |  | R3677    | 1-216-813-11 | METAL CHIP  | 220    | 5%   | 1/10W |  |
| R3408        | 1-211-990-11 | METAL CHIP  | 75             | 0.5% | 1/10W |  | R3678    | 1-218-841-11 | METAL CHIP  | 560    | 0.5% | 1/10W |  |
| R3409        | 1-211-990-11 | METAL CHIP  | 75             | 0.5% | 1/10W |  | R3679    | 1-218-841-11 | METAL CHIP  | 560    | 0.5% | 1/10W |  |
| R3411        | 1-211-990-11 | METAL CHIP  | 75             | 0.5% | 1/10W |  | R3680    | 1-216-845-11 | METAL CHIP  | 100K   | 5%   | 1/10W |  |
| R3524        | 1-216-837-11 | METAL CHIP  | 22K            | 5%   | 1/10W |  | R3681    | 1-216-839-11 | METAL CHIP  | 33K    | 5%   | 1/10W |  |
| R3525        | 1-216-837-11 | METAL CHIP  | 22K            | 5%   | 1/10W |  | R3682    | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W |  |
| R3526        | 1-216-837-11 | METAL CHIP  | 22K            | 5%   | 1/10W |  | R3683    | 1-216-813-11 | METAL CHIP  | 220    | 5%   | 1/10W |  |
| R3603        | 1-216-842-11 | METAL CHIP  | 56K            | 5%   | 1/10W |  | R3684    | 1-218-841-11 | METAL CHIP  | 560    | 0.5% | 1/10W |  |
| R3604        | 1-216-818-11 | METAL CHIP  | 560            | 5%   | 1/10W |  | R3685    | 1-218-841-11 | METAL CHIP  | 560    | 0.5% | 1/10W |  |
|              |              |             |                |      |       |  | R3686    | 1-216-841-11 | METAL CHIP  | 47K    | 5%   | 1/10W |  |

| Ref. No.      | Part No.     | Description                                             | Remark |      |       |
|---------------|--------------|---------------------------------------------------------|--------|------|-------|
| R3687         | 1-216-839-11 | METAL CHIP                                              | 33K    | 5%   | 1/10W |
| R3688         | 1-216-821-11 | METAL CHIP                                              | 1K     | 5%   | 1/10W |
| R3689         | 1-216-833-11 | METAL CHIP                                              | 10K    | 5%   | 1/10W |
| R3690         | 1-216-841-11 | METAL CHIP                                              | 47K    | 5%   | 1/10W |
| R3701         | 1-216-823-11 | METAL CHIP                                              | 1.5K   | 5%   | 1/10W |
|               |              |                                                         |        |      |       |
| R3702         | 1-216-817-11 | METAL CHIP                                              | 470    | 5%   | 1/10W |
| R3703         | 1-216-835-11 | METAL CHIP                                              | 15K    | 5%   | 1/10W |
| R3704         | 1-216-841-11 | METAL CHIP                                              | 47K    | 5%   | 1/10W |
| R3705         | 1-216-809-11 | METAL CHIP                                              | 100    | 5%   | 1/10W |
| R3706         | 1-216-809-11 | METAL CHIP                                              | 100    | 5%   | 1/10W |
|               |              |                                                         |        |      |       |
| R3707         | 1-216-809-11 | METAL CHIP                                              | 100    | 5%   | 1/10W |
| R3708         | 1-216-813-11 | METAL CHIP                                              | 220    | 5%   | 1/10W |
| R3709         | 1-216-851-11 | METAL CHIP                                              | 330K   | 5%   | 1/10W |
| R3710         | 1-216-815-11 | METAL CHIP                                              | 330    | 5%   | 1/10W |
| R3711         | 1-216-832-11 | METAL CHIP                                              | 8.2K   | 5%   | 1/10W |
|               |              |                                                         |        |      |       |
| R3712         | 1-218-871-11 | METAL CHIP                                              | 10K    | 0.5% | 1/10W |
| R3713         | 1-216-825-11 | METAL CHIP                                              | 2.2K   | 5%   | 1/10W |
| R3714         | 1-216-827-11 | METAL CHIP                                              | 3.3K   | 5%   | 1/10W |
| R3715         | 1-216-821-11 | METAL CHIP                                              | 1K     | 5%   | 1/10W |
| R3716         | 1-216-821-11 | METAL CHIP                                              | 1K     | 5%   | 1/10W |
|               |              |                                                         |        |      |       |
| R3717         | 1-216-848-11 | METAL CHIP                                              | 180K   | 5%   | 1/10W |
| R3731         | 1-216-815-11 | METAL CHIP                                              | 330    | 5%   | 1/10W |
| R3732         | 1-216-847-11 | METAL CHIP                                              | 150K   | 5%   | 1/10W |
| R3733         | 1-216-829-11 | METAL CHIP                                              | 4.7K   | 5%   | 1/10W |
| R3734         | 1-216-821-11 | METAL CHIP                                              | 1K     | 5%   | 1/10W |
|               |              |                                                         |        |      |       |
| R3735         | 1-216-864-11 | SHORT CHIP                                              | 0      |      |       |
| R3736         | 1-216-845-11 | METAL CHIP                                              | 100K   | 5%   | 1/10W |
|               |              |                                                         |        |      |       |
| < RELAY >     |              |                                                         |        |      |       |
|               |              |                                                         |        |      |       |
| RY3301        | 1-755-359-11 | RELAY                                                   |        |      |       |
| RY3302        | 1-755-359-11 | RELAY                                                   |        |      |       |
| RY3303        | 1-755-359-11 | RELAY                                                   |        |      |       |
| RY3304        | 1-755-359-11 | RELAY                                                   |        |      |       |
|               |              |                                                         |        |      |       |
| < VIBRATOR >  |              |                                                         |        |      |       |
|               |              |                                                         |        |      |       |
| X3701         | 1-781-342-21 | OSCILLATOR, CRYSTAL (3.5795MHz)                         |        |      |       |
| X3702         | 1-781-134-21 | VIBRATOR, CRYSTAL (4.43MHz)                             |        |      |       |
| X3703         | 1-577-611-11 | OSCILALTOR, CERAMIC (500kHz)                            |        |      |       |
| *****         |              |                                                         |        |      |       |
|               |              |                                                         |        |      |       |
| VIDEO3 BOARD  |              |                                                         |        |      |       |
| *****         |              |                                                         |        |      |       |
|               |              |                                                         |        |      |       |
| < CAPACITOR > |              |                                                         |        |      |       |
|               |              |                                                         |        |      |       |
| C293          | 1-127-888-11 | CERAMIC                                                 | 0.1uF  | 10%  | 50V   |
| C294          | 1-127-888-11 | CERAMIC                                                 | 0.1uF  | 10%  | 50V   |
|               |              |                                                         |        |      |       |
| < CONNECTOR > |              |                                                         |        |      |       |
|               |              |                                                         |        |      |       |
| CN201         | 1-784-922-11 | PIN, CONNECTOR 5P                                       |        |      |       |
|               |              |                                                         |        |      |       |
| < JACK >      |              |                                                         |        |      |       |
|               |              |                                                         |        |      |       |
| J298          | 1-819-187-11 | JACK, PIN 3P<br>(VIDEO 3 IN/PORTABLE AV IN VIDEO,AUDIO) |        |      |       |
|               |              |                                                         |        |      |       |
| < RESISTOR >  |              |                                                         |        |      |       |
|               |              |                                                         |        |      |       |
| R298          | 1-247-831-11 | CARBON                                                  | 1K     | 5%   | 1/4W  |
| R299          | 1-247-831-11 | CARBON                                                  | 1K     | 5%   | 1/4W  |

| Ref. No.       | Part No.                                                | Description                         | Remark |
|----------------|---------------------------------------------------------|-------------------------------------|--------|
| < LEAD WIRE >  |                                                         |                                     |        |
| * W290         | 1-690-880-31                                            | LEAD (WITH CONNECTOR)               |        |
| *****          |                                                         |                                     |        |
| MISCELLANEOUS  |                                                         |                                     |        |
| *****          |                                                         |                                     |        |
| 58             | 1-829-023-11                                            | WIRE (FLAT TYPE) (23 CORE)          |        |
| 102            | 1-828-973-11                                            | WIRE (FLAT TYPE) (13 CORE)          |        |
| △ 104          | 1-777-071-83                                            | CORD, POWER (AEP,UK)                |        |
| △ 104          | 1-827-295-22                                            | CORD, POWER (AUS)                   |        |
| 154            | 1-829-013-11                                            | WIRE (FLAT TYPE) (21 CORE)          |        |
|                |                                                         |                                     |        |
| 155            | 1-828-963-11                                            | WIRE (FLAT TYPE) (11 CORE) (AUS)    |        |
| 155            | 1-828-980-11                                            | WIRE (FLAT TYPE) (15 CORE) (AEP,UK) |        |
| △ F901         | 1-532-464-33                                            | FUSE (T2.5AL/250V)                  |        |
| △ F902         | 1-532-464-33                                            | FUSE (T2.5AL/250V)                  |        |
| IC3103         | 8-759-071-48                                            | IC TA7807S                          |        |
|                |                                                         |                                     |        |
| IC3104         | 8-759-071-47                                            | IC TA79007S                         |        |
| Q503           | 6-702-390-01                                            | TRANSISTOR MN2488-OPY-MK            |        |
| Q504           | 6-702-391-01                                            | TRANSISTOR MP1620-OPY-MK            |        |
| Q533           | 6-702-390-01                                            | TRANSISTOR MN2488-OPY-MK            |        |
| Q534           | 6-702-391-01                                            | TRANSISTOR MP1620-OPY-MK            |        |
|                |                                                         |                                     |        |
| Q603           | 6-702-390-01                                            | TRANSISTOR MN2488-OPY-MK            |        |
| Q604           | 6-702-391-01                                            | TRANSISTOR MP1620-OPY-MK            |        |
| Q653           | 6-702-390-01                                            | TRANSISTOR MN2488-OPY-MK            |        |
| Q654           | 6-702-391-01                                            | TRANSISTOR MP1620-OPY-MK            |        |
| Q703           | 6-702-390-01                                            | TRANSISTOR MN2488-OPY-MK            |        |
|                |                                                         |                                     |        |
| Q704           | 6-702-391-01                                            | TRANSISTOR MP1620-OPY-MK            |        |
| Q753           | 6-702-390-01                                            | TRANSISTOR MN2488-OPY-MK            |        |
| Q754           | 6-702-391-01                                            | TRANSISTOR MP1620-OPY-MK            |        |
| △ T901         | 1-439-550-21                                            | TRANSFORMER, POWER (MAIN)           |        |
| TN1            | 1-693-676-11                                            | TUNER PACK (ANTENNA) (AEP,UK)       |        |
|                |                                                         |                                     |        |
| TN1            | 1-693-678-11                                            | TUNER PACK (ANTENNA) (AUS)          |        |
| *****          |                                                         |                                     |        |
| ACCESSORIES    |                                                         |                                     |        |
| *****          |                                                         |                                     |        |
|                |                                                         |                                     |        |
| 1-468-991-11   | REMOTE COMMANDER (RM-AAP011)<br>(including BATTERY LID) |                                     |        |
| 1-501-374-12   | ANTENNA, LOOP (AM)                                      |                                     |        |
| 1-501-807-12   | ANTENNA (FM)                                            |                                     |        |
| 1-542-670-11   | MEASUREMENT MIC (MONO) (ECM-AC2)                        |                                     |        |
| △ 1-770-019-61 | ADAPTOR, CONVERSION PLUG (UK)                           |                                     |        |
|                |                                                         |                                     |        |
| 2-680-065-11   | MANUAL, INSTRUCTION (ENGLISH)                           |                                     |        |
| 2-680-065-21   | MANUAL, INSTRUCTION (FRENCH) (AEP)                      |                                     |        |
| 2-680-065-31   | MANUAL, INSTRUCTION (SPANISH) (AEP)                     |                                     |        |
| 2-680-065-41   | MANUAL, INSTRUCTION (GERMAN,DUTCH,<br>SWEDISH) (AEP)    |                                     |        |
| 2-680-065-51   | MANUAL, INSTRUCTION (ITALIAN,POLISH)<br>(AEP)           |                                     |        |
|                |                                                         |                                     |        |
| 2-680-065-61   | MANUAL, INSTRUCTION (DANISH,FINNISH)<br>(AEP)           |                                     |        |
| 2-680-065-71   | MANUAL, INSTRUCTION (PORTUGUESE) (AEP)                  |                                     |        |
| 2-680-065-81   | MANUAL, INSTRUCTION (RUSSIAN) (AEP)                     |                                     |        |
| 2-681-663-11   | MANUAL, INSTRUCTION (GREEK) (AEP)                       |                                     |        |
| 2-681-663-21   | MANUAL, INSTRUCTION (TURKISH) (AEP)                     |                                     |        |
|                |                                                         |                                     |        |
| 2-681-663-31   | MANUAL, INSTRUCTION (HUNGARIAN,CZECH)<br>(AEP)          |                                     |        |
| 2-681-663-41   | MANUAL, INSTRUCTION (SLOVAKIAN) (AEP)                   |                                     |        |