

SECTION 6

EXPLODED VIEWS

Note:

- -XX and -X mean standardized parts, so they may have some difference from the original one.
- Items marked “*” are not stocked since they are seldom required for routine service.
Some delay should be anticipated when ordering these items.
- Abbreviation
CND : Canadian model
TH : Thai model

- The mechanical parts with no reference number in the exploded views are not supplied.
- Color Indication of Appearance Parts Example:
 KNOB, BALANCE (WHITE) . . . (RED)

↑
 Parts Color

↑
 Cabinet's Color
- Accessories are given in the last of the electrical parts list.

The components identified by mark  or dotted line with mark  are critical for safety.
Replace only with part number specified.


Les composants identifiés par une marque  sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

The components identified by mark  contain confidential information.
Strictly follow the instructions whenever the components are repaired and/or replaced.

Les composants identifiés par la marque  contiennent des informations confidentielles.


Suivre scrupuleusement les instructions chaque fois qu'un composant est remplacé et / ou réparé.

6-1. CASE SECTION

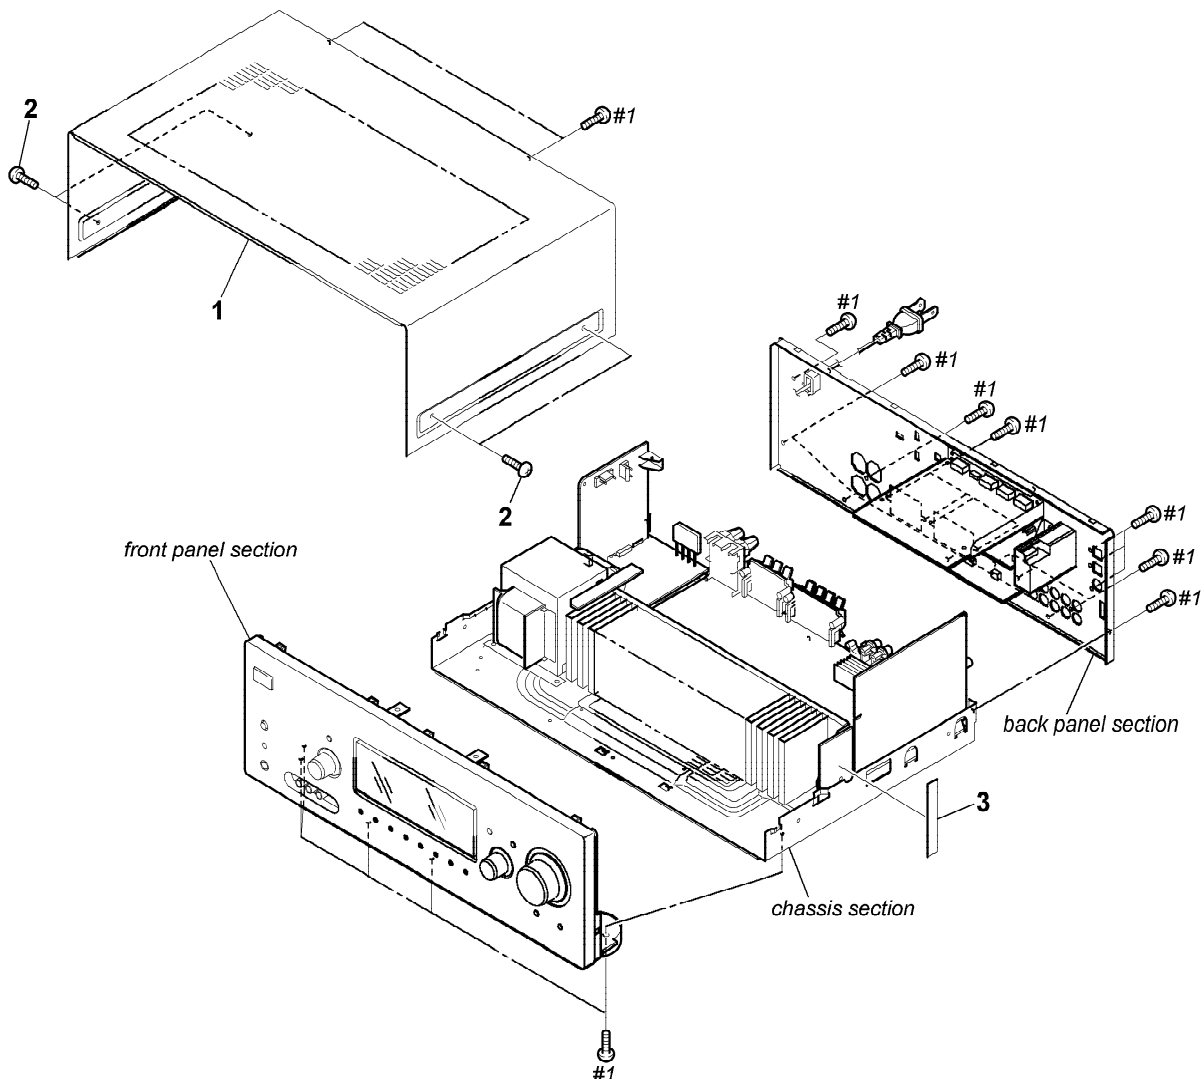


<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Remark</u>	<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Remark</u>
1	3-285-693-11	CASE (BLACK)...(BLACK)		2	7-685-881-04	SCREW +BVTT 4X8 (S) (SILVER)...(SILVER)	
1	3-285-693-31	CASE (SILVER)...(SILVER)		3	3-831-441-11	CUSHION, SARANET	
2	2-580-630-01	SCREW +BVST 4X8 (BLACK)...(BLACK)		#1	7-685-646-79	SCREW +BVTP 3X8 TYPE2 IT-3	

6-2. FRONT PANEL SECTION

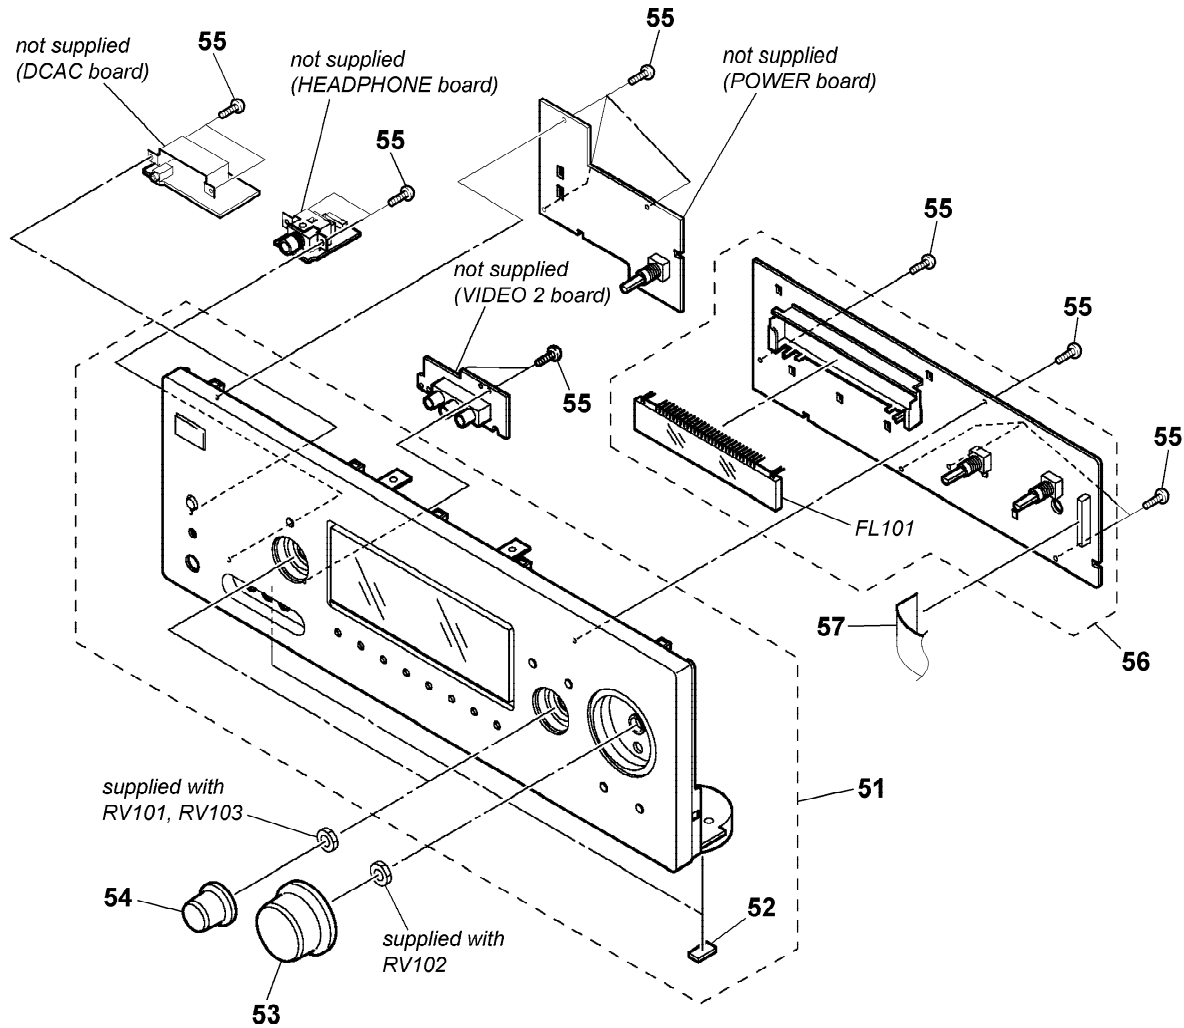


Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
51	X-2187-661-1	FRONT PANEL ASSY (BLACK)...(BLACK) (US)		54	X-2190-020-1	KNOB MENU ASSY (BLACK)...(BLACK)	
51	X-2187-662-1	FRONT PANEL ASSY (BLACK)...(BLACK) (CND)		54	X-2190-021-1	KNOB MENU ASSY (SILVER)...(SILVER)	
51	X-2187-663-1	FRONT PANEL ASSY (BLACK)...(BLACK) (AEP)		55	3-087-053-01	+BVTP 2.6 (3CR)	
51	X-2187-910-1	FRONT PANEL ASSY (SILVER)...(SILVER) (TH)		56	A-1433-581-A	DISPLAY BOARD, COMPLETE (US,CND)	
51	X-2188-399-1	FRONT PANEL ASSY (SILVER)...(SILVER) (AEP)		56	A-1433-582-A	DISPLAY BOARD, COMPLETE (AEP,TH)	
52	4-977-358-01	CUSHION		57	1-829-004-11	WIRE (FLAT TYPE) (19 CORE)	
53	2-661-142-01	VOLUME KNOB (BLACK)...(BLACK)		FL101	1-519-927-11	VACUUM FLUORESCENT DISPLAY	
53	2-661-142-11	VOLUME KNOB (SILVER)...(SILVER)					

6-3. BACK PANEL SECTION

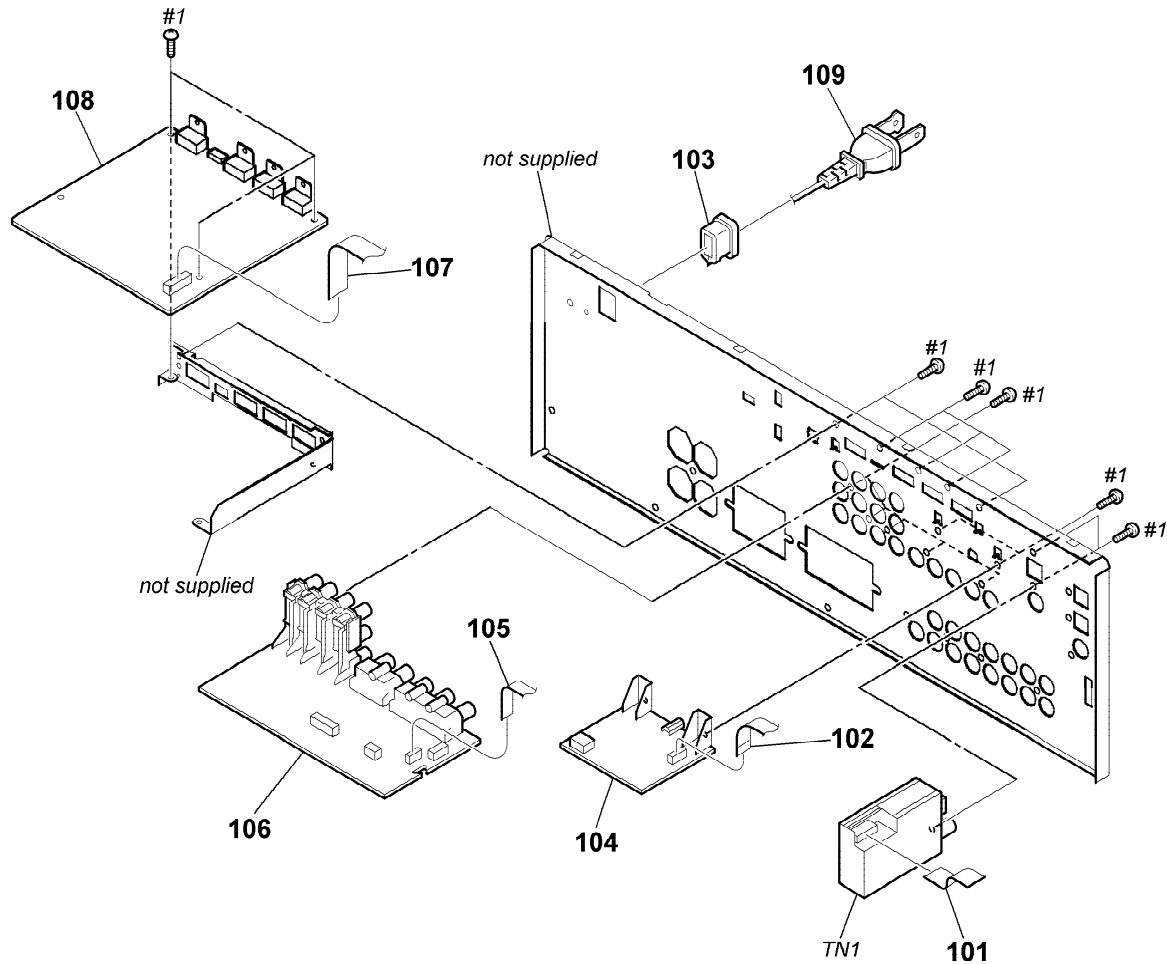

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
101	1-828-951-11	WIRE (FLAT TYPE) (9 CORE) (US,CND,TH)		108	A-1438-372-A	HDMI RE BOARD, COMPLETE (for SERVICE)	
101	1-828-961-51	WIRE (FLAT TYPE) (11 CORE) (AEP)		109	1-777-071-83	CORD, POWER (AEP)	
102	1-828-299-51	WIRE (FLAT TYPE) (7 CORE)		109	1-783-820-11	CORD, POWER (US,CND)	
103	4-966-267-12	BUSHING (FBS001), CORD		109	1-834-288-21	POWER-SUPPLY CORD (TH)	
104	A-1433-639-A	XM BOARD, COMPLETE (US,CND)		TN1	1-693-733-31	TUNER PACK (FM/AM) (ANTENNA) (US,CND)	
105	1-828-299-51	WIRE (FLAT TYPE) (7 CORE)		TN1	1-693-735-21	TUNER PACK (FM/AM) (ANTENNA) (TH)	
106	A-1433-570-A	VIDEO BOARD, COMPLETE		TN1	1-693-736-21	TUNER PACK (FM/AM) (ANTENNA) (AEP)	
107	1-828-350-51	WIRE (FLAT TYPE) (17 CORE)		#1	7-685-646-79	SCREW +BVTP 3X8 TYPE2 IT-3	

6-4. CHASSIS SECTION

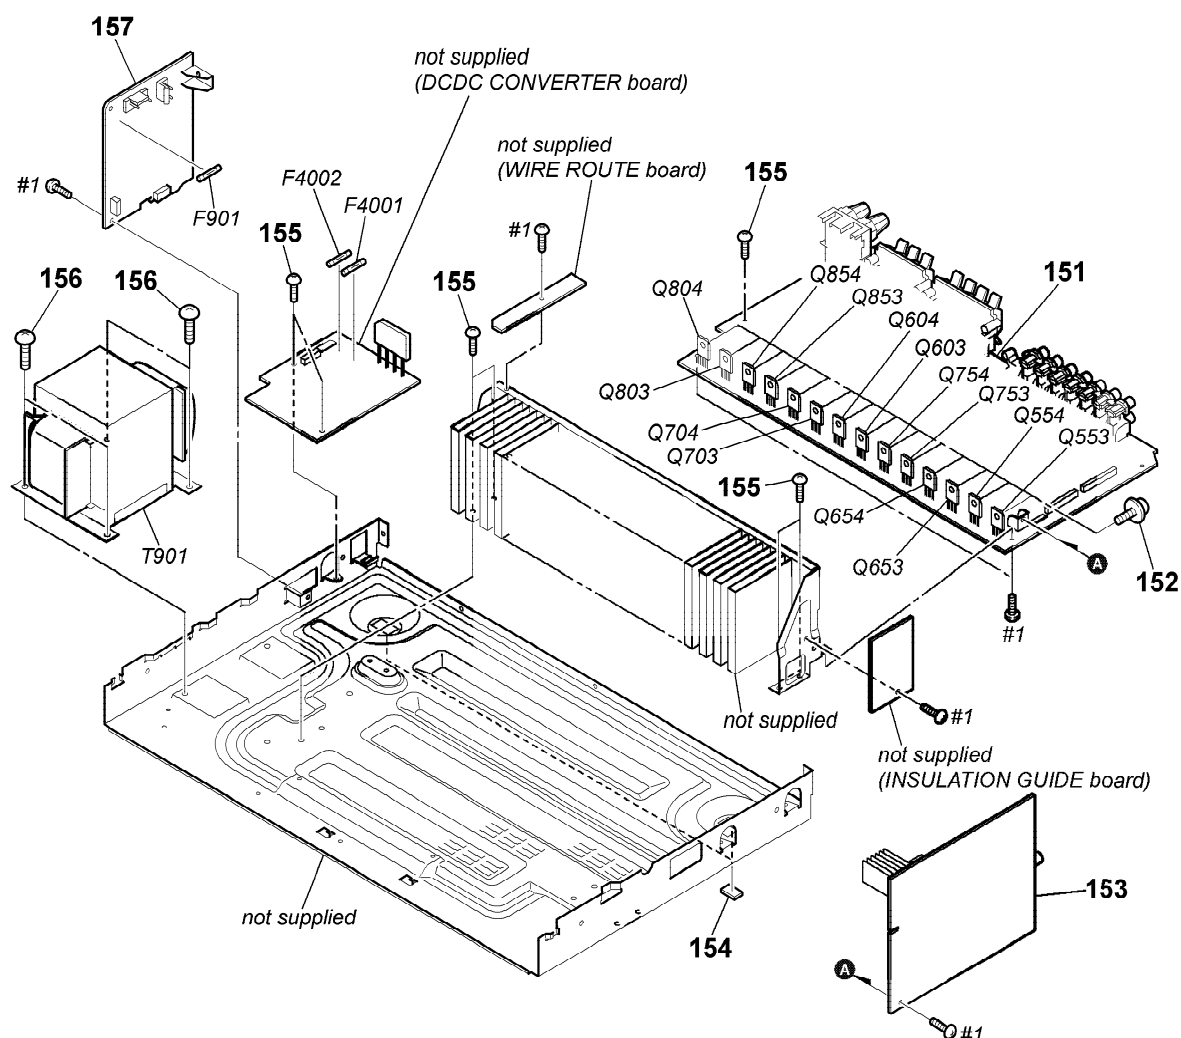

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
151	A-1433-566-A	MAIN BOARD, COMPLETE (US,CND)		Q554	6-702-391-01	TRANSISTOR MP1620-OPY-MK	
151	A-1433-567-A	MAIN BOARD, COMPLETE (AEP)		Q603	6-702-390-01	TRANSISTOR MN2488-OPY-MK	
151	A-1438-234-A	MAIN BOARD, COMPLETE (TH)		Q604	6-702-391-01	TRANSISTOR MP1620-OPY-MK	
152	3-905-609-01	SCREW (TRANSISTOR)		Q653	6-702-390-01	TRANSISTOR MN2488-OPY-MK	
153	A-1433-590-A	DIGITAL BOARD, COMPLETE (US,CND)		Q654	6-702-391-01	TRANSISTOR MP1620-OPY-MK	
153	A-1433-591-A	DIGITAL BOARD, COMPLETE (AEP)		Q703	6-702-390-01	TRANSISTOR MN2488-OPY-MK	
153	A-1438-238-A	DIGITAL BOARD, COMPLETE (TH)		Q704	6-702-391-01	TRANSISTOR MP1620-OPY-MK	
154	4-977-358-01	CUSHION		Q753	6-702-390-01	TRANSISTOR MN2488-OPY-MK	
155	3-077-331-21	+BV 3 (3-CR)		Q754	6-702-391-01	TRANSISTOR MP1620-OPY-MK	
156	4-249-675-01	+BV SUMITITE S 4X6 ROUND		Q803	6-702-390-01	TRANSISTOR MN2488-OPY-MK	
157	A-1433-572-A	STANDBY BOARD, COMPLETE (US,CND)		Q804	6-702-391-01	TRANSISTOR MP1620-OPY-MK	
157	A-1433-573-A	STANDBY BOARD, COMPLETE (AEP,TH)		Q853	6-702-390-01	TRANSISTOR MN2488-OPY-MK	
△ F901	1-532-464-33	FUSE (T2.5AL/250V) (AEP,TH)		Q854	6-702-391-01	TRANSISTOR MP1620-OPY-MK	
△ F901	1-533-454-12	FUSE, GLASS TUBE (DIA. 5) (6.3A/125V)	(US,CND)	△ T901	1-439-550-21	TRANSFORMER, POWER (MAIN) (AEP)	
△ F4001	1-532-465-33	FUSE (T3.15AL/250V)		△ T901	1-439-583-11	TRANSFORMER, POWER (MAIN) (US,CND)	
△ F4002	1-532-465-33	FUSE (T3.15AL/250V)		△ T901	1-445-019-11	TRANSFORMER, POWER (MAIN) (TH)	
Q553	6-702-390-01	TRANSISTOR MN2488-OPY-MK		#1	7-685-646-79	SCREW +BVTP 3X8 TYPE2 IT-3	

SECTION 7

ELECTRICAL PARTS LIST

Note:

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- Items marked "*" are not stocked since they are seldom required for routine service.
Some delay should be anticipated when ordering these items.
- RESISTORS**
All resistors are in ohms.
METAL: Metal-film resistor.
METAL OXIDE: Metal oxide-film resistor.
F: nonflammable

- CAPACITORS**
uF: μ F
- COILS**
uH: μ H
- SEMICONDUCTORS**
In each case, u: μ , for example:
uA... : μ A..., uPA..., μ PA...,
uPB... : μ PB..., uPC..., μ PC...,
uPD... : μ PD...
- Abbreviation**
CND : Canadian model
TH : Thai model

When indicating parts by reference number, please include the board name.

The components identified by mark $\triangle$ or dotted line with mark $\triangle$ are critical for safety.
Replace only with part number specified.

Les composants identifiés par une marque $\triangle$ sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

The components identified by mark $\triangle$ contain confidential information.
Strictly follow the instructions whenever the components are repaired and/or replaced.

Les composants identifiés par la marque $\triangle$ contiennent des informations confidentielles.
Suivre scrupuleusement les instructions chaque fois qu'un composant est remplacé et / ou réparé.

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
		DCAC BOARD *****				< LEAD WIRE >	
		< CAPACITOR >		* TP2000	1-690-880-31	LEAD (WITH CONNECTOR)	

C2001	1-162-927-11	CERAMIC CHIP 100PF	5% 50V			DCDC CONVERTER BOARD *****	
C2002	1-126-160-11	ELECT 1uF	20% 50V				
C2003	1-100-436-11	CERAMIC CHIP 0.033uF	10% 25V				
C2005	1-162-921-11	CERAMIC CHIP 33PF	5% 50V	1-533-313-11		HOLDER, FUSE	
C2006	1-126-160-11	ELECT 1uF	20% 50V	7-685-646-79		SCREW +BVTP 3X8 TYPE2 IT-3	
						< CAPACITOR >	
C2008	1-162-924-11	CERAMIC CHIP 56PF	5% 50V	C4002	1-128-549-11	ELECT 3300uF	20% 35V
C2010	1-100-436-11	CERAMIC CHIP 0.033uF	10% 25V	C4003	1-128-959-21	ELECT 1000uF	20% 35V
C2011	1-164-227-11	CERAMIC CHIP 0.022uF	10% 25V	C4004	1-100-566-11	CERAMIC CHIP 0.1uF	10% 25V
C2012	1-164-227-11	CERAMIC CHIP 0.022uF	10% 25V	C4005	1-128-950-21	ELECT 1000uF	20% 16V
C2013	1-126-160-11	ELECT 1uF	20% 50V	C4006	1-125-891-11	CERAMIC CHIP 0.47uF	10% 10V
C2014	1-124-465-00	ELECT 0.47uF	20% 50V	C4007	1-125-891-11	CERAMIC CHIP 0.47uF	10% 10V
C2018	1-100-566-11	CERAMIC CHIP 0.1uF	10% 25V	C4009	1-125-891-11	CERAMIC CHIP 0.47uF	10% 10V
C2205	1-100-566-11	CERAMIC CHIP 0.1uF	10% 25V	C4011	1-125-891-11	CERAMIC CHIP 0.47uF	10% 10V
		< DIODE >		C4012	1-125-891-11	CERAMIC CHIP 0.47uF	10% 10V
D2013	6-501-817-01	DIODE MA2J1110GLS0		C4100	1-128-959-21	ELECT 1000uF	20% 35V
D2014	6-501-817-01	DIODE MA2J1110GLS0					
		< IC >		C4102	1-100-566-11	CERAMIC CHIP 0.1uF	10% 25V
				C4103	1-128-950-21	ELECT 1000uF	20% 16V
IC2000	8-759-710-97	IC NJM4565M-D				< CONNECTOR >	
		< JACK >		CN4001	1-778-226-21	CONNECTOR, BOARD TO BOARD 6P	
J2000	1-820-056-21	SMALL TYPE JACK (3.5mm) (AUTO CAL MIC)				< DIODE >	
		< RESISTOR >		D4001	8-719-081-52	DIODE D5SBA20-4003	
R2000	1-216-821-11	METAL CHIP 1K	5% 1/10W	D4803	6-502-218-01	DIODE RB060M-30	
R2001	1-216-833-11	METAL CHIP 10K	5% 1/10W	D4804	6-501-361-01	DIODE RB051LA-40TR	
R2003	1-216-833-11	METAL CHIP 10K	5% 1/10W			< IC >	
R2005	1-216-857-11	METAL CHIP 1M	5% 1/10W	IC4001	8-759-474-09	IC SI-8050S-LF1101	
R2006	1-216-821-11	METAL CHIP 1K	5% 1/10W	IC4100	8-759-659-28	IC SI-8033S	
						< COIL >	
R2007	1-216-833-11	METAL CHIP 10K	5% 1/10W	L4000	1-456-545-11	COIL, CHOKE 100uH	
R2008	1-216-854-11	METAL CHIP 560K	5% 1/10W	L4001	1-456-545-11	COIL, CHOKE 100uH	
R2010	1-216-833-11	METAL CHIP 10K	5% 1/10W	L4100	1-456-545-11	COIL, CHOKE 100uH	
R2015	1-216-839-11	METAL CHIP 33K	5% 1/10W	L4102	1-456-721-11	COIL, CHOKE 100uH	
R2016	1-216-835-11	METAL CHIP 15K	5% 1/10W			< RESISTOR >	
				R4000	1-216-823-11	METAL CHIP 1.5K	5% 1/10W
R2017	1-216-825-11	METAL CHIP 2.2K	5% 1/10W	R4001	1-216-817-11	METAL CHIP 470	5% 1/10W
R2018	1-216-822-11	METAL CHIP 1.2K	5% 1/10W				
R2019	1-216-825-11	METAL CHIP 2.2K	5% 1/10W				

Ref. No.	Part No.	Description				Remark	Ref. No.	Part No.	Description				Remark
R4002	1-216-819-11	METAL CHIP	680	5%	1/10W		C1076	1-126-933-11	ELECT	100uF	20%	16V	
R4100	1-216-823-11	METAL CHIP	1.5K	5%	1/10W		C1077	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
R4101	1-216-817-11	METAL CHIP	470	5%	1/10W		C1078	1-165-875-11	CERAMIC CHIP	10uF	10%	10V	
R4102	1 216 819-11	METAL CHIP	680	5%	1/10W		C1079	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
*****							C1080	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
	A-1433-590-A	DIGITAL BOARD, COMPLETE (US,CND)					C1081	1-126-960-11	ELECT	1uF	20%	50V	
	A-1433-591-A	DIGITAL BOARD, COMPLETE (AEP)					C1082	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
	A-1438-238-A	DIGITAL BOARD, COMPLETE (TH)					C1083	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
		*****					C1084	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
							C1085	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
	7-685-646-79	SCREW +BVTP 3X8 TYPE2 IT-3											
		< CAPACITOR >					C1086	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
							C1087	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C1001	1-126-925-11	ELECT	470uF	20%	10V		C1088	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C1002	1-125-891-11	CERAMIC CHIP	0.47uF	10%	10V		C1089	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C1004	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V		C1092	1-165-875-11	CERAMIC CHIP	10uF	10%	10V	
C1005	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V		C1093	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C1006	1-126-965-11	ELECT	22uF	20%	50V		C1094	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
							C1095	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C1007	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V		C1096	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C1008	1-165-722-11	ELECT	100uF	20%	10V		C1097	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C1009	1-126-933-11	ELECT	100uF	20%	16V								
C1010	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V		C1098	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C1011	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V		C1099	1-100-567-81	CERAMIC CHIP	0.01uF	10%	25V	
							C1100	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C1012	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V		C1101	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C1016	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V		C1102	1-126-964-11	ELECT	10uF	20%	50V	
C1017	1-126-964-11	ELECT	10uF	20%	50V								
C1021	1-137-980-11	CERAMIC CHIP	0.47uF	10%	50V		C1103	1-126-947-11	ELECT	47uF	20%	35V	
C1022	1-135-372-31	ELECT	470uF	20%	10V		C1104	1-100-567-81	CERAMIC CHIP	0.01uF	10%	25V	
							C1105	1-165-875-11	CERAMIC CHIP	10uF	10%	10V	
C1028	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V		C1107	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C1031	1-137-980-11	CERAMIC CHIP	0.47uF	10%	50V		C1108	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C1032	1-135-372-31	ELECT	470uF	20%	10V								
C1039	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V		C1109	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C1041	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V		C1110	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
							C1112	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	
C1044	1-164-848-11	CERAMIC CHIP	8PF	0.5PF	50V		C1113	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C1047	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V		C1114	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C1048	1-164-848-11	CERAMIC CHIP	8PF	0.5PF	50V								
C1049	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V		C1115	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C1050	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V		C1116	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
							C1117	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C1051	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V		C1118	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C1052	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V		C1119	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C1053	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V								
C1054	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V		C1120	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C1055	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V		C1121	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
							C1122	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C1056	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V		C1123	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C1057	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V		C1124	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C1058	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V								
C1059	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V		C1125	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C1060	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V		C1126	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
							C1127	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C1061	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V		C1129	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	
C1062	1-165-875-11	CERAMIC CHIP	10uF	10%	10V		C1131	1-162-960-11	CERAMIC CHIP	220PF	10%	50V	
C1063	1-126-933-11	ELECT	100uF	20%	16V								
C1064	1-126-933-11	ELECT	100uF	20%	16V		C1132	1-162-960-11	CERAMIC CHIP	220PF	10%	50V	
C1065	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V		C1139	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
							C1140	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C1066	1-162-927-11	CERAMIC CHIP	100PF	5%	50V		C1142	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	
C1067	1-162-927-11	CERAMIC CHIP	100PF	5%	50V		C1145	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	
C1068	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V								
C1069	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V		C1168	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	
C1070	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V		C1171	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	
							C1172	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	
C1072	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V		C1179	1-126-933-11	ELECT	100uF	20%	16V	
C1073	1-126-923-11	ELECT	220uF	20%	10V		C1185	1-126-965-11	ELECT	22uF	20%	50V	
C1074	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V								
C1075	1-137-980-11	CERAMIC CHIP	0.47uF	10%	50V								

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
C1187	1-165-722-11	ELECT 100uF 20%	10V	C1465	1-112-083-11	ELECT 100uF 20%	16V
C1191	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	C1468	1-126-964-11	ELECT 10uF 20%	50V
C1254	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	C1473	1-164-934-11	CERAMIC CHIP 330PF 10%	50V
C1255	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	C1474	1-162-963-11	CERAMIC CHIP 680PF 10%	50V
C1258	1-164-933-11	CERAMIC CHIP 220PF 10%	50V	C1478	1-126-964-11	ELECT 10uF 20%	50V
C1301	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	C1481	1-164-934-11	CERAMIC CHIP 330PF 10%	50V
C1302	1-164-947-11	CERAMIC CHIP 0.01uF	50V	C1483	1-162-963-11	CERAMIC CHIP 680PF 10%	50V
C1303	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	C1488	1-126-964-11	ELECT 10uF 20%	50V
C1304	1-164-943-81	CERAMIC CHIP 0.01uF 10%	16V	C1604	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C1305	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	C1605	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
C1306	1-126-947-11	ELECT 47uF 20%	35V	C1612	1-100-567-81	CERAMIC CHIP 0.01uF 10%	25V
C1307	1-126-964-11	ELECT 10uF 20%	50V	C1613	1-100-567-81	CERAMIC CHIP 0.01uF 10%	25V
C1309	1-164-856-81	CERAMIC CHIP 18PF 5%	50V	C1614	1-100-567-81	CERAMIC CHIP 0.01uF 10%	25V
C1310	1-164-856-81	CERAMIC CHIP 18PF 5%	50V	C1615	1-100-567-81	CERAMIC CHIP 0.01uF 10%	25V
C1312	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	C1616	1-100-567-81	CERAMIC CHIP 0.01uF 10%	25V
C1313	1-164-874-11	CERAMIC CHIP 100PF 5%	50V	C1617	1-100-567-81	CERAMIC CHIP 0.01uF 10%	25V
C1314	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	C1618	1-100-567-81	CERAMIC CHIP 0.01uF 10%	25V
C1315	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	C1619	1-100-567-81	CERAMIC CHIP 0.01uF 10%	25V
C1316	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	C1620	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
C1317	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	C1621	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V
C1318	1-126-964-11	ELECT 10uF 20%	50V	C1622	1-100-567-81	CERAMIC CHIP 0.01uF 10%	25V
C1319	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	C1623	1-100-567-81	CERAMIC CHIP 0.01uF 10%	25V
C1320	1-164-874-11	CERAMIC CHIP 100PF 5%	50V	C1624	1-100-567-81	CERAMIC CHIP 0.01uF 10%	25V
C1351	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	C1625	1-100-567-81	CERAMIC CHIP 0.01uF 10%	25V
C1354	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	C1626	1-100-567-81	CERAMIC CHIP 0.01uF 10%	25V
C1355	1-126-965-11	ELECT 22uF 20%	50V	C1627	1-100-567-81	CERAMIC CHIP 0.01uF 10%	25V
C1358	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	C1628	1-100-567-81	CERAMIC CHIP 0.01uF 10%	25V
C1359	1-126-916-11	ELECT 1000uF 20%	6.3V	C1629	1-100-567-81	CERAMIC CHIP 0.01uF 10%	25V
C1361	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	C1630	1-100-567-81	CERAMIC CHIP 0.01uF 10%	25V
C1362	1-164-947-11	CERAMIC CHIP 0.01uF	50V	C1631	1-100-567-81	CERAMIC CHIP 0.01uF 10%	25V
C1370	1-126-947-11	ELECT 47uF 20%	35V	C1632	1-100-567-81	CERAMIC CHIP 0.01uF 10%	25V
C1401	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	C1633	1-100-567-81	CERAMIC CHIP 0.01uF 10%	25V
C1402	1-126-964-11	ELECT 10uF 20%	50V	C1634	1-100-567-81	CERAMIC CHIP 0.01uF 10%	25V
C1405	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	C1650	1-100-567-81	CERAMIC CHIP 0.01uF 10%	25V
C1406	1-126-964-11	ELECT 10uF 20%	50V	C1652	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
C1411	1-162-963-11	CERAMIC CHIP 680PF 10%	50V	C1653	1-126-964-11	ELECT 10uF 20%	50V
C1413	1-164-934-11	CERAMIC CHIP 330PF 10%	50V	C1654	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C1418	1-126-964-11	ELECT 10uF 20%	50V	C1659	1-126-960-11	ELECT 1uF 20%	50V
C1422	1-162-963-11	CERAMIC CHIP 680PF 10%	50V	C1660	1-126-960-11	ELECT 1uF 20%	50V
C1423	1-162-961-11	CERAMIC CHIP 330PF 10%	50V	C1667	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C1428	1-126-964-11	ELECT 10uF 20%	50V	C1701	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
C1432	1-162-963-11	CERAMIC CHIP 680PF 10%	50V	C1704	1-162-968-11	CERAMIC CHIP 0.0047uF 10%	50V
C1433	1-164-934-11	CERAMIC CHIP 330PF 10%	50V	C1907	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
C1438	1-126-964-11	ELECT 10uF 20%	50V	C1909	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C1441	1-162-963-11	CERAMIC CHIP 680PF 10%	50V	C1913	1-137-980-11	CERAMIC CHIP 0.47uF 10%	50V
C1442	1-164-934-11	CERAMIC CHIP 330PF 10%	50V	C1914	1-126-947-11	ELECT 47uF 20%	35V
C1448	1-126-964-11	ELECT 10uF 20%	50V	C1915	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V
C1450	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	C1923	1-126-933-11	ELECT 100uF 20%	16V
C1451	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	C1972	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V
C1453	1-164-934-11	CERAMIC CHIP 330PF 10%	50V	< CONNECTOR >			
C1454	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	* CNP503	1-564-510-11	PLUG, CONNECTOR 7P	
C1455	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	CNP505	1-779-799-11	PIN, CONNECTOR 9P	
C1456	1-162-963-11	CERAMIC CHIP 680PF 10%	50V	* CNP512	1-564-506-11	PLUG, CONNECTOR 3P	
C1457	1-112-083-11	ELECT 100uF 20%	16V	CNS501	1-573-829-11	CONNECTOR, BOARD TO BOARD 15P	
C1458	1-126-964-11	ELECT 10uF 20%	50V	CNS502	1-764-865-41	CONNECTOR, BOARD TO BOARD 13P	
C1459	1-125-777-11	CERAMIC CHIP 0.1uF 10%	10V	CNS503	1-785-466-41	CONNECTOR, FFC/FPC 7P (US,CND)	
C1460	1-112-083-11	ELECT 100uF 20%	16V	CNS506	1-784-780-11	CONNECTOR, FFC 19P	
C1461	1-112-083-11	ELECT 100uF 20%	16V	CNS507	1-568-830-11	CONNECTOR, FFC 11P (AEP)	
C1462	1-162-963-11	CERAMIC CHIP 680PF 10%	50V	CNS508	1-784-770-11	CONNECTOR, FFC 9P (US,CND,TH)	
C1463	1-164-934-11	CERAMIC CHIP 330PF 10%	50V	CNS509	1-785-466-41	CONNECTOR, FFC/FPC 7P	

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
CNS512	1-820-116-41	CONNECTOR, FFC/FPC 17P		IC1301	8-759-825-15	IC LC89056W-E	
		< DIODE >		IC1302	8-759-595-15	IC TC74ACT153F(EL)	
D1001	8-719-053-18	DIODE 1SR154-400TE-25		IC1303	8-759-096-87	IC TC7WU04FU(TE12R)	
D1003	8-719-049-09	DIODE 1SS367-T3SONY		IC1351	6-600-466-01	IC TORX147L(SONY)	
D1004	8-719-049-09	DIODE 1SS367-T3SONY				(DIGITAL (ASSIGNABLE) SAT IN (OPTICAL))	
D1106	8-719-060-48	DIODE RB751V-40TE-17		IC1352	6-600-466-01	IC TORX147L(SONY) (TV IN (OPTICAL))	
D1107	6-501-817-01	DIODE MA2J1110GLS0		IC1401	6-710-554-01	IC PCM1808PWR	
D1108	6-501-817-01	DIODE MA2J1110GLS0		IC1403	8-759-710-97	IC NJM4565M-D	
D1109	6-501-817-01	DIODE MA2J1110GLS0		IC1404	8-759-710-97	IC NJM4565M-D	
D1110	6-501-817-01	DIODE MA2J1110GLS0		IC1405	8-759-710-97	IC NJM4565M-D	
D1111	6-501-817-01	DIODE MA2J1110GLS0		IC1406	8-759-710-97	IC NJM4565M-D	
D1112	6-501-817-01	DIODE MA2J1110GLS0		IC1452	6-711-874-01	IC WM8768GEDS/R	
D1301	6-501-817-01	DIODE MA2J1110GLS0		IC1902	8-759-231-56	IC TA7809S	
D1501	8-719-049-09	DIODE 1SS367-T3SONY		IC1904	6-705-463-01	IC BA33BC0T	
D1502	8-719-049-09	DIODE 1SS367-T3SONY				< JACK >	
D1503	8-719-049-09	DIODE 1SS367-T3SONY		J1301	1-793-446-21	JACK, PIN 1P (DIGITAL (ASSIGNABLE) DVD IN (COAXIAL))	
D1504	8-719-049-09	DIODE 1SS367-T3SONY				< CONNECTOR >	
		< FERRITE BEAD >		J1302	1-817-615-21	CONNECTOR, SQUARE TYPE (RECE) 18P (DMPORT)	
FB1053	1-469-139-21	FERRITE, EMI (SMD) (2012)				< JUMPER RESISTOR >	
FB1101	1-400-862-11	BEAD, FERRITE		JR1003	1-211-950-11	SHORT CHIP 0	
FB1102	1-400-862-11	BEAD, FERRITE		JR1005	1-216-864-11	SHORT CHIP 0	
FB1103	1-400-862-11	BEAD, FERRITE				< TRANSISTOR >	
FB1104	1-469-670-21	FERRITE, EMI (SMD) (2012)		Q1103	8-729-027-43	TRANSISTOR DTC114EKA-T146	
FB1105	1-400-862-11	BEAD, FERRITE		Q1104	8-729-620-13	TRANSISTOR 2SC4154TP-1EF	
FB1106	1-400-862-11	BEAD, FERRITE		Q1105	8-729-620-13	TRANSISTOR 2SC4154TP-1EF	
FB1112	1-469-670-21	FERRITE, EMI (SMD) (2012)		Q1106	6-551-699-01	TRANSISTOR ISA1602AM1TP-1EF	
FB1113	1-400-862-11	BEAD, FERRITE				< RESISTOR >	
FB1117	1-400-862-11	BEAD, FERRITE		R1010	1-216-809-11	METAL CHIP 100 5% 1/10W	
FB1302	1-400-862-11	BEAD, FERRITE		R1011	1-216-845-11	METAL CHIP 100K 5% 1/10W	
FB1305	1-469-139-21	FERRITE, EMI (SMD) (2012)		R1012	1-216-809-11	METAL CHIP 100 5% 1/10W	
FB1306	1-469-139-21	FERRITE, EMI (SMD) (2012)		R1013	1-216-809-11	METAL CHIP 100 5% 1/10W	
FB1307	1-469-139-21	FERRITE, EMI (SMD) (2012)		R1014	1-216-809-11	METAL CHIP 100 5% 1/10W	
FB1308	1-400-862-11	BEAD, FERRITE		R1015	1-216-809-11	METAL CHIP 100 5% 1/10W	
FB1309	1-400-862-11	BEAD, FERRITE		R1016	1-216-809-11	METAL CHIP 100 5% 1/10W	
FB1310	1-400-862-11	BEAD, FERRITE		R1017	1-216-809-11	METAL CHIP 100 5% 1/10W	
FB1311	1-400-862-11	BEAD, FERRITE		R1018	1-216-805-11	METAL CHIP 47 5% 1/10W	
FB1350	1-400-862-11	BEAD, FERRITE		R1019	1-216-864-11	SHORT CHIP 0	
FB1403	1-400-862-11	BEAD, FERRITE		R1021	1-216-809-11	METAL CHIP 100 5% 1/10W	
FB1405	1-400-862-11	BEAD, FERRITE		R1022	1-216-809-11	METAL CHIP 100 5% 1/10W	
FB1452	1-400-862-11	BEAD, FERRITE		R1023	1-216-813-11	METAL CHIP 220 5% 1/10W	
FB1453	1-400-862-11	BEAD, FERRITE		R1025	1-216-809-11	METAL CHIP 100 5% 1/10W	
FB1503	1-469-139-21	FERRITE, EMI (SMD) (2012)		R1028	1-216-801-11	METAL CHIP 22 5% 1/10W	
		< IC >		R1029	1-216-801-11	METAL CHIP 22 5% 1/10W	
IC1001	8-759-231-53	IC TA7805S		R1030	1-216-801-11	METAL CHIP 22 5% 1/10W	
IC1002	6-710-766-01	IC BD12KA5FP-E2		R1031	1-216-801-11	METAL CHIP 22 5% 1/10W	
IC1005	8-759-277-63	IC TC7W14FU(TE12R)		R1033	1-216-833-11	METAL CHIP 10K 5% 1/10W	
IC1006	8-759-058-62	IC TC7S08FU(TE85R)		R1034	1-216-821-11	METAL CHIP 1K 5% 1/10W	
IC1007	6-702-913-01	IC S-80929CNMC-G8Z12G		R1035	1-216-833-11	METAL CHIP 10K 5% 1/10W	
IC1008	8-759-524-10	IC TC74VHC157FT(EL)		R1036	1-216-864-11	SHORT CHIP 0	
IC1009	6-706-764-01	IC ADSP21266SKSTZ-2C		R1037	1-216-833-11	METAL CHIP 10K 5% 1/10W	
IC1010	6-807-917-01	IC MB91353APMT-G-117E1		R1038	1-216-801-11	METAL CHIP 22 5% 1/10W	
IC1012	6-707-745-01	IC SI-3050KM-TL		R1039	1-216-833-11	METAL CHIP 10K 5% 1/10W	
IC1013	6-707-744-01	IC SI-3033KM-TL		R1040	1-216-801-11	METAL CHIP 22 5% 1/10W	
IC1014	8-759-447-77	IC TC7WH74FU(TE12R)					
IC1016	8-759-524-48	IC TC74VHC393FT(EL)					
IC1017	8-759-680-48	IC TC7WH157FK(TE85R)					
IC1031	6-705-469-01	IC BA50BC0FP-E2					
IC1131	(Not supplied)	IC S-24CS16A0I-J8T1G					

Note: When IC1131 on the DIGITAL board are damaged, exchange the new DIGITAL board for the DIGITAL board which IC damaged.

STR-DG720

Ver. 1.1

DIGITAL

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
R1041	1-216-809-11	METAL CHIP	100	5%	1/10W	R1128	1-216-809-11	METAL CHIP	100	5%	1/10W
R1042	1-216-809-11	METAL CHIP	100	5%	1/10W	R1129	1-216-809-11	METAL CHIP	100	5%	1/10W
R1043	1-216-801-11	METAL CHIP	22	5%	1/10W	R1130	1-216-809-11	METAL CHIP	100	5%	1/10W
R1044	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1131	1-216-809-11	METAL CHIP	100	5%	1/10W
R1046	1-216-801-11	METAL CHIP	22	5%	1/10W	R1132	1-216-821-11	METAL CHIP	1K	5%	1/10W
R1047	1-216-801-11	METAL CHIP	22	5%	1/10W	R1133	1-216-813-11	METAL CHIP	220	5%	1/10W
R1048	1-216-857-11	METAL CHIP	1M	5%	1/10W	R1134	1-216-809-11	METAL CHIP	100	5%	1/10W
R1049	1-216-817-11	METAL CHIP	470	5%	1/10W	R1135	1-216-809-11	METAL CHIP	100	5%	1/10W
R1050	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1136	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R1053	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1137	1-216-809-11	METAL CHIP	100	5%	1/10W
R1054	1-216-817-11	METAL CHIP	470	5%	1/10W	R1138	1-216-809-11	METAL CHIP	100	5%	1/10W
R1058	1-216-813-11	METAL CHIP	220	5%	1/10W	R1139	1-216-864-11	SHORT CHIP	0		
R1059	1-216-813-11	METAL CHIP	220	5%	1/10W	R1140	1-216-809-11	METAL CHIP	100	5%	1/10W
R1062	1-216-801-11	METAL CHIP	22	5%	1/10W	R1141	1-216-864-11	SHORT CHIP	0		
R1063	1-216-809-11	METAL CHIP	100	5%	1/10W	R1142	1-216-809-11	METAL CHIP	100	5%	1/10W
R1066	1-216-809-11	METAL CHIP	100	5%	1/10W	R1144	1-216-801-11	METAL CHIP	22	5%	1/10W
R1067	1-216-809-11	METAL CHIP	100	5%	1/10W	R1146	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1068	1-216-801-11	METAL CHIP	22	5%	1/10W	R1147	1-216-837-11	METAL CHIP	22K	5%	1/10W
R1069	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1148	1-216-803-11	METAL CHIP	33	5%	1/10W
R1070	1-216-864-11	SHORT CHIP	0			R1151	1-216-864-11	SHORT CHIP	0		
R1071	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1153	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R1072	1-216-827-11	METAL CHIP	3.3K	5%	1/10W	R1155	1-216-809-11	METAL CHIP	100	5%	1/10W
R1073	1-216-827-11	METAL CHIP	3.3K	5%	1/10W	R1156	1-216-864-11	SHORT CHIP	0		
R1076	1-216-809-11	METAL CHIP	100	5%	1/10W	R1157	1-216-864-11	SHORT CHIP	0		
R1077	1-216-809-11	METAL CHIP	100	5%	1/10W	R1158	1-216-809-11	METAL CHIP	100	5%	1/10W
R1078	1-216-809-11	METAL CHIP	100	5%	1/10W	R1159	1-216-827-11	METAL CHIP	3.3K	5%	1/10W
R1080	1-216-864-11	SHORT CHIP	0			R1160	1-216-809-11	METAL CHIP	100	5%	1/10W
R1083	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1161	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1084	1-216-864-11	SHORT CHIP	0			R1162	1-216-809-11	METAL CHIP	100	5%	1/10W
R1088	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1164	1-216-864-11	SHORT CHIP	0		
R1094	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1167	1-216-809-11	METAL CHIP	100	5%	1/10W
R1095	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1168	1-216-809-11	METAL CHIP	100	5%	1/10W
R1097	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1174	1-216-809-11	METAL CHIP	100	5%	1/10W
R1100	1-216-864-11	SHORT CHIP	0			R1175	1-216-821-11	METAL CHIP	1K	5%	1/10W
R1101	1-216-864-11	SHORT CHIP	0			R1179	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1102	1-216-864-11	SHORT CHIP	0			R1180	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1103	1-216-864-11	SHORT CHIP	0			R1181	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1104	1-216-864-11	SHORT CHIP	0			R1182	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1105	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1183	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1106	1-216-809-11	METAL CHIP	100	5%	1/10W	R1184	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1107	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R1185	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1108	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R1186	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1109	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R1187	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1111	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R1188	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1112	1-216-809-11	METAL CHIP	100	5%	1/10W	R1191	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1115	1-216-809-11	METAL CHIP	100	5%	1/10W	R1192	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1116	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1193	1-216-841-11	METAL CHIP	47K	5%	1/10W
R1117	1-216-821-11	METAL CHIP	1K	5%	1/10W	R1194	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R1118	1-216-809-11	METAL CHIP	100	5%	1/10W	R1194	1-216-841-11	METAL CHIP	47K	5%	1/10W
R1119	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1194	1-216-864-11	SHORT CHIP	0 (US,CND)		
R1120	1-216-864-11	SHORT CHIP	0			R1197	1-216-809-11	METAL CHIP	100	5%	1/10W
R1122	1-216-809-11	METAL CHIP	100	5%	1/10W	R1199	1-216-809-11	METAL CHIP	100	5%	1/10W
R1123	1-216-809-11	METAL CHIP	100	5%	1/10W	R1200	1-216-809-11	METAL CHIP	100	5%	1/10W
R1124	1-216-809-11	METAL CHIP	100	5%	1/10W	R1201	1-216-809-11	METAL CHIP	100	5%	1/10W
R1125	1-216-809-11	METAL CHIP	100	5%	1/10W	R1202	1-216-809-11	METAL CHIP	100	5%	1/10W
R1126	1-216-809-11	METAL CHIP	100	5%	1/10W	R1203	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1127	1-216-809-11	METAL CHIP	100	5%	1/10W	R1253	1-216-833-11	METAL CHIP	10K	5%	1/10W

DIGITAL

DISPLAY

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
R1260	1-216-821-11	METAL CHIP	1K	5%	1/10W	R1466	1-216-821-11	METAL CHIP	1K	5%	1/10W
R1261	1-216-821-11	METAL CHIP	1K	5%	1/10W	R1468	1-216-832-11	METAL CHIP	8.2K	5%	1/10W
R1301	1-216-830-11	METAL CHIP	5.6K	5%	1/10W	R1470	1-216-864-11	SHORT CHIP	0		
R1302	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R1471	1-216-864-11	SHORT CHIP	0		
R1303	1-216-839-11	METAL CHIP	33K	5%	1/10W	R1472	1-216-864-11	SHORT CHIP	0		
R1304	1-216-809-11	METAL CHIP	100	5%	1/10W	R1473	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R1305	1-216-817-11	METAL CHIP	470	5%	1/10W	R1474	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1306	1-216-801-11	METAL CHIP	22	5%	1/10W	R1476	1-216-821-11	METAL CHIP	1K	5%	1/10W
R1307	1-216-809-11	METAL CHIP	100	5%	1/10W	R1483	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R1308	1-216-809-11	METAL CHIP	100	5%	1/10W	R1484	1-216-864-11	SHORT CHIP	0		
R1310	1-216-857-11	METAL CHIP	1M	5%	1/10W	R1485	1-216-864-11	SHORT CHIP	0		
R1311	1-216-809-11	METAL CHIP	100	5%	1/10W	R1486	1-216-821-11	METAL CHIP	1K	5%	1/10W
R1313	1-216-809-11	METAL CHIP	100	5%	1/10W	R1491	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R1314	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1492	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R1318	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1493	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R1319	1-216-817-11	METAL CHIP	470	5%	1/10W	R1494	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R1321	1-216-864-11	SHORT CHIP	0			R1495	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R1323	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1496	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R1324	1-216-809-11	METAL CHIP	100	5%	1/10W	R1497	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R1325	1-216-820-11	METAL CHIP	820	5%	1/10W	R1498	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R1326	1-216-809-11	METAL CHIP	100	5%	1/10W	R1508	1-216-864-11	SHORT CHIP	0		
R1327	1-216-809-11	METAL CHIP	100	5%	1/10W	R1509	1-216-864-11	SHORT CHIP	0		
R1350	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1510	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1351	1-216-809-11	METAL CHIP	100	5%	1/10W	R1511	1-216-838-11	METAL CHIP	27K	5%	1/10W
R1352	1-216-864-11	SHORT CHIP	0			R1512	1-216-813-11	METAL CHIP	220	5%	1/10W
R1353	1-216-864-11	SHORT CHIP	0			R1513	1-216-837-11	METAL CHIP	22K	5%	1/10W
R1354	1-216-809-11	METAL CHIP	100	5%	1/10W	R1514	1-216-837-11	METAL CHIP	22K	5%	1/10W
R1355	1-218-285-11	METAL CHIP	75	5%	1/10W	R1515	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1356	1-216-817-11	METAL CHIP	470	5%	1/10W	R1530	1-216-845-11	METAL CHIP	100K	5%	1/10W
R1357	1-216-841-11	METAL CHIP	47K	5%	1/10W	R1556	1-216-815-11	METAL CHIP	330	5%	1/10W
R1358	1-216-853-11	METAL CHIP	470K	5%	1/10W	R1635	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1359	1-216-809-11	METAL CHIP	100	5%	1/10W	R1636	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1360	1-216-813-11	METAL CHIP	220	5%	1/10W	R1801	1-216-809-11	METAL CHIP	100	5%	1/10W
R1362	1-216-855-11	METAL CHIP	680K	5%	1/10W						(US,CND)
R1366	1-216-809-11	METAL CHIP	100	5%	1/10W	R1802	1-216-809-11	METAL CHIP	100	5%	1/10W
											(US,CND)
R1367	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R1804	1-216-809-11	METAL CHIP	100	5%	1/10W
R1368	1-216-864-11	SHORT CHIP	0								(US,CND)
R1401	1-216-809-11	METAL CHIP	100	5%	1/10W						
R1414	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R1806	1-216-809-11	METAL CHIP	100	5%	1/10W
R1415	1-216-864-11	SHORT CHIP	0			R1807	1-216-809-11	METAL CHIP	100	5%	1/10W
											(US,CND)
R1416	1-216-821-11	METAL CHIP	1K	5%	1/10W	R1940	1-216-864-11	SHORT CHIP	0		
R1420	1-216-864-11	SHORT CHIP	0			R1949	1-216-841-11	METAL CHIP	47K	5%	1/10W
R1424	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	R1964	1-216-864-11	SHORT CHIP	0		
R1425	1-216-864-11	SHORT CHIP	0								
R1426	1-216-821-11	METAL CHIP	1K	5%	1/10W						< VIBRATOR >
R1427	1-216-864-11	SHORT CHIP	0			X1101	1-781-893-21	VIBRATOR, CERAMIC (CHIP TYPE) (12.5MHz)			
R1434	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	X1301	1-795-126-21	VIBRATOR, CRYSTAL (12.288MHz)			
R1435	1-216-864-11	SHORT CHIP	0			X1302	1-795-807-11	VIBRATOR, CRYSTAL (25MHz)			
R1436	1-216-821-11	METAL CHIP	1K	5%	1/10W	*****					
R1444	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W						
R1445	1-216-864-11	SHORT CHIP	0			A-1433-581-A	DISPLAY BOARD, COMPLETE (US,CND)				
R1446	1-216-821-11	METAL CHIP	1K	5%	1/10W	A-1433-582-A	DISPLAY BOARD, COMPLETE (AEP,TH)				
R1447	1-216-821-11	METAL CHIP	1K	5%	1/10W						*****
R1454	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W						< CAPACITOR >
R1455	1-216-864-11	SHORT CHIP	0								
R1456	1-216-821-11	METAL CHIP	1K	5%	1/10W	C110	1-162-960-11	CERAMIC CHIP	220PF	10%	50V
R1460	1-216-864-11	SHORT CHIP	0			C111	1-162-960-11	CERAMIC CHIP	220PF	10%	50V
R1461	1-216-864-11	SHORT CHIP	0			C112	1-162-960-11	CERAMIC CHIP	220PF	10%	50V
R1463	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W	C114	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
R1464	1-216-864-11	SHORT CHIP	0			C115	1-126-964-11	ELECT	10uF	20%	50V
						C144	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V

STR-DG720

Ver. 1.1

DISPLAY

HDMI RE

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
C145	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V	S105	1-771-410-21	SWITCH, TACTILE (MUSIC)			
C147	1-162-960-11	CERAMIC CHIP	220PF	10%	50V	S106	1-771-410-21	SWITCH, TACTILE (MOVIE)			
C148	1-126-964-11	ELECT	10uF	20%	50V	S107	1-771-410-21	SWITCH, TACTILE (A.F.D.)			
C149	1-162-960-11	CERAMIC CHIP	220PF	10%	50V	S108	1-771-410-21	SWITCH, TACTILE (2CH)			
C160	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V	S109	1-771-410-21	SWITCH, TACTILE (CATEGORY +) (US,CND)			
C162	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V	S109	1-771-410-21	SWITCH, TACTILE (SUR BACK DECODING)			
C164	1-162-960-11	CERAMIC CHIP	220PF	10%	50V			(AEP,TH)			
C165	1-126-964-11	ELECT	10uF	20%	50V	S110	1-771-410-21	SWITCH, TACTILE (CATEGORY -) (US,CND)			
< CONNECTOR >						S110	1-771-410-21	SWITCH, TACTILE (SLEEP) (AEP,TH)			
* CN104	1-691-746-11	CONNECTOR, BOARD TO BOARD 5P				S111	1-771-410-21	SWITCH, TACTILE (CATEGORY MODE) (US,CND)			
* CNP106	1-564-517-11	PLUG, CONNECTOR 2P				S111	1-771-410-21	SWITCH, TACTILE (DIMMER) (AEP,TH)			
CNS101	1-784-780-11	CONNECTOR, FFC 19P				S112	1-771-410-21	SWITCH, TACTILE (MEMORY/ENTER)			
< VACUUM FLUORESCENT DISPLAY >						*****					
FL101	1-519-927-11	VACUUM FLUORESCENT DISPLAY				Ⓔ	A-1438-372-A	HDMI RE BOARD, COMPLETE (for SERVICE)			
< IC >						*****					
IC100	6-701-729-01	IC PT6315				C3501	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
IC101	8-759-157-94	IC TC74ACT08F(EL)				C3502	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
IC103	6-600-349-31	IC NJL24H400A (IR)				C3503	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
< RESISTOR >						C3504	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R101	1-216-813-11	METAL CHIP	220	5%	1/10W	C3505	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R102	1-216-815-11	METAL CHIP	330	5%	1/10W	C3507	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R103	1-216-817-11	METAL CHIP	470	5%	1/10W	C3508	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R104	1-216-819-11	METAL CHIP	680	5%	1/10W	C3509	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R105	1-216-821-11	METAL CHIP	1K	5%	1/10W	C3510	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R106	1-216-823-11	METAL CHIP	1.5K	5%	1/10W	C3511	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R107	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	C3512	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R108	1-216-813-11	METAL CHIP	220	5%	1/10W	C3513	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R109	1-216-815-11	METAL CHIP	330	5%	1/10W	C3514	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R110	1-216-817-11	METAL CHIP	470	5%	1/10W	C3516	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R115	1-216-809-11	METAL CHIP	100	5%	1/10W	C3517	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R116	1-216-809-11	METAL CHIP	100	5%	1/10W	C3518	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R117	1-216-809-11	METAL CHIP	100	5%	1/10W	C3519	1-126-210-21	ELECT CHIP	220uF	20%	4V
R118	1-216-844-11	METAL CHIP	82K	5%	1/10W	C3520	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R119	1-216-809-11	METAL CHIP	100	5%	1/10W	C3521	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R120	1-249-393-11	CARBON	10	5%	1/4W F	C3522	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R180	1-216-864-11	SHORT CHIP	0			C3523	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R181	1-216-864-11	SHORT CHIP	0			C3524	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R182	1-216-864-11	SHORT CHIP	0			C3525	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R197	1-249-385-11	CARBON	2.2	5%	1/4W F	C3526	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
					(AEP,TH)	C3527	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R197	1-249-387-11	CARBON	3.3	5%	1/4W F	C3529	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
					(US,CND)	C3530	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R198	1-249-385-11	CARBON	2.2	5%	1/4W F	C3531	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
					(AEP,TH)	C3533	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R198	1-249-387-11	CARBON	3.3	5%	1/4W F	C3534	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
					(US,CND)	C3535	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
< ROTARY ENCODER >						C3536	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
RV101	1-418-817-31	ENCODER, ROTARY (INPUT SELECTOR)				C3537	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
RV102	1-418-725-41	ENCODER, ROTARY (12 TYPE)				C3538	1-162-916-11	CERAMIC CHIP	12PF	5%	50V
		(MASTER VOLUME)				C3539	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
< SWITCH >						C3540	1-162-916-11	CERAMIC CHIP	12PF	5%	50V
S101	1-771-410-21	SWITCH, TACTILE (MUTING)				C3541	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
S102	1-771-410-21	SWITCH, TACTILE (ANALOG DIRECT)				C3542	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
S103	1-771-410-21	SWITCH, TACTILE (INPUT MODE)				C3543	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
S104	1-771-410-21	SWITCH, TACTILE (DISPLAY)				C3544	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
						C3545	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
						C3547	1-100-053-21	ELECT CHIP	220uF	20%	6.3V
						C3548	1-126-210-21	ELECT CHIP	220uF	20%	4V

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
C3549	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	CN3510	1-784-859-51	CONNECTOR, FFC (LIF(NON-ZIF)) 7P	
C3550	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	CN3511	1-820-116-41	CONNECTOR, FFC/FPC 17P	
C3551	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V			< DIODE >	
C3552	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	D3501	6-501-817-01	DIODE MA2J1110GLS0	
C3553	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	D3502	6-501-817-01	DIODE MA2J1110GLS0	
C3555	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	D3511	6-501-817-01	DIODE MA2J1110GLS0	
C3556	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	D3512	6-501-817-01	DIODE MA2J1110GLS0	
C3557	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	D3513	6-501-817-01	DIODE MA2J1110GLS0	
C3558	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V			< GROUND TERMINAL >	
C3561	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	ET3503	1-780-318-11	TERMINAL, GROUND	
C3562	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V			< FERRITE BEAD >	
C3563	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	FB3501	1-414-234-22	INDUCTOR, FERRITE BEAD	
C3564	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	FB3502	1-414-234-22	INDUCTOR, FERRITE BEAD	
C3566	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	FB3503	1-414-234-22	INDUCTOR, FERRITE BEAD	
C3567	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	FB3504	1-414-234-22	INDUCTOR, FERRITE BEAD	
C3568	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	FB3505	1-414-234-22	INDUCTOR, FERRITE BEAD	
C3569	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	FB3506	1-414-234-22	INDUCTOR, FERRITE BEAD	
C3570	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	FB3508	1-414-234-22	INDUCTOR, FERRITE BEAD	
C3571	1-126-205-11	ELECT CHIP 47uF 20%	6.3V	FB3509	1-469-152-11	FERRITE, EMI (SMD) (2012)	
C3572	1-126-206-11	ELECT CHIP 100uF 20%	6.3V	FB3510	1-414-234-22	INDUCTOR, FERRITE BEAD	
C3573	1-126-205-11	ELECT CHIP 47uF 20%	6.3V	FB3511	1-414-234-22	INDUCTOR, FERRITE BEAD	
C3574	1-126-210-21	ELECT CHIP 220uF 20%	4V	FB3512	1-414-234-22	INDUCTOR, FERRITE BEAD	
C3575	1-100-053-21	ELECT CHIP 220uF 20%	6.3V	FB3513	1-414-234-22	INDUCTOR, FERRITE BEAD	
C3576	1-165-667-21	ELECT CHIP 100uF 20%	6.3V	FB3514	1-414-234-22	INDUCTOR, FERRITE BEAD	
C3579	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V			< IC >	
C3580	1-165-667-21	ELECT CHIP 100uF 20%	6.3V	IC3501	8-759-389-26	IC 74LCX08MTCX	
C3584	1-115-467-11	CERAMIC CHIP 0.22uF 10%	10V	IC3503	6-710-819-01	IC TMDS341APFCR	
C3585	1-165-908-11	CERAMIC CHIP 1uF 10%	10V	IC3504	8-759-596-39	IC SN74LV4052APWR	
C3586	1-128-995-21	ELECT CHIP 100uF 20%	10V	IC3507	6-708-758-01	IC PCA9517DP.118	
C3590	1-128-934-11	CERAMIC CHIP 0.33uF 20%	10V	IC3509	6-704-001-01	IC BR24L02F-WSE2	
C3591	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	IC3511	(Not supplied)	IC SII9011CLU	
C3593	1-128-994-21	ELECT CHIP 47uF 20%	10V	IC3513	(Not supplied)	IC SII9030CTU-7	
C3594	1-128-994-21	ELECT CHIP 47uF 20%	10V	IC3516	6-705-337-01	IC TK11150CSCL-G	
C3596	1-128-994-21	ELECT CHIP 47uF 20%	10V	IC3519	6-807-915-01	IC M30620FCPGP-RSX01	
C3597	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	IC3521	8-759-596-39	IC SN74LV4052APWR	
C3615	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	IC3526	6-707-744-01	IC SI-3033KM-TL	
C3616	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	IC3527	6-707-744-01	IC SI-3033KM-TL	
C3617	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	IC3528	8-759-832-05	IC BA18BC0FP-E2	
C3618	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V			< TRANSISTOR >	
C3619	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V	Q3504	6-550-014-01	FET SSM6N15FU(TE85R)	
C3620	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	Q3505	6-551-696-01	TRANSISTOR ISA1235AC1TP-1EF	
C3621	1-112-791-11	ELECT CHIP 100uF 20%	16V	Q3506	6-551-696-01	TRANSISTOR ISA1235AC1TP-1EF	
C3625	1-126-205-11	ELECT CHIP 47uF 20%	6.3V	Q3507	6-551-696-01	TRANSISTOR ISA1235AC1TP-1EF	
C3627	1-126-205-11	ELECT CHIP 47uF 20%	6.3V			< RESISTOR >	
C3630	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	R3500	1-216-833-11	METAL CHIP 10K 5% 1/10W	
C3631	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	R3502	1-216-864-11	SHORT CHIP 0	
C3632	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	R3504	1-216-864-11	SHORT CHIP 0	
C3633	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	R3506	1-216-864-11	SHORT CHIP 0	
C3634	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V	R3509	1-216-805-11	METAL CHIP 47 5% 1/10W	
C3635	1-126-205-11	ELECT CHIP 47uF 20%	6.3V	R3511	1-216-841-11	METAL CHIP 47K 5% 1/10W	
C3643	1-126-205-11	ELECT CHIP 47uF 20%	6.3V	R3512	1-216-805-11	METAL CHIP 47 5% 1/10W	
C3644	1-126-205-11	ELECT CHIP 47uF 20%	6.3V	R3513	1-216-841-11	METAL CHIP 47K 5% 1/10W	
		< CONNECTOR >		R3514	1-216-841-11	METAL CHIP 47K 5% 1/10W	
CN3501	1-820-735-11	CONNECTOR, HDMI 19P (HDMI SAT IN)		R3519	1-216-864-11	SHORT CHIP 0	
CN3502	1-820-735-11	CONNECTOR, HDMI 19P (HDMI DVD IN)					
CN3503	1-820-735-11	CONNECTOR, HDMI 19P (HDMI BD IN)					
CN3504	1-820-735-11	CONNECTOR, HDMI 19P (HDMI OUT)					
CN3509	1-779-993-11	PIN, CONNECTOR (PWB) 5P					

Note: When IC3511 and IC3513 on the HDMI RE board are damaged, exchange the new HDMI RE board for the HDMI RE board which IC damaged.

HDMI RE

Ref. No.	Part No.	Description			Remark	Ref. No.	Part No.	Description			Remark
R3521	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3605	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3524	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3608	1-216-805-11	METAL CHIP	47	5%	1/10W
R3525	1-218-844-11	METAL CHIP	750	0.5%	1/10W	R3609	1-216-805-11	METAL CHIP	47	5%	1/10W
R3526	1-218-861-11	METAL CHIP	3.9K	0.5%	1/10W	R3610	1-216-805-11	METAL CHIP	47	5%	1/10W
R3527	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3611	1-216-805-11	METAL CHIP	47	5%	1/10W
R3528	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3612	1-216-805-11	METAL CHIP	47	5%	1/10W
R3532	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3613	1-216-805-11	METAL CHIP	47	5%	1/10W
R3533	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3614	1-216-805-11	METAL CHIP	47	5%	1/10W
R3534	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3615	1-216-805-11	METAL CHIP	47	5%	1/10W
R3535	1-216-864-11	SHORT CHIP	0			R3616	1-216-805-11	METAL CHIP	47	5%	1/10W
R3536	1-216-864-11	SHORT CHIP	0			R3621	1-216-805-11	METAL CHIP	47	5%	1/10W
R3541	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3622	1-216-805-11	METAL CHIP	47	5%	1/10W
R3542	1-216-864-11	SHORT CHIP	0			R3623	1-216-805-11	METAL CHIP	47	5%	1/10W
R3544	1-216-805-11	METAL CHIP	47	5%	1/10W	R3624	1-216-801-11	METAL CHIP	22	5%	1/10W
R3545	1-216-805-11	METAL CHIP	47	5%	1/10W	R3625	1-216-801-11	METAL CHIP	22	5%	1/10W
R3546	1-216-857-11	METAL CHIP	1M	5%	1/10W	R3633	1-216-864-11	SHORT CHIP	0		
R3548	1-216-803-11	METAL CHIP	33	5%	1/10W	R3634	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3549	1-216-809-11	METAL CHIP	100	5%	1/10W	R3639	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R3550	1-216-809-11	METAL CHIP	100	5%	1/10W	R3642	1-216-841-11	METAL CHIP	47K	5%	1/10W
R3551	1-216-809-11	METAL CHIP	100	5%	1/10W	R3645	1-216-809-11	METAL CHIP	100	5%	1/10W
R3552	1-216-809-11	METAL CHIP	100	5%	1/10W	R3652	1-216-824-11	METAL CHIP	1.8K	5%	1/10W
R3554	1-216-809-11	METAL CHIP	100	5%	1/10W	R3653	1-216-824-11	METAL CHIP	1.8K	5%	1/10W
R3556	1-216-809-11	METAL CHIP	100	5%	1/10W	R3654	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R3557	1-216-805-11	METAL CHIP	47	5%	1/10W	R3655	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R3558	1-216-864-11	SHORT CHIP	0			R3660	1-216-864-11	SHORT CHIP	0		
R3562	1-216-864-11	SHORT CHIP	0			R3661	1-216-821-11	METAL CHIP	1K	5%	1/10W
R3563	1-216-809-11	METAL CHIP	100	5%	1/10W	R3662	1-216-821-11	METAL CHIP	1K	5%	1/10W
R3564	1-218-285-11	METAL CHIP	75	5%	1/10W	R3663	1-216-821-11	METAL CHIP	1K	5%	1/10W
R3565	1-216-805-11	METAL CHIP	47	5%	1/10W	R3676	1-216-809-11	METAL CHIP	100	5%	1/10W
R3566	1-218-285-11	METAL CHIP	75	5%	1/10W	R3700	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3567	1-218-285-11	METAL CHIP	75	5%	1/10W	R3711	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R3570	1-216-809-11	METAL CHIP	100	5%	1/10W	R3712	1-216-837-11	METAL CHIP	22K	5%	1/10W
R3576	1-216-805-11	METAL CHIP	47	5%	1/10W	R3713	1-216-837-11	METAL CHIP	22K	5%	1/10W
R3577	1-216-805-11	METAL CHIP	47	5%	1/10W	R3714	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R3578	1-216-809-11	METAL CHIP	100	5%	1/10W	R3715	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R3579	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3716	1-216-837-11	METAL CHIP	22K	5%	1/10W
R3580	1-218-839-11	METAL CHIP	470	0.5%	1/10W	R3741	1-216-817-11	METAL CHIP	470	5%	1/10W
R3581	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3744	1-216-805-11	METAL CHIP	47	5%	1/10W
R3582	1-216-793-11	METAL CHIP	4.7	5%	1/10W	R3745	1-216-805-11	METAL CHIP	47	5%	1/10W
R3583	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R3747	1-216-864-11	SHORT CHIP	0		
R3584	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R3748	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R3585	1-216-864-11	SHORT CHIP	0			R3749	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R3586	1-216-864-11	SHORT CHIP	0			R3750	1-216-805-11	METAL CHIP	47	5%	1/10W
R3587	1-216-864-11	SHORT CHIP	0			R3775	1-216-797-11	METAL CHIP	10	5%	1/10W
R3588	1-216-864-11	SHORT CHIP	0			R3776	1-216-797-11	METAL CHIP	10	5%	1/10W
R3589	1-216-864-11	SHORT CHIP	0			R3779	1-216-805-11	METAL CHIP	47	5%	1/10W
R3590	1-216-864-11	SHORT CHIP	0			R3780	1-216-805-11	METAL CHIP	47	5%	1/10W
R3591	1-216-864-11	SHORT CHIP	0			R3784	1-216-864-11	SHORT CHIP	0		
R3592	1-216-864-11	SHORT CHIP	0			R3788	1-216-864-11	SHORT CHIP	0		
R3593	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3790	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3594	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3791	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3595	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3793	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3597	1-216-864-11	SHORT CHIP	0			R3796	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3598	1-216-864-11	SHORT CHIP	0			R3797	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3599	1-216-824-11	METAL CHIP	1.8K	5%	1/10W	R3798	1-216-864-11	SHORT CHIP	0		
R3600	1-216-824-11	METAL CHIP	1.8K	5%	1/10W	R3799	1-216-805-11	METAL CHIP	47	5%	1/10W
R3601	1-216-833-11	METAL CHIP	10K	5%	1/10W	< NETWORK RESISTOR >					
R3602	1-216-833-11	METAL CHIP	10K	5%	1/10W	* RB3501	1-234-723-11	RES, NETWORK 75X4 (1005)			
R3603	1-216-833-11	METAL CHIP	10K	5%	1/10W	* RB3502	1-234-723-11	RES, NETWORK 75X4 (1005)			
R3604	1-216-833-11	METAL CHIP	10K	5%	1/10W						

HDMI RE

HEADPHONE

MAIN

Ref. No.	Part No.	Description					Remark	Ref. No.	Part No.	Description					Remark
* RB3503	1-234-723-11	RES, NETWORK 75X4 (1005)						C552	1-162-927-11	CERAMIC CHIP	100PF	5%	50V		
* RB3504	1-234-723-11	RES, NETWORK 75X4 (1005)						C553	1-102-233-00	CERAMIC	33PF	10%	500V		
* RB3505	1-234-723-11	RES, NETWORK 75X4 (1005)						C554	1-162-927-11	CERAMIC CHIP	100PF	5%	50V		
* RB3506	1-234-723-11	RES, NETWORK 75X4 (1005)						C555	1-107-583-11	CERAMIC	3PF	0.25PF	500V		
								C556	1-126-923-11	ELECT	220uF	20%	10V		
< VIBRATOR >															
X3501	1-813-570-21	VIBRATOR, CRYSTAL (28.322MHz)						C557	1-126-947-11	ELECT	47uF	20%	35V		
X3502	1-795-244-11	VIBRATOR, CERAMIC (10MHz)						C558	1-162-815-11	CERAMIC	47PF	5%	500V		
*****								C559	1-162-815-11	CERAMIC	47PF	5%	500V		
								C561	1-162-960-11	CERAMIC CHIP	220PF	10%	50V		
								C570	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V		
HEADPHONE BOARD															
*****								C571	1-126-964-11	ELECT	10uF	20%	50V		
< CAPACITOR >								C579	1-136-157-00	FILM	0.022uF	5%	50V		
C601	1-126-964-11	ELECT	10uF	20%	50V		C602	1-162-927-11	CERAMIC CHIP	100PF	5%	50V			
C603	1-102-233-00	CERAMIC	33PF	10%	500V		C604	1-162-927-11	CERAMIC CHIP	100PF	5%	50V			
< CONNECTOR >								C605	1-107-583-11	CERAMIC	3PF	0.25PF	500V		
* CNP790	1-564-507-11	PLUG, CONNECTOR 4P						C606	1-126-923-11	ELECT	220uF	20%	10V		
< JACK >								C607	1-126-947-11	ELECT	47uF	20%	35V		
J790	1-815-313-21	JACK (PHONES)						C608	1-162-815-11	CERAMIC	47PF	5%	500V		
< LEAD WIRE >								C609	1-162-815-11	CERAMIC	47PF	5%	500V		
* TP790	1-690-880-31	LEAD (WITH CONNECTOR)						C611	1-162-960-11	CERAMIC CHIP	220PF	10%	50V		
*****								C620	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V		
								C621	1-126-964-11	ELECT	10uF	20%	50V		
								C629	1-136-157-00	FILM	0.022uF	5%	50V		
A-1433-566-A MAIN BOARD, COMPLETE (US,CND)								C644	1-126-964-11	ELECT	10uF	20%	50V		
A-1433-567-A MAIN BOARD, COMPLETE (AEP)								C651	1-126-964-11	ELECT	10uF	20%	50V		
A-1438-234-A MAIN BOARD, COMPLETE (TH)								C652	1-162-927-11	CERAMIC CHIP	100PF	5%	50V		
*****								C653	1-102-233-00	CERAMIC	33PF	10%	500V		
								C654	1-162-927-11	CERAMIC CHIP	100PF	5%	50V		
7-685-646-79	SCREW +BVTP 3X8 TYPE2 IT-3							C655	1-107-583-11	CERAMIC	3PF	0.25PF	500V		
< CAPACITOR >								C656	1-126-923-11	ELECT	220uF	20%	10V		
C320	1-126-924-11	ELECT	330uF	20%	10V		C657	1-126-947-11	ELECT	47uF	20%	35V			
C323	1-126-924-11	ELECT	330uF	20%	10V		C658	1-162-815-11	CERAMIC	47PF	5%	500V			
C325	1-126-964-11	ELECT	10uF	20%	50V		C659	1-162-815-11	CERAMIC	47PF	5%	500V			
C350	1-137-980-11	CERAMIC CHIP	0.47uF	10%	50V		C661	1-162-960-11	CERAMIC CHIP	220PF	10%	50V			
C351	1-126-933-11	ELECT	100uF	20%	16V		C670	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V			
C352	1-137-980-11	CERAMIC CHIP	0.47uF	10%	50V		C671	1-126-964-11	ELECT	10uF	20%	50V			
C353	1-126-933-11	ELECT	100uF	20%	16V		C679	1-136-157-00	FILM	0.022uF	5%	50V			
C400	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V		C701	1-126-964-11	ELECT	10uF	20%	50V			
C403	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V		C702	1-162-927-11	CERAMIC CHIP	100PF	5%	50V			
C405	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V		C703	1-102-233-00	CERAMIC	33PF	10%	500V			
C408	1-126-963-11	ELECT	4.7uF	20%	50V		C704	1-162-927-11	CERAMIC CHIP	100PF	5%	50V			
C409	1-126-963-11	ELECT	4.7uF	20%	50V		C705	1-107-583-11	CERAMIC	3PF	0.25PF	500V			
C430	1-162-960-11	CERAMIC CHIP	220PF	10%	50V		C706	1-126-923-11	ELECT	220uF	20%	10V			
C431	1-162-960-11	CERAMIC CHIP	220PF	10%	50V		C707	1-126-947-11	ELECT	47uF	20%	35V			
C449	1-162-927-11	CERAMIC CHIP	100PF	5%	50V		C708	1-162-815-11	CERAMIC	47PF	5%	500V			
C450	1-162-927-11	CERAMIC CHIP	100PF	5%	50V		C709	1-162-815-11	CERAMIC	47PF	5%	500V			
C458	1-126-963-11	ELECT	4.7uF	20%	50V		C711	1-162-960-11	CERAMIC CHIP	220PF	10%	50V			
C459	1-126-963-11	ELECT	4.7uF	20%	50V		C720	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V			
C471	1-126-963-11	ELECT	4.7uF	20%	50V		C721	1-126-964-11	ELECT	10uF	20%	50V			
C487	1-112-089-11	ELECT	47uF	20%	25V		C729	1-136-157-00	FILM	0.022uF	5%	50V			
C488	1-112-089-11	ELECT	47uF	20%	25V		C744	1-126-964-11	ELECT	10uF	20%	50V			
C489	1-164-156-11	CERAMIC CHIP	0.1uF		25V		C751	1-126-964-11	ELECT	10uF	20%	50V			
C499	1-164-156-11	CERAMIC CHIP	0.1uF		25V		C752	1-162-927-11	CERAMIC CHIP	100PF	5%	50V			
C500	1-164-156-11	CERAMIC CHIP	0.1uF		25V		C753	1-102-233-00	CERAMIC	33PF	10%	500V			
C544	1-126-964-11	ELECT	10uF	20%	50V		C754	1-162-927-11	CERAMIC CHIP	100PF	5%	50V			
C545	1-128-582-11	ELECT	10uF	20%	100V		C755	1-107-583-11	CERAMIC	3PF	0.25PF	500V			
C546	1-128-582-11	ELECT	10uF	20%	100V		C756	1-126-923-11	ELECT	220uF	20%	10V			
C551	1-126-964-11	ELECT	10uF	20%	50V		C757	1-126-947-11	ELECT	47uF	20%	35V			

Ref. No.	Part No.	Description	Remark
C758	1-162-815-11	CERAMIC 47PF 5%	500V
C759	1-162-815-11	CERAMIC 47PF 5%	500V
C761	1-162-960-11	CERAMIC CHIP 220PF 10%	50V
C770	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V
C771	1-126-964-11	ELECT 10uF 20%	50V
C779	1-136-157-00	FILM 0.022uF 5%	50V
C801	1-126-964-11	ELECT 10uF 20%	50V
C802	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
C803	1-102-233-00	CERAMIC 33PF 10%	500V
C804	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
C805	1-107-583-11	CERAMIC 3PF 0.25PF	500V
C806	1-126-923-11	ELECT 220uF 20%	10V
C807	1-126-947-11	ELECT 47uF 20%	35V
C808	1-162-815-11	CERAMIC 47PF 5%	500V
C809	1-162-815-11	CERAMIC 47PF 5%	500V
C811	1-162-960-11	CERAMIC CHIP 220PF 10%	50V
C820	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V
C821	1-126-964-11	ELECT 10uF 20%	50V
C829	1-136-157-00	FILM 0.022uF 5%	50V
C844	1-126-964-11	ELECT 10uF 20%	50V
C851	1-126-964-11	ELECT 10uF 20%	50V
C852	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
C853	1-102-233-00	CERAMIC 33PF 10%	500V
C854	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
C855	1-107-583-11	CERAMIC 3PF 0.25PF	500V
C856	1-126-923-11	ELECT 220uF 20%	10V
C857	1-126-947-11	ELECT 47uF 20%	35V
C858	1-162-815-11	CERAMIC 47PF 5%	500V
C859	1-162-815-11	CERAMIC 47PF 5%	500V
C861	1-162-960-11	CERAMIC CHIP 220PF 10%	50V
C870	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V
C871	1-126-964-11	ELECT 10uF 20%	50V
C879	1-136-157-00	FILM 0.022uF 5%	50V
C900	1-107-826-11	CERAMIC CHIP 0.1uF 10%	16V
C904	1-126-936-11	ELECT 3300uF 20%	16V
C920	1-135-851-21	MYLAR 0.22uF	100V
C921	1-135-851-21	MYLAR 0.22uF	100V
C922	1-109-932-15	ELECT(BLOCK) 10000uF 20%	71V
C923	1-109-932-15	ELECT(BLOCK) 10000uF 20%	71V
C930	1-119-772-11	ELECT 47uF 20%	35V
C931	1-126-947-11	ELECT 47uF 20%	35V
C932	1-126-947-11	ELECT 47uF 20%	35V
C933	1-100-623-11	CERAMIC CHIP 0.1uF 10%	100V
C940	1-137-980-11	CERAMIC CHIP 0.47uF 10%	50V
C941	1-137-980-11	CERAMIC CHIP 0.47uF 10%	50V
C3022	1-165-908-11	CERAMIC CHIP 1uF 10%	10V
C3024	1-126-963-11	ELECT 4.7uF 20%	50V
C3025	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C3026	1-164-156-11	CERAMIC CHIP 0.1uF	25V
C3027	1-165-908-11	CERAMIC CHIP 1uF 10%	10V
C3032	1-165-908-11	CERAMIC CHIP 1uF 10%	10V
C3034	1-126-963-11	ELECT 4.7uF 20%	50V
C3037	1-165-908-11	CERAMIC CHIP 1uF 10%	10V
CC01	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
CC02	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
CC03	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
CC04	1-162-927-11	CERAMIC CHIP 100PF 5%	50V

Ref. No.	Part No.	Description	Remark
CC05	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
CC08	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
CC09	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
CC11	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V
CC12	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V
CC13	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V
CC14	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V
CC15	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V
CC16	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V
CC17	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V
CC18	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V
CC19	1-162-970-11	CERAMIC CHIP 0.01uF 10%	25V
CC51	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
CC52	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
CC53	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
CC54	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
CC55	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
CC58	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
CC59	1-162-927-11	CERAMIC CHIP 100PF 5%	50V
< CONNECTOR >			
CNP410	1-573-845-11	CONNECTOR, BOARD TO BOARD 13P	
CNP411	1-573-847-11	CONNECTOR, BOARD TO BOARD 15P	
CNP430	1-779-978-11	PIN, CONNECTOR 3P	
* CNP500	1-564-506-11	PLUG, CONNECTOR 3P	
* CNP912	1-564-510-11	PLUG, CONNECTOR 7P	
* CNP921	1-564-687-11	PIN, CONNECTOR (3.96mm PITCH) 3P	
* CNP930	1-564-506-11	PLUG, CONNECTOR 3P	
* CNP940	1-564-509-11	PLUG, CONNECTOR 6P	
< DIODE >			
D301	6-501-817-01	DIODE MA2J1110GLS0	
D320	6-501-817-01	DIODE MA2J1110GLS0	
D325	6-501-817-01	DIODE MA2J1110GLS0	
D326	6-501-817-01	DIODE MA2J1110GLS0	
D327	6-501-817-01	DIODE MA2J1110GLS0	
D350	6-501-817-01	DIODE MA2J1110GLS0	
D352	8-719-053-18	DIODE 1SR154-400TE-25	
D355	6-501-817-01	DIODE MA2J1110GLS0	
D360	6-501-817-01	DIODE MA2J1110GLS0	
D365	6-501-817-01	DIODE MA2J1110GLS0	
D370	6-501-817-01	DIODE MA2J1110GLS0	
D375	6-501-817-01	DIODE MA2J1110GLS0	
D500	6-501-792-01	DIODE MAZ8300GMLS0	
D501	6-501-817-01	DIODE MA2J1110GLS0	

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
D561	6-501-817-01	DIODE MA2J1110GLS0				< TRANSISTOR >	
D570	6-501-817-01	DIODE MA2J1110GLS0		Q301	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF	
D611	6-501-817-01	DIODE MA2J1110GLS0		Q320	8-729-216-31	TRANSISTOR 2SA1163-G	
D620	6-501-817-01	DIODE MA2J1110GLS0		Q321	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF	
D661	6-501-817-01	DIODE MA2J1110GLS0		Q323	8-729-216-31	TRANSISTOR 2SA1163-G	
				Q324	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF	
D670	6-501-817-01	DIODE MA2J1110GLS0					
D711	6-501-817-01	DIODE MA2J1110GLS0		Q325	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF	
D720	6-501-817-01	DIODE MA2J1110GLS0		Q350	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF	
D761	6-501-817-01	DIODE MA2J1110GLS0		Q355	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF	
D770	6-501-817-01	DIODE MA2J1110GLS0		Q360	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF	
				Q365	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF	
D811	6-501-817-01	DIODE MA2J1110GLS0					
D820	6-501-817-01	DIODE MA2J1110GLS0		Q370	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF	
D861	6-501-817-01	DIODE MA2J1110GLS0		Q375	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF	
D870	6-501-817-01	DIODE MA2J1110GLS0		Q500	8-729-281-53	TRANSISTOR 2SC1815-GR	
D921	8-719-081-52	DIODE D5SBA20-4003		Q501	8-729-027-31	TRANSISTOR DTA124EKA-T146	
				Q551	8-729-119-76	TRANSISTOR 2SA1175-HFE	
D930	6-500-295-01	DIODE PTZ-TE25-5.6B					
D931	6-501-785-01	DIODE MAZ8200GMLS0		Q552	8-729-141-30	TRANSISTOR 2SC3623A-LK	
D940	8-719-053-18	DIODE 1SR154-400TE-25		Q561	8-729-216-31	TRANSISTOR 2SA1163-G	
D941	8-719-053-18	DIODE 1SR154-400TE-25		Q562	8-729-216-31	TRANSISTOR 2SA1163-G	
D942	8-719-053-18	DIODE 1SR154-400TE-25		Q570	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF	
				Q601	8-729-119-76	TRANSISTOR 2SA1175-HFE	
D943	8-719-053-18	DIODE 1SR154-400TE-25					
		< GROUND TERMINAL >		Q602	8-729-141-30	TRANSISTOR 2SC3623A-LK	
ET902	1-537-738-21	TERMINAL, GROUND		Q611	8-729-216-31	TRANSISTOR 2SA1163-G	
		< IC >		Q612	8-729-216-31	TRANSISTOR 2SA1163-G	
				Q620	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF	
				Q651	8-729-119-76	TRANSISTOR 2SA1175-HFE	
IC350	8-759-071-48	IC TA7807S					
IC352	8-759-373-94	IC TA79007SB		Q652	8-729-141-30	TRANSISTOR 2SC3623A-LK	
IC400	6-711-760-01	IC BD3471KS2		Q661	8-729-216-31	TRANSISTOR 2SA1163-G	
IC500	6-700-943-01	IC uPC2581V-S		Q662	8-729-216-31	TRANSISTOR 2SA1163-G	
IC565	8-759-710-97	IC NJM4565M-D		Q670	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF	
				Q701	8-729-119-76	TRANSISTOR 2SA1175-HFE	
IC600	6-700-943-01	IC uPC2581V-S					
IC700	6-700-943-01	IC uPC2581V-S		Q702	8-729-141-30	TRANSISTOR 2SC3623A-LK	
IC800	6-700-943-01	IC uPC2581V-S		Q711	8-729-216-31	TRANSISTOR 2SA1163-G	
IC3002	8-759-710-97	IC NJM4565M-D		Q712	8-729-216-31	TRANSISTOR 2SA1163-G	
		< JACK >		Q720	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF	
				Q751	8-729-119-76	TRANSISTOR 2SA1175-HFE	
J401	1-774-411-11	JACK, PIN 6P (SA-CD/CD/CD-R OUT, SA-CD/CD/CD-R IN,TV IN)					
J403	1-794-981-11	JACK, PIN 4P (SAT AUDIO IN,DVD AUDIO IN)		Q752	8-729-141-30	TRANSISTOR 2SC3623A-LK	
J404	1-794-981-11	JACK, PIN 4P (VIDEO 1 AUDIO OUT,AUDIO IN)		Q761	8-729-216-31	TRANSISTOR 2SA1163-G	
J405	1-774-785-11	JACK, PIN 1P (SUB WOOFER AUDIO OUT)		Q762	8-729-216-31	TRANSISTOR 2SA1163-G	
		< JUMPER RESISTOR >		Q770	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF	
				Q801	8-729-119-76	TRANSISTOR 2SA1175-HFE	
JR321	1-216-864-11	SHORT CHIP 0					
JR322	1-216-864-11	SHORT CHIP 0		Q802	8-729-141-30	TRANSISTOR 2SC3623A-LK	
JR406	1-216-864-11	SHORT CHIP 0		Q811	8-729-216-31	TRANSISTOR 2SA1163-G	
JR434	1-216-864-11	SHORT CHIP 0 (AEP,TH)		Q812	8-729-216-31	TRANSISTOR 2SA1163-G	
JR435	1-216-864-11	SHORT CHIP 0 (AEP,TH)		Q820	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF	
				Q851	8-729-119-76	TRANSISTOR 2SA1175-HFE	
JR632	1-216-864-11	SHORT CHIP 0					
JR702	1-216-864-11	SHORT CHIP 0		Q852	8-729-141-30	TRANSISTOR 2SC3623A-LK	
		< COIL >		Q861	8-729-216-31	TRANSISTOR 2SA1163-G	
				Q862	8-729-216-31	TRANSISTOR 2SA1163-G	
L578	1-420-872-52	COIL, AIR-CORE		Q870	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF	
L628	1-420-872-52	COIL, AIR-CORE		Q930	8-729-140-97	TRANSISTOR 2SB734-34	
L678	1-420-872-52	COIL, AIR-CORE				< RESISTOR >	
L728	1-420-872-52	COIL, AIR-CORE		R301	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
L778	1-420-872-52	COIL, AIR-CORE		R302	1-249-405-11	CARBON 100 5% 1/4W F	
				R303	1-249-405-11	CARBON 100 5% 1/4W F	
L828	1-420-872-52	COIL, AIR-CORE		R304	1-216-841-11	METAL CHIP 47K 5% 1/10W	
L878	1-420-872-52	COIL, AIR-CORE		R320	1-218-292-11	METAL CHIP 20K 5% 1/10W	
				R323	1-216-840-11	METAL CHIP 39K 5% 1/10W	
				R325	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W	

STR-DG720

Ver. 1.1

MAIN

Ref. No.	Part No.	Description				Remark	Ref. No.	Part No.	Description				Remark
R326	1-216-840-11	METAL CHIP	39K	5%	1/10W		△ R511	1-215-889-00	METAL OXIDE	330	5%	2W	F
R327	1-216-833-11	METAL CHIP	10K	5%	1/10W								(US,CND)
R328	1-216-821-11	METAL CHIP	1K	5%	1/10W		△ R511	1-215-890-11	METAL OXIDE	470	5%	2W	F
R350	1-216-825-11	METAL CHIP	2.2K	5%	1/10W								(AEP,TH)
R351	1-249-399-11	CARBON	33	5%	1/4W	F	R545	1-249-381-11	CARBON	1	5%	1/4W	F
							R546	1-249-381-11	CARBON	1	5%	1/4W	F
R352	1-249-401-11	CARBON	47	5%	1/4W	F	R551	1-216-821-11	METAL CHIP	1K	5%	1/10W	
R353	1-216-841-11	METAL CHIP	47K	5%	1/10W								
R355	1-216-821-11	METAL CHIP	1K	5%	1/10W		R552	1-216-843-11	METAL CHIP	68K	5%	1/10W	
R356	1-249-399-11	CARBON	33	5%	1/4W	F	R553	1-208-445-41	RES-CHIP	2.2K	2%	1/10W	
R357	1-249-401-11	CARBON	47	5%	1/4W	F	R554	1-208-826-11	METAL CHIP	68K	0.5%	1/10W	
							R555	1-216-230-00	RES-CHIP	22K	2%	1/8W	
R358	1-216-841-11	METAL CHIP	47K	5%	1/10W		R556	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	
R360	1-216-821-11	METAL CHIP	1K	5%	1/10W								
R361	1-249-399-11	CARBON	33	5%	1/4W	F	R557	1-216-844-11	METAL CHIP	82K	5%	1/10W	
R362	1-249-401-11	CARBON	47	5%	1/4W	F	R558	1-216-818-11	METAL CHIP	560	5%	1/10W	
R363	1-216-841-11	METAL CHIP	47K	5%	1/10W		R559	1-249-405-11	CARBON	100	5%	1/4W	F
							R560	1-249-405-11	CARBON	100	5%	1/4W	F
R365	1-216-825-11	METAL CHIP	2.2K	5%	1/10W		R561	1-216-214-00	RES-CHIP	4.7K	2%	1/8W	
R366	1-249-399-11	CARBON	33	5%	1/4W	F							
R367	1-249-401-11	CARBON	47	5%	1/4W	F	R562	1-240-855-11	CARBON	6.2K	5%	1/4W	F
R368	1-216-841-11	METAL CHIP	47K	5%	1/10W		R563	1-234-182-11	ENCAPSULATED COMPONENT	0.22X2	5W		
R370	1-216-825-11	METAL CHIP	2.2K	5%	1/10W		R564	1-216-823-11	METAL CHIP	1.5K	5%	1/10W	
							R565	1-216-835-11	METAL CHIP	15K	5%	1/10W	
R371	1-249-399-11	CARBON	33	5%	1/4W	F	R566	1-216-843-11	METAL CHIP	68K	5%	1/10W	
R372	1-249-401-11	CARBON	47	5%	1/4W	F							
R373	1-216-841-11	METAL CHIP	47K	5%	1/10W		R570	1-216-837-11	METAL CHIP	22K	5%	1/10W	
R375	1-216-825-11	METAL CHIP	2.2K	5%	1/10W		R571	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	
R376	1-249-399-11	CARBON	33	5%	1/4W	F							(EXCEPT TH)
							R571	1-216-834-11	METAL CHIP	12K	5%	1/10W	(TH)
R377	1-249-401-11	CARBON	47	5%	1/4W	F							
R378	1-216-841-11	METAL CHIP	47K	5%	1/10W		R572	1-216-835-11	METAL CHIP	15K	5%	1/10W	
△ R392	1-215-891-11	METAL OXIDE	680	5%	2W	F	R573	1-216-841-11	METAL CHIP	47K	5%	1/10W	
△ R393	1-215-891-11	METAL OXIDE	680	5%	2W	F							
R401	1-216-821-11	METAL CHIP	1K	5%	1/10W		R574	1-216-837-11	METAL CHIP	22K	5%	1/10W	
							R578	1-249-389-11	CARBON	4.7	5%	1/4W	F
R402	1-216-821-11	METAL CHIP	1K	5%	1/10W		R579	1-249-393-11	CARBON	10	5%	1/4W	F
R403	1-216-821-11	METAL CHIP	1K	5%	1/10W		R580	1-216-841-11	METAL CHIP	47K	5%	1/10W	
R404	1-216-821-11	METAL CHIP	1K	5%	1/10W		R601	1-216-821-11	METAL CHIP	1K	5%	1/10W	
R405	1-216-821-11	METAL CHIP	1K	5%	1/10W								
R408	1-216-821-11	METAL CHIP	1K	5%	1/10W		R602	1-216-843-11	METAL CHIP	68K	5%	1/10W	
							R603	1-208-445-41	RES-CHIP	2.2K	2%	1/10W	
R409	1-216-821-11	METAL CHIP	1K	5%	1/10W		R604	1-208-826-11	METAL CHIP	68K	0.5%	1/10W	
R430	1-216-821-11	METAL CHIP	1K	5%	1/10W		R605	1-216-230-00	RES-CHIP	22K	2%	1/8W	
R431	1-216-821-11	METAL CHIP	1K	5%	1/10W		R606	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	
R449	1-216-821-11	METAL CHIP	1K	5%	1/10W								
R450	1-216-821-11	METAL CHIP	1K	5%	1/10W		R607	1-216-844-11	METAL CHIP	82K	5%	1/10W	
							R608	1-216-818-11	METAL CHIP	560	5%	1/10W	
R451	1-216-821-11	METAL CHIP	1K	5%	1/10W		R609	1-249-405-11	CARBON	100	5%	1/4W	F
R452	1-216-821-11	METAL CHIP	1K	5%	1/10W		R610	1-249-405-11	CARBON	100	5%	1/4W	F
R453	1-216-821-11	METAL CHIP	1K	5%	1/10W		R611	1-216-214-00	RES-CHIP	4.7K	2%	1/8W	
R454	1-216-821-11	METAL CHIP	1K	5%	1/10W								
R455	1-216-821-11	METAL CHIP	1K	5%	1/10W		R612	1-240-855-11	CARBON	6.2K	5%	1/4W	F
							R613	1-234-182-11	ENCAPSULATED COMPONENT	0.22X2	5W		
R458	1-216-821-11	METAL CHIP	1K	5%	1/10W		R614	1-216-823-11	METAL CHIP	1.5K	5%	1/10W	
R459	1-216-821-11	METAL CHIP	1K	5%	1/10W		R615	1-216-835-11	METAL CHIP	15K	5%	1/10W	
R466	1-216-821-11	METAL CHIP	1K	5%	1/10W		R616	1-216-843-11	METAL CHIP	68K	5%	1/10W	
R467	1-216-845-11	METAL CHIP	100K	5%	1/10W								
R470	1-216-841-11	METAL CHIP	47K	5%	1/10W		R620	1-216-837-11	METAL CHIP	22K	5%	1/10W	
							R621	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	
													(EXCEPT TH)
R487	1-249-385-11	CARBON	2.2	5%	1/4W	F	R621	1-216-834-11	METAL CHIP	12K	5%	1/10W	(TH)
R488	1-249-385-11	CARBON	2.2	5%	1/4W	F							
R501	1-216-833-11	METAL CHIP	10K	5%	1/10W		R622	1-216-835-11	METAL CHIP	15K	5%	1/10W	
R502	1-216-853-11	METAL CHIP	470K	5%	1/10W		R623	1-216-841-11	METAL CHIP	47K	5%	1/10W	
R503	1-216-833-11	METAL CHIP	10K	5%	1/10W								
							R624	1-216-837-11	METAL CHIP	22K	5%	1/10W	
R504	1-216-833-11	METAL CHIP	10K	5%	1/10W		R628	1-249-389-11	CARBON	4.7	5%	1/4W	F
R506	1-216-841-11	METAL CHIP	47K	5%	1/10W		R629	1-249-393-11	CARBON	10	5%	1/4W	F
R507	1-216-849-11	METAL CHIP	220K	5%	1/10W		R630	1-216-841-11	METAL CHIP	47K	5%	1/10W	
△ R510	1-215-886-11	METAL OXIDE	100	5%	2W	F	R651	1-216-821-11	METAL CHIP	1K	5%	1/10W	
					(US,CND)								

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
R652	1-216-843-11	METAL CHIP	68K	5%	1/10W	R761	1-216-214-00	RES-CHIP	4.7K	2%	1/8W
R653	1-208-445-41	RES-CHIP	2.2K	2%	1/10W	R762	1-240-855-11	CARBON	6.2K	5%	1/4W F
R654	1-208-826-11	METAL CHIP	68K	0.5%	1/10W	R763	1-234-182-11	ENCAPSULATED COMPONENT 0.22X2 5W			
R656	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R764	1-216-823-11	METAL CHIP	1.5K	5%	1/10W
R657	1-216-844-11	METAL CHIP	82K	5%	1/10W	R765	1-216-835-11	METAL CHIP	15K	5%	1/10W
R658	1-216-818-11	METAL CHIP	560	5%	1/10W	R766	1-216-843-11	METAL CHIP	68K	5%	1/10W
R659	1-249-405-11	CARBON	100	5%	1/4W F	R770	1-216-837-11	METAL CHIP	22K	5%	1/10W
R660	1-249-405-11	CARBON	100	5%	1/4W F	R771	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R661	1-216-214-00	RES-CHIP	4.7K	2%	1/8W						(EXCEPT TH)
R662	1-240-855-11	CARBON	6.2K	5%	1/4W F	R771	1-216-834-11	METAL CHIP	12K	5%	1/10W
											(TH)
R663	1-234-182-11	ENCAPSULATED COMPONENT 0.22X2 5W				R772	1-216-835-11	METAL CHIP	15K	5%	1/10W
R664	1-216-823-11	METAL CHIP	1.5K	5%	1/10W	R773	1-216-841-11	METAL CHIP	47K	5%	1/10W
R665	1-216-835-11	METAL CHIP	15K	5%	1/10W	R774	1-216-837-11	METAL CHIP	22K	5%	1/10W
R666	1-216-843-11	METAL CHIP	68K	5%	1/10W	R778	1-249-389-11	CARBON	4.7	5%	1/4W F
R670	1-216-837-11	METAL CHIP	22K	5%	1/10W	R779	1-249-393-11	CARBON	10	5%	1/4W F
R671	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R780	1-216-841-11	METAL CHIP	47K	5%	1/10W
R671	1-216-834-11	METAL CHIP	12K	5%	1/10W	R801	1-216-821-11	METAL CHIP	1K	5%	1/10W
						R802	1-216-843-11	METAL CHIP	68K	5%	1/10W
R672	1-216-835-11	METAL CHIP	15K	5%	1/10W	R803	1-208-445-41	RES-CHIP	2.2K	2%	1/10W
R673	1-216-841-11	METAL CHIP	47K	5%	1/10W	R804	1-208-826-11	METAL CHIP	68K	0.5%	1/10W
R674	1-216-837-11	METAL CHIP	22K	5%	1/10W	R805	1-216-230-00	RES-CHIP	22K	2%	1/8W
R678	1-249-389-11	CARBON	4.7	5%	1/4W F	R806	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R679	1-249-393-11	CARBON	10	5%	1/4W F	R807	1-216-844-11	METAL CHIP	82K	5%	1/10W
R680	1-216-841-11	METAL CHIP	47K	5%	1/10W	R808	1-216-818-11	METAL CHIP	560	5%	1/10W
R701	1-216-821-11	METAL CHIP	1K	5%	1/10W	R809	1-249-405-11	CARBON	100	5%	1/4W F
R702	1-216-843-11	METAL CHIP	68K	5%	1/10W	R810	1-249-405-11	CARBON	100	5%	1/4W F
R703	1-208-445-41	RES-CHIP	2.2K	2%	1/10W	R811	1-216-214-00	RES-CHIP	4.7K	2%	1/8W
R704	1-208-826-11	METAL CHIP	68K	0.5%	1/10W	R812	1-240-855-11	CARBON	6.2K	5%	1/4W F
R705	1-216-230-00	RES-CHIP	22K	2%	1/8W	R813	1-234-182-11	ENCAPSULATED COMPONENT 0.22X2 5W			
R706	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R814	1-216-823-11	METAL CHIP	1.5K	5%	1/10W
R707	1-216-844-11	METAL CHIP	82K	5%	1/10W	R815	1-216-835-11	METAL CHIP	15K	5%	1/10W
R708	1-216-818-11	METAL CHIP	560	5%	1/10W	R816	1-216-843-11	METAL CHIP	68K	5%	1/10W
R709	1-249-405-11	CARBON	100	5%	1/4W F	R820	1-216-837-11	METAL CHIP	22K	5%	1/10W
R710	1-249-405-11	CARBON	100	5%	1/4W F	R821	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R711	1-216-214-00	RES-CHIP	4.7K	2%	1/8W						(EXCEPT TH)
R712	1-240-855-11	CARBON	6.2K	5%	1/4W F	R821	1-216-834-11	METAL CHIP	12K	5%	1/10W
											(TH)
R713	1-234-182-11	ENCAPSULATED COMPONENT 0.22X2 5W				R822	1-216-835-11	METAL CHIP	15K	5%	1/10W
R714	1-216-823-11	METAL CHIP	1.5K	5%	1/10W	R823	1-216-841-11	METAL CHIP	47K	5%	1/10W
R715	1-216-835-11	METAL CHIP	15K	5%	1/10W	R824	1-216-837-11	METAL CHIP	22K	5%	1/10W
R716	1-216-843-11	METAL CHIP	68K	5%	1/10W	R828	1-249-389-11	CARBON	4.7	5%	1/4W F
R720	1-216-837-11	METAL CHIP	22K	5%	1/10W	R829	1-249-393-11	CARBON	10	5%	1/4W F
R721	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R830	1-216-841-11	METAL CHIP	47K	5%	1/10W
R721	1-216-834-11	METAL CHIP	12K	5%	1/10W	R851	1-216-821-11	METAL CHIP	1K	5%	1/10W
						R852	1-216-843-11	METAL CHIP	68K	5%	1/10W
R722	1-216-835-11	METAL CHIP	15K	5%	1/10W	R853	1-208-445-41	RES-CHIP	2.2K	2%	1/10W
R723	1-216-841-11	METAL CHIP	47K	5%	1/10W	R854	1-208-826-11	METAL CHIP	68K	0.5%	1/10W
R724	1-216-837-11	METAL CHIP	22K	5%	1/10W	R856	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R728	1-249-389-11	CARBON	4.7	5%	1/4W F	R857	1-216-844-11	METAL CHIP	82K	5%	1/10W
R729	1-249-393-11	CARBON	10	5%	1/4W F	R858	1-216-818-11	METAL CHIP	560	5%	1/10W
R730	1-216-841-11	METAL CHIP	47K	5%	1/10W	R859	1-249-405-11	CARBON	100	5%	1/4W F
R751	1-216-821-11	METAL CHIP	1K	5%	1/10W	R860	1-249-405-11	CARBON	100	5%	1/4W F
R752	1-216-843-11	METAL CHIP	68K	5%	1/10W	R861	1-216-214-00	RES-CHIP	4.7K	2%	1/8W
R753	1-208-445-41	RES-CHIP	2.2K	2%	1/10W	R862	1-240-855-11	CARBON	6.2K	5%	1/4W F
R754	1-208-826-11	METAL CHIP	68K	0.5%	1/10W	R863	1-234-182-11	ENCAPSULATED COMPONENT 0.22X2 5W			
R756	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R864	1-216-823-11	METAL CHIP	1.5K	5%	1/10W
R757	1-216-844-11	METAL CHIP	82K	5%	1/10W	R865	1-216-835-11	METAL CHIP	15K	5%	1/10W
R758	1-216-818-11	METAL CHIP	560	5%	1/10W	R866	1-216-843-11	METAL CHIP	68K	5%	1/10W
R759	1-249-405-11	CARBON	100	5%	1/4W F	R870	1-216-837-11	METAL CHIP	22K	5%	1/10W
R760	1-249-405-11	CARBON	100	5%	1/4W F						

Ver. 1.1

MAIN

POWER

STANDBY

STANDBY

VIDEO

VIDEO 2

Ref. No.	Part No.	Description	Remark				Ref. No.	Part No.	Description	Remark			
< GROUND TERMINAL >						< CONNECTOR >							
ET901	1-537-738-21	TERMINAL, GROUND					* CNP203	1-564-507-11	PLUG, CONNECTOR 4P				
< TRANSISTOR >						CNP240	1-564-705-11	PIN, CONNECTOR (SMALL TYPE) 3P					
Q901	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF					* CNP242	1-564-506-11	PLUG, CONNECTOR 3P				
Q951	8-729-106-60	TRANSISTOR 2SB1115A-YQ					CNS271	1-779-275-11	CONNECTOR, FFC (LIF(NON-ZIF)) 7P				
Q955	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF					< DIODE >						
Q990	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF					D210	6-501-817-01	DIODE MA2J1110GLS0				
< RESISTOR >						D211	6-501-817-01	DIODE MA2J1110GLS0					
< IC >						< JACK >							
△ R901	1-219-237-11	SOLID 3.3M 20%	1/2W	F	(US,CND)	IC201	8-759-231-53	IC TA7805S					
R902	1-249-381-11	CARBON 1 5%	1/4W	F		IC202	8-759-373-92	IC TA79005SB					
R903	1-216-825-11	METAL CHIP 2.2K 5%	1/10W			IC210	6-704-199-01	IC NJM2595M-TE2					
R904	1-216-841-11	METAL CHIP 47K 5%	1/10W			IC220	6-706-767-01	IC NJM2586AM					
△ R910	1-243-634-11	FUSIBLE 0.22 5%	1/2W	F		< JACK >							
△ R911	1-243-634-11	FUSIBLE 0.22 5%	1/2W	F		J210	1-815-043-11	JACK, PIN 2P (VIDEO 1 VIDEO IN,MONITOR VIDEO OUT)					
R955	1-216-825-11	METAL CHIP 2.2K 5%	1/10W			J211	1-794-978-11	JACK, PIN 3P (SAT VIDEO IN,DVD VIDEO IN, VIDEO 1 VIDEO OUT)					
R956	1-216-825-11	METAL CHIP 2.2K 5%	1/10W			J220	1-816-592-11	JACK, PIN 9P (COMPONENT VIDEO DVD IN,VIDEO 1 IN,MONITOR OUT)					
R957	1-216-841-11	METAL CHIP 47K 5%	1/10W			J221	1-821-278-12	JACK, PIN 3P (COMPONENT VIDEO SAT IN)					
R990	1-216-841-11	METAL CHIP 47K 5%	1/10W			< RESISTOR >							
R991	1-216-837-11	METAL CHIP 22K 5%	1/10W			R211	1-211-990-11	METAL CHIP 75 0.5%	1/10W				
R993	1-216-833-11	METAL CHIP 10K 5%	1/10W			R212	1-211-990-11	METAL CHIP 75 0.5%	1/10W				
< RELAY >						R213	1-211-990-11	METAL CHIP 75 0.5%	1/10W				
△ RY901	1-755-541-11	RELAY					R214	1-211-990-11	METAL CHIP 75 0.5%	1/10W			
< TRANSFORMER >						R215	1-211-990-11	METAL CHIP 75 0.5%	1/10W				
△ T904	1-437-312-11	TRANSFORMER, POWER (SUB) (US,CND)					R221	1-211-990-11	METAL CHIP 75 0.5%	1/10W			
△ T904	1-437-313-11	TRANSFORMER, POWER (SUB) (AEP,TH)					R222	1-211-990-11	METAL CHIP 75 0.5%	1/10W			

A-1433-570-A	VIDEO BOARD, COMPLETE					R223	1-211-990-11	METAL CHIP 75 0.5%	1/10W				

< CAPACITOR >						R224	1-211-990-11	METAL CHIP 75 0.5%	1/10W				
C201	1-100-385-11	CERAMIC CHIP 0.47uF			25V	R225	1-211-990-11	METAL CHIP 75 0.5%	1/10W				
C202	1-100-385-11	CERAMIC CHIP 0.47uF			25V	R226	1-211-990-11	METAL CHIP 75 0.5%	1/10W				
C203	1-126-947-11	ELECT 47uF 20%			35V	R227	1-211-990-11	METAL CHIP 75 0.5%	1/10W				
C204	1-126-947-11	ELECT 47uF 20%			35V	R228	1-211-990-11	METAL CHIP 75 0.5%	1/10W				
C211	1-126-964-11	ELECT 10uF 20%			50V	R229	1-211-990-11	METAL CHIP 75 0.5%	1/10W				
C212	1-126-964-11	ELECT 10uF 20%			50V	R240	1-211-990-11	METAL CHIP 75 0.5%	1/10W				
C213	1-126-964-11	ELECT 10uF 20%			50V	R242	1-211-990-11	METAL CHIP 75 0.5%	1/10W				
C215	1-107-826-11	CERAMIC CHIP 0.1uF 10%			16V	R276	1-211-990-11	METAL CHIP 75 0.5%	1/10W				
C217	1-107-826-11	CERAMIC CHIP 0.1uF 10%			16V	R277	1-211-990-11	METAL CHIP 75 0.5%	1/10W				
C221	1-126-964-11	ELECT 10uF 20%			50V	R278	1-211-990-11	METAL CHIP 75 0.5%	1/10W				

C222	1-126-964-11	ELECT 10uF 20%			50V	VIDEO 2 BOARD							
C223	1-126-964-11	ELECT 10uF 20%			50V	*****							
C224	1-126-964-11	ELECT 10uF 20%			50V	< CAPACITOR >							
C225	1-126-964-11	ELECT 10uF 20%			50V	C293	1-100-566-11	CERAMIC CHIP 0.1uF 10%	25V				
C226	1-126-964-11	ELECT 10uF 20%			50V	C294	1-100-566-11	CERAMIC CHIP 0.1uF 10%	25V				
C227	1-126-964-11	ELECT 10uF 20%			50V	C298	1-162-960-11	CERAMIC CHIP 220PF 10%	50V				
C228	1-126-964-11	ELECT 10uF 20%			50V	C299	1-162-960-11	CERAMIC CHIP 220PF 10%	50V				
C229	1-126-964-11	ELECT 10uF 20%			50V	< CONNECTOR >							
C232	1-107-826-11	CERAMIC CHIP 0.1uF 10%			16V	CNP201	1-564-721-11	PIN, CONNECTOR (SMALL TYPE) 5P					
C233	1-107-826-11	CERAMIC CHIP 0.1uF 10%			16V								
C240	1-126-964-11	ELECT 10uF 20%			50V								
C242	1-126-964-11	ELECT 10uF 20%			50V								

STR-DG720

Ver. 1.1

VIDEO 2 XM

Ref. No.	Part No.	Description	Remark				Ref. No.	Part No.	Description	Remark			
		< JACK >					C174	1-164-874-11	CERAMIC CHIP	100PF	5%	50V	
J298	1-819-189-11	JACK, PIN 3P (VIDEO 2 IN/PORTABLE AV IN VIDEO,AUDIO)					C175	1-164-874-11	CERAMIC CHIP	100PF	5%	50V	
		< LEAD WIRE >					C176	1-164-874-11	CERAMIC CHIP	100PF	5%	50V	
* TP202	1-690-880-31	LEAD (WITH CONNECTOR)					< CONNECTOR >						
*****						CN101	1-785-466-41	CONNECTOR, FFC/FPC 7P					
							CN102	1-779-993-11	PIN, CONNECTOR (PWB) 5P				
							CNP103	1-774-730-21	PIN, CONNECTOR (PC BOARD) 3P				
	A-1433-639-A	XM BOARD, COMPLETE (US,CND)					< DIODE >						
		*****					D101	6-500-462-01	DIODE NSAD500F-T1B				
		< CAPACITOR >					D103	8-719-083-02	DIODE KDS160-RTK				
C101	1-112-791-11	ELECT CHIP	100uF	20%	16V	< FERRITE BEAD >							
C102	1-125-891-11	CERAMIC CHIP	0.47uF	10%	10V								
C103	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	FB101	1-469-152-11	FERRITE, EMI (SMD) (2012)					
C104	1-128-991-21	ELECT CHIP	10uF	20%	50V	FB104	1-469-152-11	FERRITE, EMI (SMD) (2012)					
C105	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	< IC >							
C106	1-112-692-11	CERAMIC CHIP	0.001uF	5%	50V	IC101	6-705-468-01	IC BA33BC0FP-E2					
C107	1-112-692-11	CERAMIC CHIP	0.001uF	5%	50V	IC102	6-709-251-01	IC F2602E-01-TR					
C108	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	IC104	8-759-710-97	IC NJM4565M-D					
C109	1-112-692-11	CERAMIC CHIP	0.001uF	5%	50V	IC105	6-707-111-01	IC PCM1753DBQR					
C110	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	IC106	6-706-740-01	IC BA00BC0WFP-E2					
C111	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	IC107	6-705-469-01	IC BA50BC0FP-E2					
C113	1-128-991-21	ELECT CHIP	10uF	20%	50V	< CONNECTOR >							
C116	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	J101	1-793-642-21	CONNECTOR (USB) (4P), SQUARE (XM)					
C118	1-164-936-11	CERAMIC CHIP	680PF	10%	50V	< JUMPER RESISTOR >							
C119	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	L101	1-216-295-11	SHORT CHIP	0				
C120	1-164-942-11	CERAMIC CHIP	0.0068uF	10%	16V	L102	1-216-295-11	SHORT CHIP	0				
C121	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	< TRANSISTOR >							
C122	1-128-991-21	ELECT CHIP	10uF	20%	50V	Q105	8-729-027-46	TRANSISTOR	DTC114YKA-T146				
C123	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	Q106	6-550-044-01	TRANSISTOR	2SB1689-T106				
C124	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	< RESISTOR >							
C125	1-128-991-21	ELECT CHIP	10uF	20%	50V	R101	1-216-845-11	METAL CHIP	100K	5%	1/10W		
C126	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	R102	1-216-845-11	METAL CHIP	100K	5%	1/10W		
C127	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	R103	1-216-833-11	METAL CHIP	10K	5%	1/10W		
C128	1-164-942-11	CERAMIC CHIP	0.0068uF	10%	16V	R104	1-216-833-11	METAL CHIP	10K	5%	1/10W		
C129	1-164-936-11	CERAMIC CHIP	680PF	10%	50V	R107	1-216-809-11	METAL CHIP	100	5%	1/10W		
C130	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	R108	1-216-809-11	METAL CHIP	100	5%	1/10W		
C131	1-164-858-11	CERAMIC CHIP	22PF	5%	50V	R109	1-216-841-11	METAL CHIP	47K	5%	1/10W		
C132	1-164-858-11	CERAMIC CHIP	22PF	5%	50V	R110	1-216-809-11	METAL CHIP	100	5%	1/10W		
C133	1-164-858-11	CERAMIC CHIP	22PF	5%	50V	R112	1-216-833-11	METAL CHIP	10K	5%	1/10W		
C134	1-164-858-11	CERAMIC CHIP	22PF	5%	50V	R115	1-216-833-11	METAL CHIP	10K	5%	1/10W		
C135	1-100-567-81	CERAMIC CHIP	0.01uF	10%	25V	R116	1-216-833-11	METAL CHIP	10K	5%	1/10W		
C136	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	R117	1-216-809-11	METAL CHIP	100	5%	1/10W		
C137	1-128-991-21	ELECT CHIP	10uF	20%	50V	R118	1-216-841-11	METAL CHIP	47K	5%	1/10W		
C138	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	R119	1-216-841-11	METAL CHIP	47K	5%	1/10W		
C139	1-128-991-21	ELECT CHIP	10uF	20%	50V	R120	1-216-834-11	METAL CHIP	12K	5%	1/10W		
C140	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	R121	1-216-841-11	METAL CHIP	47K	5%	1/10W		
C142	1-128-991-21	ELECT CHIP	10uF	20%	50V	R122	1-216-841-11	METAL CHIP	47K	5%	1/10W		
C143	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	R123	1-216-819-11	METAL CHIP	680	5%	1/10W		
C144	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V	R124	1-216-832-11	METAL CHIP	8.2K	5%	1/10W		
C145	1-117-681-11	ELECT CHIP	100uF	20%	16V	R125	1-216-813-11	METAL CHIP	220	5%	1/10W		
C153	1-117-681-11	ELECT CHIP	100uF	20%	16V	R126	1-216-845-11	METAL CHIP	100K	5%	1/10W		
C157	1-107-823-11	CERAMIC CHIP	0.47uF	10%	16V	R127	1-216-809-11	METAL CHIP	100	5%	1/10W		
C159	1-112-791-11	ELECT CHIP	100uF	20%	16V								
C161	1-107-823-11	CERAMIC CHIP	0.47uF	10%	16V								
C163	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V								
C164	1-125-777-11	CERAMIC CHIP	0.1uF	10%	10V								
C165	1-164-845-11	CERAMIC CHIP	5PF	0.25PF	50V								
C166	1-164-845-11	CERAMIC CHIP	5PF	0.25PF	50V								

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
R128	1-216-845-11	METAL CHIP 100K 5%	1/10W			ACCESSORIES	
R129	1-216-809-11	METAL CHIP 100 5%	1/10W			*****	
R130	1-216-809-11	METAL CHIP 100 5%	1/10W				
R131	1-216-809-11	METAL CHIP 100 5%	1/10W	1-480-587-11		REMOTE COMMANDER (RM-AAU023)	
R132	1-216-832-11	METAL CHIP 8.2K 5%	1/10W			(including BATTERY LID) (AEP,TH)	
				1-480-588-11		REMOTE COMMANDER (RM-AAU021)	
R133	1-216-819-11	METAL CHIP 680 5%	1/10W			(including BATTERY LID) (US,CND)	
R134	1-216-809-11	METAL CHIP 100 5%	1/10W	1-501-374-12		ANTENNA, LOOP (AM)	
R137	1-216-834-11	METAL CHIP 12K 5%	1/10W	1-501-807-12		ANTENNA (FM) (AEP,TH)	
R138	1-216-821-11	METAL CHIP 1K 5%	1/10W	1-542-670-11		MEASUREMENT MIC (MONO)	
R143	1-216-809-11	METAL CHIP 100 5%	1/10W				
				1-793-184-23		CONNECTOR (F TYPE ADAPTOR) (FM) (US,CND)	
R144	1-216-821-11	METAL CHIP 1K 5%	1/10W	3-283-372-11		MANUAL, INSTRUCTION (ENGLISH) (US,CND)	
R145	1-216-841-11	METAL CHIP 47K 5%	1/10W	3-283-372-21		MANUAL, INSTRUCTION (FRENCH) (CND)	
R146	1-216-841-11	METAL CHIP 47K 5%	1/10W	3-283-372-31		MANUAL, INSTRUCTION (SPANISH) (US)	
R147	1-216-833-11	METAL CHIP 10K 5%	1/10W	3-283-372-42		MANUAL, INSTRUCTION (ENGLISH) (AEP)	
R156	1-216-811-11	METAL CHIP 150 5%	1/10W				
				3-283-372-52		MANUAL, INSTRUCTION (FRENCH) (AEP)	
R158	1-216-829-11	METAL CHIP 4.7K 5%	1/10W	3-283-372-62		MANUAL, INSTRUCTION (SPANISH) (AEP)	
R162	1-216-845-11	METAL CHIP 100K 5%	1/10W	3-283-372-72		MANUAL, INSTRUCTION (GERMAN,DUTCH, SWEDISH) (AEP)	
R163	1-216-851-11	METAL CHIP 330K 5%	1/10W	3-283-372-82		MANUAL, INSTRUCTION (ITALIAN,POLISH) (AEP)	
R174	1-216-819-11	METAL CHIP 680 5%	1/10W	3-283-372-91		MANUAL, INSTRUCTION (THAI) (TH)	
R176	1-216-833-11	METAL CHIP 10K 5%	1/10W				
< VIBRATOR >				3-283-373-22		MANUAL, INSTRUCTION (DANISH,FINNISH) (AEP)	
X101	1-760-841-11	VIBRATOR, CRYSTAL (45.1584MHz)		3-283-373-32		MANUAL, INSTRUCTION (PORTUGUESE) (AEP)	
*****				3-283-373-42		MANUAL, INSTRUCTION (RUSSIAN) (AEP)	
		MISCELLANEOUS		3-299-859-11		MANUAL, INSTRUCTION (GREEK) (AEP)	
		*****		3-299-859-21		MANUAL, INSTRUCTION (TURKISH) (AEP)	
57	1-829-004-11	WIRE (FLAT TYPE) (19 CORE)		3-299-859-31		MANUAL, INSTRUCTION (HUNGARIAN,CZECH) (AEP)	
101	1-828-951-11	WIRE (FLAT TYPE) (9 CORE) (US,CND,TH)		3-299-859-41		MANUAL, INSTRUCTION (SLOVAKIAN) (AEP)	
101	1-828-961-51	WIRE (FLAT TYPE) (11 CORE) (AEP)					
102	1-828-299-51	WIRE (FLAT TYPE) (7 CORE)					
105	1-828-299-51	WIRE (FLAT TYPE) (7 CORE)					
107	1-828-350-51	WIRE (FLAT TYPE) (17 CORE)					
△ 109	1-777-071-83	CORD, POWER (AEP)					
△ 109	1-783-820-11	CORD, POWER (US,CND)					
△ 109	1-834-288-21	POWER-SUPPLY CORD (TH)					
△ F901	1-532-464-33	FUSE (T2.5AL/250V) (AEP,TH)					
△ F901	1-533-454-12	FUSE, GLASS TUBE (DIA. 5) (6.3A/125V) (US,CND)					
△ F4001	1-532-465-33	FUSE (T3.15AL/250V)					
△ F4002	1-532-465-33	FUSE (T3.15AL/250V)					
Q553	6-702-390-01	TRANSISTOR MN2488-OPY-MK					
Q554	6-702-391-01	TRANSISTOR MP1620-OPY-MK					
Q603	6-702-390-01	TRANSISTOR MN2488-OPY-MK					
Q604	6-702-391-01	TRANSISTOR MP1620-OPY-MK					
Q653	6-702-390-01	TRANSISTOR MN2488-OPY-MK					
Q654	6-702-391-01	TRANSISTOR MP1620-OPY-MK					
Q703	6-702-390-01	TRANSISTOR MN2488-OPY-MK					
Q704	6-702-391-01	TRANSISTOR MP1620-OPY-MK					
Q753	6-702-390-01	TRANSISTOR MN2488-OPY-MK					
Q754	6-702-391-01	TRANSISTOR MP1620-OPY-MK					
Q803	6-702-390-01	TRANSISTOR MN2488-OPY-MK					
Q804	6-702-391-01	TRANSISTOR MP1620-OPY-MK					
Q853	6-702-390-01	TRANSISTOR MN2488-OPY-MK					
Q854	6-702-391-01	TRANSISTOR MP1620-OPY-MK					
△ T901	1-439-550-21	TRANSFORMER, POWER (MAIN) (AEP)					
△ T901	1-439-583-11	TRANSFORMER, POWER (MAIN) (US,CND)					
△ T901	1-445-019-11	TRANSFORMER, POWER (MAIN) (TH)					
TN1	1-693-733-31	TUNER PACK (FM/AM) (ANTENNA) (US,CND)					
TN1	1-693-735-21	TUNER PACK (FM/AM) (ANTENNA) (TH)					
TN1	1-693-736-21	TUNER PACK (FM/AM) (ANTENNA) (AEP)					

REVISION HISTORY

Checking the version allows you to jump to the revised page.

Also, clicking the version at the top of the revised page allows you to jump to the next revised page.

[illegible]