WH-1000XM3

SECTION 3 EXPLODED VIEWS



Note:


- they may have some difference from the original one.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- number in the exploded views are not sup-
- Color Indication of Appearance Parts Example:

KNOB, BALANCE (WHITE) . . . (RED)

Parts Color Cabinet's Color

- -XX and -X mean standardized parts, so - The mechanical parts with no reference - Refer to "COLOR VARIATIONS" on page 4 about color variation of the unit.

EARPAD SECTION 3-1.

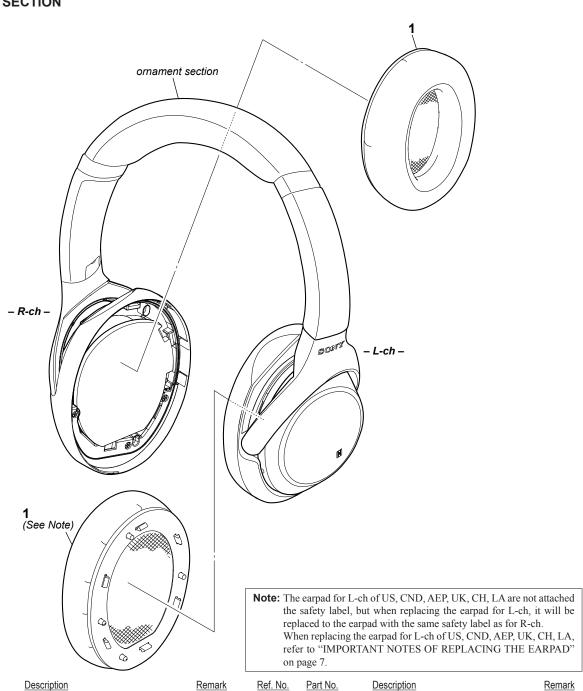


(See Note)

Ref. No.

Part No.

3-2. ORNAMENT SECTION

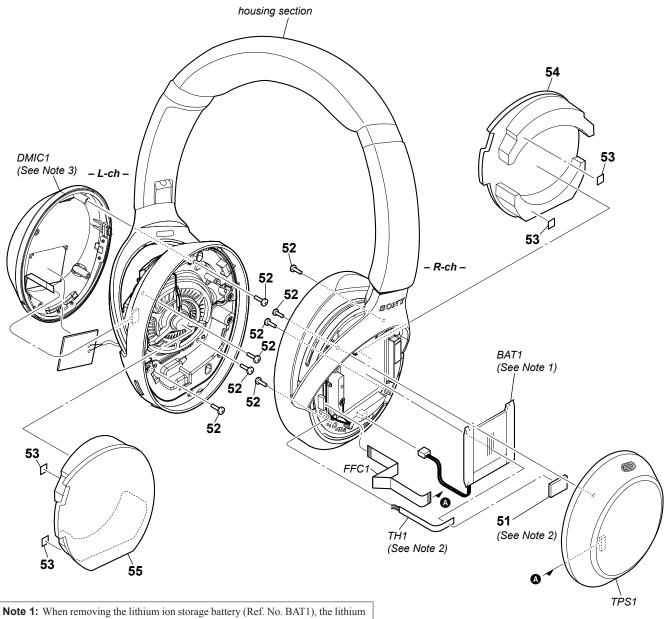

Note 1: When removing the lithium ion storage battery (Ref. No. BAT1), the lithium ion storage battery cannot be reused. Be sure to replace it with a new part. When replacing the lithium ion storage battery, refer to "CHECKING THE NEW LITHIUM ION STORAGE BATTERY FOR BEFORE USE AND NOTES ON HANDLING" on page 4.


Also, there are two types of the lithium ion storage battery for except CH,

Also, there are two types of the lithium ion storage battery for except CH, but the repair parts of the lithium ion storage battery is one type. For details, refer to "ABOUT THE TYPE OF THE LITHIUM ION STORAGE BATTERY (Except CH)" on page 4.

Note 2: When removing the cushion (BATT) (Ref. No. 51) and NTC thermistor (Ref. No. TH1) from the lithium ion storage battery, be careful so that the lithium ion storage battery is never damaged.

Note 3: When removing the ornament (L) assy (Ref. No. DMIC1) and installing it, be sure to refer to "CHECK-ING METHOD AFTER INSTALLING THE ORNA-MENT (L) ASSY" on page 8.

3-3. HOUSING SECTION

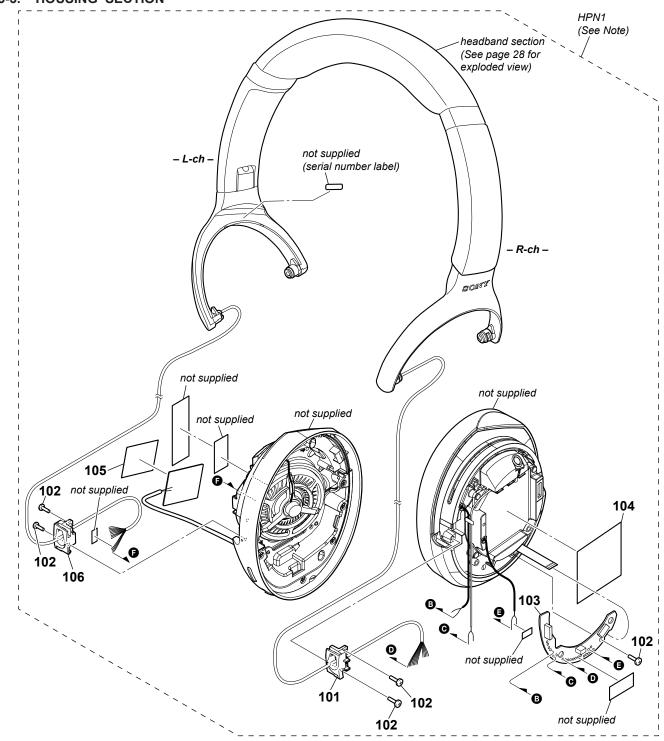


Ref. No. HPN1: Includes the Headband assy, Driver, Electret cap microphone, FFC, Wire, L MAIN board, L NFC board, L JACK board, L KEY flexible board, SUB board and R USB board.

Note: When the headphones assy (Ref. No. HPN1) is replaced, the serial number changes.



3-4. HEADBAND SECTION

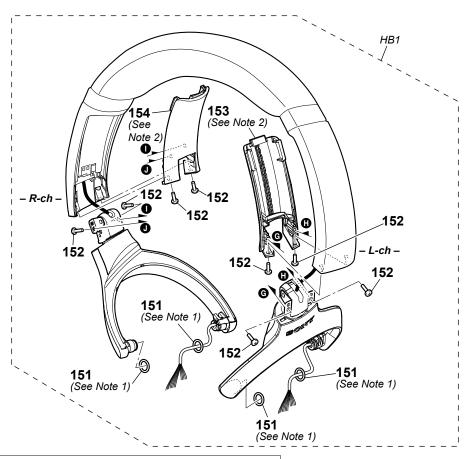

Note 1: Lubricant (SANKOL) is applied to the sub cushion AORI assy (Ref. No. 151). Be careful when handling the parts.

Note 2: Lubricant (SANKOL) is applied to the inner side of slider lower (L) assy (Ref. No. 153) and slider lower (R) assy (Ref. No. 154). Be careful when handling so that you do not touch the portion applied with the lubricant (SANKOL). For the application location of the lubricant (SANKOL), refer to "NOTES ON HANDLING OF SLIDER LOWER (L) ASSY AND SLIDER LOWER (R) ASSY BY LUBRICANT APPLICATION" on page 5.


Ref. No.Part No.DescriptionRemarkRef. No.Part No.DescriptionRemark

WH-1000XM3 Ver. 1.1

SECTION 4 ACCESSORIES



Ref. No. Part No. Description Remark

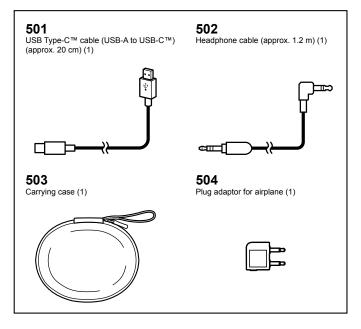

• Refer to "COLOR VARIATIONS" on page 4 about color variation of the unit.