

## SECTION 5 EXPLODED VIEWS


### NOTE :

- Non-serviceable items with no part number and no description are not stocked because they are not required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remarks column.
- Items marked “\*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

### 5-1. CHASSIS

**Note :** Les composants identifiés par une trame et par une marque Δ sont d'une importance critique pour la sécurité. Ne les remplacer que par des pièces du numéro spécifique.


**Note :** The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

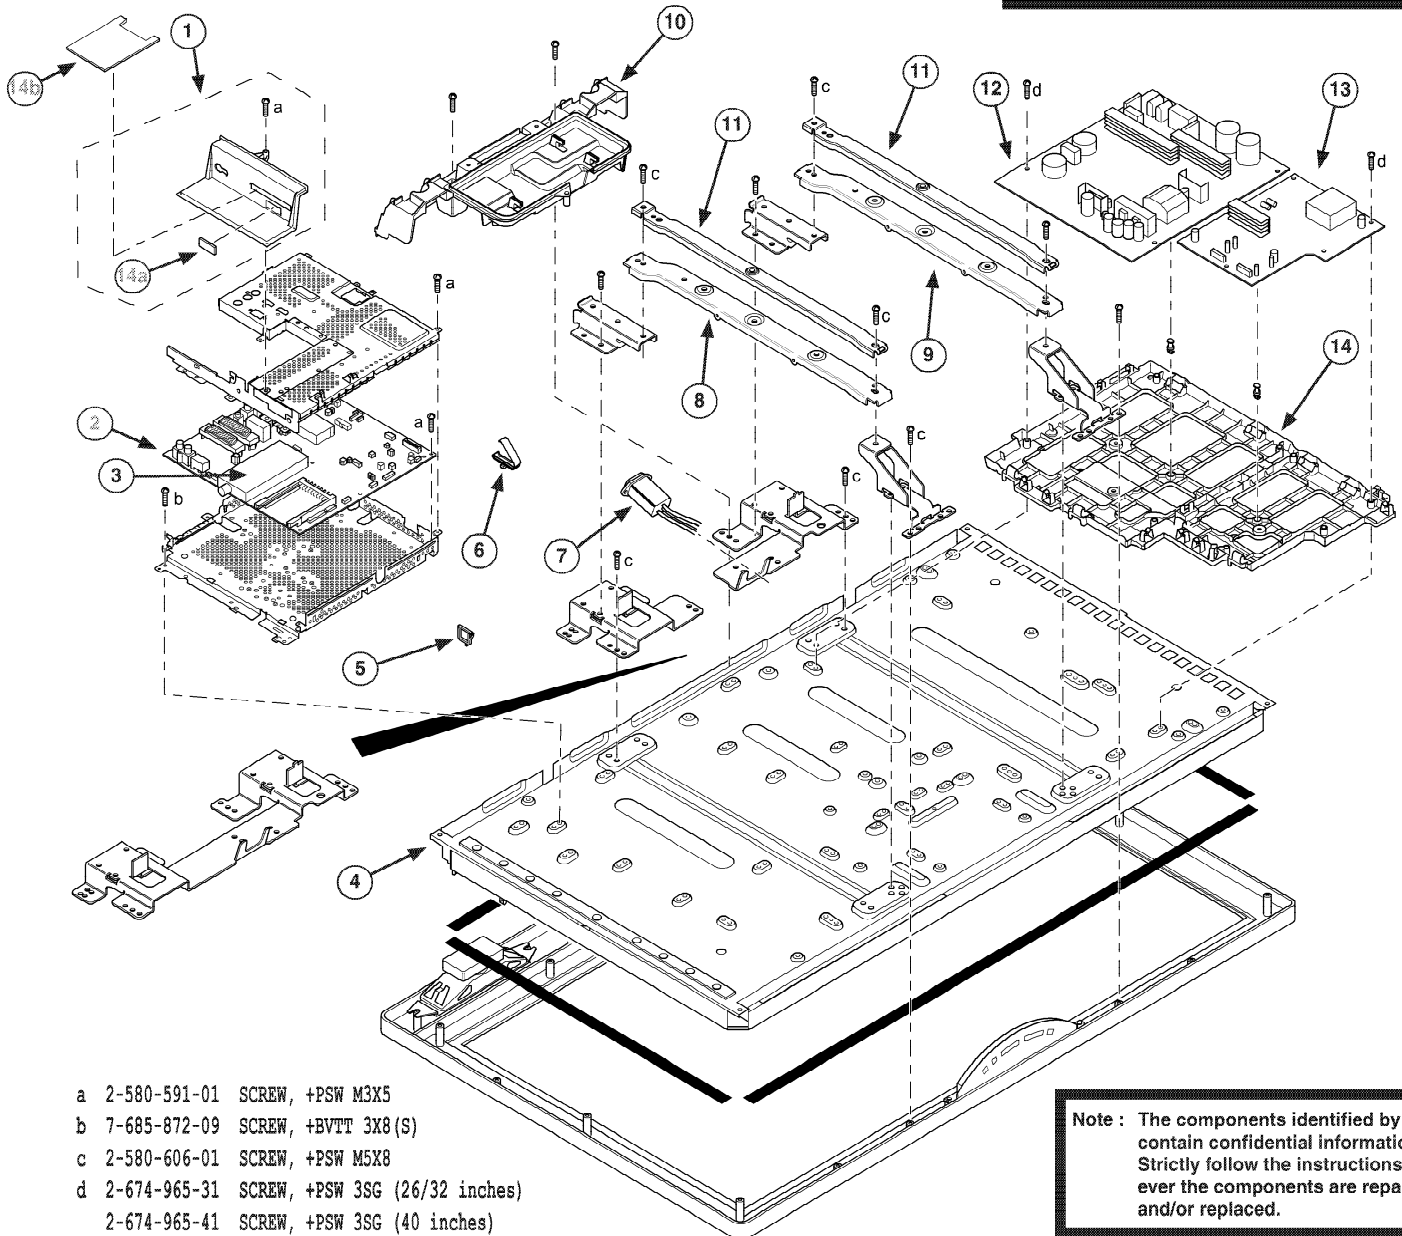

**Note :** The components identified by mark Δ contain confidential information. Strictly follow the instructions when ever the components are repaired and/or replaced.

| REF.NO. | PART.NO         | DESCRIPTION                              | REMARK         | REF.NO. | PART.NO       | DESCRIPTION        | REMARK         |
|---------|-----------------|------------------------------------------|----------------|---------|---------------|--------------------|----------------|
| 1       | X-2178-938-1    | SIDE, TERMINAL(ASSY) (AE)                | 14a            | 9       | *X-2177-259-1 | VESA ARM(40)L ASSY | (40 inches)    |
| 2       | Δ *A-1503-609-A | BC BOARD, COMPLETE                       | (26 inches)    |         | *X-2177-263-2 | VESA ARM(26)R ASSY | (26 inches)    |
|         | *A-1503-611-A   | BC BOARD, COMPLETE                       | (32/40 inches) |         | *X-2177-260-1 | VESA ARM(40)R ASSY | (40 inches)    |
| 3       | 8-595-613-01    | TUNER UNIT, DIGITAL BTD-HF401Z           |                | 10      | *3-100-283-11 | COVER, UNDER (M)   | (26/32 inches) |
| 4       | 1-802-368-12    | LCD PANEL (26INCH WXGA TFT)              | (26 inches)    |         | 3-100-285-01  | COVER, UNDER (L)   | (40 inches)    |
|         | 1-802-380-13    | LCD PANEL (32INCH WXGA TFT)              | (32 inches)    | 11      | *X-2177-257-1 | VESA ARM(32) ASSY  | (32 inches)    |
|         | 1-802-410-12    | LCD PANEL (40INCH WXGA TFT)              | (40 inches)    | 12      | *A-1268-617-A | G3 BOARD, COMPLETE | (40 inches)    |
| 5       | 2-650-770-21    | SLIDE, CLAMP (VARIOUS POSITIONS)         |                | 13      | *A-1268-621-A | D1 BOARD, COMPLETE | (40 inches)    |
| 6       | 2-595-155-02    | CLAMP                                    |                | 14      | *3-100-997-01 | BRACKET G3         | (40 inches)    |
| 7       | Δ 1-819-729-14  | INLET, AC(WITH NOISE FILTER) (40 inches) |                | 14a     | 2-689-737-01  | COVER, MS          |                |
| 8       | *X-2177-262-1   | VESA ARM(26)L ASSY                       | (26 inches)    | 14b     | *4-101-356-02 | CARD, DUMMY        |                |

## 5-2. REAR COVER, STAND & BEZEL

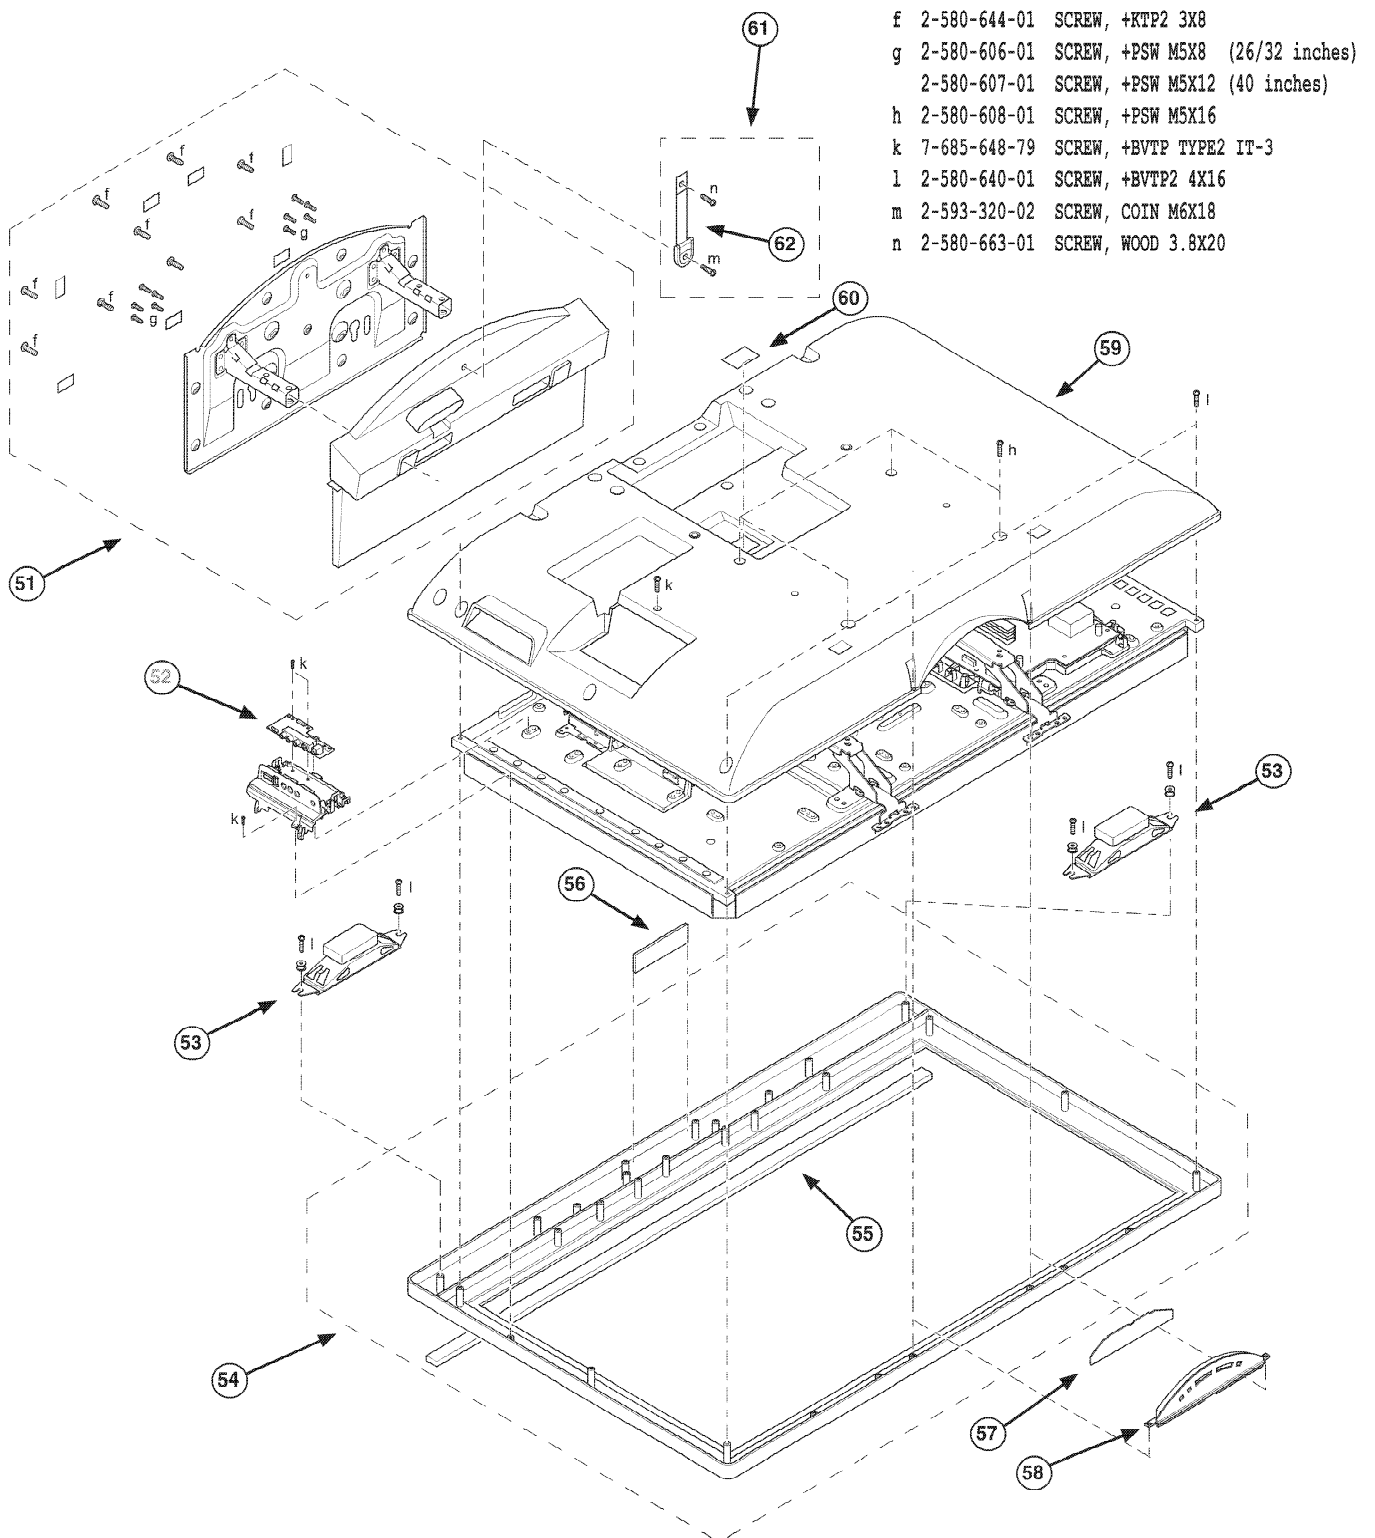


| REF.NO. | PART.NO       | DESCRIPTION               | REMARK         | REF.NO. | PART.NO       | DESCRIPTION                | REMARK      |
|---------|---------------|---------------------------|----------------|---------|---------------|----------------------------|-------------|
| 51      | *X-2177-980-3 | STAND (M) ASSY            | (26 inches)    | 55      | X-2178-398-1  | SKP GRILLE ASSY, ORN 26(T) | (26 inches) |
|         | *X-2176-635-1 | STAND (M_WS) ASSY         | (32 inches)    |         | X-2178-395-1  | SKP GRILLE ASSY, ORN 32(T) | (32 inches) |
|         | *X-2176-636-1 | STAND (ML_WS) ASSY        | (40 inches)    |         | X-2178-396-1  | SKP GRILLE ASSY, ORN 40(T) | (40 inches) |
| 52      | *A-1310-214-A | U1 BOARD, COMPLETE        | (26 inches)    | 56      | *A-1256-428-A | H2 BOARD, COMPLETE         |             |
|         | *A-1504-449-A | U2 BOARD, COMPLETE        | (32/40 inches) | 57      | *A-1256-427-A | H1 BOARD, COMPLETE         |             |
| 53      | 1-826-686-11  | LOUD SPEAKER (4.2X15CM)   | (26 inches)    | 58      | X-2178-919-1  | BUTTON, MULTI ASSY         |             |
|         | 1-826-648-11  | LOUD SPEAKER (4.2X15CM)   | (32 inches)    | 59      | 3-100-155-01  | COVER, REAR (26)           | (26 inches) |
|         | 1-826-647-11  | LOUD SPEAKER (5.5X15.5CM) | (40 inches)    |         | 3-097-970-11  | COVER, REAR (32)           | (32 inches) |
| 54      | X-2178-394-1  | BEZEL 26(T) ASSY          | 55 (26 inches) |         | 3-097-989-11  | COVER, REAR (40)           | (40 inches) |
|         | X-2178-391-1  | BEZEL 32(T) ASSY          | 55 (32 inches) | 60      | 3-106-546-01  | COVER, ECS                 |             |
|         | X-2178-392-1  | BEZEL 40(T) ASSY          | 55 (40 inches) | 61      | *X-2102-511-2 | BAG ASSY, RUDDER LOCK      | 62          |
|         |               |                           |                | 62      | X-2055-089-2  | LOCK ASSY, RUDDER          |             |

5-3. POWER SUPPLY CORDS

**Note :** Les composants identifiés par une trame et par une marque Δ sont d'une importance critique pour la sécurité. Ne les remplacer que par des pièces du numéro spécifié.

**Note :** The components identified by shading and marked Δ are critical for safety. Replace only with the part numbers specified in the parts list.

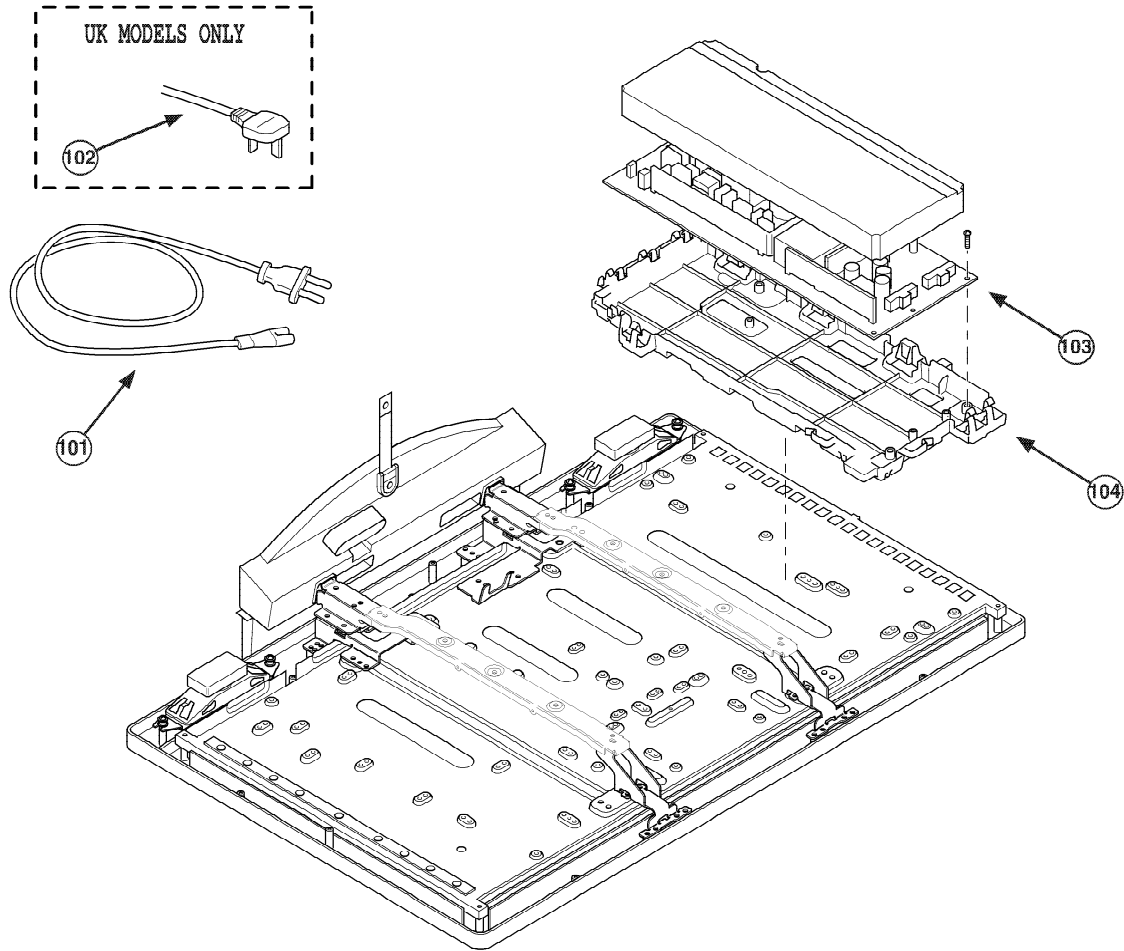

| REF.NO. | PART.NO        | DESCRIPTION                 | REMARK             | REF.NO. | PART.NO | DESCRIPTION | REMARK |
|---------|----------------|-----------------------------|--------------------|---------|---------|-------------|--------|
| 101     | Δ 1-832-132-31 | POWER-SUPPLY CORD           | (26/32 inches AEP) |         |         |             |        |
|         | Δ 1-830-611-11 | POWER-SUPPLY CORD           | (40 inches AEP)    |         |         |             |        |
| 102     | Δ 1-832-170-41 | POWER SUPPLY CORD (UK PLUG) | (26/32 inches UK)  |         |         |             |        |
|         | Δ 1-830-609-11 | AC POWER-SUPPLY CORD SET    | (40 inches UK)     |         |         |             |        |
| 103     | *A-1313-866-A  | G1 BOARD, COMPLETE          | (26 inches)        |         |         |             |        |
|         | *A-1257-919-A  | G1 BOARD, COMPLETE          | (32 inches)        |         |         |             |        |
| 104     | *3-100-996-01  | BRACKET, G1                 | (26/32 inches)     |         |         |             |        |

## SECTION 6 ELECTRICAL PARTS LIST

### PARTS LISTING TABLE OF CONTENTS

|                                       | <b>Page</b>                                          |
|---------------------------------------|------------------------------------------------------|
| <b>U2 BOARD COMPLETE Parts List :</b> | 32/40 Inches only..... 87                            |
| <b>G3 BOARD COMPLETE Parts List :</b> | 40 Inches only..... 88                               |
| <b>D1 BOARD COMPLETE Parts List :</b> | 40 Inches only..... 91                               |
| <b>BC BOARD COMMON Parts List :</b>   | Parts common to all models in this manual..... 94    |
| <b>BC BOARD VARIANT Parts List :</b>  | Parts that belong only to the model specified        |
| Model                                 |                                                      |
| 26 Inches                             | ..... 111                                            |
| 32/40 Inches                          | ..... 112                                            |
| <b>H2 BOARD COMPLETE Parts List :</b> | ..... 114                                            |
| <b>H1 BOARD COMPLETE Parts List :</b> | ..... 115                                            |
| <b>G1 BOARD COMMON Parts List :</b>   | Parts common to 26/32 Inches in this manual..... 115 |
| <b>G1 BOARD VARIANT Parts List :</b>  | Parts that belong only to the model specified        |
| Model                                 |                                                      |
| 26 Inches                             | ..... 118                                            |
| 32 Inches                             | ..... 118                                            |
| <b>U1 BOARD COMPLETE Parts List :</b> | 26 Inches only..... 118                              |
| <b>ACCESSORIES AND CONNECTORS :</b>   | ..... 119                                            |
| <b>REMOTE COMMANDER :</b>             | ..... 119                                            |

**Note :** Items marked “\*\*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.  
Parts indicated (XX) on the Schematic Diagram are not used in this model and therefore do not appear in the Parts List.



| REF.NO.                                        | PART.NO       | DESCRIPTION                    | REMARK     | REF.NO.        | PART.NO      | DESCRIPTION               | REMARK |
|------------------------------------------------|---------------|--------------------------------|------------|----------------|--------------|---------------------------|--------|
| * A-1504-449-A U2 COMPLETE (32/40 Inches Only) |               |                                |            | < COIL >       |              |                           |        |
| < CAPACITOR >                                  |               |                                |            | L250           | 1-457-223-11 | INDUCTOR                  | 0UH    |
| C200                                           | 1-165-908-11  | CERAMIC CHIP 1UF               | 10% 10V    | L251           | 1-457-223-11 | INDUCTOR                  | 0UH    |
| C201                                           | 1-165-908-11  | CERAMIC CHIP 1UF               | 10% 10V    | L252           | 1-457-223-11 | INDUCTOR                  | 0UH    |
| C202                                           | 1-112-781-11  | CERAMIC CHIP 1UF               | 10% 10V    | L253           | 1-457-223-11 | INDUCTOR                  | 0UH    |
| C204                                           | 1-100-905-11  | CERAMIC CHIP 0.001UF           | 10% 50V    | L254           | 1-457-223-11 | INDUCTOR                  | 0UH    |
| C206                                           | 1-100-912-11  | CERAMIC CHIP 1UF               | 10% 25V    | L255           | 1-457-223-11 | INDUCTOR                  | 0UH    |
| C207                                           | 1-100-905-11  | CERAMIC CHIP 0.001UF           | 10% 50V    | L256           | 1-457-223-11 | INDUCTOR                  | 0UH    |
| C209                                           | 1-100-912-11  | CERAMIC CHIP 1UF               | 10% 25V    | L257           | 1-457-223-11 | INDUCTOR                  | 0UH    |
| C211                                           | 1-100-905-11  | CERAMIC CHIP 0.001UF           | 10% 50V    | < TRANSISTOR > |              |                           |        |
| C213                                           | 1-100-905-11  | CERAMIC CHIP 0.001UF           | 10% 50V    | Q251           | 8-729-028-28 | TRANSISTOR 2SK2036(TE85L) |        |
| C215                                           | 1-100-905-11  | CERAMIC CHIP 0.001UF           | 10% 50V    | Q255           | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 |        |
| C216                                           | 1-100-905-11  | CERAMIC CHIP 0.001UF           | 10% 50V    | < RESISTOR >   |              |                           |        |
| C250                                           | 1-100-916-11  | CERAMIC CHIP 0.1UF             | 10% 16V    | R200           | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W |        |
| C251                                           | 1-112-777-11  | CERAMIC CHIP 0.01UF            | 10% 25V    | R201           | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W |        |
| C252                                           | 1-112-777-11  | CERAMIC CHIP 0.01UF            | 10% 25V    | R202           | 1-218-831-11 | METAL CHIP 220 0.5% 1/10W |        |
| C253                                           | 1-112-777-11  | CERAMIC CHIP 0.01UF            | 10% 25V    | R203           | 1-218-941-81 | RES-CHIP 100 5% 1/16W     |        |
| C254                                           | 1-100-905-11  | CERAMIC CHIP 0.001UF           | 10% 50V    | R204           | 1-218-285-11 | METAL CHIP 75 5% 1/10W    |        |
| C258                                           | 1-100-905-11  | CERAMIC CHIP 0.001UF           | 10% 50V    | R205           | 1-218-941-81 | RES-CHIP 100 5% 1/16W     |        |
| C261                                           | 1-100-905-11  | CERAMIC CHIP 0.001UF           | 10% 50V    | R206           | 1-218-953-11 | RES-CHIP 1K 5% 1/16W      |        |
| C262                                           | 1-112-777-11  | CERAMIC CHIP 0.01UF            | 10% 25V    | R207           | 1-218-953-11 | RES-CHIP 1K 5% 1/16W      |        |
| C263                                           | 1-124-779-00  | ELECT CHIP 10UF                | 20.00% 16V | R212           | 1-218-989-11 | RES-CHIP 1M 5% 1/16W      |        |
| C265                                           | 1-100-905-11  | CERAMIC CHIP 0.001UF           | 10% 50V    | R213           | 1-218-957-11 | RES-CHIP 2.2K 5% 1/16W    |        |
| C266                                           | 1-100-916-11  | CERAMIC CHIP 0.1UF             | 10% 16V    | R215           | 1-218-989-11 | RES-CHIP 1M 5% 1/16W      |        |
| C267                                           | 1-100-916-11  | CERAMIC CHIP 0.1UF             | 10% 16V    | R216           | 1-218-957-11 | RES-CHIP 2.2K 5% 1/16W    |        |
| < CONNECTOR >                                  |               |                                |            | R218           | 1-218-990-81 | SHORT CHIP 0              |        |
| CN201                                          | *1-819-928-11 | HEADER ASSEMBLY 20P            |            | R219           | 1-218-990-81 | SHORT CHIP 0              |        |
| CN250                                          | *1-818-400-11 | HDMI CONNECTOR                 |            | R220           | 1-218-990-81 | SHORT CHIP 0              |        |
| CN251                                          | *1-820-667-11 | HEADER ASSEMBLY FOR PWB 21P    |            | R221           | 1-218-990-81 | SHORT CHIP 0              |        |
| < DIODE >                                      |               |                                |            | R222           | 1-218-990-81 | SHORT CHIP 0              |        |
| D201                                           | 8-719-423-03  | DIODE MA8100                   |            | R256           | 1-218-929-11 | RES-CHIP 10 5% 1/16W      |        |
| D202                                           | 8-719-423-03  | DIODE MA8100                   |            | R257           | 1-218-973-11 | RES-CHIP 47K 5% 1/16W     |        |
| D203                                           | 8-719-423-03  | DIODE MA8100                   |            | R258           | 1-218-941-81 | RES-CHIP 100 5% 1/16W     |        |
| D254                                           | 8-719-404-50  | DIODE MA111-TX                 |            | R259           | 1-218-941-81 | RES-CHIP 100 5% 1/16W     |        |
| D261                                           | 8-719-404-50  | DIODE MA111-TX                 |            | R260           | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W    |        |
| ET201                                          | 1-780-482-11  | EARTH TERMINAL                 |            | R261           | 1-218-973-11 | RES-CHIP 47K 5% 1/16W     |        |
| ET203                                          | 1-780-482-11  | EARTH TERMINAL                 |            | R262           | 1-218-973-11 | RES-CHIP 47K 5% 1/16W     |        |
| < IC >                                         |               |                                |            | R263           | 1-208-911-11 | METAL CHIP 10K 0.5% 1/16W |        |
| IC250                                          | 6-704-001-01  | IC BR24L02F-WE2                |            | R264           | 1-218-929-11 | RES-CHIP 10 5% 1/16W      |        |
| IC251                                          | 6-708-758-01  | IC PCA9517DP.118               |            | R265           | 1-218-929-11 | RES-CHIP 10 5% 1/16W      |        |
| IC252                                          | 8-753-255-97  | IC CXB1441R-T4                 |            | R266           | 1-218-929-11 | RES-CHIP 10 5% 1/16W      |        |
| < SOCKET >                                     |               |                                |            | R267           | 1-218-929-11 | RES-CHIP 10 5% 1/16W      |        |
| J201                                           | 1-780-489-11  | S TERMINAL BLOCK (RIGHT ANGLE) |            | R269           | 1-218-929-11 | RES-CHIP 10 5% 1/16W      |        |
| J202                                           | 1-815-325-11  | JACK                           |            | R270           | 1-218-929-11 | RES-CHIP 10 5% 1/16W      |        |
|                                                |               |                                |            | R271           | 1-218-929-11 | RES-CHIP 10 5% 1/16W      |        |
|                                                |               |                                |            | R272           | 1-218-929-11 | RES-CHIP 10 5% 1/16W      |        |
|                                                |               |                                |            | R273           | 1-218-941-81 | RES-CHIP 100 5% 1/16W     |        |

**Note :** The components identified by shading and marked  $\Delta$  are critical for safety. Replace only with the part numbers specified in the parts list.

**U2 G3**

| REF.NO.                                     | PART.NO                  | DESCRIPTION    | REMARK   |        |       | REF.NO. | PART.NO      | DESCRIPTION  | REMARK  |        |      |
|---------------------------------------------|--------------------------|----------------|----------|--------|-------|---------|--------------|--------------|---------|--------|------|
| R277                                        | 1-218-961-11             | RES-CHIP       | 4.7K     | 5%     | 1/16W | C6018   | 1-119-894-51 | CERAMIC      | 2200PF  | 20.00% | 250V |
| R278                                        | 1-218-961-11             | RES-CHIP       | 4.7K     | 5%     | 1/16W | C6019   | 1-163-021-91 | CERAMIC CHIP | 0.01UF  | 10.00% | 50V  |
| R281                                        | 1-218-961-11             | RES-CHIP       | 4.7K     | 5%     | 1/16W | C6020   | 1-163-021-91 | CERAMIC CHIP | 0.01UF  | 10.00% | 50V  |
| R283                                        | 1-208-699-11             | METAL CHIP     | 4.7K     | 0.5%   | 1/16W | C6100   | 1-162-970-11 | CERAMIC CHIP | 0.01UF  | 10.00% | 25V  |
| R284                                        | 1-218-990-81             | SHORT CHIP     | 0        |        |       | C6101   | 1-100-831-91 | CERAMIC CHIP | 0.001UF | 2%     | 50V  |
| R285                                        | 1-218-937-11             | RES-CHIP       | 47       | 5%     | 1/16W | C6102   | 1-107-906-11 | ELECT        | 10UF    | 20%    | 50V  |
| R286                                        | 1-218-937-11             | RES-CHIP       | 47       | 5%     | 1/16W | C6103   | 1-107-905-11 | ELECT        | 4.7UF   | 20%    | 50V  |
| R287                                        | 1-218-937-11             | RES-CHIP       | 47       | 5%     | 1/16W | C6104   | 1-107-910-11 | ELECT        | 100UF   | 20%    | 50V  |
| R289                                        | 1-216-864-11             | SHORT CHIP     | 0        |        |       | C6106   | 1-162-970-11 | CERAMIC CHIP | 0.01UF  | 10.00% | 25V  |
| R290                                        | 1-216-864-11             | SHORT CHIP     | 0        |        |       | C6107   | 1-107-888-11 | ELECT        | 47UF    | 20%    | 25V  |
| R291                                        | 1-218-990-81             | SHORT CHIP     | 0        |        |       | C6108   | 1-115-340-11 | CERAMIC CHIP | 0.22UF  | 10.00% | 25V  |
| R293                                        | 1-218-990-81             | SHORT CHIP     | 0        |        |       | C6110   | 1-112-481-11 | CERAMIC      | 470PF   | 10%    | 1KV  |
| R298                                        | 1-208-683-11             | METAL CHIP     | 1K       | 0.5%   | 1/16W | C6111   | 1-100-310-11 | FILM         | 18000PF | 3%     | 800V |
| R303                                        | 1-218-990-81             | SHORT CHIP     | 0        |        |       | C6112   | 1-163-021-91 | CERAMIC CHIP | 0.01UF  | 10.00% | 50V  |
| < VARISTOR >                                |                          |                |          |        |       | C6150   | 1-104-760-11 | CERAMIC CHIP | 0.047UF | 10.00% | 50V  |
| VD201                                       | 1-802-078-11             | VARISTOR (SMD) |          |        |       | C6152   | 1-112-231-21 | ELECT        | 2200UF  | 20%    | 16V  |
| VD202                                       | 1-802-078-11             | VARISTOR (SMD) |          |        |       | C6154   | 1-112-835-11 | ELECT        | 3300UF  | 20%    | 25V  |
| VD203                                       | 1-802-078-11             | VARISTOR (SMD) |          |        |       | C6157   | 1-112-231-21 | ELECT        | 2200UF  | 20%    | 16V  |
| VD204                                       | 1-802-078-11             | VARISTOR (SMD) |          |        |       | C6160   | 1-162-970-11 | CERAMIC CHIP | 0.01UF  | 10.00% | 25V  |
| VD205                                       | 1-802-078-11             | VARISTOR (SMD) |          |        |       | C6170   | 1-112-231-21 | ELECT        | 2200UF  | 20%    | 16V  |
| VDR250                                      | 1-805-774-21             | VARISTOR, CHIP |          |        |       | C6200   | 1-107-826-11 | CERAMIC CHIP | 0.1UF   | 10.00% | 16V  |
| VDR251                                      | 1-802-245-11             | ESD SUPPRESSOR |          |        |       | C6201   | 1-162-927-11 | CERAMIC CHIP | 100PF   | 5.00%  | 50V  |
| VDR252                                      | 1-802-245-11             | ESD SUPPRESSOR |          |        |       | C6202   | 1-107-903-11 | ELECT        | 2.2UF   | 20%    | 50V  |
| VDR253                                      | 1-802-245-11             | ESD SUPPRESSOR |          |        |       | C6203   | 1-100-139-31 | FILM         | 0.001UF | 5%     | 630V |
| VDR254                                      | 1-802-245-11             | ESD SUPPRESSOR |          |        |       | C6204   | 1-107-904-11 | ELECT        | 3.3UF   | 20%    | 50V  |
| VDR255                                      | 1-802-245-11             | ESD SUPPRESSOR |          |        |       | C6205   | 1-107-910-11 | ELECT        | 100UF   | 20%    | 50V  |
| VDR256                                      | 1-802-245-11             | ESD SUPPRESSOR |          |        |       | C6206   | 1-162-964-11 | CERAMIC CHIP | 0.001UF | 10.00% | 50V  |
| VDR257                                      | 1-802-245-11             | ESD SUPPRESSOR |          |        |       | C6250   | 1-128-949-31 | ELECT        | 470UF   | 20%    | 16V  |
| VDR258                                      | 1-802-245-11             | ESD SUPPRESSOR |          |        |       | C6251   | 1-107-826-11 | CERAMIC CHIP | 0.1UF   | 10.00% | 16V  |
| VDR260                                      | 1-802-245-11             | ESD SUPPRESSOR |          |        |       | C6300   | 1-165-908-11 | CERAMIC CHIP | 1UF     | 10%    | 10V  |
| VDR261                                      | 1-802-245-11             | ESD SUPPRESSOR |          |        |       | C6301   | 1-107-826-11 | CERAMIC CHIP | 0.1UF   | 10.00% | 16V  |
| * A-1268-619-A G3 COMPLETE (40 Inches Only) |                          |                |          |        |       | C6302   | 1-162-964-11 | CERAMIC CHIP | 0.001UF | 10.00% | 50V  |
| 4-382-854-11                                | SCREW (M3X10), P, SW (+) |                |          |        |       | C6304   | 1-100-566-91 | CERAMIC CHIP | 0.1UF   | 10.00% | 25V  |
| < CAPACITOR >                               |                          |                |          |        |       | C6305   | 1-162-964-11 | CERAMIC CHIP | 0.001UF | 10.00% | 50V  |
| C6000 $\Delta$                              | 1-113-889-11             | CERAMIC        | 0.001UF  | 20.00% | 250V  | C6306   | 1-125-891-11 | CERAMIC CHIP | 0.47UF  | 10.00% | 10V  |
| C6002                                       | 1-165-530-11             | MYLAR          | 0.47UF   | 10     | 275V  | C6307   | 1-162-964-11 | CERAMIC CHIP | 0.001UF | 10.00% | 50V  |
| C6005 $\Delta$                              | 1-113-889-11             | CERAMIC        | 0.001UF  | 20.00% | 250V  | C6308   | 1-100-566-91 | CERAMIC CHIP | 0.1UF   | 10.00% | 25V  |
| C6006 $\Delta$                              | 1-114-153-11             | CERAMIC        | 680PF    | 10%    | 250V  | C6309   | 1-107-910-11 | ELECT        | 100UF   | 20%    | 50V  |
| C6007 $\Delta$                              | 1-119-892-51             | CERAMIC        | 470PF    | 10.00% | 250V  | C6310   | 1-162-964-11 | CERAMIC CHIP | 0.001UF | 10.00% | 50V  |
| C6010 $\Delta$                              | 1-114-153-11             | CERAMIC        | 680PF    | 10%    | 250V  | C6311   | 1-131-872-91 | CERAMIC CHIP | 1000PF  | 10%    | 630V |
| C6011 $\Delta$                              | 1-119-892-51             | CERAMIC        | 470PF    | 10.00% | 250V  | C6402   | 1-162-970-11 | CERAMIC CHIP | 0.01UF  | 10.00% | 25V  |
| C6012 $\Delta$                              | 1-165-529-11             | MYLAR          | 0.22UF   | 10     | 275V  | C6403   | 1-162-970-11 | CERAMIC CHIP | 0.01UF  | 10.00% | 25V  |
| C6014 $\Delta$                              | 1-161-964-91             | CERAMIC        | 0.0047UF |        | 250V  | C6408   | 1-165-908-11 | CERAMIC CHIP | 1UF     | 10%    | 10V  |
| C6015 $\Delta$                              | 1-161-964-91             | CERAMIC        | 0.0047UF |        | 250V  | C6410   | 1-107-826-11 | CERAMIC CHIP | 0.1UF   | 10.00% | 16V  |
| C6016                                       | 1-114-379-21             | ELECT (BLOCK)  | 150UF    | 20%    | 450V  | C6411   | 1-125-891-11 | CERAMIC CHIP | 0.47UF  | 10.00% | 10V  |
| C6017                                       | 1-114-379-21             | ELECT (BLOCK)  | 150UF    | 20%    | 450V  | C6500   | 1-112-744-61 | MYLAR        | 1UF     | 10%    | 450V |
|                                             |                          |                |          |        |       | C6501   | 1-112-188-11 | MYLAR        | 1.5UF   | 5%     | 450V |
|                                             |                          |                |          |        |       | C6503   | 1-112-188-11 | MYLAR        | 1.5UF   | 5%     | 450V |
|                                             |                          |                |          |        |       | C6505   | 1-162-964-11 | CERAMIC CHIP | 0.001UF | 10.00% | 50V  |
|                                             |                          |                |          |        |       | C6506   | 1-162-964-11 | CERAMIC CHIP | 0.001UF | 10.00% | 50V  |

**Note :** The components identified by shading and marked  $\Delta$  are critical for safety. Replace only with the part numbers specified in the parts list.

**G3**

| REF.NO.         | PART.NO       | DESCRIPTION                   | REMARK     | REF.NO.          | PART.NO      | DESCRIPTION            | REMARK |
|-----------------|---------------|-------------------------------|------------|------------------|--------------|------------------------|--------|
| C6507           | 1-162-966-11  | CERAMIC CHIP 0.0022UF         | 10.00% 50V | D6401            | 8-719-404-50 | DIODE MA111-TX         |        |
| C6508           | 1-100-566-91  | CERAMIC CHIP 0.1UF            | 10.00% 25V | D6402            | 8-719-404-50 | DIODE MA111-TX         |        |
| C6510           | 1-107-902-11  | ELECT 1UF                     | 20% 50V    | D6404            | 8-719-404-50 | DIODE MA111-TX         |        |
| C6511           | 1-164-315-11  | CERAMIC CHIP 470PF            | 5.00% 50V  | D6500            | 6-500-108-01 | DIODE EP05FA20         |        |
| C6512           | 1-162-959-11  | CERAMIC CHIP 330PF            | 5.00% 50V  | D6501            | 6-500-108-01 | DIODE EP05FA20         |        |
| C6513           | 1-112-481-11  | CERAMIC 470PF                 | 10% 1KV    | D6502            | 6-500-137-01 | DIODE BAT54HT1         |        |
| C6514           | 1-112-481-11  | CERAMIC 470PF                 | 10% 1KV    | D6503            | 8-719-404-50 | DIODE MA111-TX         |        |
| C6515           | 1-112-481-11  | CERAMIC 470PF                 | 10% 1KV    | D6506            | 6-501-871-01 | DIODE MA2DF60001S0     |        |
| C6516           | 1-112-481-11  | CERAMIC 470PF                 | 10% 1KV    | D6511            | 8-719-404-50 | DIODE MA111-TX         |        |
| C6517           | 1-100-566-91  | CERAMIC CHIP 0.1UF            | 10.00% 25V | D6512            | 8-719-404-50 | DIODE MA111-TX         |        |
| C6518           | 1-107-908-11  | ELECT 33UF                    | 20% 50V    | D6513            | 6-500-137-01 | DIODE BAT54HT1         |        |
| C6519           | 1-107-906-11  | ELECT 10UF                    | 20% 50V    | ET6000           | 1-537-770-21 | TERMINAL BOARD, GROUND |        |
| C6521           | 1-107-906-11  | ELECT 10UF                    | 20% 50V    | ET6001           | 1-537-770-21 | TERMINAL BOARD, GROUND |        |
| < CONNECTOR >   |               |                               |            | ET6002           | 1-537-770-21 | TERMINAL BOARD, GROUND |        |
| CN6000 $\Delta$ | *1-793-660-11 | PIN, CONNECTOR (PC BOARD) 3P  |            | ET6003           | 1-537-770-21 | TERMINAL BOARD, GROUND |        |
| CN6001          | *1-695-915-11 | TAB (CONTACT)                 |            | < FUSE >         |              |                        |        |
| CN6002          | *1-695-915-11 | TAB (CONTACT)                 |            | F6000 $\Delta$   | 1-576-233-51 | FUSE 6.3A 250V         |        |
| CN6003          | *1-695-915-11 | TAB (CONTACT)                 |            | FH6000 $\Delta$  | 1-533-223-11 | FUSE HOLDER 0A 0V      |        |
| CN6202          | *1-785-708-11 | PIN, CONNECTOR (PC BOARD) 12P |            | FH6001 $\Delta$  | 1-533-223-11 | FUSE HOLDER 0A 0V      |        |
| CN6203          | *1-785-707-11 | PIN, CONNECTOR (PC BOARD) 11P |            | < FERRITE BEAD > |              |                        |        |
| CN6204          | *1-778-853-11 | PIN, CONNECTOR (PC BOARD) 8P  |            | FB6000           | 1-412-911-11 | FERRITE 0UH            |        |
| CN6501          | *1-793-660-11 | PIN, CONNECTOR (PC BOARD) 3P  |            | FB6001           | 1-412-911-11 | FERRITE 0UH            |        |
| CN6502          | *1-793-660-11 | PIN, CONNECTOR (PC BOARD) 3P  |            | FB6004           | 1-410-396-41 | FERRITE 0.45UH         |        |
| < DIODE >       |               |                               |            | FB6005           | 1-410-396-41 | FERRITE 0.45UH         |        |
| D6000           | 8-719-054-89  | DIODE D15XB60                 |            | FB6100           | 1-412-911-11 | FERRITE 0UH            |        |
| D6100           | 8-719-081-67  | DIODE M1FM3                   |            | FB6101           | 1-412-911-11 | FERRITE 0UH            |        |
| D6101           | 6-500-137-01  | DIODE BAT54HT1                |            | FB6150           | 1-412-911-11 | FERRITE 0UH            |        |
| D6102           | 8-719-017-89  | DIODE MA8150-TX               |            | FB6151           | 1-412-911-11 | FERRITE 0UH            |        |
| D6104           | 8-719-979-64  | DIODE UF4005/23               |            | FB6152           | 1-412-911-11 | FERRITE 0UH            |        |
| D6105           | 8-719-081-67  | DIODE M1FM3                   |            | FB6153           | 1-412-911-11 | FERRITE 0UH            |        |
| D6151           | 8-719-060-88  | DIODE D4SBS6                  |            | < IC >           |              |                        |        |
| D6152           | 6-501-545-01  | DIODE SG10SC6-F5              |            | IC6100           | 6-707-749-01 | IC CXD9841P            |        |
| D6153           | 6-501-545-01  | DIODE SG10SC6-F5              |            | IC6150           | 6-709-368-01 | IC MM1431ATT (CN)      |        |
| D6201           | 8-719-058-74  | DIODE 05NU42-TPA2             |            | IC6200           | 6-708-801-01 | IC MIP2H2              |        |
| D6203           | 6-500-567-31  | DIODE 10ERB20-TB3             |            | IC6250           | 6-709-442-01 | IC MM1530ATT           |        |
| D6204           | 6-500-567-31  | DIODE 10ERB20-TB3             |            | IC6300           | 6-709-368-01 | IC MM1431ATT (CN)      |        |
| D6206           | 8-719-404-50  | DIODE MA111-TX                |            | IC6301           | 6-709-368-01 | IC MM1431ATT (CN)      |        |
| D6250           | 8-719-510-02  | DIODE D1NS4                   |            | IC6500           | 6-709-791-01 | IC L6562N              |        |
| D6251           | 8-719-073-35  | DIODE RB551V-30TE-17          |            | < COIL >         |              |                        |        |
| D6303           | 8-719-404-50  | DIODE MA111-TX                |            | L6000 $\Delta$   | 1-457-457-11 | LINE FILTER COIL       |        |
| D6304           | 8-719-404-50  | DIODE MA111-TX                |            | L6002 $\Delta$   | 1-457-457-11 | LINE FILTER COIL       |        |
| D6308           | 8-719-404-50  | DIODE MA111-TX                |            | L6150            | 1-414-487-41 | INDUCTOR 1UH           |        |
| D6309           | 8-719-404-50  | DIODE MA111-TX                |            | L6151            | 1-414-487-41 | INDUCTOR 1UH           |        |
| D6310           | 8-719-404-50  | DIODE MA111-TX                |            | L6152            | 1-457-239-11 | INDUCTOR 4.7UH         |        |
| D6311           | 8-719-018-01  | DIODE MA8220-TX               |            | L6250            | 1-414-183-41 | INDUCTOR 10UH          |        |
| D6312           | 8-719-058-74  | DIODE 05NU42-TPA2             |            |                  |              |                        |        |
| D6313           | 8-719-404-50  | DIODE MA111-TX                |            |                  |              |                        |        |
| D6400           | 8-719-017-89  | DIODE MA8150-TX               |            |                  |              |                        |        |

Note : The components identified by shading and marked  $\Delta$  are critical for safety. Replace only with the part numbers specified in the parts list.

G3

| REF.NO.          | PART.NO      | DESCRIPTION                   | REMARK       | REF.NO.        | PART.NO      | DESCRIPTION | REMARK          |
|------------------|--------------|-------------------------------|--------------|----------------|--------------|-------------|-----------------|
| L6500            | 1-457-277-11 | INDUCTOR                      | 260UH        | R6009          | 1-240-251-11 | METAL       | 6.8 5% 10W      |
| L6501            | 1-457-435-11 | INDUCTOR                      | 300UH        | R6014          | 1-216-857-11 | METAL CHIP  | 1M 5% 1/10W     |
| < PHOTOCOUPLER > |              |                               |              | R6015          | 1-216-857-11 | METAL CHIP  | 1M 5% 1/10W     |
| PH6100           | 6-600-187-01 | PHOTO COUPLER                 | PC123Y22JOOF | R6100          | 1-218-885-11 | METAL CHIP  | 39K 0.5% 1/10W  |
| PH6200           | 6-600-187-01 | PHOTO COUPLER                 | PC123Y22JOOF | R6101          | 1-249-385-11 | CARBON      | 2.2 5% 1/4W     |
| PH6300           | 6-600-187-01 | PHOTO COUPLER                 | PC123Y22JOOF | R6102          | 1-218-863-11 | METAL CHIP  | 4.7K 0.5% 1/10W |
| PH6301           | 6-600-187-01 | PHOTO COUPLER                 | PC123Y22JOOF | R6103          | 1-218-827-11 | METAL CHIP  | 150 0.5% 1/10W  |
| PH6302           | 6-600-187-01 | PHOTO COUPLER                 | PC123Y22JOOF | R6104          | 1-218-877-11 | METAL CHIP  | 18K 0.5% 1/10W  |
| < TRANSISTOR >   |              |                               |              | R6106          | 1-208-854-11 | METAL CHIP  | 1M 0.5% 1/10W   |
| Q6100            | 6-551-302-01 | TRANSISTOR 2SK3561(LBS1SONY,Q |              | R6107          | 1-208-854-11 | METAL CHIP  | 1M 0.5% 1/10W   |
| Q6101            | 6-551-302-01 | TRANSISTOR 2SK3561(LBS1SONY,Q |              | R6108          | 1-208-854-11 | METAL CHIP  | 1M 0.5% 1/10W   |
| Q6300            | 6-551-696-01 | TRANSISTOR ISA1235AC1TP-1EF   |              | R6109          | 1-208-854-11 | METAL CHIP  | 1M 0.5% 1/10W   |
| Q6301            | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF   |              | R6110 $\Delta$ | 1-202-933-61 | FUSIBLE     | 0.1 10% 1/2W    |
| Q6303            | 6-551-678-01 | TRANSISTOR 2SA1364-T111-1DE   |              | R6111          | 1-218-760-11 | METAL CHIP  | 220K 0.5% 1/10W |
| Q6304            | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF   |              | R6112          | 1-218-877-11 | METAL CHIP  | 18K 0.5% 1/10W  |
| Q6305            | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF   |              | R6115          | 1-211-981-11 | METAL CHIP  | 33 0.5% 1/10W   |
| Q6306            | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF   |              | R6116          | 1-216-009-91 | RES-CHIP    | 22 5% 1/10W     |
| Q6307            | 6-551-696-01 | TRANSISTOR ISA1235AC1TP-1EF   |              | R6117          | 1-216-009-91 | RES-CHIP    | 22 5% 1/10W     |
| Q6403            | 6-551-714-01 | TRANSISTOR INK0001AC1-T112A-1 |              | R6118          | 1-216-833-11 | METAL CHIP  | 10K 5% 1/10W    |
| Q6405            | 6-551-696-01 | TRANSISTOR ISA1235AC1TP-1EF   |              | R6119          | 1-216-833-11 | METAL CHIP  | 10K 5% 1/10W    |
| Q6406            | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF   |              | R6120          | 1-216-361-00 | METAL OXIDE | 0.22 5% 2W      |
| Q6407            | 6-551-714-01 | TRANSISTOR INK0001AC1-T112A-1 |              | R6121          | 1-216-361-00 | METAL OXIDE | 0.22 5% 2W      |
| Q6500            | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF   |              | R6122          | 1-216-857-11 | METAL CHIP  | 1M 5% 1/10W     |
| Q6501            | 6-551-696-01 | TRANSISTOR ISA1235AC1TP-1EF   |              | R6123          | 1-218-847-11 | METAL CHIP  | 1K 0.5% 1/10W   |
| Q6502            | 6-551-336-01 | TRANSISTOR 2SK3934(LBS1SONY,Q |              | R6150          | 1-216-821-11 | METAL CHIP  | 1K 5% 1/10W     |
| Q6503            | 6-551-336-01 | TRANSISTOR 2SK3934(LBS1SONY,Q |              | R6151          | 1-216-821-11 | METAL CHIP  | 1K 5% 1/10W     |
| Q6504            | 8-729-820-90 | TRANSISTOR 2SD1621-ST         |              | R6152          | 1-216-821-11 | METAL CHIP  | 1K 5% 1/10W     |
| Q6505            | 8-729-804-41 | TRANSISTOR 2SB1122-S          |              | R6153          | 1-218-859-11 | METAL CHIP  | 3.3K 0.5% 1/10W |
| Q6506            | 6-551-696-01 | TRANSISTOR ISA1235AC1TP-1EF   |              | R6154          | 1-218-875-11 | METAL CHIP  | 15K 0.5% 1/10W  |
| < RESISTOR >     |              |                               |              | R6155          | 1-216-845-11 | METAL CHIP  | 100K 5% 1/10W   |
| JR6001           | 1-216-864-11 | SHORT CHIP                    | 0            | R6157          | 1-216-841-11 | METAL CHIP  | 47K 5% 1/10W    |
| JR6002           | 1-216-295-91 | SHORT CHIP                    | 0            | R6158          | 1-249-389-11 | CARBON      | 4.7 5% 1/4W     |
| JR6003           | 1-216-296-11 | SHORT CHIP                    | 0            | R6159          | 1-218-863-11 | METAL CHIP  | 4.7K 0.5% 1/10W |
| JR6004           | 1-216-295-91 | SHORT CHIP                    | 0            | R6200 $\Delta$ | 1-246-188-51 | FUSIBLE     | 10 5% 1/4W      |
| JR6005           | 1-216-295-91 | SHORT CHIP                    | 0            | R6201          | 1-218-865-11 | METAL CHIP  | 5.6K 0.5% 1/10W |
| JR6006           | 1-216-864-11 | SHORT CHIP                    | 0            | R6202          | 1-243-725-71 | METAL OXIDE | 100K 5% 1W      |
| JR6007           | 1-216-296-11 | SHORT CHIP                    | 0            | R6203          | 1-249-385-11 | CARBON      | 2.2 5% 1/4W     |
| JR6008           | 1-216-296-11 | SHORT CHIP                    | 0            | R6250          | 1-216-821-11 | METAL CHIP  | 1K 5% 1/10W     |
| JR6009           | 1-216-296-11 | SHORT CHIP                    | 0            | R6251          | 1-216-827-11 | METAL CHIP  | 3.3K 5% 1/10W   |
| JR6010           | 1-216-296-11 | SHORT CHIP                    | 0            | R6252          | 1-216-805-11 | METAL CHIP  | 47 5% 1/10W     |
| JR6011           | 1-216-295-91 | SHORT CHIP                    | 0            | R6253          | 1-218-879-11 | METAL CHIP  | 22K 0.5% 1/10W  |
| JR6012           | 1-216-295-91 | SHORT CHIP                    | 0            | R6254          | 1-218-871-11 | METAL CHIP  | 10K 0.5% 1/10W  |
| JR6013           | 1-216-295-91 | SHORT CHIP                    | 0            | R6255          | 1-218-867-11 | METAL CHIP  | 6.8K 0.5% 1/10W |
| JR6014           | 1-216-295-91 | SHORT CHIP                    | 0            | R6300          | 1-216-835-11 | METAL CHIP  | 15K 5% 1/10W    |
| JR6015           | 1-216-864-11 | SHORT CHIP                    | 0            | R6301          | 1-216-833-11 | METAL CHIP  | 10K 5% 1/10W    |
| JR6016           | 1-216-296-11 | SHORT CHIP                    | 0            | R6302          | 1-218-903-11 | METAL CHIP  | 220K 0.5% 1/10W |
| JR6017           | 1-216-295-91 | SHORT CHIP                    | 0            | R6303          | 1-218-885-11 | METAL CHIP  | 39K 0.5% 1/10W  |
|                  |              |                               |              | R6304          | 1-218-863-11 | METAL CHIP  | 4.7K 0.5% 1/10W |
|                  |              |                               |              | R6305          | 1-216-833-11 | METAL CHIP  | 10K 5% 1/10W    |
|                  |              |                               |              | R6309          | 1-216-833-11 | METAL CHIP  | 10K 5% 1/10W    |

**Note :** The components identified by shading and marked  $\Delta$  are critical for safety. Replace only with the part numbers specified in the parts list.

**G3 D1**

| REF.NO.        | PART.NO      | DESCRIPTION | REMARK |      |       | REF.NO.                                     | PART.NO                  | DESCRIPTION                 | REMARK  |        |       |
|----------------|--------------|-------------|--------|------|-------|---------------------------------------------|--------------------------|-----------------------------|---------|--------|-------|
| R6310          | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W | R6512                                       | 1-215-882-00             | METAL OXIDE                 | 22      | 5%     | 2W    |
| R6311          | 1-218-863-11 | METAL CHIP  | 4.7K   | 0.5% | 1/10W | R6514                                       | 1-218-895-11             | METAL CHIP                  | 100K    | 0.5%   | 1/10W |
| R6312          | 1-218-887-11 | METAL CHIP  | 47K    | 0.5% | 1/10W | R6515                                       | 1-216-817-11             | METAL CHIP                  | 470     | 5%     | 1/10W |
| R6313          | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R6516                                       | 1-218-871-11             | METAL CHIP                  | 10K     | 0.5%   | 1/10W |
| R6315          | 1-216-829-11 | METAL CHIP  | 4.7K   | 5%   | 1/10W | R6517                                       | 1-218-851-11             | METAL CHIP                  | 1.5K    | 0.5%   | 1/10W |
| R6316          | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W | R6518                                       | 1-218-887-11             | METAL CHIP                  | 47K     | 0.5%   | 1/10W |
| R6317          | 1-216-829-11 | METAL CHIP  | 4.7K   | 5%   | 1/10W | R6520                                       | 1-216-833-11             | METAL CHIP                  | 10K     | 5%     | 1/10W |
| R6319          | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W | R6521                                       | 1-216-833-11             | METAL CHIP                  | 10K     | 5%     | 1/10W |
| R6320          | 1-218-903-11 | METAL CHIP  | 220K   | 0.5% | 1/10W | R6522                                       | 1-249-389-11             | CARBON                      | 4.7     | 5%     | 1/4W  |
| R6321          | 1-218-887-11 | METAL CHIP  | 47K    | 0.5% | 1/10W | R6523                                       | 1-249-389-11             | CARBON                      | 4.7     | 5%     | 1/4W  |
| R6322          | 1-216-837-11 | METAL CHIP  | 22K    | 5%   | 1/10W | R6524                                       | 1-243-550-71             | METAL OXIDE                 | 6.8     | 5%     | 2W    |
| R6324          | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W | R6526                                       | 1-216-864-11             | SHORT CHIP                  | 0       |        |       |
| R6325          | 1-218-889-11 | METAL CHIP  | 56K    | 0.5% | 1/10W | R6527                                       | 1-216-864-11             | SHORT CHIP                  | 0       |        |       |
| R6326          | 1-216-849-11 | METAL CHIP  | 220K   | 5%   | 1/10W | R6528                                       | 1-216-809-11             | METAL CHIP                  | 100     | 5%     | 1/10W |
| R6327          | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W | R6529                                       | 1-249-393-11             | CARBON                      | 10      | 5%     | 1/4W  |
| R6328          | 1-218-911-11 | METAL CHIP  | 470K   | 0.5% | 1/10W | R6530                                       | 1-208-840-11             | METAL CHIP                  | 270K    | 0.5%   | 1/10W |
| R6329          | 1-218-887-11 | METAL CHIP  | 47K    | 0.5% | 1/10W | R6531                                       | 1-218-760-11             | METAL CHIP                  | 220K    | 0.5%   | 1/10W |
| R6332          | 1-216-793-11 | METAL CHIP  | 4.7    | 5%   | 1/10W | R6532                                       | 1-218-760-11             | METAL CHIP                  | 220K    | 0.5%   | 1/10W |
| R6333          | 1-216-843-11 | METAL CHIP  | 68K    | 5%   | 1/10W | R6533                                       | 1-218-760-11             | METAL CHIP                  | 220K    | 0.5%   | 1/10W |
| R6334          | 1-208-814-91 | METAL CHIP  | 22K    | 0.5% | 1/10W | R6534                                       | 1-208-834-11             | METAL CHIP                  | 150K    | 0.5%   | 1/10W |
| R6335          | 1-218-847-11 | METAL CHIP  | 1K     | 0.5% | 1/10W | R6535                                       | 1-218-867-11             | METAL CHIP                  | 6.8K    | 0.5%   | 1/10W |
| R6336          | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R6536                                       | 1-218-823-11             | METAL CHIP                  | 100     | 0.5%   | 1/10W |
| R6337          | 1-208-814-91 | METAL CHIP  | 22K    | 0.5% | 1/10W | R6538                                       | 1-218-879-11             | METAL CHIP                  | 22K     | 0.5%   | 1/10W |
| R6404          | 1-216-837-11 | METAL CHIP  | 22K    | 5%   | 1/10W | R6539                                       | 1-218-907-11             | METAL CHIP                  | 330K    | 0.5%   | 1/10W |
| R6405          | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R6540                                       | 1-218-903-11             | METAL CHIP                  | 220K    | 0.5%   | 1/10W |
| R6408          | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W | R6541                                       | 1-216-809-11             | METAL CHIP                  | 100     | 5%     | 1/10W |
| R6413          | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W | R6542                                       | 1-218-903-11             | METAL CHIP                  | 220K    | 0.5%   | 1/10W |
| R6415          | 1-216-837-11 | METAL CHIP  | 22K    | 5%   | 1/10W | R6543                                       | 1-211-954-11             | METAL CHIP                  | 12      | 0.5%   | 1/10W |
| R6416          | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W | R6544                                       | 1-246-189-11             | METAL                       | 0.12    | 5%     | 10W   |
| R6418          | 1-216-864-11 | SHORT CHIP  | 0      |      |       | < RELAY >                                   |                          |                             |         |        |       |
| R6420          | 1-216-817-11 | METAL CHIP  | 470    | 5%   | 1/10W | RY6000                                      | 1-755-516-11             | RELAY (AC POWER)            |         |        |       |
| R6429          | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W | < TRANSFORMER >                             |                          |                             |         |        |       |
| R6430          | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W | T6100 $\Delta$                              | 1-445-205-11             | CONVERTER TRANSFORMER (PIT) |         |        |       |
| R6433          | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W | T6200 $\Delta$                              | 1-443-984-11             | CONVERTER TRANSFORMER (SBT) |         |        |       |
| R6434          | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W | < VARISTOR >                                |                          |                             |         |        |       |
| R6435          | 1-216-864-11 | SHORT CHIP  | 0      |      |       | VD6000 $\Delta$                             | 1-804-996-21             | VARISTOR                    |         |        |       |
| R6436          | 1-216-837-11 | METAL CHIP  | 22K    | 5%   | 1/10W | VD6001 $\Delta$                             | 1-804-996-21             | VARISTOR                    |         |        |       |
| R6437          | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W | * A-1268-623-A D1 COMPLETE (40 Inches Only) |                          |                             |         |        |       |
| R6438          | 1-216-829-11 | METAL CHIP  | 4.7K   | 5%   | 1/10W | 4-382-854-11                                | SCREW (M3X10), P, SW (+) |                             |         |        |       |
| R6500 $\Delta$ | 1-218-760-11 | METAL CHIP  | 220K   | 0.5% | 1/10W | < CAPACITOR >                               |                          |                             |         |        |       |
| R6501 $\Delta$ | 1-218-760-11 | METAL CHIP  | 220K   | 0.5% | 1/10W | C6600                                       | 1-165-794-21             | MYLAR                       | 1UF     | 10%    | 450V  |
| R6502 $\Delta$ | 1-208-830-11 | METAL CHIP  | 100K   | 0.5% | 1/10W | C6601                                       | 1-162-964-11             | CERAMIC CHIP                | 0.001UF | 10.00% | 50V   |
| R6503          | 1-208-846-11 | METAL CHIP  | 470K   | 0.5% | 1/10W | C6602                                       | 1-162-964-11             | CERAMIC CHIP                | 0.001UF | 10.00% | 50V   |
| R6504 $\Delta$ | 1-218-760-11 | METAL CHIP  | 220K   | 0.5% | 1/10W | C6604                                       | 1-115-339-11             | CERAMIC CHIP                | 0.1UF   | 10.00% | 50V   |
| R6505 $\Delta$ | 1-218-760-11 | METAL CHIP  | 220K   | 0.5% | 1/10W |                                             |                          |                             |         |        |       |
| R6506          | 1-218-913-91 | METAL CHIP  | 560K   | 0.5% | 1/10W |                                             |                          |                             |         |        |       |
| R6507          | 1-218-865-11 | METAL CHIP  | 5.6K   | 0.5% | 1/10W |                                             |                          |                             |         |        |       |
| R6508          | 1-218-881-11 | METAL CHIP  | 27K    | 0.5% | 1/10W |                                             |                          |                             |         |        |       |
| R6510          | 1-218-887-11 | METAL CHIP  | 47K    | 0.5% | 1/10W |                                             |                          |                             |         |        |       |
| R6511          | 1-216-817-11 | METAL CHIP  | 470    | 5%   | 1/10W |                                             |                          |                             |         |        |       |

| REF.NO. | PART.NO      | DESCRIPTION           | REMARK      | REF.NO.          | PART.NO       | DESCRIPTION                  | REMARK     |
|---------|--------------|-----------------------|-------------|------------------|---------------|------------------------------|------------|
| C6606   | 1-165-794-21 | MYLAR 1UF             | 10% 450V    | C6785            | 1-100-566-91  | CERAMIC CHIP 0.1UF           | 10.00% 25V |
| C6609   | 1-107-826-11 | CERAMIC CHIP 0.1UF    | 10.00% 16V  | C6789            | 1-107-888-11  | ELECT 47UF                   | 20% 25V    |
| C6612   | 1-119-891-51 | CERAMIC 220PF         | 10.00% 250V | C6794            | 1-100-566-91  | CERAMIC CHIP 0.1UF           | 10.00% 25V |
| C6700   | 1-100-566-91 | CERAMIC CHIP 0.1UF    | 10.00% 25V  | < CONNECTOR >    |               |                              |            |
| C6701   | 1-100-566-91 | CERAMIC CHIP 0.1UF    | 10.00% 25V  | CN6600           | *1-793-660-11 | PIN, CONNECTOR (PC BOARD) 3P |            |
| C6702   | 1-100-566-91 | CERAMIC CHIP 0.1UF    | 10.00% 25V  | CN6700           | *1-821-072-11 | HEADER ASSEMBLY FOR PWB 2P   |            |
| C6703   | 1-100-566-91 | CERAMIC CHIP 0.1UF    | 10.00% 25V  | CN6701           | *1-785-704-11 | PIN, CONNECTOR (PC BOARD) 7P |            |
| C6706   | 1-162-970-11 | CERAMIC CHIP 0.01UF   | 10.00% 25V  | CN6707           | *1-778-853-11 | PIN, CONNECTOR (PC BOARD) 8P |            |
| C6707   | 1-162-970-11 | CERAMIC CHIP 0.01UF   | 10.00% 25V  | < DIODE >        |               |                              |            |
| C6709   | 1-112-737-11 | CERAMIC 27PF          | 5% 6.3KV    | D6608            | 8-719-041-97  | DIODE MA113-(TX)             |            |
| C6710   | 1-162-967-11 | CERAMIC CHIP 0.0033UF | 10.00% 50V  | D6609            | 8-719-041-97  | DIODE MA113-(TX)             |            |
| C6711   | 1-104-512-11 | CERAMIC 22PF          | 5% 6.3KV    | D6612            | 6-501-848-01  | DIODE S3K60                  |            |
| C6712   | 1-162-979-11 | CERAMIC CHIP 0.0027UF | 10.00% 50V  | D6613            | 6-501-848-01  | DIODE S3K60                  |            |
| C6715   | 1-125-891-11 | CERAMIC CHIP 0.47UF   | 10.00% 10V  | D6614            | 6-501-848-01  | DIODE S3K60                  |            |
| C6716   | 1-162-970-11 | CERAMIC CHIP 0.01UF   | 5.00% 25V   | D6615            | 6-501-848-01  | DIODE S3K60                  |            |
| C6717   | 1-164-217-11 | CERAMIC CHIP 150PF    | 5.00% 50V   | D6623            | 8-719-083-57  | DIODE UDZSNPTE-173.6B        |            |
| C6718   | 1-162-970-11 | CERAMIC CHIP 0.01UF   | 10.00% 25V  | D6624            | 8-719-083-57  | DIODE UDZSNPTE-173.6B        |            |
| C6719   | 1-164-315-11 | CERAMIC CHIP 470PF    | 5.00% 50V   | D6625            | 6-500-137-01  | DIODE BAT54HT1               |            |
| C6720   | 1-162-964-11 | CERAMIC CHIP 0.001UF  | 10.00% 50V  | D6700            | 8-719-420-90  | DIODE MA8051-M               |            |
| C6721   | 1-165-908-11 | CERAMIC CHIP 1UF      | 10% 10V     | D6701            | 8-719-420-90  | DIODE MA8051-M               |            |
| C6723   | 1-165-908-11 | CERAMIC CHIP 1UF      | 10% 10V     | D6702            | 8-719-404-50  | DIODE MA111-TX               |            |
| C6724   | 1-127-804-91 | CERAMIC CHIP 100PF    | 1% 50V      | D6703            | 8-719-404-50  | DIODE MA111-TX               |            |
| C6725   | 1-107-826-11 | CERAMIC CHIP 0.1UF    | 10.00% 16V  | D6704            | 8-719-800-76  | DIODE 1SS226                 |            |
| C6726   | 1-127-573-11 | CERAMIC CHIP 1UF      | 10% 16V     | D6705            | 8-719-800-76  | DIODE 1SS226                 |            |
| C6727   | 1-165-908-11 | CERAMIC CHIP 1UF      | 10% 10V     | D6708            | 6-500-335-01  | DIODE MC2838-T112-1          |            |
| C6728   | 1-162-970-11 | CERAMIC CHIP 0.01UF   | 10.00% 25V  | D6709            | 8-719-017-58  | DIODE MA8068                 |            |
| C6729   | 1-107-882-91 | ELECT 100UF           | 20% 16V     | D6710            | 8-719-017-58  | DIODE MA8068                 |            |
| C6730   | 1-162-970-11 | CERAMIC CHIP 0.01UF   | 10.00% 25V  | D6714            | 8-719-422-12  | DIODE MA8039                 |            |
| C6731   | 1-162-964-11 | CERAMIC CHIP 0.001UF  | 10.00% 50V  | D6715            | 8-719-422-12  | DIODE MA8039                 |            |
| C6732   | 1-100-591-91 | CERAMIC CHIP 1UF      | 10% 25V     | D6717            | 8-719-404-50  | DIODE MA111-TX               |            |
| C6735   | 1-165-176-11 | CERAMIC CHIP 0.047UF  | 10.00% 16V  | D6718            | 8-719-404-50  | DIODE MA111-TX               |            |
| C6738   | 1-165-908-11 | CERAMIC CHIP 1UF      | 10% 10V     | ET6700           | 1-537-770-21  | TERMINAL BOARD, GROUND       |            |
| C6739   | 1-162-970-11 | CERAMIC CHIP 0.01UF   | 10.00% 25V  | ET6701           | 1-537-770-21  | TERMINAL BOARD, GROUND       |            |
| C6740   | 1-107-882-91 | ELECT 100UF           | 20% 16V     | < FERRITE BEAD > |               |                              |            |
| C6741   | 1-165-908-11 | CERAMIC CHIP 1UF      | 10% 10V     | FB6604           | 1-412-911-11  | FERRITE 0UH                  |            |
| C6742   | 1-100-566-91 | CERAMIC CHIP 0.1UF    | 10.00% 25V  | FB6605           | 1-412-911-11  | FERRITE 0UH                  |            |
| C6743   | 1-100-566-91 | CERAMIC CHIP 0.1UF    | 10.00% 25V  | FB6606           | 1-412-911-11  | FERRITE 0UH                  |            |
| C6744   | 1-100-566-91 | CERAMIC CHIP 0.1UF    | 10.00% 25V  | FB6607           | 1-412-911-11  | FERRITE 0UH                  |            |
| C6745   | 1-107-877-11 | ELECT 1000UF          | 20% 10V     | FB6609           | 1-481-256-11  | FERRITE 0UH                  |            |
| C6746   | 1-100-566-91 | CERAMIC CHIP 0.1UF    | 10.00% 25V  | FB6610           | 1-410-396-41  | FERRITE 0.45UH               |            |
| C6747   | 1-100-566-91 | CERAMIC CHIP 0.1UF    | 10.00% 25V  | < IC >           |               |                              |            |
| C6748   | 1-165-908-11 | CERAMIC CHIP 1UF      | 10% 10V     | IC6701           | 6-711-021-01  | IC LX1692BIDW-TR             |            |
| C6749   | 1-100-566-91 | CERAMIC CHIP 0.1UF    | 10.00% 25V  | IC6702           | 6-708-762-01  | IC PQ200WNA1ZPH              |            |
| C6750   | 1-162-970-11 | CERAMIC CHIP 0.01UF   | 10.00% 25V  | IC6703           | 8-759-575-27  | IC BA10339F-E2               |            |
| C6753   | 1-107-906-11 | ELECT 10UF            | 20% 50V     | IC6704           | 6-709-368-01  | IC MM1431ATT (CN)            |            |
| C6754   | 1-107-826-11 | CERAMIC CHIP 0.1UF    | 10.00% 16V  |                  |               |                              |            |
| C6755   | 1-162-964-11 | CERAMIC CHIP 0.001UF  | 10.00% 50V  |                  |               |                              |            |
| C6756   | 1-100-566-91 | CERAMIC CHIP 0.1UF    | 10.00% 25V  |                  |               |                              |            |
| C6757   | 1-100-566-91 | CERAMIC CHIP 0.1UF    | 10.00% 25V  |                  |               |                              |            |
| C6759   | 1-107-882-91 | ELECT 100UF           | 20% 16V     |                  |               |                              |            |

| REF.NO.        | PART.NO      | DESCRIPTION | REMARK             | REF.NO. | PART.NO      | DESCRIPTION | REMARK          |
|----------------|--------------|-------------|--------------------|---------|--------------|-------------|-----------------|
| < COIL >       |              |             |                    | R6635   | 1-216-057-00 | RES-CHIP    | 2.2K 5% 1/10W   |
| L6600          | 1-406-977-21 | INDUCTOR    | 100UH              | R6700   | 1-216-793-11 | METAL CHIP  | 4.7 5% 1/10W    |
| < TRANSISTOR > |              |             |                    | R6701   | 1-216-793-11 | METAL CHIP  | 4.7 5% 1/10W    |
| Q6604          | 8-729-804-41 | TRANSISTOR  | 2SB1122-S          | R6702   | 1-216-793-11 | METAL CHIP  | 4.7 5% 1/10W    |
| Q6605          | 8-729-804-41 | TRANSISTOR  | 2SB1122-S          | R6703   | 1-216-793-11 | METAL CHIP  | 4.7 5% 1/10W    |
| Q6606          | 6-551-713-01 | TRANSISTOR  | 2SK3569(LBS1SONY.Q | R6704   | 1-216-793-11 | METAL CHIP  | 4.7 5% 1/10W    |
| Q6607          | 6-551-713-01 | TRANSISTOR  | 2SK3569(LBS1SONY.Q | R6705   | 1-216-833-11 | METAL CHIP  | 10K 5% 1/10W    |
| Q6700          | 6-551-687-01 | TRANSISTOR  | 3LP02C-TB-E        | R6706   | 1-216-833-11 | METAL CHIP  | 10K 5% 1/10W    |
| Q6701          | 6-551-688-01 | TRANSISTOR  | 3LN02C-TB-E        | R6707   | 1-216-833-11 | METAL CHIP  | 10K 5% 1/10W    |
| Q6702          | 6-551-687-01 | TRANSISTOR  | 3LP02C-TB-E        | R6708   | 1-216-833-11 | METAL CHIP  | 10K 5% 1/10W    |
| Q6703          | 6-551-688-01 | TRANSISTOR  | 3LN02C-TB-E        | R6710   | 1-243-831-71 | METAL OXIDE | 12 5% 1W        |
| Q6704          | 8-729-028-27 | TRANSISTOR  | 2SK2009(TE85L)     | R6711   | 1-243-831-71 | METAL OXIDE | 12 5% 1W        |
| Q6705          | 8-729-620-07 | TRANSISTOR  | 2SC3052EF-T1-LEF   | R6712   | 1-243-831-71 | METAL OXIDE | 12 5% 1W        |
| Q6711          | 8-729-620-07 | TRANSISTOR  | 2SC3052EF-T1-LEF   | R6713   | 1-243-831-71 | METAL OXIDE | 12 5% 1W        |
| Q6712          | 6-551-696-01 | TRANSISTOR  | ISA1235AC1TP-1EF   | R6714   | 1-216-829-11 | METAL CHIP  | 4.7K 5% 1/10W   |
| Q6714          | 6-551-696-01 | TRANSISTOR  | ISA1235AC1TP-1EF   | R6715   | 1-216-837-11 | METAL CHIP  | 22K 5% 1/10W    |
| < RESISTOR >   |              |             |                    | R6716   | 1-216-825-11 | METAL CHIP  | 2.2K 5% 1/10W   |
| JR6700         | 1-216-296-11 | SHORT CHIP  | 0                  | R6721   | 1-216-817-11 | METAL CHIP  | 470 5% 1/10W    |
| JR6701         | 1-216-296-11 | SHORT CHIP  | 0                  | R6722   | 1-218-897-11 | METAL CHIP  | 120K 0.5% 1/10W |
| JR6702         | 1-216-296-11 | SHORT CHIP  | 0                  | R6723   | 1-218-871-11 | METAL CHIP  | 10K 0.5% 1/10W  |
| JR6703         | 1-216-296-11 | SHORT CHIP  | 0                  | R6724   | 1-216-864-11 | SHORT CHIP  | 0               |
| JR6704         | 1-216-296-11 | SHORT CHIP  | 0                  | R6725   | 1-218-891-11 | METAL CHIP  | 68K 0.5% 1/10W  |
| JR6705         | 1-216-296-11 | SHORT CHIP  | 0                  | R6727   | 1-216-841-11 | METAL CHIP  | 47K 5% 1/10W    |
| JR6706         | 1-216-296-11 | SHORT CHIP  | 0                  | R6729   | 1-216-829-11 | METAL CHIP  | 4.7K 5% 1/10W   |
| JR6707         | 1-216-296-11 | SHORT CHIP  | 0                  | R6730   | 1-216-829-11 | METAL CHIP  | 4.7K 5% 1/10W   |
| JR6709         | 1-216-296-11 | SHORT CHIP  | 0                  | R6731   | 1-216-837-11 | METAL CHIP  | 22K 5% 1/10W    |
| JR6714         | 1-216-296-11 | SHORT CHIP  | 0                  | R6732   | 1-218-893-11 | METAL CHIP  | 82K 0.5% 1/10W  |
| JR6717         | 1-216-864-11 | SHORT CHIP  | 0                  | R6733   | 1-218-863-11 | METAL CHIP  | 4.7K 0.5% 1/10W |
| JR6718         | 1-216-864-11 | SHORT CHIP  | 0                  | R6734   | 1-216-833-11 | METAL CHIP  | 10K 5% 1/10W    |
| JR6719         | 1-216-296-11 | SHORT CHIP  | 0                  | R6736   | 1-218-885-11 | METAL CHIP  | 39K 0.5% 1/10W  |
| JR6721         | 1-216-296-11 | SHORT CHIP  | 0                  | R6737   | 1-216-821-11 | METAL CHIP  | 1K 5% 1/10W     |
| JR6724         | 1-216-296-11 | SHORT CHIP  | 0                  | R6739   | 1-216-864-11 | SHORT CHIP  | 0               |
| JR6725         | 1-216-864-11 | SHORT CHIP  | 0                  | R6750   | 1-218-895-11 | METAL CHIP  | 100K 0.5% 1/10W |
| JR6726         | 1-216-296-11 | SHORT CHIP  | 0                  | R6751   | 1-218-871-11 | METAL CHIP  | 10K 0.5% 1/10W  |
| JR6727         | 1-216-864-11 | SHORT CHIP  | 0                  | R6752   | 1-211-983-11 | METAL CHIP  | 39 0.5% 1/10W   |
| R6609          | 1-216-857-11 | METAL CHIP  | 1M 5% 1/10W        | R6754   | 1-211-983-11 | METAL CHIP  | 39 0.5% 1/10W   |
| R6610          | 1-216-057-00 | RES-CHIP    | 2.2K 5% 1/10W      | R6755   | 1-216-861-11 | METAL CHIP  | 2.2M 5% 1/10W   |
| R6611          | 1-216-057-00 | RES-CHIP    | 2.2K 5% 1/10W      | R6756   | 1-211-983-11 | METAL CHIP  | 39 0.5% 1/10W   |
| R6612          | 1-249-403-11 | CARBON      | 68 5% 1/4W         | R6757   | 1-216-833-11 | METAL CHIP  | 10K 5% 1/10W    |
| R6613          | 1-249-403-11 | CARBON      | 68 5% 1/4W         | R6758   | 1-211-983-11 | METAL CHIP  | 39 0.5% 1/10W   |
| R6614          | 1-216-793-11 | METAL CHIP  | 4.7 5% 1/10W       | R6760   | 1-218-854-11 | METAL CHIP  | 2K 0.5% 1/10W   |
| R6615          | 1-216-793-11 | METAL CHIP  | 4.7 5% 1/10W       | R6761   | 1-218-853-11 | METAL CHIP  | 1.8K 0.5% 1/10W |
| R6616          | 1-216-833-11 | METAL CHIP  | 10K 5% 1/10W       | R6762   | 1-211-983-11 | METAL CHIP  | 39 0.5% 1/10W   |
| R6617          | 1-216-833-11 | METAL CHIP  | 10K 5% 1/10W       | R6763   | 1-218-863-11 | METAL CHIP  | 4.7K 0.5% 1/10W |
| R6626          | 1-216-864-11 | SHORT CHIP  | 0                  | R6764   | 1-211-985-11 | METAL CHIP  | 47 0.5% 1/10W   |
| R6634          | 1-216-057-00 | RES-CHIP    | 2.2K 5% 1/10W      | R6766   | 1-216-864-11 | SHORT CHIP  | 0               |
|                |              |             |                    | R6768   | 1-211-985-11 | METAL CHIP  | 47 0.5% 1/10W   |
|                |              |             |                    | R6770   | 1-218-863-11 | METAL CHIP  | 4.7K 0.5% 1/10W |
|                |              |             |                    | R6771   | 1-218-871-11 | METAL CHIP  | 10K 0.5% 1/10W  |
|                |              |             |                    | R6772   | 1-218-871-11 | METAL CHIP  | 10K 0.5% 1/10W  |

Note : The components identified by mark  contain confidential information. Strictly follow the instructions when ever the components are repaired and/or replaced.

**D1** **BC**

| REF.NO.                                                                                                                                                                                                                                                               | PART.NO      | DESCRIPTION                    | REMARK |      |        | REF.NO. | PART.NO      | DESCRIPTION          | REMARK               |        |     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------------------------|--------|------|--------|---------|--------------|----------------------|----------------------|--------|-----|
| R6773                                                                                                                                                                                                                                                                 | 1-216-833-11 | METAL CHIP                     | 10K    | 5%   | 1/10W  | C1013   | 1-165-667-21 | ELECT CHIP 100UF     | 20%                  | 6.3V   |     |
| R6775                                                                                                                                                                                                                                                                 | 1-216-845-11 | METAL CHIP                     | 100K   | 5%   | 1/10W  | C1015   | 1-164-936-11 | CERAMIC CHIP 680PF   | 10.00%               | 50V    |     |
| R6776                                                                                                                                                                                                                                                                 | 1-218-847-11 | METAL CHIP                     | 1K     | 0.5% | 1/10W  | C1016   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10%                  | 10V    |     |
| R6778                                                                                                                                                                                                                                                                 | 1-216-864-11 | SHORT CHIP                     | 0      |      |        | C1017   | 1-115-339-11 | CERAMIC CHIP 0.1UF   | 10.00%               | 50V    |     |
| R6779                                                                                                                                                                                                                                                                 | 1-218-871-11 | METAL CHIP                     | 10K    | 0.5% | 1/10W  | C1018   | 1-164-947-11 | CERAMIC CHIP 0.01UF  |                      | 50V    |     |
| R6780                                                                                                                                                                                                                                                                 | 1-216-864-11 | SHORT CHIP                     | 0      |      |        | C1019   | 1-117-681-11 | ELECT CHIP 100UF     | 20.00%               | 16V    |     |
| R6782                                                                                                                                                                                                                                                                 | 1-218-887-11 | METAL CHIP                     | 47K    | 0.5% | 1/10W  | C1020   | 1-165-667-21 | ELECT CHIP 100UF     | 20%                  | 6.3V   |     |
| R6783                                                                                                                                                                                                                                                                 | 1-218-895-11 | METAL CHIP                     | 100K   | 0.5% | 1/10W  | C1021   | 1-165-667-21 | ELECT CHIP 100UF     | 20%                  | 6.3V   |     |
| R6786                                                                                                                                                                                                                                                                 | 1-216-829-11 | METAL CHIP                     | 4.7K   | 5%   | 1/10W  | C1022   | 1-164-936-11 | CERAMIC CHIP 680PF   | 10.00%               | 50V    |     |
| R6787                                                                                                                                                                                                                                                                 | 1-216-817-11 | METAL CHIP                     | 470    | 5%   | 1/10W  | C1023   | 1-164-936-11 | CERAMIC CHIP 680PF   | 10.00%               | 50V    |     |
| R6788                                                                                                                                                                                                                                                                 | 1-216-864-11 | SHORT CHIP                     | 0      |      |        | C1024   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10%                  | 10V    |     |
| R6789                                                                                                                                                                                                                                                                 | 1-218-887-11 | METAL CHIP                     | 47K    | 0.5% | 1/10W  | C1026   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10%                  | 10V    |     |
| R6790                                                                                                                                                                                                                                                                 | 1-218-883-11 | METAL CHIP                     | 33K    | 0.5% | 1/10W  | C1027   | 1-100-611-91 | CERAMIC CHIP 22UF    | 20%                  | 6.3V   |     |
| R6792                                                                                                                                                                                                                                                                 | 1-218-885-11 | METAL CHIP                     | 39K    | 0.5% | 1/10W  | C1028   | 1-100-611-91 | CERAMIC CHIP 22UF    | 20%                  | 6.3V   |     |
| R6793                                                                                                                                                                                                                                                                 | 1-216-833-11 | METAL CHIP                     | 10K    | 5%   | 1/10W  | C1029   | 1-162-961-11 | CERAMIC CHIP 330PF   | 10.00%               | 50V    |     |
| R6794                                                                                                                                                                                                                                                                 | 1-218-871-11 | METAL CHIP                     | 10K    | 0.5% | 1/10W  | C1030   | 1-164-936-11 | CERAMIC CHIP 680PF   | 10.00%               | 50V    |     |
| R6795                                                                                                                                                                                                                                                                 | 1-216-841-11 | METAL CHIP                     | 47K    | 5%   | 1/10W  | C1031   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10%                  | 10V    |     |
| R6802                                                                                                                                                                                                                                                                 | 1-218-887-11 | METAL CHIP                     | 47K    | 0.5% | 1/10W  | C1032   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10%                  | 10V    |     |
| R6804                                                                                                                                                                                                                                                                 | 1-249-381-11 | CARBON                         | 1      | 5%   | 1/4W   | C1033   | 1-124-778-00 | ELECT CHIP 22UF      | 20.00%               | 6.3V   |     |
| R6805                                                                                                                                                                                                                                                                 | 1-216-793-11 | METAL CHIP                     | 4.7    | 5%   | 1/10W  | C1034   | 1-162-995-11 | CERAMIC CHIP 0.022UF |                      | 50V    |     |
| R6806                                                                                                                                                                                                                                                                 | 1-216-864-11 | SHORT CHIP                     | 0      |      |        | C1035   | 1-162-995-11 | CERAMIC CHIP 0.022UF |                      | 50V    |     |
| R6807                                                                                                                                                                                                                                                                 | 1-216-864-11 | SHORT CHIP                     | 0      |      |        | C1036   | 1-128-996-11 | ELECT CHIP 4.7UF     | 20%                  | 50V    |     |
| R6809                                                                                                                                                                                                                                                                 | 1-216-825-11 | METAL CHIP                     | 2.2K   | 5%   | 1/10W  | C1037   | 1-115-339-11 | CERAMIC CHIP 0.1UF   | 10.00%               | 50V    |     |
| R6810                                                                                                                                                                                                                                                                 | 1-218-875-11 | METAL CHIP                     | 15K    | 0.5% | 1/10W  | C1039   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00%               | 50V    |     |
| R6811                                                                                                                                                                                                                                                                 | 1-218-901-11 | METAL CHIP                     | 180K   | 0.5% | 1/10W  | C1042   | 1-100-911-11 | CERAMIC CHIP 4.7UF   | 10%                  | 25V    |     |
| R6816                                                                                                                                                                                                                                                                 | 1-216-864-11 | SHORT CHIP                     | 0      |      |        | C1043   | 1-100-911-11 | CERAMIC CHIP 4.7UF   | 10%                  | 25V    |     |
| R6819                                                                                                                                                                                                                                                                 | 1-216-864-11 | SHORT CHIP                     | 0      |      |        | C1044   | 1-165-667-21 | ELECT CHIP 100UF     | 20%                  | 6.3V   |     |
| R6823                                                                                                                                                                                                                                                                 | 1-216-864-11 | SHORT CHIP                     | 0      |      |        | C1045   | 1-165-667-21 | ELECT CHIP 100UF     | 20%                  | 6.3V   |     |
| R6824                                                                                                                                                                                                                                                                 | 1-216-864-11 | SHORT CHIP                     | 0      |      |        | C2004   | 1-164-227-11 | CERAMIC CHIP 0.022UF | 10.00%               | 25V    |     |
| R6909                                                                                                                                                                                                                                                                 | 1-216-821-11 | METAL CHIP                     | 1K     | 5%   | 1/10W  | C2005   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00%               | 50V    |     |
| < TRANSFORMER >                                                                                                                                                                                                                                                       |              |                                |        |      |        | C2006   | 1-164-227-11 | CERAMIC CHIP 0.022UF | 10.00%               | 25V    |     |
| T6800                                                                                                                                                                                                                                                                 | 1-445-237-11 | TRANSFORMER, DRIVE             |        |      |        | C2007   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00%               | 50V    |     |
| T6801                                                                                                                                                                                                                                                                 | 8-597-054-00 | TRANSFORMER, HIGH-VOLTAGE INSU |        |      |        | C2014   | 1-165-908-11 | CERAMIC CHIP 1UF     | 10%                  | 10V    |     |
|  * A-1503-609-A BC COMPLETE (26 inches Only)<br> * A-1503-611-A BC COMPLETE (32/40 inches Only) |              |                                |        |      |        | C2015   | 1-165-908-11 | CERAMIC CHIP 1UF     | 10%                  | 10V    |     |
| <b>BC Board Common Parts</b>                                                                                                                                                                                                                                          |              |                                |        |      |        | C2016   | 1-126-396-11 | ELECT CHIP 47UF      | 20.00%               | 16V    |     |
| < CAPACITOR >                                                                                                                                                                                                                                                         |              |                                |        |      |        | C2017   | 1-126-396-11 | ELECT CHIP 47UF      | 20.00%               | 16V    |     |
| C1000                                                                                                                                                                                                                                                                 | 1-126-204-11 | ELECT CHIP 47UF                |        |      | 20.00% | 16V     | C2020        | 1-117-370-11         | CERAMIC CHIP 10UF    |        | 10V |
| C1001                                                                                                                                                                                                                                                                 | 1-100-907-11 | CERAMIC CHIP 0.1UF             |        |      | 10%    | 10V     | C2021        | 1-107-826-11         | CERAMIC CHIP 0.1UF   | 10.00% | 16V |
| C1002                                                                                                                                                                                                                                                                 | 1-100-907-11 | CERAMIC CHIP 0.1UF             |        |      | 10%    | 10V     | C2022        | 1-165-908-11         | CERAMIC CHIP 1UF     | 10%    | 10V |
| C1003                                                                                                                                                                                                                                                                 | 1-115-566-11 | CERAMIC CHIP 4.7UF             |        |      | 10.00% | 10V     | C2023        | 1-165-908-11         | CERAMIC CHIP 1UF     | 10%    | 10V |
| C1004                                                                                                                                                                                                                                                                 | 1-164-852-11 | CERAMIC CHIP 12PF              |        |      | 5.00%  | 50V     | C2024        | 1-162-964-11         | CERAMIC CHIP 0.001UF | 10.00% | 50V |
| C1005                                                                                                                                                                                                                                                                 | 1-164-852-11 | CERAMIC CHIP 12PF              |        |      | 5.00%  | 50V     | C2025        | 1-162-964-11         | CERAMIC CHIP 0.001UF | 10.00% | 50V |
| C1006                                                                                                                                                                                                                                                                 | 1-100-907-11 | CERAMIC CHIP 0.1UF             |        |      | 10%    | 10V     | C2026        | 1-162-964-11         | CERAMIC CHIP 0.001UF | 10.00% | 50V |
| C1007                                                                                                                                                                                                                                                                 | 1-164-852-11 | CERAMIC CHIP 12PF              |        |      | 5.00%  | 50V     | C2027        | 1-162-964-11         | CERAMIC CHIP 0.001UF | 10.00% | 50V |
| C1008                                                                                                                                                                                                                                                                 | 1-164-852-11 | CERAMIC CHIP 12PF              |        |      | 5.00%  | 50V     | C2028        | 1-165-908-11         | CERAMIC CHIP 1UF     | 10%    | 10V |
| C1010                                                                                                                                                                                                                                                                 | 1-164-852-11 | CERAMIC CHIP 12PF              |        |      | 5.00%  | 50V     | C2029        | 1-165-908-11         | CERAMIC CHIP 1UF     | 10%    | 10V |
|                                                                                                                                                                                                                                                                       |              |                                |        |      |        |         | C2034        | 1-165-908-11         | CERAMIC CHIP 1UF     | 10%    | 10V |
|                                                                                                                                                                                                                                                                       |              |                                |        |      |        |         | C2035        | 1-165-908-11         | CERAMIC CHIP 1UF     | 10%    | 10V |
|                                                                                                                                                                                                                                                                       |              |                                |        |      |        |         | C2036        | 1-164-227-11         | CERAMIC CHIP 0.022UF | 10.00% | 25V |
|                                                                                                                                                                                                                                                                       |              |                                |        |      |        |         | C2037        | 1-162-964-11         | CERAMIC CHIP 0.001UF | 10.00% | 50V |



| REF.NO. | PART.NO      | DESCRIPTION          | REMARK     | REF.NO. | PART.NO      | DESCRIPTION          | REMARK      |
|---------|--------------|----------------------|------------|---------|--------------|----------------------|-------------|
| C2038   | 1-164-227-11 | CERAMIC CHIP 0.022UF | 10.00% 25V | C3042   | 1-126-396-11 | ELECT CHIP 47UF      | 20.00% 16V  |
| C2039   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V | C3043   | 1-100-597-91 | CERAMIC CHIP 0.1UF   | 10% 25V     |
| C2040   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V | C3044   | 1-100-591-91 | CERAMIC CHIP 1UF     | 10% 25V     |
| C2041   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V | C3045   | 1-100-591-91 | CERAMIC CHIP 1UF     | 10% 25V     |
| C2042   | 1-165-908-11 | CERAMIC CHIP 1UF     | 10% 10V    | C3050   | 1-100-597-91 | CERAMIC CHIP 0.1UF   | 10% 25V     |
| C2043   | 1-165-908-11 | CERAMIC CHIP 1UF     | 10% 10V    | C3051   | 1-100-597-91 | CERAMIC CHIP 0.1UF   | 10% 25V     |
| C2044   | 1-126-396-11 | ELECT CHIP 47UF      | 20.00% 16V | C3052   | 1-100-905-11 | CERAMIC CHIP 0.001UF | 10% 50V     |
| C2045   | 1-126-396-11 | ELECT CHIP 47UF      | 20.00% 16V | C3053   | 1-165-908-11 | CERAMIC CHIP 1UF     | 10% 10V     |
| C2050   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V | C3054   | 1-165-908-11 | CERAMIC CHIP 1UF     | 10% 10V     |
| C2051   | 1-117-370-11 | CERAMIC CHIP 10UF    | 10V        | C3057   | 1-117-681-11 | ELECT CHIP 100UF     | 20.00% 16V  |
| C3002   | 1-100-912-11 | CERAMIC CHIP 1UF     | 10% 25V    | C3058   | 1-164-156-11 | CERAMIC CHIP 0.1UF   | 25V         |
| C3003   | 1-100-912-11 | CERAMIC CHIP 1UF     | 10% 25V    | C3059   | 1-117-681-11 | ELECT CHIP 100UF     | 20.00% 16V  |
| C3004   | 1-100-912-11 | CERAMIC CHIP 1UF     | 10% 25V    | C3060   | 1-117-681-11 | ELECT CHIP 100UF     | 20.00% 16V  |
| C3005   | 1-100-912-11 | CERAMIC CHIP 1UF     | 10% 25V    | C3061   | 1-124-779-00 | ELECT CHIP 10UF      | 20.00% 16V  |
| C3006   | 1-100-597-91 | CERAMIC CHIP 0.1UF   | 10% 25V    | C3062   | 1-100-597-91 | CERAMIC CHIP 0.1UF   | 10% 25V     |
| C3007   | 1-100-764-21 | ELECT CHIP 4.7UF     | 20% 25V    | C3063   | 1-126-396-11 | ELECT CHIP 47UF      | 20.00% 16V  |
| C3008   | 1-112-777-11 | CERAMIC CHIP 0.01UF  | 10% 25V    | C3064   | 1-100-912-11 | CERAMIC CHIP 1UF     | 10% 25V     |
| C3009   | 1-100-764-21 | ELECT CHIP 4.7UF     | 20% 25V    | C3065   | 1-100-912-11 | CERAMIC CHIP 1UF     | 10% 25V     |
| C3010   | 1-115-340-11 | CERAMIC CHIP 0.22UF  | 10.00% 25V | C3066   | 1-100-912-11 | CERAMIC CHIP 1UF     | 10% 25V     |
| C3011   | 1-115-340-11 | CERAMIC CHIP 0.22UF  | 10.00% 25V | C3068   | 1-126-396-11 | ELECT CHIP 47UF      | 20.00% 16V  |
| C3012   | 1-100-905-11 | CERAMIC CHIP 0.001UF | 10% 50V    | C4002   | 1-125-891-11 | CERAMIC CHIP 0.47UF  | 10.00% 10V  |
| C3013   | 1-126-396-11 | ELECT CHIP 47UF      | 20.00% 16V | C4003   | 1-125-891-11 | CERAMIC CHIP 0.47UF  | 10.00% 10V  |
| C3014   | 1-100-905-11 | CERAMIC CHIP 0.001UF | 10% 50V    | C4004   | 1-125-891-11 | CERAMIC CHIP 0.47UF  | 10.00% 10V  |
| C3015   | 1-115-340-11 | CERAMIC CHIP 0.22UF  | 10.00% 25V | C4005   | 1-125-891-11 | CERAMIC CHIP 0.47UF  | 10.00% 10V  |
| C3016   | 1-115-340-11 | CERAMIC CHIP 0.22UF  | 10.00% 25V | C4006   | 1-127-573-11 | CERAMIC CHIP 1UF     | 10% 16V     |
| C3017   | 1-100-905-11 | CERAMIC CHIP 0.001UF | 10% 50V    | C4007   | 1-163-037-11 | CERAMIC CHIP 0.022UF | 10.00% 50V  |
| C3018   | 1-125-889-11 | CERAMIC CHIP 2.2UF   | 10% 10V    | C4008   | 1-126-205-11 | ELECT CHIP 47UF      | 20.00% 6.3V |
| C3019   | 1-125-889-11 | CERAMIC CHIP 2.2UF   | 10% 10V    | C4009   | 1-164-156-11 | CERAMIC CHIP 0.1UF   | 25V         |
| C3020   | 1-112-797-11 | ELECT CHIP 470UF     | 20% 25V    | C4011   | 1-164-156-11 | CERAMIC CHIP 0.1UF   | 25V         |
| C3021   | 1-112-800-11 | ELECT CHIP 100UF     | 20% 35V    | C4014   | 1-164-156-11 | CERAMIC CHIP 0.1UF   | 25V         |
| C3022   | 1-100-597-91 | CERAMIC CHIP 0.1UF   | 10% 25V    | C4016   | 1-126-205-11 | ELECT CHIP 47UF      | 20.00% 6.3V |
| C3023   | 1-100-912-11 | CERAMIC CHIP 1UF     | 10% 25V    | C4020   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |
| C3024   | 1-100-912-11 | CERAMIC CHIP 1UF     | 10% 25V    | C4021   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |
| C3025   | 1-112-800-11 | ELECT CHIP 100UF     | 20% 35V    | C4022   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |
| C3026   | 1-100-597-91 | CERAMIC CHIP 0.1UF   | 10% 25V    | C4023   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |
| C3027   | 1-125-889-11 | CERAMIC CHIP 2.2UF   | 10% 10V    | C4024   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |
| C3028   | 1-125-889-11 | CERAMIC CHIP 2.2UF   | 10% 10V    | C4025   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |
| C3029   | 1-100-905-11 | CERAMIC CHIP 0.001UF | 10% 50V    | C4026   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |
| C3030   | 1-100-597-91 | CERAMIC CHIP 0.1UF   | 10% 25V    | C4027   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |
| C3031   | 1-100-905-11 | CERAMIC CHIP 0.001UF | 10% 50V    | C4028   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |
| C3032   | 1-164-874-11 | CERAMIC CHIP 100PF   | 5.00% 50V  | C4029   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |
| C3033   | 1-125-889-11 | CERAMIC CHIP 2.2UF   | 10% 10V    | C4030   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |
| C3034   | 1-164-874-11 | CERAMIC CHIP 100PF   | 5.00% 50V  | C4031   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |
| C3035   | 1-115-340-11 | CERAMIC CHIP 0.22UF  | 10.00% 25V | C4032   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |
| C3036   | 1-115-340-11 | CERAMIC CHIP 0.22UF  | 10.00% 25V | C4033   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |
| C3037   | 1-126-396-11 | ELECT CHIP 47UF      | 20.00% 16V | C4034   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |
| C3038   | 1-115-340-11 | CERAMIC CHIP 0.22UF  | 10.00% 25V | C4035   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |
| C3039   | 1-115-340-11 | CERAMIC CHIP 0.22UF  | 10.00% 25V | C4036   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |
| C3040   | 1-115-340-11 | CERAMIC CHIP 0.22UF  | 10.00% 25V | C4037   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |
| C3041   | 1-115-340-11 | CERAMIC CHIP 0.22UF  | 10.00% 25V | C4038   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |

| REF.NO. | PART.NO      | DESCRIPTION           | REMARK     | REF.NO. | PART.NO      | DESCRIPTION          | REMARK     |
|---------|--------------|-----------------------|------------|---------|--------------|----------------------|------------|
| C4039   | 1-107-826-11 | CERAMIC CHIP 0.1UF    | 10.00% 16V | C4206   | 1-164-156-11 | CERAMIC CHIP 0.1UF   | 25V        |
| C4040   | 1-107-826-11 | CERAMIC CHIP 0.1UF    | 10.00% 16V | C4207   | 1-164-156-11 | CERAMIC CHIP 0.1UF   | 25V        |
| C4041   | 1-107-826-11 | CERAMIC CHIP 0.1UF    | 10.00% 16V | C4208   | 1-164-156-11 | CERAMIC CHIP 0.1UF   | 25V        |
| C4042   | 1-100-566-91 | CERAMIC CHIP 0.1UF    | 10.00% 25V | C4210   | 1-164-156-11 | CERAMIC CHIP 0.1UF   | 25V        |
| C4043   | 1-100-566-91 | CERAMIC CHIP 0.1UF    | 10.00% 25V | C4211   | 1-162-970-11 | CERAMIC CHIP 0.01UF  | 10.00% 25V |
| C4045   | 1-100-566-91 | CERAMIC CHIP 0.1UF    | 10.00% 25V | C4212   | 1-162-970-11 | CERAMIC CHIP 0.01UF  | 10.00% 25V |
| C4046   | 1-163-021-91 | CERAMIC CHIP 0.01UF   | 10.00% 50V | C4213   | 1-162-970-11 | CERAMIC CHIP 0.01UF  | 10.00% 25V |
| C4047   | 1-107-826-11 | CERAMIC CHIP 0.1UF    | 10.00% 16V | C4214   | 1-162-970-11 | CERAMIC CHIP 0.01UF  | 10.00% 25V |
| C4052   | 1-127-715-91 | CERAMIC CHIP 0.22UF   | 10% 16V    | C4215   | 1-162-970-11 | CERAMIC CHIP 0.01UF  | 10.00% 25V |
| C4053   | 1-107-826-11 | CERAMIC CHIP 0.1UF    | 10.00% 16V | C4216   | 1-162-970-11 | CERAMIC CHIP 0.01UF  | 10.00% 25V |
| C4054   | 1-126-394-11 | ELECT CHIP 10UF       | 20.00% 16V | C4217   | 1-162-970-11 | CERAMIC CHIP 0.01UF  | 10.00% 25V |
| C4055   | 1-127-715-91 | CERAMIC CHIP 0.22UF   | 10% 16V    | C4218   | 1-162-970-11 | CERAMIC CHIP 0.01UF  | 10.00% 25V |
| C4056   | 1-107-826-11 | CERAMIC CHIP 0.1UF    | 10.00% 16V | C4219   | 1-162-970-11 | CERAMIC CHIP 0.01UF  | 10.00% 25V |
| C4059   | 1-162-966-11 | CERAMIC CHIP 0.0022UF | 10.00% 50V | C4300   | 1-117-370-11 | CERAMIC CHIP 10UF    | 10V        |
| C4060   | 1-162-966-11 | CERAMIC CHIP 0.0022UF | 10.00% 50V | C4301   | 1-117-370-11 | CERAMIC CHIP 10UF    | 10V        |
| C4061   | 1-107-826-11 | CERAMIC CHIP 0.1UF    | 10.00% 16V | C4302   | 1-117-370-11 | CERAMIC CHIP 10UF    | 10V        |
| C4062   | 1-162-966-11 | CERAMIC CHIP 0.0022UF | 10.00% 50V | C4303   | 1-117-370-11 | CERAMIC CHIP 10UF    | 10V        |
| C4063   | 1-162-966-11 | CERAMIC CHIP 0.0022UF | 10.00% 50V | C4304   | 1-126-396-11 | ELECT CHIP 47UF      | 20.00% 16V |
| C4064   | 1-162-966-11 | CERAMIC CHIP 0.0022UF | 10.00% 50V | C4305   | 1-100-911-11 | CERAMIC CHIP 4.7UF   | 10% 25V    |
| C4065   | 1-162-966-11 | CERAMIC CHIP 0.0022UF | 10.00% 50V | C4306   | 1-117-370-11 | CERAMIC CHIP 10UF    | 10V        |
| C4066   | 1-164-004-11 | CERAMIC CHIP 0.1UF    | 10.00% 25V | C4307   | 1-126-396-11 | ELECT CHIP 47UF      | 20.00% 16V |
| C4067   | 1-124-779-00 | ELECT CHIP 10UF       | 20.00% 16V | C4308   | 1-117-370-11 | CERAMIC CHIP 10UF    | 10V        |
| C4068   | 1-216-864-11 | SHORT CHIP 0          |            | C4310   | 1-126-396-11 | ELECT CHIP 47UF      | 20.00% 16V |
| C4069   | 1-164-004-11 | CERAMIC CHIP 0.1UF    | 10.00% 25V | C4311   | 1-126-396-11 | ELECT CHIP 47UF      | 20.00% 16V |
| C4070   | 1-162-928-11 | CERAMIC CHIP 120PF    | 5.00% 50V  | C4312   | 1-126-396-11 | ELECT CHIP 47UF      | 20.00% 16V |
| C4072   | 1-107-826-11 | CERAMIC CHIP 0.1UF    | 10.00% 16V | C4313   | 1-126-396-11 | ELECT CHIP 47UF      | 20.00% 16V |
| C4073   | 1-107-826-11 | CERAMIC CHIP 0.1UF    | 10.00% 16V | C4314   | 1-100-911-11 | CERAMIC CHIP 4.7UF   | 10% 25V    |
| C4074   | 1-162-968-11 | CERAMIC CHIP 0.0047UF | 10.00% 50V | C4316   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V |
| C4076   | 1-107-826-11 | CERAMIC CHIP 0.1UF    | 10.00% 16V | C5005   | 1-115-416-11 | CERAMIC CHIP 0.001UF | 5.00% 25V  |
| C4077   | 1-107-826-11 | CERAMIC CHIP 0.1UF    | 10.00% 16V | C5006   | 1-162-970-11 | CERAMIC CHIP 0.01UF  | 10.00% 25V |
| C4079   | 1-164-004-11 | CERAMIC CHIP 0.1UF    | 10.00% 25V | C5007   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V |
| C4080   | 1-107-826-11 | CERAMIC CHIP 0.1UF    | 10.00% 16V | C5008   | 1-115-416-11 | CERAMIC CHIP 0.001UF | 5.00% 25V  |
| C4081   | 1-107-826-11 | CERAMIC CHIP 0.1UF    | 10.00% 16V | C5009   | 1-162-970-11 | CERAMIC CHIP 0.01UF  | 10.00% 25V |
| C4082   | 1-164-388-91 | CERAMIC CHIP 270PF    | 5.00% 50V  | C5010   | 1-137-710-91 | CERAMIC CHIP 10UF    | 20% 6.3V   |
| C4083   | 1-107-826-11 | CERAMIC CHIP 0.1UF    | 10.00% 16V | C5011   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V |
| C4084   | 1-107-826-11 | CERAMIC CHIP 0.1UF    | 10.00% 16V | C5012   | 1-137-710-91 | CERAMIC CHIP 10UF    | 20% 6.3V   |
| C4085   | 1-107-826-11 | CERAMIC CHIP 0.1UF    | 10.00% 16V | C5013   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V |
| C4086   | 1-162-917-11 | CERAMIC CHIP 15PF     | 5.00% 50V  | C5014   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V |
| C4087   | 1-162-917-11 | CERAMIC CHIP 15PF     | 5.00% 50V  | C5015   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V |
| C4088   | 1-162-927-11 | CERAMIC CHIP 100PF    | 5.00% 50V  | C5052   | 1-126-396-11 | ELECT CHIP 47UF      | 20.00% 16V |
| C4089   | 1-127-715-91 | CERAMIC CHIP 0.22UF   | 10% 16V    | C5053   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V |
| C4090   | 1-115-340-11 | CERAMIC CHIP 0.22UF   | 10.00% 25V | C5054   | 1-162-962-11 | CERAMIC CHIP 470PF   | 10.00% 50V |
| C4091   | 1-100-566-91 | CERAMIC CHIP 0.1UF    | 10.00% 25V | C5055   | 1-162-970-11 | CERAMIC CHIP 0.01UF  | 10.00% 25V |
| C4092   | 1-100-566-91 | CERAMIC CHIP 0.1UF    | 10.00% 25V | C5500   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V |
| C4109   | 1-124-779-00 | ELECT CHIP 10UF       | 20.00% 16V | C5501   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V |
| C4110   | 1-162-927-11 | CERAMIC CHIP 100PF    | 5.00% 50V  | C5502   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V |
| C4200   | 1-164-156-11 | CERAMIC CHIP 0.1UF    | 25V        | C5503   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V |
| C4202   | 1-164-156-11 | CERAMIC CHIP 0.1UF    | 25V        | C5508   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V |
| C4204   | 1-164-156-11 | CERAMIC CHIP 0.1UF    | 25V        | C5511   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V |
| C4205   | 1-107-826-11 | CERAMIC CHIP 0.1UF    | 10.00% 16V | C5514   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V |

| REF.NO. | PART.NO      | DESCRIPTION          | REMARK      | REF.NO. | PART.NO      | DESCRIPTION          | REMARK     |
|---------|--------------|----------------------|-------------|---------|--------------|----------------------|------------|
| C5517   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  | C6509   | 1-137-894-21 | ELECT CHIP 470UF     | 20% 25V    |
| C5523   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6511   | 1-112-797-11 | ELECT CHIP 470UF     | 20% 25V    |
| C5524   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6512   | 1-137-894-21 | ELECT CHIP 470UF     | 20% 25V    |
| C5525   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6514   | 1-162-970-11 | CERAMIC CHIP 0.01UF  | 10.00% 25V |
| C5526   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6515   | 1-162-974-11 | CERAMIC CHIP 0.01UF  | 50V        |
| C5527   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6516   | 1-162-970-11 | CERAMIC CHIP 0.01UF  | 10.00% 25V |
| C5528   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6520   | 1-100-566-91 | CERAMIC CHIP 0.1UF   | 10.00% 25V |
| C5529   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6521   | 1-100-911-11 | CERAMIC CHIP 4.7UF   | 10% 25V    |
| C5531   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6522   | 1-100-911-11 | CERAMIC CHIP 4.7UF   | 10% 25V    |
| C5533   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6523   | 1-126-396-11 | ELECT CHIP 47UF      | 20.00% 16V |
| C5534   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6525   | 1-162-974-11 | CERAMIC CHIP 0.01UF  | 50V        |
| C5535   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6526   | 1-100-566-91 | CERAMIC CHIP 0.1UF   | 10.00% 25V |
| C5536   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6528   | 1-100-566-91 | CERAMIC CHIP 0.1UF   | 10.00% 25V |
| C5538   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6529   | 1-100-911-11 | CERAMIC CHIP 4.7UF   | 10% 25V    |
| C5540   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6530   | 1-100-566-91 | CERAMIC CHIP 0.1UF   | 10.00% 25V |
| C5541   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6531   | 1-165-671-21 | ELECT CHIP 470UF     | 20% 6.3V   |
| C5542   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6532   | 1-127-715-91 | CERAMIC CHIP 0.22UF  | 10% 16V    |
| C5545   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6534   | 1-127-715-91 | CERAMIC CHIP 0.22UF  | 10% 16V    |
| C5546   | 1-124-779-00 | ELECT CHIP 10UF      | 20.00% 16V  | C6537   | 1-165-671-21 | ELECT CHIP 470UF     | 20% 6.3V   |
| C5547   | 1-124-779-00 | ELECT CHIP 10UF      | 20.00% 16V  | C6538   | 1-100-566-91 | CERAMIC CHIP 0.1UF   | 10.00% 25V |
| C5548   | 1-124-779-00 | ELECT CHIP 10UF      | 20.00% 16V  | C6540   | 1-165-671-21 | ELECT CHIP 470UF     | 20% 6.3V   |
| C5549   | 1-124-779-00 | ELECT CHIP 10UF      | 20.00% 16V  | C6544   | 1-100-566-91 | CERAMIC CHIP 0.1UF   | 10.00% 25V |
| C5550   | 1-124-779-00 | ELECT CHIP 10UF      | 20.00% 16V  | C6545   | 1-100-566-91 | CERAMIC CHIP 0.1UF   | 10.00% 25V |
| C5551   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6546   | 1-100-566-91 | CERAMIC CHIP 0.1UF   | 10.00% 25V |
| C5552   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6552   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V |
| C5553   | 1-100-566-91 | CERAMIC CHIP 0.1UF   | 10.00% 25V  | C6555   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V |
| C5554   | 1-100-566-91 | CERAMIC CHIP 0.1UF   | 10.00% 25V  | C6556   | 1-164-004-11 | CERAMIC CHIP 0.1UF   | 10.00% 25V |
| C5555   | 1-100-566-91 | CERAMIC CHIP 0.1UF   | 10.00% 25V  | C6557   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V |
| C5556   | 1-100-566-91 | CERAMIC CHIP 0.1UF   | 10.00% 25V  | C6561   | 1-127-573-11 | CERAMIC CHIP 1UF     | 10% 16V    |
| C5557   | 1-100-566-91 | CERAMIC CHIP 0.1UF   | 10.00% 25V  | C6563   | 1-127-573-11 | CERAMIC CHIP 1UF     | 10% 16V    |
| C5558   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6573   | 1-100-566-91 | CERAMIC CHIP 0.1UF   | 10.00% 25V |
| C5559   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6574   | 1-117-681-11 | ELECT CHIP 100UF     | 20.00% 16V |
| C5560   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6590   | 1-162-974-11 | CERAMIC CHIP 0.01UF  | 50V        |
| C5561   | 1-100-566-91 | CERAMIC CHIP 0.1UF   | 10.00% 25V  | C6599   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    |
| C5562   | 1-100-566-91 | CERAMIC CHIP 0.1UF   | 10.00% 25V  | C6600   | 1-117-720-11 | CERAMIC CHIP 4.7UF   | 10V        |
| C5563   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6601   | 1-107-823-11 | CERAMIC CHIP 0.47UF  | 10.00% 16V |
| C5570   | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  | C6603   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    |
| C5571   | 1-164-874-11 | CERAMIC CHIP 100PF   | 5.00% 50V   | C6604   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    |
| C6402   | 1-164-230-11 | CERAMIC CHIP 220PF   | 5.00% 50V   | C6605   | 1-112-066-11 | CERAMIC CHIP 10UF    | 10% 10V    |
| C6404   | 1-165-908-11 | CERAMIC CHIP 1UF     | 10% 10V     | C6606   | 1-117-681-11 | ELECT CHIP 100UF     | 20.00% 16V |
| C6405   | 1-126-390-11 | ELECT CHIP 22UF      | 20.00% 6.3V | C6609   | 1-107-823-11 | CERAMIC CHIP 0.47UF  | 10.00% 16V |
| C6406   | 1-162-927-11 | CERAMIC CHIP 100PF   | 5.00% 50V   | C6610   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    |
| C6408   | 1-162-970-11 | CERAMIC CHIP 0.01UF  | 10.00% 25V  | C6612   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    |
| C6409   | 1-127-760-11 | CERAMIC CHIP 4.7UF   | 10% 6.3V    | C6613   | 1-117-681-11 | ELECT CHIP 100UF     | 20.00% 16V |
| C6410   | 1-162-970-11 | CERAMIC CHIP 0.01UF  | 10.00% 25V  | C6615   | 1-162-927-11 | CERAMIC CHIP 100PF   | 5.00% 50V  |
| C6411   | 1-162-970-11 | CERAMIC CHIP 0.01UF  | 10.00% 25V  | C6616   | 1-164-874-11 | CERAMIC CHIP 100PF   | 5.00% 50V  |
| C6500   | 1-162-974-11 | CERAMIC CHIP 0.01UF  | 50V         | C6617   | 1-164-874-11 | CERAMIC CHIP 100PF   | 5.00% 50V  |
| C6501   | 1-162-970-11 | CERAMIC CHIP 0.01UF  | 10.00% 25V  | C6618   | 1-164-874-11 | CERAMIC CHIP 100PF   | 5.00% 50V  |
| C6502   | 1-162-970-11 | CERAMIC CHIP 0.01UF  | 10.00% 25V  | C6619   | 1-162-959-11 | CERAMIC CHIP 330PF   | 5.00% 50V  |
| C6503   | 1-162-970-11 | CERAMIC CHIP 0.01UF  | 10.00% 25V  | C6620   | 1-164-937-11 | CERAMIC CHIP 0.001UF | 10.00% 50V |

| REF.NO. | PART.NO      | DESCRIPTION          | REMARK     | REF.NO. | PART.NO      | DESCRIPTION          | REMARK      |
|---------|--------------|----------------------|------------|---------|--------------|----------------------|-------------|
| C6621   | 1-164-937-11 | CERAMIC CHIP 0.001UF | 10.00% 50V | C7208   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     |
| C6622   | 1-164-937-11 | CERAMIC CHIP 0.001UF | 10.00% 50V | C7209   | 1-117-720-11 | CERAMIC CHIP 4.7UF   | 10V         |
| C6623   | 1-112-777-11 | CERAMIC CHIP 0.01UF  | 10% 25V    | C7210   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     |
| C6624   | 1-112-777-11 | CERAMIC CHIP 0.01UF  | 10% 25V    | C7211   | 1-117-720-11 | CERAMIC CHIP 4.7UF   | 10V         |
| C6625   | 1-112-777-11 | CERAMIC CHIP 0.01UF  | 10% 25V    | C7212   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     |
| C6626   | 1-164-937-11 | CERAMIC CHIP 0.001UF | 10.00% 50V | C7213   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     |
| C6627   | 1-164-937-11 | CERAMIC CHIP 0.001UF | 10.00% 50V | C7214   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     |
| C7100   | 1-100-911-11 | CERAMIC CHIP 4.7UF   | 10% 25V    | C7215   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     |
| C7101   | 1-117-720-11 | CERAMIC CHIP 4.7UF   | 10V        | C7216   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     |
| C7102   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7217   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     |
| C7103   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7218   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     |
| C7104   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7219   | 1-117-720-11 | CERAMIC CHIP 4.7UF   | 10V         |
| C7105   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7220   | 1-117-681-11 | ELECT CHIP 100UF     | 20.00% 16V  |
| C7106   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7221   | 1-125-777-11 | CERAMIC CHIP 0.1UF   | 10.00% 10V  |
| C7107   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7222   | 1-125-777-11 | CERAMIC CHIP 0.1UF   | 10.00% 10V  |
| C7108   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7224   | 1-164-943-81 | CERAMIC CHIP 0.01UF  | 10.00% 16V  |
| C7109   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7226   | 1-164-840-11 | CERAMIC CHIP 1PF     | 0.25PF 50V  |
| C7110   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7227   | 1-164-840-11 | CERAMIC CHIP 1PF     | 0.25PF 50V  |
| C7111   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7229   | 1-125-777-11 | CERAMIC CHIP 0.1UF   | 10.00% 10V  |
| C7112   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7230   | 1-126-205-11 | ELECT CHIP 47UF      | 20.00% 6.3V |
| C7113   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7231   | 1-104-905-11 | DOUBLE LAYER 0.22F   | 5.5V        |
| C7114   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7232   | 1-164-860-11 | CERAMIC CHIP 27PF    | 5.00% 50V   |
| C7116   | 1-124-779-00 | ELECT CHIP 10UF      | 20.00% 16V | C7233   | 1-164-870-11 | CERAMIC CHIP 68PF    | 5.00% 50V   |
| C7120   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7234   | 1-164-874-11 | CERAMIC CHIP 100PF   | 5.00% 50V   |
| C7121   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7235   | 1-164-874-11 | CERAMIC CHIP 100PF   | 5.00% 50V   |
| C7122   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7236   | 1-164-874-11 | CERAMIC CHIP 100PF   | 5.00% 50V   |
| C7123   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7237   | 1-164-874-11 | CERAMIC CHIP 100PF   | 5.00% 50V   |
| C7124   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7238   | 1-164-874-11 | CERAMIC CHIP 100PF   | 5.00% 50V   |
| C7125   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7300   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     |
| C7126   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7301   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     |
| C7130   | 1-164-850-11 | CERAMIC CHIP 10PF    | 0.50PF 50V | C7304   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     |
| C7133   | 1-100-911-11 | CERAMIC CHIP 4.7UF   | 10% 25V    | C7305   | 1-164-937-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  |
| C7134   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7306   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     |
| C7135   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7307   | 1-164-937-11 | CERAMIC CHIP 0.001UF | 10.00% 50V  |
| C7136   | 1-100-911-11 | CERAMIC CHIP 4.7UF   | 10% 25V    | C7308   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     |
| C7137   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7309   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     |
| C7138   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7310   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     |
| C7139   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7311   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     |
| C7140   | 1-124-779-00 | ELECT CHIP 10UF      | 20.00% 16V | C7312   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     |
| C7141   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7313   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     |
| C7142   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7314   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     |
| C7143   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7315   | 1-117-720-11 | CERAMIC CHIP 4.7UF   | 10V         |
| C7200   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7316   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     |
| C7201   | 1-165-908-11 | CERAMIC CHIP 1UF     | 10% 10V    | C7402   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     |
| C7202   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7404   | 1-126-394-11 | ELECT CHIP 10UF      | 20.00% 16V  |
| C7203   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7405   | 1-126-394-11 | ELECT CHIP 10UF      | 20.00% 16V  |
| C7204   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V    | C7411   | 1-125-889-11 | CERAMIC CHIP 2.2UF   | 10% 10V     |
| C7205   | 1-164-937-11 | CERAMIC CHIP 0.001UF | 10.00% 50V | C7412   | 1-125-889-11 | CERAMIC CHIP 2.2UF   | 10% 10V     |
| C7206   | 1-164-840-11 | CERAMIC CHIP 1PF     | 0.25PF 50V | C7415   | 1-164-874-11 | CERAMIC CHIP 100PF   | 5.00% 50V   |
| C7207   | 1-164-840-11 | CERAMIC CHIP 1PF     | 0.25PF 50V | C7418   | 1-164-874-11 | CERAMIC CHIP 100PF   | 5.00% 50V   |

| REF.NO.       | PART.NO       | DESCRIPTION                    | REMARK     | REF.NO. | PART.NO      | DESCRIPTION          | REMARK |
|---------------|---------------|--------------------------------|------------|---------|--------------|----------------------|--------|
| C7419         | 1-164-874-11  | CERAMIC CHIP 100PF             | 5.00% 50V  | D2019   | 6-501-619-01 | DIODE PZU9.1B2       |        |
| C7420         | 1-117-720-11  | CERAMIC CHIP 4.7UF             | 10V        | D2020   | 6-501-619-01 | DIODE PZU9.1B2       |        |
| C7421         | 1-117-720-11  | CERAMIC CHIP 4.7UF             | 10V        | D2021   | 6-501-619-01 | DIODE PZU9.1B2       |        |
| C7422         | 1-125-777-11  | CERAMIC CHIP 0.1UF             | 10.00% 10V | D2022   | 6-501-619-01 | DIODE PZU9.1B2       |        |
| C7423         | 1-100-597-91  | CERAMIC CHIP 0.1UF             | 10% 25V    | D2023   | 6-501-619-01 | DIODE PZU9.1B2       |        |
| C7424         | 1-126-394-11  | ELECT CHIP 10UF                | 20.00% 16V | D2024   | 6-501-619-01 | DIODE PZU9.1B2       |        |
| C7425         | 1-165-908-11  | CERAMIC CHIP 1UF               | 10% 10V    | D2025   | 6-501-614-01 | DIODE PZU5.6B2       |        |
| C7426         | 1-165-908-11  | CERAMIC CHIP 1UF               | 10% 10V    | D2026   | 6-501-623-01 | DIODE PZU13B2        |        |
| C7427         | 1-100-597-91  | CERAMIC CHIP 0.1UF             | 10% 25V    | D2027   | 6-501-619-01 | DIODE PZU9.1B2       |        |
| C7428         | 1-126-394-11  | ELECT CHIP 10UF                | 20.00% 16V | D2028   | 6-501-623-01 | DIODE PZU13B2        |        |
| < CONNECTOR > |               |                                |            | D2029   | 6-501-614-01 | DIODE PZU5.6B2       |        |
| CN2000        | *1-417-602-11 | SOCKET 21PIN                   |            | D2030   | 6-501-614-01 | DIODE PZU5.6B2       |        |
| CN2001        | *1-417-602-11 | SOCKET 21PIN                   |            | D2031   | 6-501-614-01 | DIODE PZU5.6B2       |        |
| CN3000        | *1-819-461-11 | HEADER ASSEMBLY FOR PWB 4P     |            | D2032   | 6-501-614-01 | DIODE PZU5.6B2       |        |
| CN3001        | *1-819-473-11 | HEADER ASSEMBLY FOR PWB 4P     |            | D2033   | 6-501-614-01 | DIODE PZU5.6B2       |        |
| CN4000        | *1-819-444-11 | HEADER ASSEMBLY FOR PWB 11P    |            | D2034   | 6-501-614-01 | DIODE PZU5.6B2       |        |
| CN4005        | *1-779-936-51 | CONNECTOR, FFC/FPC 18P         |            | D2035   | 6-501-619-01 | DIODE PZU9.1B2       |        |
| CN4200        | *1-817-804-11 | CONNECTOR, D SUB 15P           |            | D2036   | 6-501-619-01 | DIODE PZU9.1B2       |        |
| CN5000        | *1-818-656-21 | HEADER ASSEMBLY 30P            |            | D2037   | 6-501-619-01 | DIODE PZU9.1B2       |        |
| CN5501        | *1-821-188-11 | HDMI CONNECTOR                 |            | D2038   | 6-501-619-01 | DIODE PZU9.1B2       |        |
| CN5502        | *1-821-188-11 | HDMI CONNECTOR                 |            | D3000   | 6-501-619-01 | DIODE PZU9.1B2       |        |
| CN6400        | *1-820-180-11 | HEADER ASSEMBLY (PRINT PWB) 3P |            | D3001   | 6-501-619-01 | DIODE PZU9.1B2       |        |
| CN6401        | *1-820-189-11 | HEADER ASSEMBLY (PRINT PWB)12P |            | D3002   | 6-501-618-01 | DIODE PZU8.2B2       |        |
| CN6402        | *1-819-333-11 | HEADER ASSEMBLY FOR PWB 5P     |            | D3003   | 8-719-081-97 | DIODE MMDL914T1      |        |
| CN6500        | *1-819-442-11 | HEADER ASSEMBLY FOR PWB 14P    |            | D3005   | 6-500-335-01 | DIODE MC2838-T112-1  |        |
| CN6501        | *1-819-473-11 | HEADER ASSEMBLY FOR PWB 4P     |            | D3008   | 8-719-081-97 | DIODE MMDL914T1      |        |
| CN7300        | *1-793-769-22 | CONNECTOR, CARD (PCMCIA CARD)  |            | D3009   | 8-719-081-97 | DIODE MMDL914T1      |        |
| CN7501        | *1-820-209-11 | MEMORY STICK CONNECTOR         |            | D3010   | 8-719-081-97 | DIODE MMDL914T1      |        |
| < DIODE >     |               |                                |            | D3011   | 8-719-081-97 | DIODE MMDL914T1      |        |
| D2000         | 6-501-622-01  | DIODE PZU12B2                  |            | D3012   | 6-501-619-01 | DIODE PZU9.1B2       |        |
| D2001         | 6-501-622-01  | DIODE PZU12B2                  |            | D3013   | 8-719-422-46 | DIODE MA8056         |        |
| D2002         | 6-501-622-01  | DIODE PZU12B2                  |            | D4000   | 8-719-081-97 | DIODE MMDL914T1      |        |
| D2003         | 6-501-622-01  | DIODE PZU12B2                  |            | D4001   | 8-719-081-97 | DIODE MMDL914T1      |        |
| D2004         | 6-501-619-01  | DIODE PZU9.1B2                 |            | D4002   | 8-719-058-24 | DIODE RB501V-40TE-17 |        |
| D2005         | 6-501-623-01  | DIODE PZU13B2                  |            | D4005   | 8-719-081-97 | DIODE MMDL914T1      |        |
| D2006         | 6-501-619-01  | DIODE PZU9.1B2                 |            | D4006   | 8-719-081-97 | DIODE MMDL914T1      |        |
| D2007         | 6-501-619-01  | DIODE PZU9.1B2                 |            | D4200   | 6-500-335-01 | DIODE MC2838-T112-1  |        |
| D2008         | 6-501-619-01  | DIODE PZU9.1B2                 |            | D4201   | 6-501-614-01 | DIODE PZU5.6B2       |        |
| D2009         | 6-501-614-01  | DIODE PZU5.6B2                 |            | D4202   | 6-501-614-01 | DIODE PZU5.6B2       |        |
| D2010         | 6-501-619-01  | DIODE PZU9.1B2                 |            | D4203   | 6-501-614-01 | DIODE PZU5.6B2       |        |
| D2011         | 6-501-619-01  | DIODE PZU9.1B2                 |            | D4204   | 8-719-081-97 | DIODE MMDL914T1      |        |
| D2012         | 6-501-619-01  | DIODE PZU9.1B2                 |            | D5501   | 8-719-404-50 | DIODE MA111-TX       |        |
| D2013         | 6-501-619-01  | DIODE PZU9.1B2                 |            | D5502   | 8-719-404-50 | DIODE MA111-TX       |        |
| D2014         | 6-501-619-01  | DIODE PZU9.1B2                 |            | D5504   | 8-719-404-50 | DIODE MA111-TX       |        |
| D2015         | 6-501-619-01  | DIODE PZU9.1B2                 |            | D5505   | 8-719-404-50 | DIODE MA111-TX       |        |
| D2016         | 6-501-619-01  | DIODE PZU9.1B2                 |            | D6401   | 8-719-081-97 | DIODE MMDL914T1      |        |
| D2017         | 6-501-619-01  | DIODE PZU9.1B2                 |            | D6404   | 6-501-614-01 | DIODE PZU5.6B2       |        |
| D2018         | 6-501-619-01  | DIODE PZU9.1B2                 |            | D6409   | 6-501-614-01 | DIODE PZU5.6B2       |        |
|               |               |                                |            | D6506   | 8-719-081-97 | DIODE MMDL914T1      |        |
|               |               |                                |            | D6507   | 8-719-081-97 | DIODE MMDL914T1      |        |

**Note :** The components identified by shading and marked  $\Delta$  are critical for safety. Replace only with the part numbers specified in the parts list.

**BC**

| REF.NO.          | PART.NO      | DESCRIPTION         | REMARK   | REF.NO. | PART.NO      | DESCRIPTION | REMARK |
|------------------|--------------|---------------------|----------|---------|--------------|-------------|--------|
| D6510            | 6-500-253-01 | DIODE RB053L-30TE25 |          | FB1009  | 1-400-834-11 | FERRITE     | OUH    |
| D6512            | 8-719-081-97 | DIODE MMDL914T1     |          | FB1010  | 1-400-834-11 | FERRITE     | OUH    |
| D6513            | 6-500-294-01 | DIODE PTZ-TE25-3.9B |          | FB1011  | 1-400-834-11 | FERRITE     | OUH    |
| D6514            | 6-500-253-01 | DIODE RB053L-30TE25 |          | FB1012  | 1-400-834-11 | FERRITE     | OUH    |
| D6517            | 6-500-253-01 | DIODE RB053L-30TE25 |          | FB1013  | 1-400-834-11 | FERRITE     | OUH    |
| D6518            | 6-501-612-01 | DIODE PZU4.7B2      |          | FB1014  | 1-400-834-11 | FERRITE     | OUH    |
| D6519            | 6-500-295-01 | DIODE PTZ-TE25-5.6B |          | FB1015  | 1-400-834-11 | FERRITE     | OUH    |
| D6522            | 6-501-623-01 | DIODE PZU13B2       |          | FB3000  | 1-400-089-21 | FERRITE     | OUH    |
| D6523            | 6-501-623-01 | DIODE PZU13B2       |          | FB3001  | 1-400-089-21 | FERRITE     | OUH    |
| D6524            | 6-500-334-01 | DIODE MC2836-T112-1 |          | FB3002  | 1-400-089-21 | FERRITE     | OUH    |
| D6525            | 8-719-081-97 | DIODE MMDL914T1     |          | FB3003  | 1-400-089-21 | FERRITE     | OUH    |
| D6526            | 6-500-334-01 | DIODE MC2836-T112-1 |          | FB3006  | 1-400-089-21 | FERRITE     | OUH    |
| D6536            | 6-500-253-01 | DIODE RB053L-30TE25 |          | FB4000  | 1-400-833-21 | FERRITE     | OUH    |
| D6537            | 6-500-253-01 | DIODE RB053L-30TE25 |          | FB4001  | 1-400-833-21 | FERRITE     | OUH    |
| D6539            | 6-500-253-01 | DIODE RB053L-30TE25 |          | FB4002  | 1-400-833-21 | FERRITE     | OUH    |
| D6540            | 6-500-253-01 | DIODE RB053L-30TE25 |          | FB4003  | 1-400-833-21 | FERRITE     | OUH    |
| D6541            | 6-500-253-01 | DIODE RB053L-30TE25 |          | FB4004  | 1-400-833-21 | FERRITE     | OUH    |
| D6542            | 6-500-253-01 | DIODE RB053L-30TE25 |          | FB4005  | 1-400-833-21 | FERRITE     | OUH    |
| D6543            | 6-500-253-01 | DIODE RB053L-30TE25 |          | FB4006  | 1-400-833-21 | FERRITE     | OUH    |
| D6544            | 6-501-614-01 | DIODE PZU5.6B2      |          | FB4007  | 1-400-833-21 | FERRITE     | OUH    |
| D6545            | 6-500-335-01 | DIODE MC2838-T112-1 |          | FB4008  | 1-400-833-21 | FERRITE     | OUH    |
| D6546            | 6-500-335-01 | DIODE MC2838-T112-1 |          | FB4009  | 1-414-760-21 | FERRITE     | OUH    |
| D6547            | 8-719-081-97 | DIODE MMDL914T1     |          | FB4010  | 1-414-445-11 | FERRITE     | OUH    |
| D6548            | 6-500-253-01 | DIODE RB053L-30TE25 |          | FB4011  | 1-414-445-11 | FERRITE     | OUH    |
| D6549            | 6-500-253-01 | DIODE RB053L-30TE25 |          | FB4200  | 1-400-141-22 | FERRITE     | OUH    |
| D6551            | 6-501-614-01 | DIODE PZU5.6B2      |          | FB5500  | 1-414-234-22 | FERRITE     | OUH    |
| D7200            | 8-719-041-97 | DIODE MA113-(TX)    |          | FB5501  | 1-414-234-22 | FERRITE     | OUH    |
| D7201            | 8-719-081-97 | DIODE MMDL914T1     |          | FB6400  | 1-414-760-21 | FERRITE     | OUH    |
| ET1000           | 1-780-482-11 | EARTH TERMINAL      |          | FB6401  | 1-414-760-21 | FERRITE     | OUH    |
| ET1001           | 1-780-482-11 | EARTH TERMINAL      |          | FB6402  | 1-414-760-21 | FERRITE     | OUH    |
| ET1002           | 1-780-152-11 | CONTACT, ON-BOARD   |          | FB6403  | 1-414-760-21 | FERRITE     | OUH    |
| ET1003           | 1-780-152-11 | CONTACT, ON-BOARD   |          | FB6404  | 1-414-760-21 | FERRITE     | OUH    |
| ET6501           | 1-780-482-11 | EARTH TERMINAL      |          | FB6405  | 1-414-445-11 | FERRITE     | OUH    |
| ET6503           | 1-780-482-11 | EARTH TERMINAL      |          | FB6406  | 1-414-445-11 | FERRITE     | OUH    |
| ET6504           | 1-780-482-11 | EARTH TERMINAL      |          | FB6407  | 1-414-445-11 | FERRITE     | OUH    |
| < FUSE >         |              |                     |          | FB6408  | 1-414-445-11 | FERRITE     | OUH    |
| F3000 $\Delta$   | 1-576-958-21 | FUSE                | 4A 24V   | FB6500  | 1-469-324-21 | FERRITE     | OUH    |
| F4200 $\Delta$   | 1-576-646-11 | FUSE                | 0.5A 50V | FB6502  | 1-469-324-21 | FERRITE     | OUH    |
| < FERRITE BEAD > |              |                     |          | FB6503  | 1-469-775-21 | FERRITE     | OUH    |
| FB1000           | 1-469-869-21 | FERRITE             | OUH      | FB6506  | 1-414-760-21 | FERRITE     | OUH    |
| FB1001           | 1-469-869-21 | FERRITE             | OUH      | FB6507  | 1-400-110-21 | FERRITE     | OUH    |
| FB1002           | 1-469-869-21 | FERRITE             | OUH      | FB6508  | 1-400-110-21 | FERRITE     | OUH    |
| FB1004           | 1-400-833-21 | FERRITE             | OUH      | FB6509  | 1-400-244-11 | FERRITE     | OUH    |
| FB1005           | 1-400-834-11 | FERRITE             | OUH      | FB6510  | 1-400-244-11 | FERRITE     | OUH    |
| FB1006           | 1-400-834-11 | FERRITE             | OUH      | FB7100  | 1-469-869-21 | FERRITE     | OUH    |
| FB1007           | 1-400-834-11 | FERRITE             | OUH      | FB7101  | 1-469-869-21 | FERRITE     | OUH    |
| FB1008           | 1-400-834-11 | FERRITE             | OUH      | FB7102  | 1-469-869-21 | FERRITE     | OUH    |
|                  |              |                     |          | FB7103  | 1-469-869-21 | FERRITE     | OUH    |
|                  |              |                     |          | FB7104  | 1-400-244-11 | FERRITE     | OUH    |
|                  |              |                     |          | FB7105  | 1-400-244-11 | FERRITE     | OUH    |

| REF.NO. | PART.NO      | DESCRIPTION         | REMARK | REF.NO.    | PART.NO      | DESCRIPTION             | REMARK |
|---------|--------------|---------------------|--------|------------|--------------|-------------------------|--------|
| FB7106  | 1-400-244-11 | FERRITE             | OUH    | IC5500     | 6-704-001-01 | IC BR24L02F-WE2         |        |
| FB7107  | 1-400-244-11 | FERRITE             | OUH    | IC5501     | 6-709-806-01 | IC IP4776CZ38           |        |
| FB7108  | 1-400-834-11 | FERRITE             | OUH    | IC5502     | 6-704-001-01 | IC BR24L02F-WE2         |        |
| FB7109  | 1-400-834-11 | FERRITE             | OUH    | IC5504     | 6-709-806-01 | IC IP4776CZ38           |        |
| FB7110  | 1-400-834-11 | FERRITE             | OUH    | IC6501     | 6-710-889-01 | IC LA5734MP-DL-E        |        |
| FB7111  | 1-400-834-11 | FERRITE             | OUH    | IC6502     | 6-710-889-01 | IC LA5734MP-DL-E        |        |
| FB7112  | 1-400-834-11 | FERRITE             | OUH    | IC6503     | 6-706-046-01 | IC TK11185CSCL-G        |        |
| FB7113  | 1-400-834-11 | FERRITE             | OUH    | IC6504     | 6-710-889-01 | IC LA5734MP-DL-E        |        |
| FB7114  | 1-400-834-11 | FERRITE             | OUH    | IC6507     | 6-706-106-01 | IC NCP1117STAT3         |        |
| FB7115  | 1-400-834-11 | FERRITE             | OUH    | IC6508     | 6-705-403-01 | IC PQ070X201ZPH         |        |
| FB7116  | 1-400-834-11 | FERRITE             | OUH    | IC6509     | 6-705-403-01 | IC PQ070X201ZPH         |        |
| FB7117  | 1-400-834-11 | FERRITE             | OUH    | IC7100     | 6-709-214-01 | IC UPD61123F1-100-KA3-A |        |
| FB7118  | 1-469-869-21 | FERRITE             | OUH    | IC7200     | 6-711-534-01 | IC NAND128W3A2BN6F      |        |
| FB7200  | 1-400-244-11 | FERRITE             | OUH    | IC7201     | 6-705-306-01 | IC HYB25DC256160CE-6    |        |
| FB7201  | 1-400-244-11 | FERRITE             | OUH    | IC7202     | 6-708-916-01 | IC ICS7150MLFT          |        |
| FB7202  | 1-400-244-11 | FERRITE             | OUH    | IC7203     | 6-700-108-01 | IC RV5C387A-E2-FB       |        |
| FB7300  | 1-400-834-11 | FERRITE             | OUH    | IC7300     | 6-706-482-01 | IC TC7SH00FU(T5RSOYJF)  |        |
| FB7303  | 1-400-834-11 | FERRITE             | OUH    | IC7301     | 6-707-850-01 | IC TC74LCX245FT(EKJ)    |        |
| FB7304  | 1-400-834-11 | FERRITE             | OUH    | IC7304     | 6-706-482-01 | IC TC7SH00FU(T5RSOYJF)  |        |
| FB7305  | 1-400-834-11 | FERRITE             | OUH    | IC7305     | 6-707-846-01 | IC TC74LCX14FT(EKJ)     |        |
| FB7306  | 1-400-834-11 | FERRITE             | OUH    | IC7306     | 6-707-853-01 | IC TC74LCX541FT(EKJ)    |        |
| FB7307  | 1-400-834-11 | FERRITE             | OUH    | IC7307     | 6-707-853-01 | IC TC74LCX541FT(EKJ)    |        |
| FB7308  | 1-400-834-11 | FERRITE             | OUH    | IC7308     | 6-707-853-01 | IC TC74LCX541FT(EKJ)    |        |
| FB7309  | 1-400-834-11 | FERRITE             | OUH    | IC7309     | 6-707-853-01 | IC TC74LCX541FT(EKJ)    |        |
| FB7310  | 1-400-834-11 | FERRITE             | OUH    | IC7310     | 6-707-853-01 | IC TC74LCX541FT(EKJ)    |        |
| FB7311  | 1-469-869-21 | FERRITE             | OUH    | IC7311     | 6-707-853-01 | IC TC74LCX541FT(EKJ)    |        |
| FB7401  | 1-400-834-11 | FERRITE             | OUH    | IC7312     | 6-710-593-01 | IC MIC2025-1YM          |        |
| FB7402  | 1-400-244-11 | FERRITE             | OUH    | IC7400     | 6-710-905-01 | IC AK4388ET-E2          |        |
|         |              |                     |        | IC7403     | 8-759-278-58 | IC NJM4558V-TE2         |        |
| < IC >  |              |                     |        | < SOCKET > |              |                         |        |
| IC1000  | 6-709-257-01 | IC 74LVC4066PW      |        | J2000      | 1-819-327-21 | PHONO JACK 2P           |        |
| IC1001  | 8-749-925-00 | IC TK11819MTL       |        | J2001      | 1-819-327-21 | PHONO JACK 2P           |        |
| IC3000  | 6-711-225-01 | IC TPA3101D2PHPRG4  |        | J2002      | 1-820-021-11 | JACK                    |        |
| IC3001  | 8-759-359-49 | IC NJM3414AV(Te2)   |        | J2003      | 1-819-354-21 | PHONO JACK 5P           |        |
| IC3002  | 6-709-927-01 | IC RT8H225C-TP-2    |        |            |              |                         |        |
| IC3003  | 8-759-385-76 | IC MC14052 BDR2     |        | < COIL >   |              |                         |        |
| IC4000  | 8-759-082-60 | IC TC7S66FU         |        | L1000      | 1-410-993-42 | INDUCTOR                | 1UH    |
| IC4001  | 6-704-573-01 | IC M24C32-WMN6T(B)  |        | L1001      | 1-410-993-42 | INDUCTOR                | 1UH    |
| IC4002  | 6-701-173-01 | IC MC74LVXT4053DTR2 |        | L1002      | 1-410-993-42 | INDUCTOR                | 1UH    |
| IC4004  | 6-703-175-01 | IC PST3629UL        |        | L1003      | 1-414-755-11 | INDUCTOR                | 22UH   |
| IC4005  | 6-807-390-01 | IC CXD9905R         |        | L1004      | 1-400-815-21 | INDUCTOR                | 1.2MH  |
| IC4200  | 6-701-155-01 | IC MC74LVX138DTR2   |        | L1005      | 1-414-755-11 | INDUCTOR                | 22UH   |
| IC4202  | 6-701-162-01 | IC MC74LVX259DTR2   |        | L3000      | 1-412-058-11 | INDUCTOR                | 10UH   |
| IC4204  | 6-701-162-01 | IC MC74LVX259DTR2   |        | L3001      | 1-481-083-11 | INDUCTOR                | 22UH   |
| IC4205  | 6-701-166-01 | IC MC74LVX4051DTR2  |        | L3006      | 1-412-058-11 | INDUCTOR                | 10UH   |
| IC4206  | 6-704-600-01 | IC M24C02-WMN6T(B)  |        | L3007      | 1-457-429-11 | INDUCTOR                | 22UH   |
| IC4207  | 6-701-162-01 | IC MC74LVX259DTR2   |        | L3008      | 1-457-429-11 | INDUCTOR                | 22UH   |
| IC4208  | 6-701-166-01 | IC MC74LVX4051DTR2  |        | L3009      | 1-457-429-11 | INDUCTOR                | 22UH   |
| IC4210  | 6-701-162-01 | IC MC74LVX259DTR2   |        | L3010      | 1-457-429-11 | INDUCTOR                | 22UH   |
| IC5001  | 6-704-519-11 | IC THC63LVD103-R    |        |            |              |                         |        |

**Note :** The components identified by shading and marked  $\Delta$  are critical for safety. Replace only with the part numbers specified in the parts list.



| REF.NO.              | PART.NO      | DESCRIPTION | REMARK    | REF.NO.        | PART.NO      | DESCRIPTION                   | REMARK |
|----------------------|--------------|-------------|-----------|----------------|--------------|-------------------------------|--------|
| L4000                | 1-412-990-41 | INDUCTOR    | 8.2UH     | < TRANSISTOR > |              |                               |        |
| L4300                | 1-481-240-11 | INDUCTOR    | 1UH       | Q1000          | 8-729-027-43 | TRANSISTOR DTC114EKA-T146     |        |
| L4301                | 1-481-240-11 | INDUCTOR    | 1UH       | Q1001          | 6-550-237-01 | TRANSISTOR 2SC5658T2LQ/R      |        |
| L4302                | 1-481-240-11 | INDUCTOR    | 1UH       | Q1002          | 6-550-237-01 | TRANSISTOR 2SC5658T2LQ/R      |        |
| L4303                | 1-414-394-11 | INDUCTOR    | 2.2UH     | Q1003          | 6-550-871-01 | TRANSISTOR 2SA2048TL QR       |        |
| L4304                | 1-481-240-11 | INDUCTOR    | 1UH       | Q1004          | 6-550-871-01 | TRANSISTOR 2SA2048TL QR       |        |
| L4305                | 1-481-240-11 | INDUCTOR    | 1UH       | Q1005          | 6-550-871-01 | TRANSISTOR 2SA2048TL QR       |        |
| L4306                | 1-481-240-11 | INDUCTOR    | 1UH       | Q1006          | 6-550-237-01 | TRANSISTOR 2SC5658T2LQ/R      |        |
| L4307                | 1-481-240-11 | INDUCTOR    | 1UH       | Q1007          | 6-550-237-01 | TRANSISTOR 2SC5658T2LQ/R      |        |
| L4308                | 1-481-240-11 | INDUCTOR    | 1UH       | Q2000          | 6-551-696-01 | TRANSISTOR ISA1235AC1TP-1EF   |        |
| L4309                | 1-481-240-11 | INDUCTOR    | 1UH       | Q2001          | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF   |        |
| L4310                | 1-481-240-11 | INDUCTOR    | 1UH       | Q2002          | 6-551-696-01 | TRANSISTOR ISA1235AC1TP-1EF   |        |
| L4311                | 1-414-394-11 | INDUCTOR    | 2.2UH     | Q2003          | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF   |        |
| L4312                | 1-414-394-11 | INDUCTOR    | 2.2UH     | Q3000          | 6-551-364-01 | TRANSISTOR DTC614TUT106       |        |
| L5001                | 1-456-984-11 | INDUCTOR    | 0UH       | Q3001          | 6-551-364-01 | TRANSISTOR DTC614TUT106       |        |
| L5002                | 1-456-984-11 | INDUCTOR    | 0UH       | Q3002          | 6-551-271-01 | TRANSISTOR RT3AMMM            |        |
| L5003                | 1-456-984-11 | INDUCTOR    | 0UH       | Q3003          | 6-551-271-01 | TRANSISTOR RT3AMMM            |        |
| L5004                | 1-456-984-11 | INDUCTOR    | 0UH       | Q3004          | 8-729-028-96 | TRANSISTOR DTC114EUA-T106     |        |
| L5005                | 1-456-984-11 | INDUCTOR    | 0UH       | Q3005          | 8-729-028-96 | TRANSISTOR DTC114EUA-T106     |        |
| L5006                | 1-456-984-11 | INDUCTOR    | 0UH       | Q3006          | 8-729-028-97 | TRANSISTOR DTC114TUA-T106     |        |
| L5050                | 1-400-180-21 | FERRITE     | 0UH       | Q3009          | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF   |        |
| L5504                | 1-414-394-11 | INDUCTOR    | 2.2UH     | Q3010          | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF   |        |
| L5505                | 1-414-394-11 | INDUCTOR    | 2.2UH     | Q3011          | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF   |        |
| L5506                | 1-414-394-11 | INDUCTOR    | 2.2UH     | Q3012          | 6-551-699-01 | TRANSISTOR ISA1602AM1TP-1EF   |        |
| L5507                | 1-414-394-11 | INDUCTOR    | 2.2UH     | Q3013          | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF   |        |
| L5508                | 1-414-394-11 | INDUCTOR    | 2.2UH     | Q3014          | 8-729-038-28 | TRANSISTOR RT1N441C-TP-1      |        |
| L5509                | 1-414-394-11 | INDUCTOR    | 2.2UH     | Q4000          | 6-551-696-01 | TRANSISTOR ISA1235AC1TP-1EF   |        |
| L5510                | 1-414-394-11 | INDUCTOR    | 2.2UH     | Q4001          | 8-729-028-73 | TRANSISTOR DTA114EUA-T106     |        |
| L5511                | 1-414-394-11 | INDUCTOR    | 2.2UH     | Q4002          | 6-551-701-01 | TRANSISTOR INK0003AC1-T112A-1 |        |
| L5512                | 1-414-394-11 | INDUCTOR    | 2.2UH     | Q4003          | 6-551-701-01 | TRANSISTOR INK0003AC1-T112A-1 |        |
| L6502                | 1-457-454-11 | INDUCTOR    | 47UH      | Q4004          | 8-729-028-28 | TRANSISTOR 2SK2036 (TE85L)    |        |
| L6504                | 1-457-454-11 | INDUCTOR    | 47UH      | Q4005          | 6-551-701-01 | TRANSISTOR INK0003AC1-T112A-1 |        |
| L6506                | 1-457-454-11 | INDUCTOR    | 47UH      | Q4006          | 8-729-038-28 | TRANSISTOR RT1N441C-TP-1      |        |
| L6507                | 1-414-398-11 | INDUCTOR    | 10UH      | Q4007          | 8-729-027-43 | TRANSISTOR DTC114EKA-T146     |        |
| L6508                | 1-457-242-11 | INDUCTOR    | 47UH      | Q4010          | 6-551-696-01 | TRANSISTOR ISA1235AC1TP-1EF   |        |
| L6510                | 1-424-976-21 | INDUCTOR    | 47UH      | Q4011          | 8-729-050-10 | TRANSISTOR PMBF170-215        |        |
| L6512                | 1-457-242-11 | INDUCTOR    | 47UH      | Q4012          | 8-729-038-28 | TRANSISTOR RT1N441C-TP-1      |        |
| L6513                | 1-457-455-11 | INDUCTOR    | 10UH      | Q4019          | 8-729-038-28 | TRANSISTOR RT1N441C-TP-1      |        |
| L6515                | 1-457-455-11 | INDUCTOR    | 10UH      | Q4020          | 8-729-038-28 | TRANSISTOR RT1N441C-TP-1      |        |
| L6516                | 1-457-455-11 | INDUCTOR    | 10UH      | Q5500          | 8-729-027-43 | TRANSISTOR DTC114EKA-T146     |        |
| L6517                | 1-457-455-11 | INDUCTOR    | 10UH      | Q5501          | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF   |        |
| L7100                | 1-414-398-11 | INDUCTOR    | 10UH      | Q5502          | 8-729-027-43 | TRANSISTOR DTC114EKA-T146     |        |
| L7200                | 1-412-008-31 | INDUCTOR    | 15UH      | Q5503          | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF   |        |
| < PROTECTOR MODULE > |              |             |           | Q5506          | 8-729-027-43 | TRANSISTOR DTC114EKA-T146     |        |
| PS6501 $\Delta$      | 1-576-736-41 | IC LINK     | 3.15A 24V | Q5508          | 8-729-028-96 | TRANSISTOR DTC114EUA-T106     |        |
| PS6502 $\Delta$      | 1-576-736-41 | IC LINK     | 3.15A 24V | Q5509          | 8-729-028-96 | TRANSISTOR DTC114EUA-T106     |        |
| PS6503 $\Delta$      | 1-576-736-41 | IC LINK     | 3.15A 24V | Q6401          | 8-729-620-13 | TRANSISTOR 2SC4154TP-1EF      |        |
| PS6506 $\Delta$      | 1-576-736-41 | IC LINK     | 3.15A 24V | Q6402          | 6-551-701-01 | TRANSISTOR INK0003AC1-T112A-1 |        |
| PS6507 $\Delta$      | 1-576-736-41 | IC LINK     | 3.15A 24V | Q6403          | 8-729-620-13 | TRANSISTOR 2SC4154TP-1EF      |        |



| REF.NO.      | PART.NO      | DESCRIPTION                   | REMARK        | REF.NO. | PART.NO      | DESCRIPTION | REMARK        |
|--------------|--------------|-------------------------------|---------------|---------|--------------|-------------|---------------|
| Q6404        | 8-729-620-13 | TRANSISTOR 2SC4154TP-1EF      |               | R1030   | 1-218-990-81 | SHORT CHIP  | 0             |
| Q6405        | 8-729-620-13 | TRANSISTOR 2SC4154TP-1EF      |               | R1031   | 1-218-990-81 | SHORT CHIP  | 0             |
| Q6501        | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF   |               | R1032   | 1-218-933-11 | RES-CHIP    | 22 5% 1/16W   |
| Q6503        | 8-729-027-43 | TRANSISTOR DTC114EKA-T146     |               | R1033   | 1-218-990-81 | SHORT CHIP  | 0             |
| Q6504        | 8-729-027-43 | TRANSISTOR DTC114EKA-T146     |               | R1034   | 1-218-990-81 | SHORT CHIP  | 0             |
| Q6505        | 8-729-027-43 | TRANSISTOR DTC114EKA-T146     |               | R1035   | 1-218-941-81 | RES-CHIP    | 100 5% 1/16W  |
| Q6506        | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF   |               | R1036   | 1-218-941-81 | RES-CHIP    | 100 5% 1/16W  |
| Q6507        | 8-729-027-43 | TRANSISTOR DTC114EKA-T146     |               | R1037   | 1-218-969-11 | RES-CHIP    | 22K 5% 1/16W  |
| Q6508        | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF   |               | R1038   | 1-218-990-81 | SHORT CHIP  | 0             |
| Q6509        | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF   |               | R1039   | 1-218-990-81 | SHORT CHIP  | 0             |
| Q6510        | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF   |               | R1040   | 1-218-941-81 | RES-CHIP    | 100 5% 1/16W  |
| Q6513        | 8-729-027-43 | TRANSISTOR DTC114EKA-T146     |               | R1041   | 1-218-941-81 | RES-CHIP    | 100 5% 1/16W  |
| Q6514        | 8-729-027-43 | TRANSISTOR DTC114EKA-T146     |               | R1042   | 1-218-990-81 | SHORT CHIP  | 0             |
| Q6515        | 6-550-369-01 | TRANSISTOR TPC8109 (TE12L)    |               | R1043   | 1-216-295-91 | SHORT CHIP  | 0             |
| Q6516        | 6-550-369-01 | TRANSISTOR TPC8109 (TE12L)    |               | R1044   | 1-218-990-81 | SHORT CHIP  | 0             |
| Q6520        | 6-551-696-01 | TRANSISTOR ISA1235AC1TP-1EF   |               | R1045   | 1-218-957-11 | RES-CHIP    | 2.2K 5% 1/16W |
| Q6522        | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF   |               | R1046   | 1-218-933-11 | RES-CHIP    | 22 5% 1/16W   |
| Q6523        | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF   |               | R1047   | 1-218-933-11 | RES-CHIP    | 22 5% 1/16W   |
| Q6526        | 8-729-038-28 | TRANSISTOR RT1N441C-TP-1      |               | R1051   | 1-218-965-11 | RES-CHIP    | 10K 5% 1/16W  |
| Q6527        | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF   |               | R1054   | 1-218-990-81 | SHORT CHIP  | 0             |
| Q7200        | 6-551-696-01 | TRANSISTOR ISA1235AC1TP-1EF   |               | R1056   | 1-218-937-11 | RES-CHIP    | 47 5% 1/16W   |
| Q7201        | 6-551-701-01 | TRANSISTOR INK0003AC1-T112A-1 |               | R1063   | 1-218-953-11 | RES-CHIP    | 1K 5% 1/16W   |
| Q7202        | 6-551-701-01 | TRANSISTOR INK0003AC1-T112A-1 |               | R1068   | 1-218-977-11 | RES-CHIP    | 100K 5% 1/16W |
| Q7203        | 8-729-028-97 | TRANSISTOR DTC114TUA-T106     |               | R1069   | 1-218-963-11 | RES-CHIP    | 6.8K 5% 1/16W |
| Q7205        | 8-729-028-86 | TRANSISTOR DTA143EUA-T106     |               | R2000   | 1-216-295-91 | SHORT CHIP  | 0             |
| < RESISTOR > |              |                               |               | R2001   | 1-216-815-11 | METAL CHIP  | 330 5% 1/10W  |
| JR5002       | 1-216-864-11 | SHORT CHIP                    | 0             | R2002   | 1-216-049-11 | RES-CHIP    | 1K 5% 1/10W   |
| JR5007       | 1-216-864-11 | SHORT CHIP                    | 0             | R2003   | 1-216-815-11 | METAL CHIP  | 330 5% 1/10W  |
| JR6501       | 1-216-864-11 | SHORT CHIP                    | 0             | R2004   | 1-216-049-11 | RES-CHIP    | 1K 5% 1/10W   |
| JR6503       | 1-216-864-11 | SHORT CHIP                    | 0             | R2005   | 1-216-022-00 | RES-CHIP    | 75 5% 1/10W   |
| R1000        | 1-218-965-11 | RES-CHIP                      | 10K 5% 1/16W  | R2007   | 1-216-022-00 | RES-CHIP    | 75 5% 1/10W   |
| R1002        | 1-218-969-11 | RES-CHIP                      | 22K 5% 1/16W  | R2008   | 1-216-022-00 | RES-CHIP    | 75 5% 1/10W   |
| R1004        | 1-218-965-11 | RES-CHIP                      | 10K 5% 1/16W  | R2009   | 1-216-022-00 | RES-CHIP    | 75 5% 1/10W   |
| R1005        | 1-218-953-11 | RES-CHIP                      | 1K 5% 1/16W   | R2010   | 1-216-022-00 | RES-CHIP    | 75 5% 1/10W   |
| R1006        | 1-218-957-11 | RES-CHIP                      | 2.2K 5% 1/16W | R2011   | 1-216-815-11 | METAL CHIP  | 330 5% 1/10W  |
| R1007        | 1-218-953-11 | RES-CHIP                      | 1K 5% 1/16W   | R2012   | 1-216-815-11 | METAL CHIP  | 330 5% 1/10W  |
| R1008        | 1-218-965-11 | RES-CHIP                      | 10K 5% 1/16W  | R2018   | 1-216-864-11 | SHORT CHIP  | 0             |
| R1012        | 1-218-941-81 | RES-CHIP                      | 100 5% 1/16W  | R2019   | 1-216-864-11 | SHORT CHIP  | 0             |
| R1013        | 1-218-949-11 | RES-CHIP                      | 470 5% 1/16W  | R2020   | 1-216-864-11 | SHORT CHIP  | 0             |
| R1014        | 1-218-949-11 | RES-CHIP                      | 470 5% 1/16W  | R2021   | 1-216-864-11 | SHORT CHIP  | 0             |
| R1016        | 1-218-933-11 | RES-CHIP                      | 22 5% 1/16W   | R2022   | 1-216-025-11 | RES-CHIP    | 100 5% 1/10W  |
| R1020        | 1-216-833-11 | METAL CHIP                    | 10K 5% 1/10W  | R2023   | 1-216-033-00 | RES-CHIP    | 220 5% 1/10W  |
| R1021        | 1-218-969-11 | RES-CHIP                      | 22K 5% 1/16W  | R2024   | 1-216-025-11 | RES-CHIP    | 100 5% 1/10W  |
| R1022        | 1-218-937-11 | RES-CHIP                      | 47 5% 1/16W   | R2025   | 1-216-025-11 | RES-CHIP    | 100 5% 1/10W  |
| R1023        | 1-218-937-11 | RES-CHIP                      | 47 5% 1/16W   | R2026   | 1-216-025-11 | RES-CHIP    | 100 5% 1/10W  |
| R1024        | 1-218-961-11 | RES-CHIP                      | 4.7K 5% 1/16W | R2027   | 1-216-022-00 | RES-CHIP    | 75 5% 1/10W   |
| R1025        | 1-218-961-11 | RES-CHIP                      | 4.7K 5% 1/16W | R2028   | 1-216-025-11 | RES-CHIP    | 100 5% 1/10W  |
| R1028        | 1-218-929-11 | RES-CHIP                      | 10 5% 1/16W   | R2033   | 1-216-864-11 | SHORT CHIP  | 0             |
| R1029        | 1-218-929-11 | RES-CHIP                      | 10 5% 1/16W   | R2034   | 1-216-864-11 | SHORT CHIP  | 0             |
|              |              |                               |               | R2037   | 1-216-853-11 | METAL CHIP  | 470K 5% 1/10W |

| REF.NO. | PART.NO      | DESCRIPTION | REMARK |    |       | REF.NO. | PART.NO      | DESCRIPTION | REMARK |    |       |
|---------|--------------|-------------|--------|----|-------|---------|--------------|-------------|--------|----|-------|
| R2038   | 1-216-853-11 | METAL CHIP  | 470K   | 5% | 1/10W | R2109   | 1-216-029-00 | RES-CHIP    | 150    | 5% | 1/10W |
| R2039   | 1-216-853-11 | METAL CHIP  | 470K   | 5% | 1/10W | R2110   | 1-216-029-00 | RES-CHIP    | 150    | 5% | 1/10W |
| R2040   | 1-216-853-11 | METAL CHIP  | 470K   | 5% | 1/10W | R2111   | 1-216-029-00 | RES-CHIP    | 150    | 5% | 1/10W |
| R2041   | 1-216-811-11 | METAL CHIP  | 150    | 5% | 1/10W | R2112   | 1-216-853-11 | METAL CHIP  | 470K   | 5% | 1/10W |
| R2043   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R2113   | 1-216-853-11 | METAL CHIP  | 470K   | 5% | 1/10W |
| R2046   | 1-216-817-11 | METAL CHIP  | 470    | 5% | 1/10W | R2114   | 1-216-853-11 | METAL CHIP  | 470K   | 5% | 1/10W |
| R2047   | 1-216-811-11 | METAL CHIP  | 150    | 5% | 1/10W | R2115   | 1-216-853-11 | METAL CHIP  | 470K   | 5% | 1/10W |
| R2054   | 1-216-840-11 | METAL CHIP  | 39K    | 5% | 1/10W | R2116   | 1-216-049-11 | RES-CHIP    | 1K     | 5% | 1/10W |
| R2055   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R2117   | 1-216-029-00 | RES-CHIP    | 150    | 5% | 1/10W |
| R2056   | 1-216-049-11 | RES-CHIP    | 1K     | 5% | 1/10W | R2118   | 1-216-029-00 | RES-CHIP    | 150    | 5% | 1/10W |
| R2057   | 1-216-049-11 | RES-CHIP    | 1K     | 5% | 1/10W | R2119   | 1-216-029-00 | RES-CHIP    | 150    | 5% | 1/10W |
| R2058   | 1-216-853-11 | METAL CHIP  | 470K   | 5% | 1/10W | R2120   | 1-216-049-11 | RES-CHIP    | 1K     | 5% | 1/10W |
| R2059   | 1-216-853-11 | METAL CHIP  | 470K   | 5% | 1/10W | R2121   | 1-216-811-11 | METAL CHIP  | 150    | 5% | 1/10W |
| R2060   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R2122   | 1-216-817-11 | METAL CHIP  | 470    | 5% | 1/10W |
| R2061   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R2123   | 1-216-811-11 | METAL CHIP  | 150    | 5% | 1/10W |
| R2062   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R2124   | 1-216-840-11 | METAL CHIP  | 39K    | 5% | 1/10W |
| R2063   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R2125   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W |
| R2064   | 1-216-853-11 | METAL CHIP  | 470K   | 5% | 1/10W | R3000   | 1-216-829-11 | METAL CHIP  | 4.7K   | 5% | 1/10W |
| R2065   | 1-216-853-11 | METAL CHIP  | 470K   | 5% | 1/10W | R3001   | 1-216-829-11 | METAL CHIP  | 4.7K   | 5% | 1/10W |
| R2066   | 1-216-049-11 | RES-CHIP    | 1K     | 5% | 1/10W | R3002   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R2067   | 1-216-049-11 | RES-CHIP    | 1K     | 5% | 1/10W | R3003   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R2077   | 1-216-295-91 | SHORT CHIP  | 0      |    |       | R3004   | 1-218-977-11 | RES-CHIP    | 100K   | 5% | 1/16W |
| R2080   | 1-216-022-00 | RES-CHIP    | 75     | 5% | 1/10W | R3005   | 1-218-965-11 | RES-CHIP    | 10K    | 5% | 1/16W |
| R2082   | 1-216-022-00 | RES-CHIP    | 75     | 5% | 1/10W | R3006   | 1-218-965-11 | RES-CHIP    | 10K    | 5% | 1/16W |
| R2083   | 1-216-022-00 | RES-CHIP    | 75     | 5% | 1/10W | R3007   | 1-218-961-11 | RES-CHIP    | 4.7K   | 5% | 1/16W |
| R2084   | 1-216-022-00 | RES-CHIP    | 75     | 5% | 1/10W | R3008   | 1-218-973-11 | RES-CHIP    | 47K    | 5% | 1/16W |
| R2085   | 1-216-022-00 | RES-CHIP    | 75     | 5% | 1/10W | R3009   | 1-218-965-11 | RES-CHIP    | 10K    | 5% | 1/16W |
| R2086   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R3010   | 1-218-961-11 | RES-CHIP    | 4.7K   | 5% | 1/16W |
| R2087   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R3011   | 1-218-973-11 | RES-CHIP    | 47K    | 5% | 1/16W |
| R2088   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R3012   | 1-218-973-11 | RES-CHIP    | 47K    | 5% | 1/16W |
| R2089   | 1-216-815-11 | METAL CHIP  | 330    | 5% | 1/10W | R3013   | 1-218-965-11 | RES-CHIP    | 10K    | 5% | 1/16W |
| R2090   | 1-216-049-11 | RES-CHIP    | 1K     | 5% | 1/10W | R3014   | 1-218-973-11 | RES-CHIP    | 47K    | 5% | 1/16W |
| R2091   | 1-216-815-11 | METAL CHIP  | 330    | 5% | 1/10W | R3015   | 1-218-965-11 | RES-CHIP    | 10K    | 5% | 1/16W |
| R2092   | 1-216-049-11 | RES-CHIP    | 1K     | 5% | 1/10W | R3016   | 1-218-965-11 | RES-CHIP    | 10K    | 5% | 1/16W |
| R2093   | 1-216-853-11 | METAL CHIP  | 470K   | 5% | 1/10W | R3017   | 1-218-977-11 | RES-CHIP    | 100K   | 5% | 1/16W |
| R2094   | 1-216-853-11 | METAL CHIP  | 470K   | 5% | 1/10W | R3018   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R2095   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R3019   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R2096   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R3020   | 1-218-977-11 | RES-CHIP    | 100K   | 5% | 1/16W |
| R2097   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R3021   | 1-218-977-11 | RES-CHIP    | 100K   | 5% | 1/16W |
| R2098   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R3022   | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R2099   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R3024   | 1-216-815-11 | METAL CHIP  | 330    | 5% | 1/10W |
| R2100   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R3025   | 1-216-815-11 | METAL CHIP  | 330    | 5% | 1/10W |
| R2101   | 1-216-025-11 | RES-CHIP    | 100    | 5% | 1/10W | R3026   | 1-218-963-11 | RES-CHIP    | 6.8K   | 5% | 1/16W |
| R2102   | 1-216-025-11 | RES-CHIP    | 100    | 5% | 1/10W | R3027   | 1-218-977-11 | RES-CHIP    | 100K   | 5% | 1/16W |
| R2103   | 1-216-033-00 | RES-CHIP    | 220    | 5% | 1/10W | R3028   | 1-218-965-11 | RES-CHIP    | 10K    | 5% | 1/16W |
| R2104   | 1-216-025-11 | RES-CHIP    | 100    | 5% | 1/10W | R3029   | 1-218-977-11 | RES-CHIP    | 100K   | 5% | 1/16W |
| R2105   | 1-216-025-11 | RES-CHIP    | 100    | 5% | 1/10W | R3030   | 1-218-973-11 | RES-CHIP    | 47K    | 5% | 1/16W |
| R2106   | 1-216-025-11 | RES-CHIP    | 100    | 5% | 1/10W | R3031   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R2107   | 1-216-022-00 | RES-CHIP    | 75     | 5% | 1/10W | R3032   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R2108   | 1-216-025-11 | RES-CHIP    | 100    | 5% | 1/10W | R3033   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |

| REF.NO. | PART.NO      | DESCRIPTION | REMARK |    |       | REF.NO. | PART.NO      | DESCRIPTION | REMARK |    |       |
|---------|--------------|-------------|--------|----|-------|---------|--------------|-------------|--------|----|-------|
| R3034   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R4025   | 1-216-849-11 | METAL CHIP  | 220K   | 5% | 1/10W |
| R3035   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R4026   | 1-216-849-11 | METAL CHIP  | 220K   | 5% | 1/10W |
| R3036   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R4027   | 1-216-849-11 | METAL CHIP  | 220K   | 5% | 1/10W |
| R3037   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R4028   | 1-216-845-11 | METAL CHIP  | 100K   | 5% | 1/10W |
| R3038   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R4029   | 1-216-841-11 | METAL CHIP  | 47K    | 5% | 1/10W |
| R3039   | 1-216-817-11 | METAL CHIP  | 470    | 5% | 1/10W | R4030   | 1-216-849-11 | METAL CHIP  | 220K   | 5% | 1/10W |
| R3040   | 1-216-829-11 | METAL CHIP  | 4.7K   | 5% | 1/10W | R4031   | 1-216-841-11 | METAL CHIP  | 47K    | 5% | 1/10W |
| R3041   | 1-216-829-11 | METAL CHIP  | 4.7K   | 5% | 1/10W | R4032   | 1-216-849-11 | METAL CHIP  | 220K   | 5% | 1/10W |
| R3042   | 1-216-817-11 | METAL CHIP  | 470    | 5% | 1/10W | R4033   | 1-216-849-11 | METAL CHIP  | 220K   | 5% | 1/10W |
| R3043   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R4034   | 1-216-849-11 | METAL CHIP  | 220K   | 5% | 1/10W |
| R3044   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R4035   | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R3045   | 1-216-849-11 | METAL CHIP  | 220K   | 5% | 1/10W | R4036   | 1-216-849-11 | METAL CHIP  | 220K   | 5% | 1/10W |
| R3046   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R4040   | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R3047   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R4041   | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R3048   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R4042   | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R3049   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R4043   | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R3052   | 1-216-821-11 | METAL CHIP  | 1K     | 5% | 1/10W | R4044   | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R3053   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R4045   | 1-220-397-11 | METAL CHIP  | 4.7M   | 5% | 1/10W |
| R3054   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R4046   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W |
| R3055   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R4047   | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R3056   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R4048   | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R3057   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R4049   | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R3058   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R4050   | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R3059   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R4051   | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R3060   | 1-216-837-11 | METAL CHIP  | 22K    | 5% | 1/10W | R4052   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R3061   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R4053   | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R3062   | 1-216-817-11 | METAL CHIP  | 470    | 5% | 1/10W | R4054   | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R3063   | 1-216-841-11 | METAL CHIP  | 47K    | 5% | 1/10W | R4055   | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R3064   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R4056   | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R3065   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R4057   | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R3067   | 1-216-839-11 | METAL CHIP  | 33K    | 5% | 1/10W | R4058   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R3068   | 1-216-839-11 | METAL CHIP  | 33K    | 5% | 1/10W | R4059   | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R3069   | 1-216-837-11 | METAL CHIP  | 22K    | 5% | 1/10W | R4060   | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R3071   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R4061   | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R3073   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R4062   | 1-216-845-11 | METAL CHIP  | 100K   | 5% | 1/10W |
| R3074   | 1-216-845-11 | METAL CHIP  | 100K   | 5% | 1/10W | R4063   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R4000   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R4064   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W |
| R4001   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R4065   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R4003   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R4066   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R4004   | 1-216-825-11 | METAL CHIP  | 2.2K   | 5% | 1/10W | R4067   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R4005   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R4068   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R4006   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R4069   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R4007   | 1-216-825-11 | METAL CHIP  | 2.2K   | 5% | 1/10W | R4070   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R4008   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R4071   | 1-216-864-11 | SHORT CHIP  | 0      |    |       |
| R4009   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R4072   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R4011   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R4073   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R4021   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R4074   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R4022   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R4075   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W |
| R4023   | 1-216-847-11 | METAL CHIP  | 150K   | 5% | 1/10W | R4076   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R4024   | 1-216-838-11 | METAL CHIP  | 27K    | 5% | 1/10W | R4077   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |

| REF.NO. | PART.NO      | DESCRIPTION | REMARK |      |       | REF.NO. | PART.NO      | DESCRIPTION | REMARK |      |       |
|---------|--------------|-------------|--------|------|-------|---------|--------------|-------------|--------|------|-------|
| R4079   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R4150   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4080   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R4151   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R4081   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R4152   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R4082   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R4153   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R4084   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R4154   | 1-216-817-11 | METAL CHIP  | 470    | 5%   | 1/10W |
| R4085   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R4156   | 1-216-837-11 | METAL CHIP  | 22K    | 5%   | 1/10W |
| R4087   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W | R4157   | 1-216-849-11 | METAL CHIP  | 220K   | 5%   | 1/10W |
| R4088   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R4159   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R4089   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R4160   | 1-216-839-11 | METAL CHIP  | 33K    | 5%   | 1/10W |
| R4090   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R4162   | 1-216-839-11 | METAL CHIP  | 33K    | 5%   | 1/10W |
| R4091   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R4163   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4092   | 1-216-813-11 | METAL CHIP  | 220    | 5%   | 1/10W | R4164   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R4093   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R4165   | 1-216-841-11 | METAL CHIP  | 47K    | 5%   | 1/10W |
| R4094   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R4180   | 1-216-837-11 | METAL CHIP  | 22K    | 5%   | 1/10W |
| R4095   | 1-218-823-11 | METAL CHIP  | 100    | 0.5% | 1/10W | R4190   | 1-218-990-81 | SHORT CHIP  | 0      |      |       |
| R4096   | 1-218-823-11 | METAL CHIP  | 100    | 0.5% | 1/10W | R4191   | 1-218-990-81 | SHORT CHIP  | 0      |      |       |
| R4097   | 1-218-823-11 | METAL CHIP  | 100    | 0.5% | 1/10W | R4192   | 1-218-990-81 | SHORT CHIP  | 0      |      |       |
| R4098   | 1-218-823-11 | METAL CHIP  | 100    | 0.5% | 1/10W | R4200   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R4099   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R4201   | 1-218-847-11 | METAL CHIP  | 1K     | 0.5% | 1/10W |
| R4100   | 1-218-823-11 | METAL CHIP  | 100    | 0.5% | 1/10W | R4202   | 1-218-965-11 | RES-CHIP    | 10K    | 5%   | 1/16W |
| R4101   | 1-218-823-11 | METAL CHIP  | 100    | 0.5% | 1/10W | R4203   | 1-218-847-11 | METAL CHIP  | 1K     | 0.5% | 1/10W |
| R4102   | 1-218-823-11 | METAL CHIP  | 100    | 0.5% | 1/10W | R4204   | 1-216-813-11 | METAL CHIP  | 220    | 5%   | 1/10W |
| R4103   | 1-218-823-11 | METAL CHIP  | 100    | 0.5% | 1/10W | R4215   | 1-218-867-11 | METAL CHIP  | 6.8K   | 0.5% | 1/10W |
| R4104   | 1-218-823-11 | METAL CHIP  | 100    | 0.5% | 1/10W | R4216   | 1-218-867-11 | METAL CHIP  | 6.8K   | 0.5% | 1/10W |
| R4105   | 1-218-823-11 | METAL CHIP  | 100    | 0.5% | 1/10W | R4217   | 1-216-825-11 | METAL CHIP  | 2.2K   | 5%   | 1/10W |
| R4106   | 1-218-823-11 | METAL CHIP  | 100    | 0.5% | 1/10W | R4218   | 1-216-825-11 | METAL CHIP  | 2.2K   | 5%   | 1/10W |
| R4107   | 1-218-823-11 | METAL CHIP  | 100    | 0.5% | 1/10W | R4220   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4108   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R4221   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4109   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R4222   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4114   | 1-216-805-11 | METAL CHIP  | 47     | 5%   | 1/10W | R4223   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4115   | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W | R4229   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4116   | 1-216-805-11 | METAL CHIP  | 47     | 5%   | 1/10W | R4230   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4118   | 1-216-805-11 | METAL CHIP  | 47     | 5%   | 1/10W | R4231   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4120   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R4232   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4124   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R4234   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4128   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R4235   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4129   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R4236   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4131   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R4237   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4134   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R4238   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4135   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R4240   | 1-216-845-11 | METAL CHIP  | 100K   | 5%   | 1/10W |
| R4137   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R4242   | 1-216-797-11 | METAL CHIP  | 10     | 5%   | 1/10W |
| R4138   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R4243   | 1-216-797-11 | METAL CHIP  | 10     | 5%   | 1/10W |
| R4142   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R4244   | 1-216-797-11 | METAL CHIP  | 10     | 5%   | 1/10W |
| R4143   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R4245   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4144   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R4246   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4145   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R4247   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4146   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R4248   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4147   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R4249   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4148   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R4251   | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W |
| R4149   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R4252   | 1-218-827-11 | METAL CHIP  | 150    | 0.5% | 1/10W |

| REF.NO. | PART.NO      | DESCRIPTION | REMARK |      |       | REF.NO. | PART.NO      | DESCRIPTION | REMARK |      |       |
|---------|--------------|-------------|--------|------|-------|---------|--------------|-------------|--------|------|-------|
| R4253   | 1-218-827-11 | METAL CHIP  | 150    | 0.5% | 1/10W | R4435   | 1-218-867-11 | METAL CHIP  | 6.8K   | 0.5% | 1/10W |
| R4254   | 1-216-829-11 | METAL CHIP  | 4.7K   | 5%   | 1/10W | R4438   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R4255   | 1-216-829-11 | METAL CHIP  | 4.7K   | 5%   | 1/10W | R4439   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R4256   | 1-216-829-11 | METAL CHIP  | 4.7K   | 5%   | 1/10W | R4440   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R4257   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R4441   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R4258   | 1-218-827-11 | METAL CHIP  | 150    | 0.5% | 1/10W | R4442   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R4259   | 1-218-827-11 | METAL CHIP  | 150    | 0.5% | 1/10W | R4443   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R4260   | 1-218-827-11 | METAL CHIP  | 150    | 0.5% | 1/10W | R4444   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4261   | 1-218-827-11 | METAL CHIP  | 150    | 0.5% | 1/10W | R4445   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R4262   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5006   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4263   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5007   | 1-216-845-11 | METAL CHIP  | 100K   | 5%   | 1/10W |
| R4265   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5024   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R4266   | 1-216-805-11 | METAL CHIP  | 47     | 5%   | 1/10W | R5025   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R4267   | 1-216-805-11 | METAL CHIP  | 47     | 5%   | 1/10W | R5026   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R4270   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W | R5027   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R4271   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W | R5050   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R4274   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5051   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R4275   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5052   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R4276   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5053   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R4278   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5054   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R4279   | 1-216-805-11 | METAL CHIP  | 47     | 5%   | 1/10W | R5055   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R4280   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R5501   | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W |
| R4281   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R5503   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R4282   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R5504   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R4283   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5505   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R4284   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5514   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4285   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5515   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4286   | 1-216-829-11 | METAL CHIP  | 4.7K   | 5%   | 1/10W | R5516   | 1-216-835-11 | METAL CHIP  | 15K    | 5%   | 1/10W |
| R4287   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5517   | 1-216-835-11 | METAL CHIP  | 15K    | 5%   | 1/10W |
| R4288   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5518   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R4289   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5521   | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W |
| R4290   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5522   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R4291   | 1-216-805-11 | METAL CHIP  | 47     | 5%   | 1/10W | R5523   | 1-216-829-11 | METAL CHIP  | 4.7K   | 5%   | 1/10W |
| R4292   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5524   | 1-216-829-11 | METAL CHIP  | 4.7K   | 5%   | 1/10W |
| R4293   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5525   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R4294   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5526   | 1-218-990-81 | SHORT CHIP  | 0      |      |       |
| R4295   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5527   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R4296   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5528   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4306   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5530   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4307   | 1-216-829-11 | METAL CHIP  | 4.7K   | 5%   | 1/10W | R5532   | 1-216-835-11 | METAL CHIP  | 15K    | 5%   | 1/10W |
| R4308   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5534   | 1-216-835-11 | METAL CHIP  | 15K    | 5%   | 1/10W |
| R4309   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5536   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R4310   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5546   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |
| R4311   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5553   | 1-216-829-11 | METAL CHIP  | 4.7K   | 5%   | 1/10W |
| R4312   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5557   | 1-216-829-11 | METAL CHIP  | 4.7K   | 5%   | 1/10W |
| R4313   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5566   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R4314   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5567   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R4315   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5576   | 1-218-847-11 | METAL CHIP  | 1K     | 0.5% | 1/10W |
| R4430   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W | R5577   | 1-218-847-11 | METAL CHIP  | 1K     | 0.5% | 1/10W |
| R4434   | 1-218-867-11 | METAL CHIP  | 6.8K   | 0.5% | 1/10W | R5578   | 1-216-809-11 | METAL CHIP  | 100    | 5%   | 1/10W |

| REF.NO. | PART.NO      | DESCRIPTION | REMARK |    |       | REF.NO. | PART.NO      | DESCRIPTION | REMARK |      |       |
|---------|--------------|-------------|--------|----|-------|---------|--------------|-------------|--------|------|-------|
| R5583   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R6504   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R5584   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R6505   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R5585   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R6506   | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W |
| R5586   | 1-216-839-11 | METAL CHIP  | 33K    | 5% | 1/10W | R6507   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R5587   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R6508   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R5588   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R6511   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R5589   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R6518   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R5590   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R6519   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R5591   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R6520   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R5592   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R6523   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R5593   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R6524   | 1-216-295-91 | SHORT CHIP  | 0      |      |       |
| R5601   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R6525   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R5606   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R6527   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R5607   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R6528   | 1-218-885-11 | METAL CHIP  | 39K    | 0.5% | 1/10W |
| R5608   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R6529   | 1-218-857-11 | METAL CHIP  | 2.7K   | 0.5% | 1/10W |
| R5609   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R6531   | 1-218-865-11 | METAL CHIP  | 5.6K   | 0.5% | 1/10W |
| R5616   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R6533   | 1-218-863-11 | METAL CHIP  | 4.7K   | 0.5% | 1/10W |
| R5617   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R6534   | 1-218-895-11 | METAL CHIP  | 100K   | 0.5% | 1/10W |
| R5618   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R6535   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R5631   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R6536   | 1-218-891-11 | METAL CHIP  | 68K    | 0.5% | 1/10W |
| R5632   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R6539   | 1-218-868-11 | METAL CHIP  | 7.5K   | 0.5% | 1/10W |
| R5640   | 1-216-829-11 | METAL CHIP  | 4.7K   | 5% | 1/10W | R6540   | 1-218-853-11 | METAL CHIP  | 1.8K   | 0.5% | 1/10W |
| R6401   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R6541   | 1-218-898-11 | METAL CHIP  | 130K   | 0.5% | 1/10W |
| R6402   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R6542   | 1-218-850-11 | METAL CHIP  | 1.3K   | 0.5% | 1/10W |
| R6404   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R6544   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R6406   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R6545   | 1-218-868-11 | METAL CHIP  | 7.5K   | 0.5% | 1/10W |
| R6407   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R6546   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R6408   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R6550   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R6409   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R6551   | 1-216-842-11 | METAL CHIP  | 56K    | 5%   | 1/10W |
| R6411   | 1-216-825-11 | METAL CHIP  | 2.2K   | 5% | 1/10W | R6552   | 1-216-844-11 | METAL CHIP  | 82K    | 5%   | 1/10W |
| R6412   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R6555   | 1-216-847-11 | METAL CHIP  | 150K   | 5%   | 1/10W |
| R6414   | 1-216-829-11 | METAL CHIP  | 4.7K   | 5% | 1/10W | R6556   | 1-216-839-11 | METAL CHIP  | 33K    | 5%   | 1/10W |
| R6415   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R6565   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R6416   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R6566   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R6417   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R6567   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R6418   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R6569   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R6419   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R6570   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R6420   | 1-216-843-11 | METAL CHIP  | 68K    | 5% | 1/10W | R6581   | 1-218-953-11 | RES-CHIP    | 1K     | 5%   | 1/16W |
| R6421   | 1-216-851-11 | METAL CHIP  | 330K   | 5% | 1/10W | R6584   | 1-208-683-11 | METAL CHIP  | 1K     | 0.5% | 1/16W |
| R6422   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R6585   | 1-220-174-11 | RES-CHIP    | 200    | 5%   | 1/16W |
| R6423   | 1-216-851-11 | METAL CHIP  | 330K   | 5% | 1/10W | R6586   | 1-208-683-11 | METAL CHIP  | 1K     | 0.5% | 1/16W |
| R6424   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W | R6587   | 1-218-941-11 | RES-CHIP    | 100    | 5%   | 1/16W |
| R6426   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R6588   | 1-208-683-11 | METAL CHIP  | 1K     | 0.5% | 1/16W |
| R6427   | 1-216-851-11 | METAL CHIP  | 330K   | 5% | 1/10W | R6589   | 1-216-295-91 | SHORT CHIP  | 0      |      |       |
| R6428   | 1-216-864-11 | SHORT CHIP  | 0      |    |       | R6590   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R6429   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W | R6591   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R6432   | 1-216-827-11 | METAL CHIP  | 3.3K   | 5% | 1/10W | R6592   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R6500   | 1-216-837-11 | METAL CHIP  | 22K    | 5% | 1/10W | R6593   | 1-216-864-11 | SHORT CHIP  | 0      |      |       |
| R6501   | 1-216-295-91 | SHORT CHIP  | 0      |    |       | R6594   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W |
| R6503   | 1-216-841-11 | METAL CHIP  | 47K    | 5% | 1/10W | R6596   | 1-218-860-11 | METAL CHIP  | 3.6K   | 0.5% | 1/10W |

| REF.NO. | PART.NO      | DESCRIPTION | REMARK |      |       | REF.NO. | PART.NO      | DESCRIPTION | REMARK |    |       |
|---------|--------------|-------------|--------|------|-------|---------|--------------|-------------|--------|----|-------|
| R6597   | 1-218-853-11 | METAL CHIP  | 1.8K   | 0.5% | 1/10W | R7156   | 1-218-937-11 | RES-CHIP    | 47     | 5% | 1/16W |
| R6598   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R7200   | 1-218-949-11 | RES-CHIP    | 470    | 5% | 1/16W |
| R6599   | 1-216-829-11 | METAL CHIP  | 4.7K   | 5%   | 1/10W | R7202   | 1-218-953-11 | RES-CHIP    | 1K     | 5% | 1/16W |
| R6600   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W | R7203   | 1-218-965-11 | RES-CHIP    | 10K    | 5% | 1/16W |
| R6601   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R7204   | 1-218-953-11 | RES-CHIP    | 1K     | 5% | 1/16W |
| R6602   | 1-216-833-11 | METAL CHIP  | 10K    | 5%   | 1/10W | R7206   | 1-218-949-11 | RES-CHIP    | 470    | 5% | 1/16W |
| R6603   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R7207   | 1-218-949-11 | RES-CHIP    | 470    | 5% | 1/16W |
| R6606   | 1-216-829-11 | METAL CHIP  | 4.7K   | 5%   | 1/10W | R7208   | 1-218-961-11 | RES-CHIP    | 4.7K   | 5% | 1/16W |
| R6610   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R7217   | 1-218-939-11 | RES-CHIP    | 68     | 5% | 1/16W |
| R6615   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R7218   | 1-218-941-11 | RES-CHIP    | 100    | 5% | 1/16W |
| R6616   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R7219   | 1-218-941-11 | RES-CHIP    | 100    | 5% | 1/16W |
| R7100   | 1-218-965-11 | RES-CHIP    | 10K    | 5%   | 1/16W | R7221   | 1-218-965-11 | RES-CHIP    | 10K    | 5% | 1/16W |
| R7101   | 1-218-965-11 | RES-CHIP    | 10K    | 5%   | 1/16W | R7223   | 1-218-965-11 | RES-CHIP    | 10K    | 5% | 1/16W |
| R7104   | 1-218-941-81 | RES-CHIP    | 100    | 5%   | 1/16W | R7224   | 1-218-965-11 | RES-CHIP    | 10K    | 5% | 1/16W |
| R7106   | 1-218-941-81 | RES-CHIP    | 100    | 5%   | 1/16W | R7226   | 1-218-965-11 | RES-CHIP    | 10K    | 5% | 1/16W |
| R7107   | 1-218-937-11 | RES-CHIP    | 47     | 5%   | 1/16W | R7227   | 1-218-953-11 | RES-CHIP    | 1K     | 5% | 1/16W |
| R7108   | 1-218-937-11 | RES-CHIP    | 47     | 5%   | 1/16W | R7228   | 1-218-939-11 | RES-CHIP    | 68     | 5% | 1/16W |
| R7109   | 1-218-937-11 | RES-CHIP    | 47     | 5%   | 1/16W | R7229   | 1-218-941-81 | RES-CHIP    | 100    | 5% | 1/16W |
| R7110   | 1-218-937-11 | RES-CHIP    | 47     | 5%   | 1/16W | R7230   | 1-218-941-81 | RES-CHIP    | 100    | 5% | 1/16W |
| R7112   | 1-218-961-11 | RES-CHIP    | 4.7K   | 5%   | 1/16W | R7231   | 1-218-941-81 | RES-CHIP    | 100    | 5% | 1/16W |
| R7113   | 1-218-961-11 | RES-CHIP    | 4.7K   | 5%   | 1/16W | R7232   | 1-218-941-81 | RES-CHIP    | 100    | 5% | 1/16W |
| R7116   | 1-218-937-11 | RES-CHIP    | 47     | 5%   | 1/16W | R7233   | 1-218-937-11 | RES-CHIP    | 47     | 5% | 1/16W |
| R7117   | 1-218-937-11 | RES-CHIP    | 47     | 5%   | 1/16W | R7234   | 1-218-945-11 | RES-CHIP    | 220    | 5% | 1/16W |
| R7119   | 1-218-937-11 | RES-CHIP    | 47     | 5%   | 1/16W | R7235   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R7120   | 1-218-937-11 | RES-CHIP    | 47     | 5%   | 1/16W | R7236   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R7121   | 1-218-937-11 | RES-CHIP    | 47     | 5%   | 1/16W | R7237   | 1-216-809-11 | METAL CHIP  | 100    | 5% | 1/10W |
| R7122   | 1-218-937-11 | RES-CHIP    | 47     | 5%   | 1/16W | R7238   | 1-218-953-11 | RES-CHIP    | 1K     | 5% | 1/16W |
| R7123   | 1-218-945-11 | RES-CHIP    | 220    | 5%   | 1/16W | R7243   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W |
| R7124   | 1-218-937-11 | RES-CHIP    | 47     | 5%   | 1/16W | R7244   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W |
| R7125   | 1-218-937-11 | RES-CHIP    | 47     | 5%   | 1/16W | R7246   | 1-216-833-11 | METAL CHIP  | 10K    | 5% | 1/10W |
| R7126   | 1-218-937-11 | RES-CHIP    | 47     | 5%   | 1/16W | R7249   | 1-216-813-11 | METAL CHIP  | 220    | 5% | 1/10W |
| R7127   | 1-218-965-11 | RES-CHIP    | 10K    | 5%   | 1/16W | R7300   | 1-218-965-11 | RES-CHIP    | 10K    | 5% | 1/16W |
| R7131   | 1-218-937-11 | RES-CHIP    | 47     | 5%   | 1/16W | R7304   | 1-218-965-11 | RES-CHIP    | 10K    | 5% | 1/16W |
| R7132   | 1-218-937-11 | RES-CHIP    | 47     | 5%   | 1/16W | R7305   | 1-218-965-11 | RES-CHIP    | 10K    | 5% | 1/16W |
| R7133   | 1-218-937-11 | RES-CHIP    | 47     | 5%   | 1/16W | R7306   | 1-218-965-11 | RES-CHIP    | 10K    | 5% | 1/16W |
| R7134   | 1-218-937-11 | RES-CHIP    | 47     | 5%   | 1/16W | R7307   | 1-218-941-81 | RES-CHIP    | 100    | 5% | 1/16W |
| R7135   | 1-218-990-81 | SHORT CHIP  | 0      |      |       | R7308   | 1-218-945-11 | RES-CHIP    | 220    | 5% | 1/16W |
| R7136   | 1-218-937-11 | RES-CHIP    | 47     | 5%   | 1/16W | R7310   | 1-218-941-81 | RES-CHIP    | 100    | 5% | 1/16W |
| R7137   | 1-220-174-11 | RES-CHIP    | 200    | 5%   | 1/16W | R7311   | 1-218-965-11 | RES-CHIP    | 10K    | 5% | 1/16W |
| R7138   | 1-220-174-11 | RES-CHIP    | 200    | 5%   | 1/16W | R7312   | 1-218-937-11 | RES-CHIP    | 47     | 5% | 1/16W |
| R7139   | 1-220-174-11 | RES-CHIP    | 200    | 5%   | 1/16W | R7313   | 1-218-937-11 | RES-CHIP    | 47     | 5% | 1/16W |
| R7140   | 1-218-937-11 | RES-CHIP    | 47     | 5%   | 1/16W | R7314   | 1-218-937-11 | RES-CHIP    | 47     | 5% | 1/16W |
| R7141   | 1-220-174-11 | RES-CHIP    | 200    | 5%   | 1/16W | R7315   | 1-218-937-11 | RES-CHIP    | 47     | 5% | 1/16W |
| R7142   | 1-220-174-11 | RES-CHIP    | 200    | 5%   | 1/16W | R7316   | 1-218-937-11 | RES-CHIP    | 47     | 5% | 1/16W |
| R7143   | 1-220-174-11 | RES-CHIP    | 200    | 5%   | 1/16W | R7317   | 1-218-937-11 | RES-CHIP    | 47     | 5% | 1/16W |
| R7144   | 1-208-671-11 | METAL CHIP  | 330    | 0.5% | 1/16W | R7318   | 1-218-937-11 | RES-CHIP    | 47     | 5% | 1/16W |
| R7145   | 1-208-883-81 | METAL CHIP  | 680    | 0.5% | 1/16W | R7319   | 1-218-937-11 | RES-CHIP    | 47     | 5% | 1/16W |
| R7147   | 1-218-990-81 | SHORT CHIP  | 0      |      |       | R7320   | 1-218-941-81 | RES-CHIP    | 100    | 5% | 1/16W |
| R7148   | 1-208-675-11 | METAL CHIP  | 470    | 0.5% | 1/16W | R7321   | 1-218-941-81 | RES-CHIP    | 100    | 5% | 1/16W |
| R7155   | 1-218-937-11 | RES-CHIP    | 47     | 5%   | 1/16W | R7322   | 1-218-941-81 | RES-CHIP    | 100    | 5% | 1/16W |

| REF.NO.           | PART.NO      | DESCRIPTION       | REMARK        | REF.NO.      | PART.NO      | DESCRIPTION                | REMARK   |
|-------------------|--------------|-------------------|---------------|--------------|--------------|----------------------------|----------|
| R7323             | 1-218-965-11 | RES-CHIP          | 10K 5% 1/16W  | RB4003       | 1-234-371-21 | RES, NETWORK 47            | (1005X4) |
| R7324             | 1-218-965-11 | RES-CHIP          | 10K 5% 1/16W  | RB4004       | 1-234-371-21 | RES, NETWORK 47            | (1005X4) |
| R7325             | 1-218-965-11 | RES-CHIP          | 10K 5% 1/16W  | RB4005       | 1-234-371-21 | RES, NETWORK 47            | (1005X4) |
| R7326             | 1-218-965-11 | RES-CHIP          | 10K 5% 1/16W  | RB4006       | 1-234-371-21 | RES, NETWORK 47            | (1005X4) |
| R7327             | 1-218-965-11 | RES-CHIP          | 10K 5% 1/16W  | RB5509       | 1-233-796-11 | RES, NETWORK               | (1608)   |
| R7328             | 1-218-965-11 | RES-CHIP          | 10K 5% 1/16W  | RB5510       | 1-233-796-11 | RES, NETWORK               | (1608)   |
| R7329             | 1-218-965-11 | RES-CHIP          | 10K 5% 1/16W  | RB5511       | 1-233-796-11 | RES, NETWORK               | (1608)   |
| R7330             | 1-218-965-11 | RES-CHIP          | 10K 5% 1/16W  | RB5512       | 1-233-796-11 | RES, NETWORK               | (1608)   |
| R7331             | 1-218-965-11 | RES-CHIP          | 1K 5% 1/16W   | RB5519       | 1-239-409-11 | NETWORK RESISTOR (CHIP) 47 |          |
| R7332             | 1-218-965-11 | RES-CHIP          | 1K 5% 1/16W   | RB5523       | 1-239-409-11 | NETWORK RESISTOR (CHIP) 47 |          |
| R7333             | 1-218-937-11 | RES-CHIP          | 47 5% 1/16W   | RB5524       | 1-239-409-11 | NETWORK RESISTOR (CHIP) 47 |          |
| R7334             | 1-218-937-11 | RES-CHIP          | 47 5% 1/16W   | RB5526       | 1-239-409-11 | NETWORK RESISTOR (CHIP) 47 |          |
| R7335             | 1-218-937-11 | RES-CHIP          | 47 5% 1/16W   | RB5527       | 1-239-409-11 | NETWORK RESISTOR (CHIP) 47 |          |
| R7402             | 1-218-965-11 | RES-CHIP          | 10K 5% 1/16W  | RB5529       | 1-239-409-11 | NETWORK RESISTOR (CHIP) 47 |          |
| R7406             | 1-218-941-81 | RES-CHIP          | 100 5% 1/16W  | RB5530       | 1-239-409-11 | NETWORK RESISTOR (CHIP) 47 |          |
| R7409             | 1-218-965-11 | RES-CHIP          | 10K 5% 1/16W  | RB6500       | 1-233-796-11 | RES, NETWORK               | (1608)   |
| R7413             | 1-218-977-11 | RES-CHIP          | 100K 5% 1/16W | RB6501       | 1-233-796-11 | RES, NETWORK               | (1608)   |
| R7414             | 1-218-977-11 | RES-CHIP          | 100K 5% 1/16W | RB6502       | 1-233-796-11 | RES, NETWORK               | (1608)   |
| R7415             | 1-218-945-11 | RES-CHIP          | 220 5% 1/16W  | RB6503       | 1-233-796-11 | RES, NETWORK               | (1608)   |
| R7416             | 1-218-945-11 | RES-CHIP          | 220 5% 1/16W  | RB7101       | 1-234-372-11 | RES, NETWORK 100           | (1005X4) |
| R7417             | 1-208-683-11 | METAL CHIP        | 1K 0.5% 1/16W | RB7102       | 1-234-378-21 | RES, NETWORK 10K           | (1005X4) |
| R7418             | 1-208-683-11 | METAL CHIP        | 1K 0.5% 1/16W | RB7200       | 1-234-375-21 | RES, NETWORK 1K            | (1005X4) |
| R7419             | 1-218-972-11 | RES-CHIP          | 39K 5% 1/16W  | RB7201       | 1-234-375-21 | RES, NETWORK 1K            | (1005X4) |
| R7420             | 1-218-972-11 | RES-CHIP          | 39K 5% 1/16W  | RB7202       | 1-234-375-21 | RES, NETWORK 1K            | (1005X4) |
| R7421             | 1-218-968-11 | RES-CHIP          | 18K 5% 1/16W  | RB7203       | 1-234-375-21 | RES, NETWORK 1K            | (1005X4) |
| R7422             | 1-218-965-11 | RES-CHIP          | 10K 5% 1/16W  | RB7204       | 1-234-375-21 | RES, NETWORK 1K            | (1005X4) |
| R7423             | 1-218-965-11 | RES-CHIP          | 10K 5% 1/16W  | RB7205       | 1-234-702-11 | RES, NETWORK 68            | (1005X4) |
| R7424             | 1-218-968-11 | RES-CHIP          | 18K 5% 1/16W  | RB7206       | 1-234-702-11 | RES, NETWORK 68            | (1005X4) |
| R7425             | 1-218-967-11 | RES-CHIP          | 15K 5% 1/16W  | RB7207       | 1-234-372-11 | RES, NETWORK 100           | (1005X4) |
| R7426             | 1-218-967-11 | RES-CHIP          | 15K 5% 1/16W  | RB7208       | 1-234-372-11 | RES, NETWORK 100           | (1005X4) |
| R7427             | 1-218-968-11 | RES-CHIP          | 18K 5% 1/16W  | RB7209       | 1-234-372-11 | RES, NETWORK 100           | (1005X4) |
| R7428             | 1-218-968-11 | RES-CHIP          | 18K 5% 1/16W  | RB7210       | 1-234-372-11 | RES, NETWORK 100           | (1005X4) |
| R7429             | 1-218-941-81 | RES-CHIP          | 100 5% 1/16W  | RB7211       | 1-234-372-11 | RES, NETWORK 100           | (1005X4) |
| R7430             | 1-218-941-81 | RES-CHIP          | 100 5% 1/16W  | RB7212       | 1-234-702-11 | RES, NETWORK 68            | (1005X4) |
| R7431             | 1-218-990-81 | SHORT CHIP        | 0             | RB7213       | 1-234-702-11 | RES, NETWORK 68            | (1005X4) |
| R7433             | 1-218-990-81 | SHORT CHIP        | 0             | RB7501       | 1-234-372-11 | RES, NETWORK 100           | (1005X4) |
| R7510             | 1-218-965-11 | RES-CHIP          | 10K 5% 1/16W  | RB7502       | 1-234-378-21 | RES, NETWORK 10K           | (1005X4) |
| R7511             | 1-218-965-11 | RES-CHIP          | 10K 5% 1/16W  | RB7503       | 1-234-378-21 | RES, NETWORK 10K           | (1005X4) |
| R7512             | 1-218-961-11 | RES-CHIP          | 4.7K 5% 1/16W | < VARISTOR > |              |                            |          |
| R7513             | 1-218-965-11 | RES-CHIP          | 10K 5% 1/16W  | VD4200       | 1-803-974-21 | VARISTOR, CHIP             | (1608)   |
| R7515             | 1-218-965-11 | RES-CHIP          | 10K 5% 1/16W  | VD4201       | 1-803-974-21 | VARISTOR, CHIP             | (1608)   |
| < RESISTOR CHIP > |              |                   |               | VD4202       | 1-803-974-21 | VARISTOR, CHIP             | (1608)   |
| RB1000            | 1-234-371-21 | RES, NETWORK 47   | (1005X4)      | VD4203       | 1-803-974-21 | VARISTOR, CHIP             | (1608)   |
| RB1001            | 1-234-371-21 | RES, NETWORK 47   | (1005X4)      | VD4204       | 1-803-974-21 | VARISTOR, CHIP             | (1608)   |
| RB3000            | 1-234-381-11 | RES, NETWORK 100K | (1005X4)      | < CRYSTAL >  |              |                            |          |
| RB4000            | 1-234-371-21 | RES, NETWORK 47   | (1005X4)      | X4000        | 1-813-531-11 | OSCILLATOR, CRYSTAL UNIT   |          |
| RB4001            | 1-234-371-21 | RES, NETWORK 47   | (1005X4)      | X5500        | 1-813-806-21 | OSCILLATOR, CRYSTAL        |          |
| RB4002            | 1-234-371-21 | RES, NETWORK 47   | (1005X4)      | X7200        | 1-813-055-11 | QUARTZ CRYSTAL UNIT        |          |



| REF.NO.                                        | PART.NO      | DESCRIPTION       | REMARK | REF.NO. | PART.NO      | DESCRIPTION    | REMARK |
|------------------------------------------------|--------------|-------------------|--------|---------|--------------|----------------|--------|
| X7201                                          | 1-813-784-21 | VIBRATOR, CRYSTAL |        | C5520   | NOT FITTED   |                |        |
| <b>BC Board Variant Parts (26 Inches Only)</b> |              |                   |        | C5521   | NOT FITTED   |                |        |
|                                                |              | < CAPACITOR >     |        | C6507   | NOT FITTED   |                |        |
| C5018                                          | NOT FITTED   |                   |        | C6508   | NOT FITTED   |                |        |
| C5019                                          | NOT FITTED   |                   |        | C6510   | NOT FITTED   |                |        |
| C5020                                          | NOT FITTED   |                   |        |         |              |                |        |
| C5021                                          | NOT FITTED   |                   |        |         |              | < CONNECTOR >  |        |
| C5022                                          | NOT FITTED   |                   |        | CN5500  | NOT FITTED   |                |        |
|                                                |              |                   |        |         |              | < IC >         |        |
| C5023                                          | NOT FITTED   |                   |        | IC5002  | NOT FITTED   |                |        |
| C5024                                          | NOT FITTED   |                   |        | IC5003  | NOT FITTED   |                |        |
| C5025                                          | NOT FITTED   |                   |        | IC5503  | NOT FITTED   |                |        |
| C5026                                          | NOT FITTED   |                   |        | IC6505  | NOT FITTED   |                |        |
| C5027                                          | NOT FITTED   |                   |        |         |              | < COIL >       |        |
|                                                |              |                   |        | L5008   | NOT FITTED   |                |        |
| C5028                                          | NOT FITTED   |                   |        | L5009   | NOT FITTED   |                |        |
| C5029                                          | NOT FITTED   |                   |        |         |              | < TRANSISTOR > |        |
| C5030                                          | NOT FITTED   |                   |        |         |              |                |        |
| C5031                                          | NOT FITTED   |                   |        | Q5505   | NOT FITTED   |                |        |
| C5032                                          | NOT FITTED   |                   |        |         |              | < RESISTOR >   |        |
|                                                |              |                   |        |         |              |                |        |
| C5033                                          | NOT FITTED   |                   |        | JR5000  | NOT FITTED   |                |        |
| C5034                                          | NOT FITTED   |                   |        | JR5001  | NOT FITTED   |                |        |
| C5035                                          | NOT FITTED   |                   |        | JR5010  | NOT FITTED   |                |        |
| C5036                                          | NOT FITTED   |                   |        | JR5011  | NOT FITTED   |                |        |
| C5037                                          | NOT FITTED   |                   |        |         |              |                |        |
|                                                |              |                   |        | R4141   | NOT FITTED   |                |        |
| C5038                                          | NOT FITTED   |                   |        | R4239   | NOT FITTED   |                |        |
| C5039                                          | NOT FITTED   |                   |        | R4264   | NOT FITTED   |                |        |
| C5040                                          | NOT FITTED   |                   |        | R4273   | NOT FITTED   |                |        |
| C5041                                          | NOT FITTED   |                   |        | R5008   | 1-216-864-11 | SHORT CHIP     | 0      |
| C5042                                          | NOT FITTED   |                   |        |         |              |                |        |
|                                                |              |                   |        | R5011   | NOT FITTED   |                |        |
| C5043                                          | NOT FITTED   |                   |        | R5013   | NOT FITTED   |                |        |
| C5044                                          | NOT FITTED   |                   |        | R5015   | NOT FITTED   |                |        |
| C5045                                          | NOT FITTED   |                   |        | R5016   | NOT FITTED   |                |        |
| C5046                                          | NOT FITTED   |                   |        | R5017   | NOT FITTED   |                |        |
| C5056                                          | NOT FITTED   |                   |        |         |              |                |        |
|                                                |              |                   |        | R5019   | NOT FITTED   |                |        |
| C5057                                          | NOT FITTED   |                   |        | R5022   | NOT FITTED   |                |        |
| C5058                                          | NOT FITTED   |                   |        | R5023   | NOT FITTED   |                |        |
| C5059                                          | NOT FITTED   |                   |        | R5030   | NOT FITTED   |                |        |
| C5504                                          | NOT FITTED   |                   |        | R5031   | NOT FITTED   |                |        |
| C5505                                          | NOT FITTED   |                   |        |         |              |                |        |
|                                                |              |                   |        | R5032   | NOT FITTED   |                |        |
| C5506                                          | NOT FITTED   |                   |        | R5033   | NOT FITTED   |                |        |
| C5507                                          | NOT FITTED   |                   |        | R5056   | 1-216-864-11 | SHORT CHIP     | 0      |
| C5509                                          | NOT FITTED   |                   |        | R5057   | NOT FITTED   |                |        |
| C5510                                          | NOT FITTED   |                   |        | R5058   | NOT FITTED   |                |        |
| C5512                                          | NOT FITTED   |                   |        |         |              |                |        |
|                                                |              |                   |        |         |              |                |        |
| C5513                                          | NOT FITTED   |                   |        |         |              |                |        |
| C5515                                          | NOT FITTED   |                   |        |         |              |                |        |
| C5516                                          | NOT FITTED   |                   |        |         |              |                |        |
| C5518                                          | NOT FITTED   |                   |        |         |              |                |        |
| C5519                                          | NOT FITTED   |                   |        |         |              |                |        |

| REF.NO. | PART.NO      | DESCRIPTION  | REMARK | REF.NO. | PART.NO      | DESCRIPTION             | REMARK |
|---------|--------------|--------------|--------|---------|--------------|-------------------------|--------|
| R5059   | NOT FITTED   |              |        | R5673   | NOT FITTED   |                         |        |
| R5060   | NOT FITTED   |              |        | R5674   | 1-218-990-81 | SHORT CHIP 0            |        |
| R5063   | NOT FITTED   |              |        | R5675   | 1-218-990-81 | SHORT CHIP 0            |        |
| R5502   | NOT FITTED   |              |        | R6560   | NOT FITTED   |                         |        |
| R5539   | NOT FITTED   |              |        | R6562   | NOT FITTED   |                         |        |
| R5544   | NOT FITTED   |              |        | R6563   | NOT FITTED   |                         |        |
| R5548   | NOT FITTED   |              |        | R6571   | NOT FITTED   |                         |        |
| R5549   | NOT FITTED   |              |        | R6572   | NOT FITTED   |                         |        |
| R5550   | NOT FITTED   |              |        | R6573   | NOT FITTED   |                         |        |
| R5551   | NOT FITTED   |              |        | R7209   | NOT FITTED   |                         |        |
| R5554   | NOT FITTED   |              |        | R7211   | 1-218-965-11 | RES-CHIP 10K 5% 1/16W   |        |
| R5555   | NOT FITTED   |              |        | R7213   | NOT FITTED   |                         |        |
| R5556   | NOT FITTED   |              |        | R7215   | 1-218-965-11 | RES-CHIP 10K 5% 1/16W   |        |
| R5558   | NOT FITTED   |              |        |         |              | < RESISTOR CHIP >       |        |
| R5560   | NOT FITTED   |              |        | RB5000  | NOT FITTED   |                         |        |
| R5561   | NOT FITTED   |              |        | RB5001  | NOT FITTED   |                         |        |
| R5627   | 1-218-990-81 | SHORT CHIP 0 |        | RB5002  | NOT FITTED   |                         |        |
| R5628   | 1-218-990-81 | SHORT CHIP 0 |        | RB5003  | NOT FITTED   |                         |        |
| R5641   | NOT FITTED   |              |        | RB5004  | NOT FITTED   |                         |        |
| R5642   | NOT FITTED   |              |        | RB5005  | NOT FITTED   |                         |        |
| R5643   | NOT FITTED   |              |        | RB5006  | NOT FITTED   |                         |        |
| R5644   | 1-218-990-81 | SHORT CHIP 0 |        | RB5007  | NOT FITTED   |                         |        |
| R5645   | 1-218-990-81 | SHORT CHIP 0 |        | RB5008  | NOT FITTED   |                         |        |
| R5646   | NOT FITTED   |              |        | RB5009  | NOT FITTED   |                         |        |
| R5647   | NOT FITTED   |              |        | RB5010  | NOT FITTED   |                         |        |
| R5648   | 1-218-990-81 | SHORT CHIP 0 |        | RB5011  | NOT FITTED   |                         |        |
| R5649   | 1-218-990-81 | SHORT CHIP 0 |        | RB5012  | NOT FITTED   |                         |        |
| R5650   | NOT FITTED   |              |        | RB5013  | NOT FITTED   |                         |        |
| R5651   | NOT FITTED   |              |        | RB5014  | NOT FITTED   |                         |        |
| R5652   | 1-218-990-81 | SHORT CHIP 0 |        | RB5015  | NOT FITTED   |                         |        |
| R5653   | 1-218-990-81 | SHORT CHIP 0 |        | RB5016  | NOT FITTED   |                         |        |
| R5654   | NOT FITTED   |              |        | RB5017  | NOT FITTED   |                         |        |
| R5655   | NOT FITTED   |              |        | RB5018  | 1-234-795-21 | RES, NETWORK 0X4 (2010) |        |
| R5656   | 1-218-990-81 | SHORT CHIP 0 |        | RB5019  | 1-234-795-21 | RES, NETWORK 0X4 (2010) |        |
| R5657   | 1-218-990-81 | SHORT CHIP 0 |        | RB5020  | 1-234-795-21 | RES, NETWORK 0X4 (2010) |        |
| R5658   | NOT FITTED   |              |        | RB5021  | 1-234-795-21 | RES, NETWORK 0X4 (2010) |        |
| R5659   | NOT FITTED   |              |        | RB5022  | 1-234-795-21 | RES, NETWORK 0X4 (2010) |        |
| R5660   | NOT FITTED   |              |        | RB5023  | 1-234-795-21 | RES, NETWORK 0X4 (2010) |        |
| R5661   | NOT FITTED   |              |        | RB5024  | 1-234-795-21 | RES, NETWORK 0X4 (2010) |        |
| R5662   | 1-218-990-81 | SHORT CHIP 0 |        | RB5025  | 1-234-795-21 | RES, NETWORK 0X4 (2010) |        |
| R5663   | 1-218-990-81 | SHORT CHIP 0 |        | RB5026  | 1-234-795-21 | RES, NETWORK (1608)     |        |
| R5664   | NOT FITTED   |              |        | RB5500  | NOT FITTED   |                         |        |
| R5665   | NOT FITTED   |              |        |         |              |                         |        |
| R5666   | 1-218-990-81 | SHORT CHIP 0 |        |         |              |                         |        |
| R5667   | 1-218-990-81 | SHORT CHIP 0 |        |         |              |                         |        |
| R5668   | NOT FITTED   |              |        |         |              |                         |        |
| R5669   | NOT FITTED   |              |        |         |              |                         |        |
| R5670   | 1-218-990-81 | SHORT CHIP 0 |        |         |              |                         |        |
| R5671   | 1-218-990-81 | SHORT CHIP 0 |        |         |              |                         |        |
| R5672   | NOT FITTED   |              |        |         |              |                         |        |

#### BC Board Variant Parts (32/40 Inches Only)

#### < CAPACITOR >

|       |              |                    |            |
|-------|--------------|--------------------|------------|
| C5018 | 1-137-710-91 | CERAMIC CHIP 10UF  | 20% 6.3V   |
| C5019 | 1-107-826-11 | CERAMIC CHIP 0.1UF | 10.00% 16V |
| C5020 | 1-107-826-11 | CERAMIC CHIP 0.1UF | 10.00% 16V |

| REF.NO. | PART.NO      | DESCRIPTION          | REMARK      | REF.NO. | PART.NO       | DESCRIPTION                 | REMARK         |
|---------|--------------|----------------------|-------------|---------|---------------|-----------------------------|----------------|
| C5021   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |         |               | < CONNECTOR >               |                |
| C5022   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |         |               |                             |                |
| C5023   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  | CN5500  | *1-820-667-11 | HEADER ASSEMBLY FOR PWB 21P |                |
| C5024   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |         |               |                             |                |
| C5025   | 1-115-416-11 | CERAMIC CHIP 0.001UF | 5.00% 25V   |         |               | < IC >                      |                |
| C5026   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  | IC5002  | 6-710-900-01  | IC EP2C8T144C7N             |                |
| C5027   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  | IC5003  | 6-807-444-01  | IC EPCS4SI8N-SE1A01         |                |
| C5028   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  | IC5503  | 6-710-819-01  | IC TMD5341APFCR             |                |
| C5029   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  | IC6505  | 6-711-042-01  | IC BD00KA5WFP-E2            |                |
| C5030   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |         |               | < COIL >                    |                |
| C5031   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |         |               |                             |                |
| C5032   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  | L5008   | 1-469-549-21  | INDUCTOR                    | 1UH            |
| C5033   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  | L5009   | 1-469-549-21  | INDUCTOR                    | 1UH            |
| C5034   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |         |               |                             |                |
| C5035   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |         |               | < TRANSISTOR >              |                |
| C5036   | 1-115-416-11 | CERAMIC CHIP 0.001UF | 5.00% 25V   | Q5505   | 8-729-028-96  | TRANSISTOR DTC114EUA-T106   |                |
| C5037   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |         |               |                             |                |
| C5038   | 1-137-710-91 | CERAMIC CHIP 10UF    | 20% 6.3V    |         |               | < RESISTOR >                |                |
| C5039   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |         |               |                             |                |
| C5040   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  | JR5000  | 1-216-864-11  | SHORT CHIP                  | 0              |
|         |              |                      |             | JR5001  | 1-216-864-11  | SHORT CHIP                  | 0              |
| C5041   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  | JR5010  | 1-216-864-11  | SHORT CHIP                  | 0              |
| C5042   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  | JR5011  | 1-216-864-11  | SHORT CHIP                  | 0              |
| C5043   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |         |               |                             |                |
| C5044   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  | R4141   | 1-216-864-11  | SHORT CHIP                  | 0              |
| C5045   | 1-126-206-11 | ELECT CHIP 100UF     | 20.00% 6.3V | R4239   | 1-216-809-11  | METAL CHIP                  | 100 5% 1/10W   |
|         |              |                      |             | R4264   | 1-216-809-11  | METAL CHIP                  | 100 5% 1/10W   |
| C5046   | 1-126-206-11 | ELECT CHIP 100UF     | 20.00% 6.3V | R4273   | 1-216-809-11  | METAL CHIP                  | 100 5% 1/10W   |
| C5056   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  | R5008   | NOT FITTED    |                             |                |
| C5057   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  |         |               |                             |                |
| C5058   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  | R5011   | 1-216-833-11  | METAL CHIP                  | 10K 5% 1/10W   |
| C5059   | 1-107-826-11 | CERAMIC CHIP 0.1UF   | 10.00% 16V  | R5013   | 1-216-805-11  | METAL CHIP                  | 47 5% 1/10W    |
|         |              |                      |             | R5015   | 1-216-833-11  | METAL CHIP                  | 10K 5% 1/10W   |
| C5504   | 1-100-567-81 | CERAMIC CHIP 0.01UF  | 10% 25V     | R5016   | 1-216-833-11  | METAL CHIP                  | 10K 5% 1/10W   |
| C5505   | 1-100-567-81 | CERAMIC CHIP 0.01UF  | 10% 25V     | R5017   | 1-216-833-11  | METAL CHIP                  | 10K 5% 1/10W   |
| C5506   | 1-100-567-81 | CERAMIC CHIP 0.01UF  | 10% 25V     |         |               |                             |                |
| C5507   | 1-100-567-81 | CERAMIC CHIP 0.01UF  | 10% 25V     | R5019   | 1-216-809-11  | METAL CHIP                  | 100 5% 1/10W   |
| C5509   | 1-100-567-81 | CERAMIC CHIP 0.01UF  | 10% 25V     | R5022   | 1-216-809-11  | METAL CHIP                  | 100 5% 1/10W   |
|         |              |                      |             | R5023   | 1-216-809-11  | METAL CHIP                  | 100 5% 1/10W   |
| C5510   | 1-100-567-81 | CERAMIC CHIP 0.01UF  | 10% 25V     | R5030   | 1-216-864-11  | SHORT CHIP                  | 0              |
| C5512   | 1-100-567-81 | CERAMIC CHIP 0.01UF  | 10% 25V     | R5031   | 1-216-864-11  | SHORT CHIP                  | 0              |
| C5513   | 1-100-567-81 | CERAMIC CHIP 0.01UF  | 10% 25V     |         |               |                             |                |
| C5515   | 1-100-567-81 | CERAMIC CHIP 0.01UF  | 10% 25V     | R5032   | 1-216-864-11  | SHORT CHIP                  | 0              |
| C5516   | 1-100-567-81 | CERAMIC CHIP 0.01UF  | 10% 25V     | R5033   | 1-216-864-11  | SHORT CHIP                  | 0              |
|         |              |                      |             | R5056   | NOT FITTED    |                             |                |
| C5518   | 1-100-567-81 | CERAMIC CHIP 0.01UF  | 10% 25V     | R5057   | 1-216-864-11  | SHORT CHIP                  | 0              |
| C5519   | 1-100-703-91 | CERAMIC CHIP 10UF    | 10% 25V     | R5058   | 1-216-864-11  | SHORT CHIP                  | 0              |
| C5520   | 1-100-567-81 | CERAMIC CHIP 0.01UF  | 10% 25V     |         |               |                             |                |
| C5521   | 1-100-567-81 | CERAMIC CHIP 0.01UF  | 10% 25V     | R5059   | 1-216-864-11  | SHORT CHIP                  | 0              |
| C6507   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     | R5060   | 1-216-864-11  | SHORT CHIP                  | 0              |
|         |              |                      |             | R5063   | 1-216-864-11  | SHORT CHIP                  | 0              |
| C6508   | 1-107-823-11 | CERAMIC CHIP 0.47UF  | 10.00% 16V  | R5502   | 1-218-973-11  | RES-CHIP                    | 47K 5% 1/16W   |
| C6510   | 1-100-907-11 | CERAMIC CHIP 0.1UF   | 10% 10V     | R5539   | 1-218-990-81  | SHORT CHIP                  | 0              |
| C6558   | 1-112-066-11 | CERAMIC CHIP 10UF    | 10% 10V     |         |               |                             |                |
|         |              |                      |             | R5544   | 1-218-953-11  | RES-CHIP                    | 1K 5% 1/16W    |
|         |              |                      |             | R5548   | 1-208-923-11  | METAL CHIP                  | 33K 0.5% 1/16W |

| REF.NO. | PART.NO      | DESCRIPTION | REMARK |      |       | REF.NO.                    | PART.NO       | DESCRIPTION                 | REMARK |        |       |
|---------|--------------|-------------|--------|------|-------|----------------------------|---------------|-----------------------------|--------|--------|-------|
| R5549   | 1-208-695-11 | METAL CHIP  | 3.3K   | 0.5% | 1/16W | R6572                      | 1-218-841-11  | METAL CHIP                  | 560    | 0.5%   | 1/10W |
| R5550   | 1-208-695-11 | METAL CHIP  | 3.3K   | 0.5% | 1/16W | R6573                      | 1-216-295-91  | SHORT CHIP                  | 0      |        |       |
| R5551   | 1-208-695-11 | METAL CHIP  | 3.3K   | 0.5% | 1/16W | R7209                      | 1-218-965-11  | RES-CHIP                    | 10K    | 5%     | 1/16W |
| R5554   | 1-218-937-11 | RES-CHIP    | 47     | 5%   | 1/16W | R7211                      | NOT FITTED    |                             |        |        |       |
| R5555   | 1-218-937-11 | RES-CHIP    | 47     | 5%   | 1/16W | R7213                      | 1-218-965-11  | RES-CHIP                    | 10K    | 5%     | 1/16W |
| R5556   | 1-216-864-11 | SHORT CHIP  | 0      |      |       | R7215                      | NOT FITTED    |                             |        |        |       |
| R5558   | 1-218-961-11 | RES-CHIP    | 4.7K   | 5%   | 1/16W | < RESISTOR CHIP >          |               |                             |        |        |       |
| R5560   | 1-218-961-11 | RES-CHIP    | 4.7K   | 5%   | 1/16W | RB5000                     | 1-233-576-11  | RES, CHIP NETWORK           | 100    | (3216) |       |
| R5561   | 1-218-965-11 | RES-CHIP    | 10K    | 5%   | 1/16W | RB5001                     | 1-233-576-11  | RES, CHIP NETWORK           | 100    | (3216) |       |
| R5627   | NOT FITTED   |             |        |      |       | RB5002                     | 1-233-576-11  | RES, CHIP NETWORK           | 100    | (3216) |       |
| R5628   | NOT FITTED   |             |        |      |       | RB5003                     | 1-233-576-11  | RES, CHIP NETWORK           | 100    | (3216) |       |
| R5641   | 1-218-990-81 | SHORT CHIP  | 0      |      |       | RB5004                     | 1-233-576-11  | RES, CHIP NETWORK           | 100    | (3216) |       |
| R5642   | 1-218-990-81 | SHORT CHIP  | 0      |      |       | RB5005                     | 1-233-576-11  | RES, CHIP NETWORK           | 100    | (3216) |       |
| R5643   | 1-218-965-11 | RES-CHIP    | 10K    | 5%   | 1/16W | RB5006                     | 1-233-576-11  | RES, CHIP NETWORK           | 100    | (3216) |       |
| R5644   | NOT FITTED   |             |        |      |       | RB5007                     | 1-233-576-11  | RES, CHIP NETWORK           | 100    | (3216) |       |
| R5645   | NOT FITTED   |             |        |      |       | RB5008                     | 1-233-576-11  | RES, CHIP NETWORK           | 100    | (3216) |       |
| R5646   | 1-218-990-81 | SHORT CHIP  | 0      |      |       | RB5009                     | 1-233-574-11  | RES, CHIP NETWORK           | 10     | (3216) |       |
| R5647   | 1-218-990-81 | SHORT CHIP  | 0      |      |       | RB5010                     | 1-233-574-11  | RES, CHIP NETWORK           | 10     | (3216) |       |
| R5648   | NOT FITTED   |             |        |      |       | RB5011                     | 1-233-574-11  | RES, CHIP NETWORK           | 10     | (3216) |       |
| R5649   | NOT FITTED   |             |        |      |       | RB5012                     | 1-233-574-11  | RES, CHIP NETWORK           | 10     | (3216) |       |
| R5650   | 1-218-990-81 | SHORT CHIP  | 0      |      |       | RB5013                     | 1-233-574-11  | RES, CHIP NETWORK           | 10     | (3216) |       |
| R5651   | 1-218-990-81 | SHORT CHIP  | 0      |      |       | RB5014                     | 1-233-574-11  | RES, CHIP NETWORK           | 10     | (3216) |       |
| R5652   | NOT FITTED   |             |        |      |       | RB5015                     | 1-233-574-11  | RES, CHIP NETWORK           | 10     | (3216) |       |
| R5653   | NOT FITTED   |             |        |      |       | RB5016                     | 1-233-574-11  | RES, CHIP NETWORK           | 10     | (3216) |       |
| R5654   | 1-218-990-81 | SHORT CHIP  | 0      |      |       | RB5017                     | 1-233-574-11  | RES, CHIP NETWORK           | 10     | (3216) |       |
| R5655   | 1-218-990-81 | SHORT CHIP  | 0      |      |       | RB5018                     | NOT FITTED    |                             |        |        |       |
| R5656   | NOT FITTED   |             |        |      |       | RB5019                     | NOT FITTED    |                             |        |        |       |
| R5657   | NOT FITTED   |             |        |      |       | RB5020                     | NOT FITTED    |                             |        |        |       |
| R5658   | 1-218-990-81 | SHORT CHIP  | 0      |      |       | RB5021                     | NOT FITTED    |                             |        |        |       |
| R5659   | 1-218-990-81 | SHORT CHIP  | 0      |      |       | RB5022                     | NOT FITTED    |                             |        |        |       |
| R5660   | 1-218-990-81 | SHORT CHIP  | 0      |      |       | RB5023                     | NOT FITTED    |                             |        |        |       |
| R5661   | 1-218-990-81 | SHORT CHIP  | 0      |      |       | RB5024                     | NOT FITTED    |                             |        |        |       |
| R5662   | NOT FITTED   |             |        |      |       | RB5025                     | NOT FITTED    |                             |        |        |       |
| R5663   | NOT FITTED   |             |        |      |       | RB5026                     | NOT FITTED    |                             |        |        |       |
| R5664   | 1-218-990-81 | SHORT CHIP  | 0      |      |       | RB5500                     | 1-234-106-81  | RES, NETWORK                | 0      |        |       |
| R5665   | 1-218-990-81 | SHORT CHIP  | 0      |      |       | * A-1256-428-A H2 COMPLETE |               |                             |        |        |       |
| R5666   | NOT FITTED   |             |        |      |       | < CAPACITOR >              |               |                             |        |        |       |
| R5667   | NOT FITTED   |             |        |      |       | C311                       | 1-162-960-11  | CERAMIC CHIP                | 220PF  | 10.00% | 50V   |
| R5668   | 1-218-990-81 | SHORT CHIP  | 0      |      |       | C312                       | 1-119-667-11  | CERAMIC CHIP                | 22UF   |        | 10V   |
| R5669   | 1-218-990-81 | SHORT CHIP  | 0      |      |       | < CONNECTOR >              |               |                             |        |        |       |
| R5670   | NOT FITTED   |             |        |      |       | CN301                      | *1-820-289-11 | HEADER ASSEMBLY (PRINT PWB) | 10P    |        |       |
| R5671   | NOT FITTED   |             |        |      |       | < DIODE >                  |               |                             |        |        |       |
| R5672   | 1-218-990-81 | SHORT CHIP  | 0      |      |       | D302                       | 8-719-085-26  | DIODE CL-165HR/SYG-D-T      |        |        |       |
| R5673   | 1-218-990-81 | SHORT CHIP  | 0      |      |       | D305                       | 8-719-085-26  | DIODE CL-165HR/SYG-D-T      |        |        |       |
| R5674   | NOT FITTED   |             |        |      |       |                            |               |                             |        |        |       |
| R5675   | NOT FITTED   |             |        |      |       |                            |               |                             |        |        |       |
| R6560   | 1-216-295-91 | SHORT CHIP  | 0      |      |       |                            |               |                             |        |        |       |
| R6562   | 1-216-821-11 | METAL CHIP  | 1K     | 5%   | 1/10W |                            |               |                             |        |        |       |
| R6563   | 1-218-871-11 | METAL CHIP  | 10K    | 0.5% | 1/10W |                            |               |                             |        |        |       |
| R6571   | 1-218-865-11 | METAL CHIP  | 5.6K   | 0.5% | 1/10W |                            |               |                             |        |        |       |

**Note :** The components identified by shading and marked  $\Delta$  are critical for safety. Replace only with the part numbers specified in the parts list.

**H2**

**H1**

**G1**

| REF.NO.        | PART.NO      | DESCRIPTION               | REMARK |
|----------------|--------------|---------------------------|--------|
| D308           | 6-500-817-01 | DIODE (LED) SML-512UWT86  |        |
| < IC >         |              |                           |        |
| IC311          | 6-600-502-01 | HIC GP1UE26RK0VF          |        |
| < TRANSISTOR > |              |                           |        |
| Q301           | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 |        |
| Q302           | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 |        |
| Q303           | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 |        |
| Q304           | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 |        |
| Q305           | 8-729-028-96 | TRANSISTOR DTC114EUA-T106 |        |
| < RESISTOR >   |              |                           |        |
| R301           | 1-216-815-11 | METAL CHIP 330 5% 1/10W   |        |
| R302           | 1-216-819-11 | METAL CHIP 680 5% 1/10W   |        |
| R303           | 1-216-815-11 | METAL CHIP 330 5% 1/10W   |        |
| R304           | 1-216-819-11 | METAL CHIP 680 5% 1/10W   |        |
| R305           | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W  |        |
| R311           | 1-216-817-11 | METAL CHIP 470 5% 1/10W   |        |
| R312           | 1-216-805-11 | METAL CHIP 47 5% 1/10W    |        |

**\* A-1256-427-A H1 COMPLETE**

|               |               |                                |  |
|---------------|---------------|--------------------------------|--|
| < CONNECTOR > |               |                                |  |
| CN101         | *1-820-180-11 | HEADER ASSEMBLY (PRINT PWB) 3P |  |
| < RESISTOR >  |               |                                |  |
| R101          | 1-218-851-11  | METAL CHIP 1.5K 0.5% 1/10W     |  |
| R103          | 1-218-833-11  | METAL CHIP 270 0.5% 1/10W      |  |
| R104          | 1-218-841-11  | METAL CHIP 560 0.5% 1/10W      |  |
| R105          | 1-218-855-11  | METAL CHIP 2.2K 0.5% 1/10W     |  |
| R106          | 1-218-841-11  | METAL CHIP 560 0.5% 1/10W      |  |
| R108          | 1-216-864-11  | SHORT CHIP 0                   |  |
| < SWITCH >    |               |                                |  |
| S101          | 1-572-595-31  | SWITCH, TACTILE (REFLOW TYPE)  |  |
| S102          | 1-572-595-31  | SWITCH, TACTILE (REFLOW TYPE)  |  |
| S103          | 1-572-595-31  | SWITCH, TACTILE (REFLOW TYPE)  |  |
| S104          | 1-572-595-31  | SWITCH, TACTILE (REFLOW TYPE)  |  |
| S105          | 1-572-595-31  | SWITCH, TACTILE (REFLOW TYPE)  |  |
| S106          | 1-572-595-31  | SWITCH, TACTILE (REFLOW TYPE)  |  |
| S107          | 1-572-595-31  | SWITCH, TACTILE (REFLOW TYPE)  |  |

| REF.NO.                                     | PART.NO | DESCRIPTION | REMARK |
|---------------------------------------------|---------|-------------|--------|
| * A-1313-867-A G1 COMPLETE (26 Inches Only) |         |             |        |
| * A-1257-921-A G1 COMPLETE (32 Inches Only) |         |             |        |

**G1 Board Common Parts**

|                                            |                       |                      |             |
|--------------------------------------------|-----------------------|----------------------|-------------|
| 2-409-877-21 WASHER (3X10), RS TITE SPRING |                       |                      |             |
| < CAPACITOR >                              |                       |                      |             |
| C6000                                      | $\Delta$ 1-113-924-11 | CERAMIC 0.0047UF     | 20.00% 250V |
| C6001                                      | $\Delta$ 1-161-964-91 | CERAMIC 0.0047UF     | 250V        |
| C6002                                      | $\Delta$ 1-119-892-51 | CERAMIC 470PF        | 10.00% 250V |
| C6003                                      | $\Delta$ 1-165-529-11 | MYLAR 0.22UF         | 10 275V     |
| C6004                                      | $\Delta$ 1-165-530-11 | MYLAR 0.47UF         | 10 275V     |
| C6005                                      | $\Delta$ 1-119-892-51 | CERAMIC 470PF        | 10.00% 250V |
| C6006                                      | $\Delta$ 1-161-964-91 | CERAMIC 0.0047UF     | 250V        |
| C6007                                      | $\Delta$ 1-119-892-51 | CERAMIC 470PF        | 10.00% 250V |
| C6008                                      | $\Delta$ 1-135-361-11 | ELECT(BLOCK) 180UF   | 20% 450V    |
| C6009                                      | 1-162-970-11          | CERAMIC CHIP 0.01UF  | 10.00% 25V  |
| C6010                                      | 1-162-964-11          | CERAMIC CHIP 0.001UF | 10.00% 50V  |
| C6011                                      | 1-107-888-11          | ELECT 47UF           | 20% 25V     |
| C6012                                      | $\Delta$ 1-119-892-51 | CERAMIC 470PF        | 10.00% 250V |
| C6013                                      | 1-100-831-91          | CERAMIC CHIP 0.001UF | 2% 50V      |
| C6014                                      | 1-107-905-11          | ELECT 4.7UF          | 20% 50V     |
| C6015                                      | $\Delta$ 1-162-970-11 | CERAMIC CHIP 0.01UF  | 10.00% 25V  |
| C6016                                      | 1-107-906-11          | ELECT 10UF           | 20% 50V     |
| C6018                                      | 1-162-970-11          | CERAMIC CHIP 0.01UF  | 10.00% 25V  |
| C6019                                      | 1-107-888-11          | ELECT 47UF           | 20% 25V     |
| C6020                                      | 1-115-339-11          | CERAMIC CHIP 0.1UF   | 10.00% 50V  |
| C6021                                      | 1-165-908-11          | CERAMIC CHIP 1UF     | 10% 10V     |
| C6022                                      | 1-107-824-11          | CERAMIC 220PF        | 5.00% 1KV   |
| C6023                                      | 1-107-824-11          | CERAMIC 220PF        | 5.00% 1KV   |
| C6024                                      | 1-165-610-11          | FILM 33000PF         | 3% 800V     |
| C6025                                      | 1-107-902-11          | ELECT 1UF            | 20% 50V     |
| C6027                                      | 1-107-902-11          | ELECT 1UF            | 20% 50V     |
| C6029                                      | 1-112-254-21          | ELECT 1000UF         | 20% 35V     |
| C6030                                      | 1-112-231-21          | ELECT 2200UF         | 20% 16V     |
| C6031                                      | 1-162-970-11          | CERAMIC CHIP 0.01UF  | 10.00% 25V  |
| C6033                                      | 1-165-745-21          | ELECT 1200UF         | 20% 35V     |
| C6034                                      | 1-165-745-21          | ELECT 1200UF         | 20% 35V     |
| C6039                                      | 1-112-228-21          | ELECT 1000UF         | 20% 16V     |
| C6040                                      | 1-112-254-21          | ELECT 1000UF         | 20% 35V     |
| C6042                                      | 1-100-566-91          | CERAMIC CHIP 0.1UF   | 10.00% 25V  |
| C6043                                      | 1-162-970-11          | CERAMIC CHIP 0.01UF  | 10.00% 25V  |
| C6202                                      | 1-107-903-11          | ELECT 2.2UF          | 20% 50V     |
| C6205                                      | 1-107-904-11          | ELECT 3.3UF          | 20% 50V     |
| C6206                                      | 1-100-139-31          | FILM 0.001UF         | 5% 630V     |
| C6208                                      | 1-162-964-11          | CERAMIC CHIP 0.001UF | 10.00% 50V  |
| C6209                                      | 1-119-892-51          | CERAMIC 470PF        | 10.00% 250V |
| C6211                                      | 1-112-226-21          | ELECT 470UF          | 20% 16V     |
| C6212                                      | 1-107-826-11          | CERAMIC CHIP 0.1UF   | 10.00% 16V  |

**Note :** The components identified by shading and marked  $\Delta$  are critical for safety. Replace only with the part numbers specified in the parts list.

**G1**

| REF.NO. | PART.NO      | DESCRIPTION         | REMARK     |
|---------|--------------|---------------------|------------|
| C6214   | 1-112-744-61 | MYLAR 1UF           | 10% 450V   |
| C6315   | 1-135-361-11 | ELECT (BLOCK) 180UF | 20% 450V   |
| C6316   | 1-107-826-11 | CERAMIC CHIP 0.1UF  | 10.00% 16V |
| C6317   | 1-162-927-11 | CERAMIC CHIP 100PF  | 5.00% 50V  |
| C6318   | 1-107-910-11 | ELECT 100UF         | 20% 50V    |
| C6320   | 1-164-156-11 | CERAMIC CHIP 0.1UF  | 25V        |
| C6321   | 1-112-240-21 | ELECT 820UF         | 20% 25V    |
| C6322   | 1-128-528-11 | ELECT 470UF         | 20% 25V    |

< CONNECTOR >

|                 |               |                               |
|-----------------|---------------|-------------------------------|
| CN6000 $\Delta$ | *1-691-960-11 | PIN, CONNECTOR (PC BOARD) 3P  |
| CN6002          | *1-785-705-11 | PIN, CONNECTOR (PC BOARD) 9P  |
| CN6003          | *1-793-236-11 | PIN, CONNECTOR (PC BOARD) 14P |
| CN6200          | *1-779-944-11 | PIN, CONNECTOR (PC BOARD) 4P  |

< DIODE >

|        |              |                        |
|--------|--------------|------------------------|
| D6000  | 8-719-510-53 | DIODE D4SB60L          |
| D6001  | 6-500-108-01 | DIODE EP05FA20         |
| D6002  | 6-500-108-01 | DIODE EP05FA20         |
| D6003  | 8-719-404-50 | DIODE MA111-TX         |
| D6004  | 6-501-625-01 | DIODE PZU15B2          |
| D6005  | 8-719-081-97 | DIODE MMDL914T1        |
| D6006  | 6-501-625-01 | DIODE PZU15B2          |
| D6007  | 6-501-625-01 | DIODE PZU15B2          |
| D6008  | 8-719-979-64 | DIODE UF4005/23        |
| D6009  | 6-501-625-01 | DIODE PZU15B2          |
| D6010  | 6-501-625-01 | DIODE PZU15B2          |
| D6011  | 6-501-545-01 | DIODE SG10SC6-F5       |
| D6012  | 6-501-917-01 | DI SG10SC9F5-5009F23   |
| D6014  | 6-501-545-01 | DIODE SG10SC6-F5       |
| D6018  | 6-501-917-01 | DI SG10SC9F5-5009F23   |
| D6019  | 6-501-631-01 | DIODE PZU27B           |
| D6023  | 8-719-404-50 | DIODE MA111-TX         |
| D6024  | 6-501-614-01 | DIODE PZU5.6B2         |
| D6025  | 8-719-404-50 | DIODE MA111-TX         |
| D6202  | 6-500-567-31 | DIODE 10ERB20-TB3      |
| D6203  | 6-501-297-01 | DIODE 1F6G             |
| D6204  | 8-719-510-02 | DIODE D1NS4            |
| D6205  | 6-501-043-01 | DIODE UMZ16NT106       |
| D6206  | 6-500-567-31 | DIODE 10ERB20-TB3      |
| D6207  | 6-500-567-31 | DIODE 10ERB20-TB3      |
| D6208  | 8-719-022-97 | DIODE D2S4MF           |
| D6209  | 8-719-084-56 | DIODE PTZ-TE25-15B     |
| D6211  | 8-719-073-35 | DIODE RB551V-30TE-17   |
| ET6000 | 1-537-770-21 | TERMINAL BOARD, GROUND |
| ET6001 | 1-537-770-21 | TERMINAL BOARD, GROUND |

< FUSE >

|                |              |      |         |
|----------------|--------------|------|---------|
| F6000 $\Delta$ | 1-576-231-51 | FUSE | 4A 250V |
|----------------|--------------|------|---------|

|                 |              |                   |           |
|-----------------|--------------|-------------------|-----------|
| FX6000 $\Delta$ | 1-533-725-21 | FUSE HOLDER       | 6.3A 250V |
| < IC >          |              |                   |           |
| IC6000          | 6-705-810-01 | IC MCZ3001DB      |           |
| IC6001          | 6-709-368-01 | IC MM1431ATT (CN) |           |
| IC6002          | 8-759-586-17 | IC TL1431CZ-AP    |           |
| IC6200          | 6-708-801-01 | IC MIP2H2         |           |
| IC6201          | 6-709-442-01 | IC MM1530ATT      |           |
| IC6202          | 8-759-640-19 | IC PQ1CG2032FZ    |           |

< COIL >

|                |              |                  |       |
|----------------|--------------|------------------|-------|
| L6001 $\Delta$ | 1-457-430-12 | INDUCTOR         | 25MH  |
| L6002 $\Delta$ | 1-457-440-11 | LINE FILTER COIL |       |
| L6003 $\Delta$ | 1-457-440-11 | LINE FILTER COIL |       |
| L6004          | 1-406-971-11 | INDUCTOR         | 10UH  |
| L6005          | 1-406-971-11 | INDUCTOR         | 10UH  |
| L6008          | 1-406-971-11 | INDUCTOR         | 10UH  |
| L6203 $\Delta$ | 1-457-430-12 | INDUCTOR         | 25MH  |
| L6204          | 1-414-183-41 | INDUCTOR         | 10UH  |
| L6205          | 1-406-971-11 | INDUCTOR         | 10UH  |
| L6206          | 1-456-803-11 | INDUCTOR         | 100UH |
| L6207          | 1-412-525-31 | INDUCTOR         | 10UH  |

< PHOTOCOUPLER >

|        |              |               |              |
|--------|--------------|---------------|--------------|
| PH6000 | 6-600-187-01 | PHOTO COUPLER | PC123Y22JOOF |
| PH6001 | 6-600-187-01 | PHOTO COUPLER | PC123Y22JOOF |
| PH6002 | 6-600-187-01 | PHOTO COUPLER | PC123Y22JOOF |
| PH6200 | 6-600-187-01 | PHOTO COUPLER | PC123Y22JOOF |

< PROTECTOR MODULE >

|                 |              |         |           |
|-----------------|--------------|---------|-----------|
| PS6000 $\Delta$ | 1-533-596-21 | IC LINK | 4A 90V    |
| PS6001 $\Delta$ | 1-533-596-21 | IC LINK | 4A 90V    |
| PS6002 $\Delta$ | 1-533-595-31 | IC LINK | 3.15A 90V |

< TRANSISTOR >

|       |              |                              |
|-------|--------------|------------------------------|
| Q6000 | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF  |
| Q6001 | 8-729-010-08 | TRANSISTOR MSB710-R          |
| Q6002 | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF  |
| Q6003 | 6-551-545-01 | TRANSISTOR 2SK3469-01MR-F111 |
| Q6004 | 6-551-545-01 | TRANSISTOR 2SK3469-01MR-F111 |
| Q6005 | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF  |
| Q6006 | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF  |
| Q6007 | 6-551-696-01 | TRANSISTOR ISAI235AC1TP-1EF  |
| Q6008 | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF  |
| Q6009 | 8-729-620-07 | TRANSISTOR 2SC3052EF-T1-LEF  |

Note : The components identified by shading and marked  $\Delta$  are critical for safety. Replace only with the part numbers specified in the parts list.

G1

| REF.NO.        | PART.NO      | DESCRIPTION | REMARK          | REF.NO.         | PART.NO      | DESCRIPTION                 | REMARK          |
|----------------|--------------|-------------|-----------------|-----------------|--------------|-----------------------------|-----------------|
| < RESISTOR >   |              |             |                 | R6053           | 1-216-821-11 | METAL CHIP                  | 1K 5% 1/10W     |
| JR6000         | 1-216-295-91 | SHORT CHIP  | 0               | R6054           | 1-216-833-11 | METAL CHIP                  | 10K 5% 1/10W    |
| JR6300         | 1-216-864-11 | SHORT CHIP  | 0               | R6055           | 1-216-864-11 | SHORT CHIP                  | 0               |
| JR6302         | 1-216-864-11 | SHORT CHIP  | 0               | R6057           | 1-216-822-11 | METAL CHIP                  | 1.2K 5% 1/10W   |
| JR6303         | 1-216-864-11 | SHORT CHIP  | 0               | R6058           | 1-216-833-11 | METAL CHIP                  | 10K 5% 1/10W    |
| R6003          | 1-218-760-11 | METAL CHIP  | 220K 0.5% 1/10W | R6061           | 1-216-837-11 | METAL CHIP                  | 22K 5% 1/10W    |
| R6004          | 1-218-760-11 | METAL CHIP  | 220K 0.5% 1/10W | R6062           | 1-218-849-11 | METAL CHIP                  | 1.2K 0.5% 1/10W |
| R6005          | 1-218-760-11 | METAL CHIP  | 220K 0.5% 1/10W | R6063           | 1-218-868-11 | METAL CHIP                  | 7.5K 0.5% 1/10W |
| R6006          | 1-218-760-11 | METAL CHIP  | 220K 0.5% 1/10W | R6064           | 1-218-847-11 | METAL CHIP                  | 1K 0.5% 1/10W   |
| R6007          | 1-208-830-11 | METAL CHIP  | 100K 0.5% 1/10W | R6066           | 1-216-829-11 | METAL CHIP                  | 4.7K 5% 1/10W   |
| R6008          | 1-218-760-11 | METAL CHIP  | 220K 0.5% 1/10W | R6068           | 1-216-849-11 | METAL CHIP                  | 220K 5% 1/10W   |
| R6009 $\Delta$ | 1-202-933-61 | FUSIBLE     | 0.1 10% 1/2W    | R6069           | 1-208-842-11 | METAL CHIP                  | 330K 0.5% 1/10W |
| R6010          | 1-208-852-11 | METAL CHIP  | 820K 0.5% 1/10W | R6070           | 1-208-842-11 | METAL CHIP                  | 330K 0.5% 1/10W |
| R6011          | 1-208-852-11 | METAL CHIP  | 820K 0.5% 1/10W | R6071           | 1-218-760-11 | METAL CHIP                  | 220K 0.5% 1/10W |
| R6012          | 1-216-837-11 | METAL CHIP  | 22K 5% 1/10W    | R6072           | 1-208-810-11 | METAL CHIP                  | 15K 0.5% 1/10W  |
| R6013          | 1-208-852-11 | METAL CHIP  | 820K 0.5% 1/10W | R6073           | 1-216-837-11 | METAL CHIP                  | 22K 5% 1/10W    |
| R6014          | 1-218-760-11 | METAL CHIP  | 220K 0.5% 1/10W | R6074           | 1-216-825-11 | METAL CHIP                  | 2.2K 5% 1/10W   |
| R6015          | 1-218-760-11 | METAL CHIP  | 220K 0.5% 1/10W | R6075           | 1-216-825-11 | METAL CHIP                  | 2.2K 5% 1/10W   |
| R6016          | 1-216-833-11 | METAL CHIP  | 10K 5% 1/10W    | R6076           | 1-216-837-11 | METAL CHIP                  | 22K 5% 1/10W    |
| R6017          | 1-208-803-11 | METAL CHIP  | 7.5K 0.5% 1/10W | R6080           | 1-218-760-11 | METAL CHIP                  | 220K 0.5% 1/10W |
| R6018          | 1-218-881-11 | METAL CHIP  | 27K 0.5% 1/10W  | R6081           | 1-216-295-91 | SHORT CHIP                  | 0               |
| R6020          | 1-218-823-11 | METAL CHIP  | 100 0.5% 1/10W  | R6200           | 1-249-389-11 | CARBON                      | 4.7 5% 1/4W     |
| R6022          | 1-218-875-11 | METAL CHIP  | 15K 0.5% 1/10W  | R6202           | 1-216-864-11 | SHORT CHIP                  | 0               |
| R6024          | 1-216-845-11 | METAL CHIP  | 100K 5% 1/10W   | R6203           | 1-216-864-11 | SHORT CHIP                  | 0               |
| R6025          | 1-216-833-11 | METAL CHIP  | 10K 5% 1/10W    | R6204           | 1-249-385-11 | CARBON                      | 2.2 5% 1/4W     |
| R6026          | 1-216-833-11 | METAL CHIP  | 10K 5% 1/10W    | R6205           | 1-243-725-21 | METAL OXIDE                 | 100K 5% 1W      |
| R6027          | 1-216-837-11 | METAL CHIP  | 22K 5% 1/10W    | R6206           | 1-216-821-11 | METAL CHIP                  | 1K 5% 1/10W     |
| R6028          | 1-218-823-11 | METAL CHIP  | 100 0.5% 1/10W  | R6209           | 1-216-805-11 | METAL CHIP                  | 47 5% 1/10W     |
| R6029          | 1-216-837-11 | METAL CHIP  | 22K 5% 1/10W    | R6210           | 1-218-871-11 | METAL CHIP                  | 10K 0.5% 1/10W  |
| R6030          | 1-249-393-11 | CARBON      | 10 5% 1/4W      | R6211           | 1-218-867-11 | METAL CHIP                  | 6.8K 0.5% 1/10W |
| R6031          | 1-249-393-11 | CARBON      | 10 5% 1/4W      | R6212           | 1-216-295-91 | SHORT CHIP                  | 0               |
| R6032          | 1-218-871-11 | METAL CHIP  | 10K 0.5% 1/10W  | R6213           | 1-216-295-91 | SHORT CHIP                  | 0               |
| R6035          | 1-216-833-11 | METAL CHIP  | 10K 5% 1/10W    | R6220           | 1-218-865-11 | METAL CHIP                  | 5.6K 0.5% 1/10W |
| R6036          | 1-216-833-11 | METAL CHIP  | 10K 5% 1/10W    | R6221           | 1-216-827-11 | METAL CHIP                  | 3.3K 5% 1/10W   |
| R6037          | 1-216-821-11 | METAL CHIP  | 1K 5% 1/10W     | R6222           | 1-218-879-11 | METAL CHIP                  | 22K 0.5% 1/10W  |
| R6038          | 1-216-864-11 | SHORT CHIP  | 0               | R6223           | 1-216-864-11 | SHORT CHIP                  | 0               |
| R6039          | 1-216-864-11 | SHORT CHIP  | 0               | R6224           | 1-218-881-11 | METAL CHIP                  | 27K 0.5% 1/10W  |
| R6040          | 1-245-494-21 | METAL       | 2.2M 2% 1/4W    | R6226           | 1-218-849-11 | METAL CHIP                  | 1.2K 0.5% 1/10W |
| R6041          | 1-245-494-21 | METAL       | 2.2M 2% 1/4W    | R6227           | 1-218-871-11 | METAL CHIP                  | 10K 0.5% 1/10W  |
| R6042          | 1-216-817-11 | METAL CHIP  | 470 5% 1/10W    | R6228           | 1-249-411-11 | CARBON                      | 330 5% 1/4W     |
| R6043          | 1-245-315-71 | METAL OXIDE | 0.1 5% 2W       | < TRANSFORMER > |              |                             |                 |
| R6044          | 1-216-864-11 | SHORT CHIP  | 0               | T6000 $\Delta$  | 1-445-204-11 | CONVERTER TRANSFORMER (PIT) |                 |
| R6045          | 1-245-315-71 | METAL OXIDE | 0.1 5% 2W       | T6001 $\Delta$  | 1-445-201-11 | CONVERTER TRANSFORMER (PIT) |                 |
| R6046          | 1-216-833-11 | METAL CHIP  | 10K 5% 1/10W    | T6200 $\Delta$  | 1-443-984-11 | CONVERTER TRANSFORMER (SBT) |                 |
| R6047          | 1-216-833-11 | METAL CHIP  | 10K 5% 1/10W    | < VARISTOR >    |              |                             |                 |
| R6048          | 1-216-837-11 | METAL CHIP  | 22K 5% 1/10W    | VD6000 $\Delta$ | 1-804-995-11 | VARISTOR                    |                 |
| R6049          | 1-216-837-11 | METAL CHIP  | 22K 5% 1/10W    |                 |              |                             |                 |
| R6050          | 1-216-833-11 | METAL CHIP  | 10K 5% 1/10W    |                 |              |                             |                 |
| R6052          | 1-216-821-11 | METAL CHIP  | 1K 5% 1/10W     |                 |              |                             |                 |

| REF.NO. | PART.NO | DESCRIPTION | REMARK |
|---------|---------|-------------|--------|
|---------|---------|-------------|--------|

**G1 Board Variant Parts (26 Inches Only)**

&lt; COIL &gt;

|       |              |          |      |
|-------|--------------|----------|------|
| L6001 | 1-457-479-12 | INDUCTOR | 36MH |
| L6203 | 1-457-479-12 | INDUCTOR | 36MH |

**G1 Board Variant Parts (32 Inches Only)**

&lt; COIL &gt;

|       |              |          |      |
|-------|--------------|----------|------|
| L6001 | 1-457-430-12 | INDUCTOR | 25MH |
| L6203 | 1-457-430-12 | INDUCTOR | 25MH |

**\* A-1310-214-A U1 COMPLETE (26 Inches Only)**

&lt; CAPACITOR &gt;

|      |              |                      |            |
|------|--------------|----------------------|------------|
| C200 | 1-165-908-11 | CERAMIC CHIP 1UF     | 10% 10V    |
| C201 | 1-165-908-11 | CERAMIC CHIP 1UF     | 10% 10V    |
| C202 | 1-112-781-11 | CERAMIC CHIP 1UF     | 10% 10V    |
| C204 | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V |
| C206 | 1-100-912-11 | CERAMIC CHIP 1UF     | 10% 25V    |
| C207 | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V |
| C209 | 1-100-912-11 | CERAMIC CHIP 1UF     | 10% 25V    |
| C211 | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V |
| C213 | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V |
| C215 | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V |
| C218 | 1-162-964-11 | CERAMIC CHIP 0.001UF | 10.00% 50V |

&lt; CONNECTOR &gt;

|       |               |                     |
|-------|---------------|---------------------|
| CN201 | *1-819-928-11 | HEADER ASSEMBLY 20P |
| CN202 | *1-695-915-11 | TAB (CONTACT)       |

&lt; DIODE &gt;

|       |              |                |
|-------|--------------|----------------|
| D203  | 8-719-423-03 | DIODE MA8100   |
| ET201 | 1-780-482-11 | EARTH TERMINAL |
| ET202 | 1-780-482-11 | EARTH TERMINAL |

&lt; SOCKET &gt;

|      |              |                                |
|------|--------------|--------------------------------|
| J201 | 1-780-489-11 | S TERMINAL BLOCK (RIGHT ANGLE) |
| J202 | 1-815-325-11 | JACK                           |

&lt; RESISTOR &gt;

|      |              |            |     |      |       |
|------|--------------|------------|-----|------|-------|
| R200 | 1-218-831-11 | METAL CHIP | 220 | 0.5% | 1/10W |
| R201 | 1-218-831-11 | METAL CHIP | 220 | 0.5% | 1/10W |
| R202 | 1-218-831-11 | METAL CHIP | 220 | 0.5% | 1/10W |
| R203 | 1-216-809-11 | METAL CHIP | 100 | 5%   | 1/10W |
| R204 | 1-218-285-11 | METAL CHIP | 75  | 5%   | 1/10W |
| R205 | 1-216-809-11 | METAL CHIP | 100 | 5%   | 1/10W |
| R206 | 1-216-821-11 | METAL CHIP | 1K  | 5%   | 1/10W |

| REF.NO. | PART.NO | DESCRIPTION | REMARK |
|---------|---------|-------------|--------|
|---------|---------|-------------|--------|

|      |              |            |               |
|------|--------------|------------|---------------|
| R207 | 1-216-821-11 | METAL CHIP | 1K 5% 1/10W   |
| R212 | 1-216-857-11 | METAL CHIP | 1M 5% 1/10W   |
| R213 | 1-216-825-11 | METAL CHIP | 2.2K 5% 1/10W |
| R215 | 1-216-857-11 | METAL CHIP | 1M 5% 1/10W   |
| R216 | 1-216-825-11 | METAL CHIP | 2.2K 5% 1/10W |

|      |              |            |   |
|------|--------------|------------|---|
| R218 | 1-216-864-11 | SHORT CHIP | 0 |
| R219 | 1-216-864-11 | SHORT CHIP | 0 |
| R220 | 1-216-864-11 | SHORT CHIP | 0 |
| R221 | 1-216-864-11 | SHORT CHIP | 0 |
| R222 | 1-216-864-11 | SHORT CHIP | 0 |

&lt; VARISTOR &gt;

|       |              |                |        |
|-------|--------------|----------------|--------|
| VD201 | 1-804-988-21 | VARISTOR, CHIP | (1608) |
| VD202 | 1-804-988-21 | VARISTOR, CHIP | (1608) |
| VD203 | 1-804-988-21 | VARISTOR, CHIP | (1608) |
| VD204 | 1-804-988-21 | VARISTOR, CHIP | (1608) |
| VD205 | 1-804-988-21 | VARISTOR, CHIP | (1608) |
| VD206 | 1-804-988-21 | VARISTOR, CHIP | (1608) |
| VD207 | 1-804-988-21 | VARISTOR, CHIP | (1608) |



| REF.NO.                           | PART.NO       | DESCRIPTION                                                                  | REMARK         | REF.NO.                 | PART.NO       | DESCRIPTION                                                                                  | REMARK |
|-----------------------------------|---------------|------------------------------------------------------------------------------|----------------|-------------------------|---------------|----------------------------------------------------------------------------------------------|--------|
| <b>ACCESSORIES AND CONNECTORS</b> |               |                                                                              |                |                         |               |                                                                                              |        |
|                                   | *1-833-927-12 | CONNECTOR ASSY (BALANCER-CN6700(D1))                                         | (40 inches)    |                         | *3-198-502-43 | INSTRUCTION MANUAL (AEP) (32/40 inches)<br>ENGLISH/RUSSIAN/POLISH/CZECH/SLOVAK/<br>HUNGARIAN |        |
|                                   | *1-910-035-64 | CONNECTOR ASSY 14P (CN6002(G1)-CN6402 (BC))                                  | (26 inches)    |                         | *3-198-502-53 | INSTRUCTION MANUAL (AEP) (32/40 inches)<br>NORWEGIAN/SWEDISH/FINNISH/DANISH/TURKISH          |        |
|                                   | *1-910-035-65 | SPEAKER HARNESS, 4 PIN (CN3000(BC)-SPEAKER)                                  | (26/32 inches) |                         | *3-218-327-12 | INSTRUCTION MANUAL (UK) (26 inches) ENGLISH                                                  |        |
|                                   | *1-910-035-66 | SPEAKER HARNESS, 4 PIN (CN3000(BC)-SPEAKER)                                  | (40 inches)    |                         | *3-218-327-22 | INSTRUCTION MANUAL (AEP) (26 inches)<br>GERMAN/FRENCH/ITALIAN/DUTCH                          |        |
|                                   | *1-910-035-68 | CONNECTOR ASSY 3P (CN101(H1)-CN6400(BC))                                     | (26/32 inches) |                         | *3-218-327-32 | INSTRUCTION MANUAL (AEP) (26 inches)<br>SPANISH/PORTUGUESE/GREEK                             |        |
|                                   | *1-910-035-70 | CONNECTOR ASSY 3P (CN101(H1)-CN6400(BC))                                     | (40 inches)    |                         | *3-218-327-42 | INSTRUCTION MANUAL (AEP) (26 inches)<br>ENGLISH/RUSSIAN/POLISH/CZECH/SLOVAK/<br>HUNGARIAN    |        |
|                                   | *1-910-035-71 | CONNECTOR ASSY 14P (CN6002(G1)-CN6402(BC)-<br>INVERTER)                      | (32 inches)    |                         | *3-218-327-52 | INSTRUCTION MANUAL (AEP) (26 inches)<br>NORWEGIAN/SWEDISH/FINNISH/DANISH/TURKISH             |        |
|                                   | *1-910-035-72 | CONNECTOR ASSY 14P (CN6003(G1)-CN6500(BC))                                   | (32 inches)    | <b>REMOTE COMMANDER</b> |               |                                                                                              |        |
|                                   | *1-910-035-73 | CONNECTOR ASSY 3P (CN6200(G1)-CN6501(BC))                                    | (32 inches)    |                         | 1-480-158-11  | REMOTE COMMANDER (RM-ED009)                                                                  |        |
|                                   | *1-910-035-75 | CONNECTOR ASSY 3P (CN6502(G3)-CN6600(D1))                                    | (40 inches)    |                         |               |                                                                                              |        |
|                                   | *1-910-035-76 | CONNECTOR ASSY 20P (CN3001(BC)-CN4000(BC)-<br>CN201(U2))                     | (26/32 inches) |                         |               |                                                                                              |        |
|                                   | *1-910-035-77 | CONNECTOR ASSY 20P (CN3001(BC)-CN4000(BC)-<br>CN201(U2))                     | (40 inches)    |                         |               |                                                                                              |        |
|                                   | *1-910-035-78 | LVDS 30P (TCOM-CN5000(BC))                                                   | (26 inches)    |                         |               |                                                                                              |        |
|                                   | *1-910-035-79 | LVDS 30P (TCOM-CN5000(BC))                                                   | (32 inches)    |                         |               |                                                                                              |        |
|                                   | *1-910-035-80 | LVDS 30P (TCOM-CN5000(BC))                                                   | (40 inches)    |                         |               |                                                                                              |        |
|                                   | *1-910-035-85 | CONNECTOR ASSY 12P (CN6401(BC)-CN301(H3)-<br>CN401(H4))                      | (26/32 inches) |                         |               |                                                                                              |        |
|                                   | *1-910-035-86 | CONNECTOR ASSY 12P (CN6401(BC)-CN301(H3)-<br>CN401(H4))                      | (40 inches)    |                         |               |                                                                                              |        |
|                                   | *1-910-036-43 | CONNECTOR ASSY 8P (CN6204(G3)-CN6707(D1))                                    | (40 inches)    |                         |               |                                                                                              |        |
|                                   | *1-910-036-44 | CONNECTOR ASSY 7P (BALANCER-CN6701(D1))                                      | (40 inches)    |                         |               |                                                                                              |        |
|                                   | *1-910-036-75 | MULTI-CONNECTOR (CN6202(G3)-CN6203(G3)-<br>CN6402(BC),CN6500(BC),CN6501(BC)) | (40 inches)    |                         |               |                                                                                              |        |
|                                   | *1-910-037-54 | CONNECTOR ASSY 14P (CN6003(G1)-CN6500(BC))                                   | (26 inches)    |                         |               |                                                                                              |        |
|                                   | *1-910-039-52 | CONNECTOR ASSY 4P (CN6200(G1)-CN6501(BC))                                    | (26 inches)    |                         |               |                                                                                              |        |
|                                   | 1-769-175-21  | ANTENNA CABLE                                                                | (40 inches)    |                         |               |                                                                                              |        |
|                                   | 1-834-221-11  | HDMI CABLE                                                                   | (32 inches)    |                         |               |                                                                                              |        |
|                                   | 1-834-222-11  | HDMI CABLE                                                                   | (40 inches)    |                         |               |                                                                                              |        |
|                                   | *3-198-502-13 | INSTRUCTION MANUAL (UK) (32/40 inches)<br>ENGLISH                            |                |                         |               |                                                                                              |        |
|                                   | *3-198-502-23 | INSTRUCTION MANUAL (AEP) (32/40 inches)<br>GERMAN/FRENCH/ITALIAN/DUTCH       |                |                         |               |                                                                                              |        |
|                                   | *3-198-502-33 | INSTRUCTION MANUAL (AEP) (32/40 inches)<br>SPANISH/PORTUGUESE/GREEK          |                |                         |               |                                                                                              |        |

