

SECTION 6
EXPLODED VIEWS

NOTE:

- The mechanical parts with no reference number in the exploded views are not supplied.
- Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- -XX and -X mean standardized parts, so they may have some difference from the original one.
- Abbreviation
CND : Canadian model
E2 : AC 120 V area in E model
KR : Korea model
TW : Taiwan model

- Color Indication of Appearance Parts
Example :
KNOB, BALANCE (WHITE) ... (RED)
Parts Color Cabinet's Color
- Accessories are given in the last of this parts list.


The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

The components identified by mark Δ contain confidential information. Strictly follow the instructions whenever the components are repaired and/or replaced.


Les composants identifiés par la marque Δ contiennent des informations confidentielles. Suivre scrupuleusement les instructions chaque fois qu'un composant est remplacé et/ou réparé.

6-1. CASE SECTION

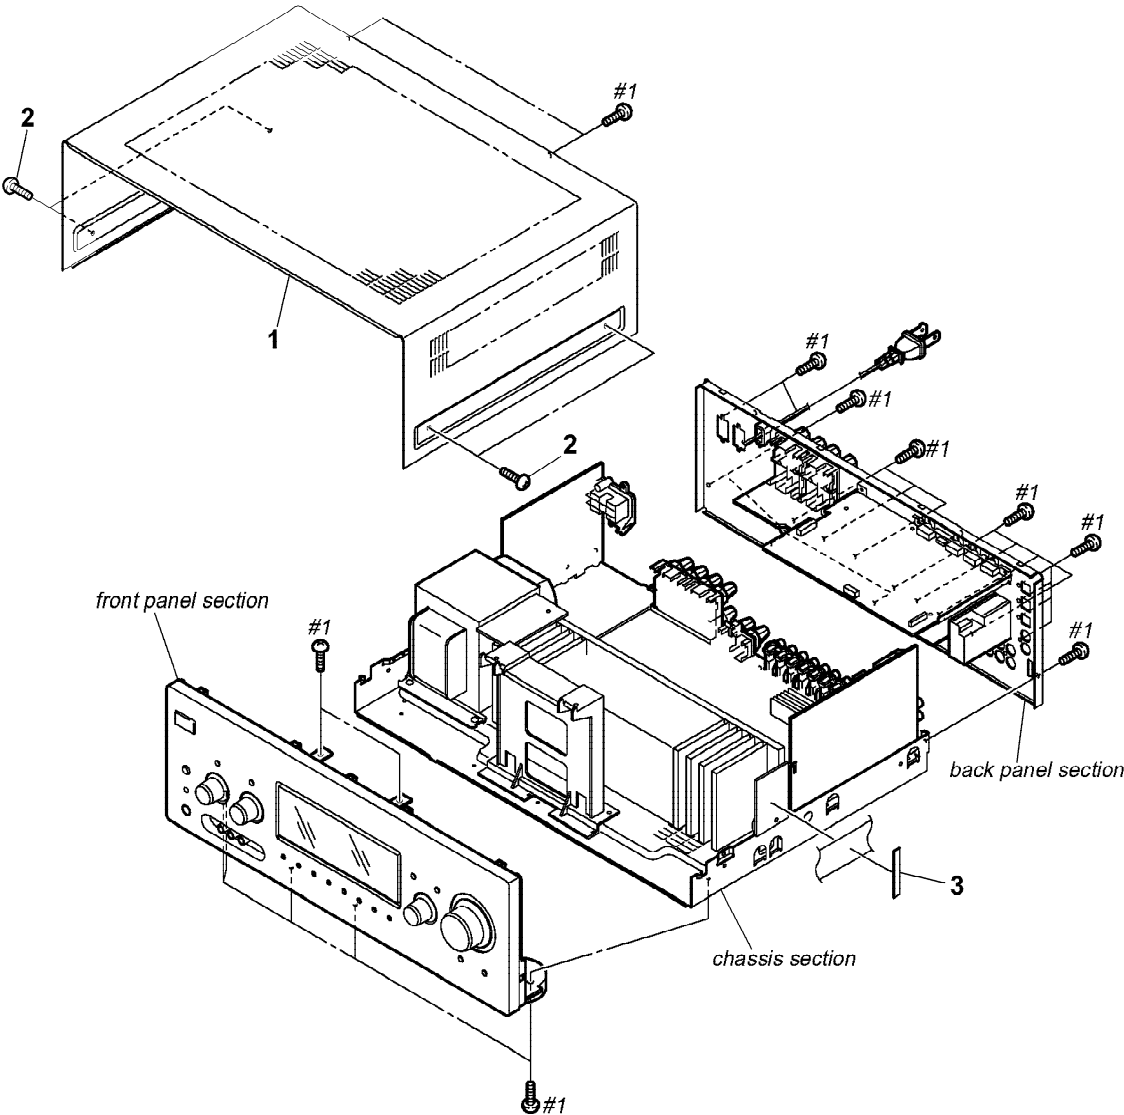


Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
1	2-666-933-11	CASE (BLACK)...(BLACK)		2	3-363-099-11	SCREW (CASE 3 TP2) (SILVER)...(SILVER)	
1	2-666-933-31	CASE (SILVER)...(SILVER)		3	3-378-109-12	CUSHION, SARANET	
2	3-363-099-02	SCREW (CASE 3 TP2) (BLACK)...(BLACK)		#1	7-685-646-79	SCREW +BVTP 3X8 TYPE2 IT-3	

6-2. FRONT PANEL SECTION

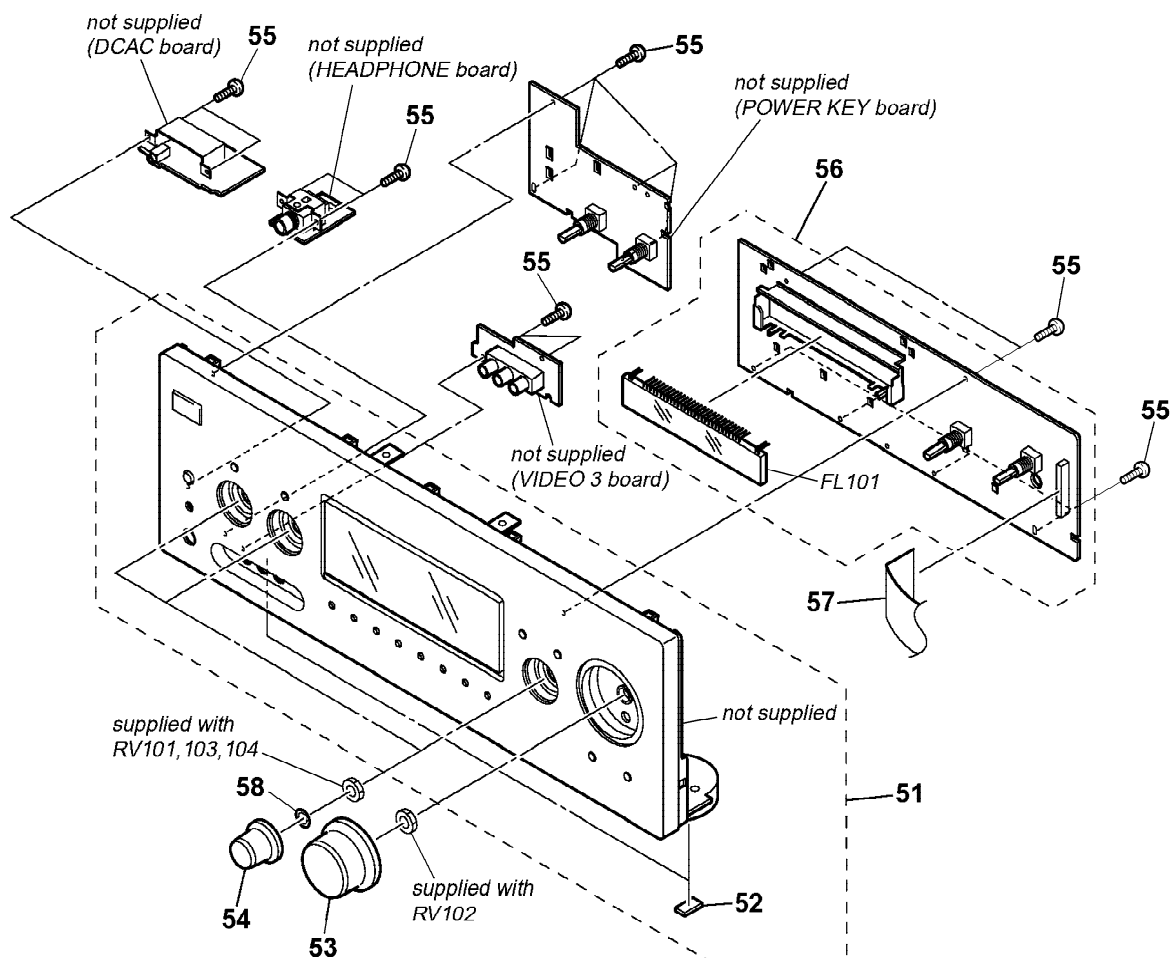


Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
51	X-2176-020-1	FRONT PANEL ASSY (BLACK)...(BLACK)	(US,CND)	53	2-661-142-01	KNOB (VOLUME) (BLACK)...(BLACK)	
51	X-2176-628-1	FRONT PANEL ASSY (BLACK)...(BLACK)	(AEP,UK)	53	2-661-142-11	KNOB (VOLUME) (SILVER)...(SILVER)	
51	X-2176-629-1	FRONT PANEL ASSY (SILVER)...(SILVER)	(AEP,UK)	54	2-661-141-01	KNOB (MENU) (BLACK)...(BLACK)	
51	X-2176-630-1	FRONT PANEL ASSY (BLACK)...(BLACK) (E2)		54	2-661-141-11	KNOB (MENU) (SILVER)...(SILVER)	
51	X-2178-403-1	FRONT PANEL ASSY (SILVER)...(SILVER)	(KR,TW)	55	3-087-053-01	+BVTP 2.6 (3CR)	
52	4-977-358-01	CUSHION		56	A-1231-379-A	DISPLAY BOARD, COMPLETE	
				57	1-829-043-11	WIRE (FLAT TYPE) (27 CORE)	
				58	3-354-981-11	SPRING (SUS), RING	
				FL101	1-519-927-11	VACUUM FLUORESCENT DISPLAY	

6-3. BACK PANEL SECTION

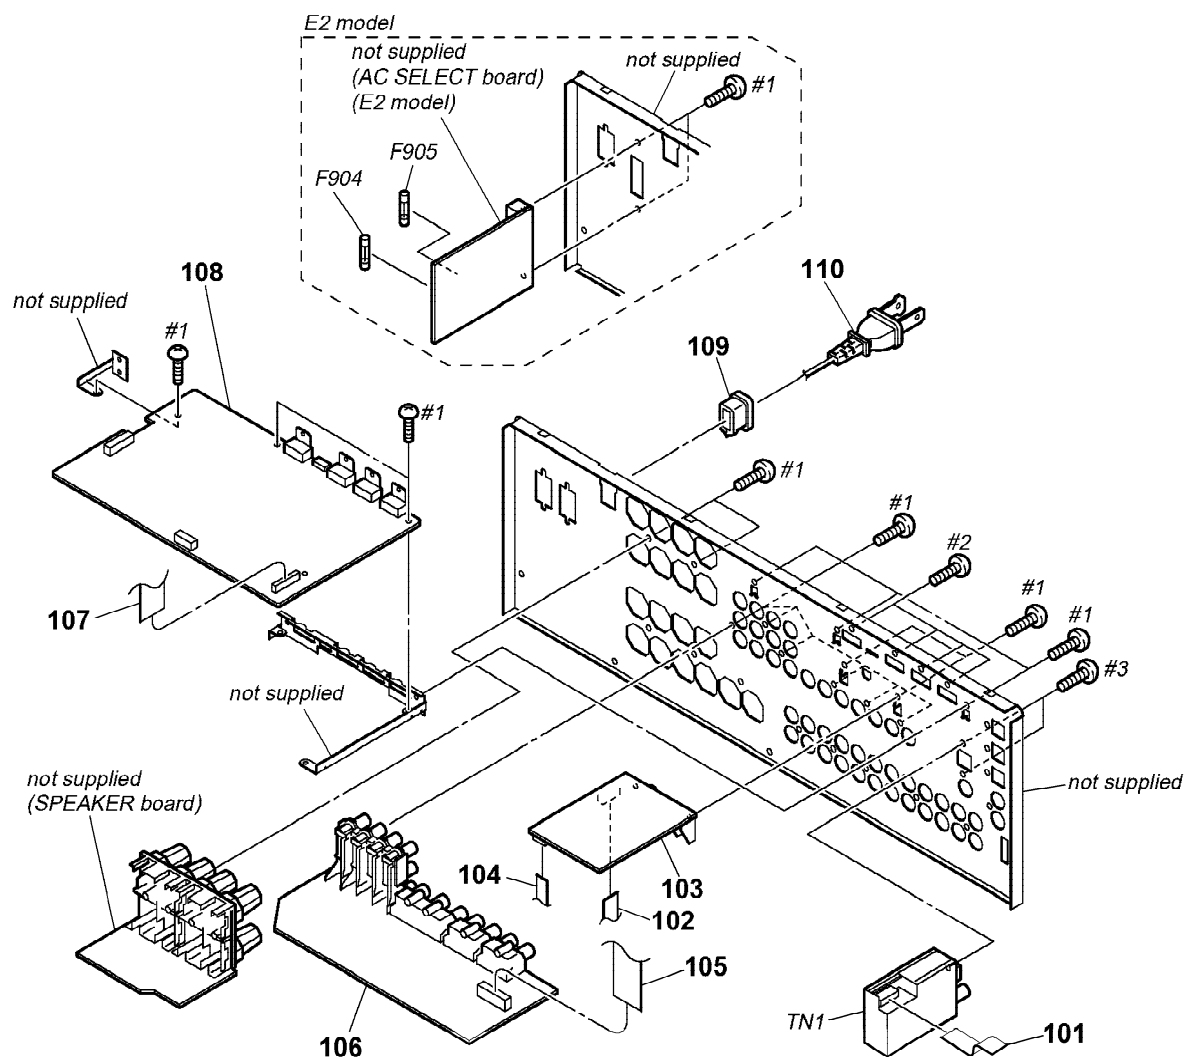

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
101	1-828-953-11	WIRE (FLAT TYPE) (9 CORE) (EXCEPT AEP,UK)		△ 110	1-777-071-83	CORD, POWER (AEP,UK,E2)	
101	1-828-963-11	WIRE (FLAT TYPE) (11 CORE) (AEP,UK)		△ 110	1-783-820-11	CORD, POWER (US,CND)	
102	1-828-958-11	WIRE (FLAT TYPE) (9 CORE) (US,CND)		△ 110	1-827-597-41	CORD, POWER (TW)	
103	A-1222-793-A	XM BOARD, COMPLETE (US,CND)		△ F904	1-532-505-33	FUSE (T5AL/250V) (E2)	
104	1-828-938-11	WIRE (FLAT TYPE) (5 CORE) (US,CND)		△ F905	1-532-504-33	FUSE (T4AL/250V) (E2)	
105	1-828-982-11	WIRE (FLAT TYPE) (15 CORE)		TN1	1-693-728-11	TUNER (FM/AM) (ANTENNA) (US,CND,E2)	
106	A-1231-372-A	VIDEO BOARD, COMPLETE (US,CND,KR,TW)		TN1	1-693-737-11	TUNER (FM/AM) (ANTENNA) (AEP,UK)	
106	A-1231-977-A	VIDEO BOARD, COMPLETE (AEP,UK,E2)		TN1	1-693-749-11	TUNER (FM/AM) (ANTENNA) (KR,TW)	
107	1-828-350-51	WIRE (FLAT TYPE) (17 CORE)		#1	7-685-646-79	SCREW +BVTP 3X8 TYPE2 IT-3	
△ 108	A-1237-655-A	HDMI RE BOARD, COMPLETE (for SERVICE)		#2	7-685-871-01	SCREW +BVTT 3X6 (S)	
109	3-703-244-21	BUSHING (2104), CORD		#3	7-685-862-09	SCREW +BVTT 2.6X6 (S)	
△ 110	1-769-079-61	CORD, POWER (KR)					

6-4. CHASSIS SECTION

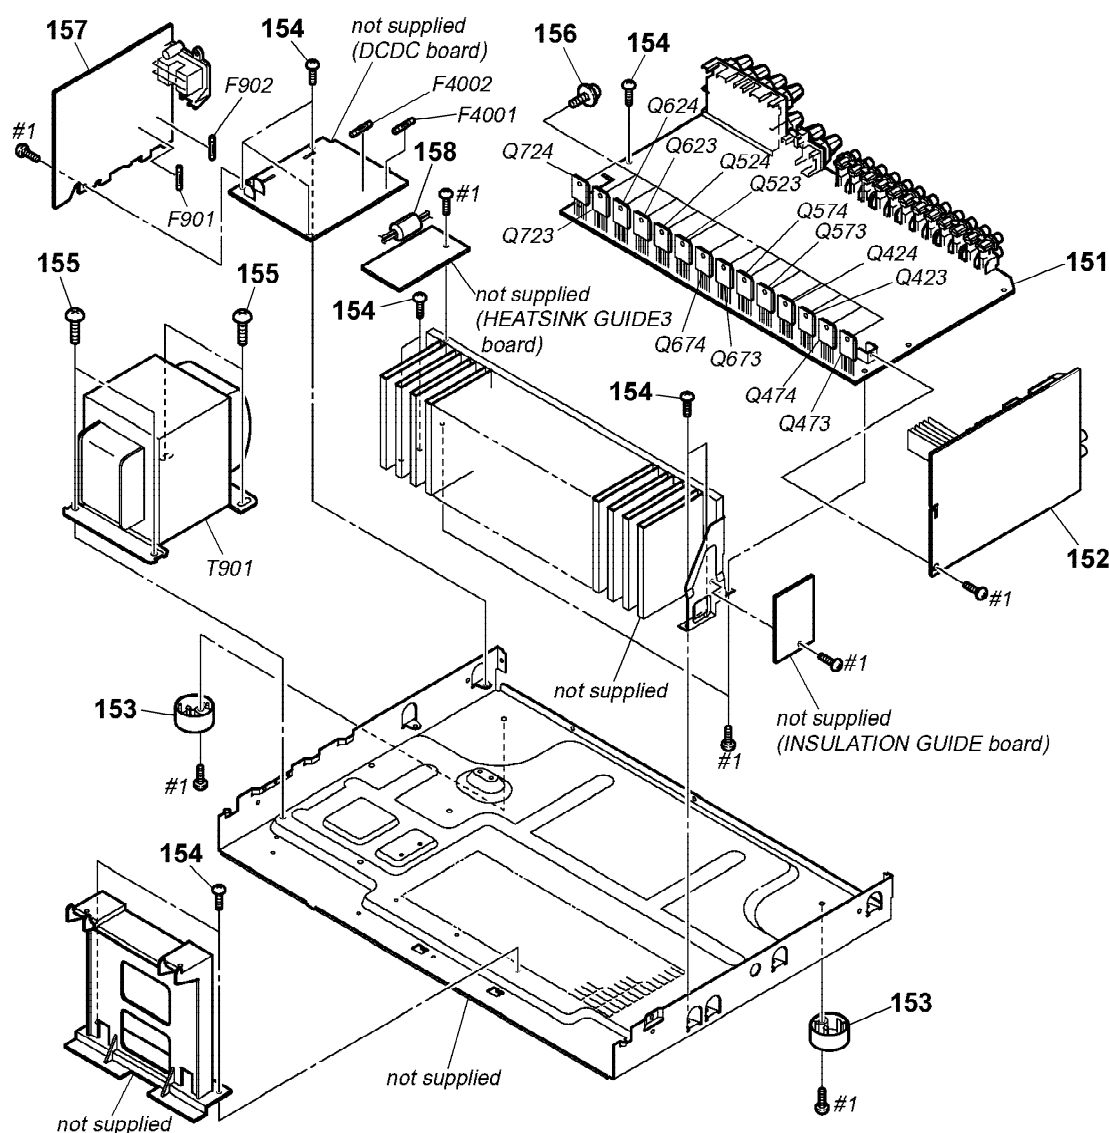

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
151	A-1231-364-A	MAIN BOARD, COMPLETE (US,CND)		△ F4001	1-532-465-33	FUSE (T3.15AL/250V)	
151	A-1231-396-A	MAIN BOARD, COMPLETE (AEP,UK,KR,TW)		△ F4002	1-532-465-33	FUSE (T3.15AL/250V)	
151	A-1271-028-A	MAIN BOARD, COMPLETE (E2)		Q423	6-702-390-01	TRANSISTOR MN2488-OPY-MK	
152	A-1231-370-A	DIGITAL BOARD, COMPLETE (US,CND)		Q424	6-702-391-01	TRANSISTOR MP1620-OPY-MK	
152	A-1231-397-A	DIGITAL BOARD, COMPLETE (AEP,UK)		Q473	6-702-390-01	TRANSISTOR MN2488-OPY-MK	
152	A-1231-970-A	DIGITAL BOARD, COMPLETE (E2)		Q474	6-702-391-01	TRANSISTOR MP1620-OPY-MK	
152	A-1287-660-A	DIGITAL BOARD, COMPLETE (KR,TW)		Q523	6-702-390-01	TRANSISTOR MN2488-OPY-MK	
153	X-4953-448-1	FOOT ASSY		Q524	6-702-391-01	TRANSISTOR MP1620-OPY-MK	
154	3-077-331-21	+BV 3 (3-CR)		Q573	6-702-390-01	TRANSISTOR MN2488-OPY-MK	
155	4-249-675-01	+BV SUMITITE S 4X6 ROUND		Q574	6-702-391-01	TRANSISTOR MP1620-OPY-MK	
156	3-905-609-01	SCREW (TRANSISTOR)		Q623	6-702-390-01	TRANSISTOR MN2488-OPY-MK	
157	A-1231-380-A	STANDBY BOARD, COMPLETE (US,CND)		Q624	6-702-391-01	TRANSISTOR MP1620-OPY-MK	
157	A-1236-403-A	STANDBY BOARD, COMPLETE (AEP,UK,KR)		Q673	6-702-390-01	TRANSISTOR MN2488-OPY-MK	
157	A-1236-404-A	STANDBY BOARD, COMPLETE (E2)		Q674	6-702-391-01	TRANSISTOR MP1620-OPY-MK	
157	A-1287-665-A	STANDBY BOARD, COMPLETE (TW)		Q723	6-702-390-01	TRANSISTOR MN2488-OPY-MK	
158	1-500-082-11	CLAMP, SLEEVE FERRITE (AEP,UK,KR,TW)		Q724	6-702-391-01	TRANSISTOR MP1620-OPY-MK	
△ F901	1-532-504-33	FUSE (T4AL/250V) (AEP,UK,KR)		△ T901	1-443-958-11	TRANSFORMER, POWER (MAIN) (US,CND)	
△ F901	1-532-505-33	FUSE (T5AL/250V) (TW)		△ T901	1-443-959-11	TRANSFORMER, POWER (MAIN) (E2)	
△ F901	1-533-312-12	FUSE, GLASS CYLINDRICAL (DIA. 5) (10A/125V) (US,CND)		△ T901	1-445-060-11	TRANSFORMER, POWER (MAIN) (TW)	
△ F902	1-532-464-33	FUSE (T2.5AL/250V) (E2)		△ T901	1-445-215-11	TRANSFORMER, POWER (MAIN) (AEP,UK,KR)	
△ F902	1-533-420-12	FUSE, GLASS CYLINDRICAL (DIA. 5) (5A/125V) (US,CND)		#1	7-685-646-79	SCREW +BV1P 3X8 TYPE2 IT-3	

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
C4007	1-125-891-11	CERAMIC CHIP	0.47uF	10%	10V	C1014	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C4009	1-125-891-11	CERAMIC CHIP	0.47uF	10%	10V	C1015	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C4010	1-125-891-11	CERAMIC CHIP	0.47uF	10%	10V	C1016	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C4100	1-115-814-11	ELECT	0.001F	20%	35V	C1017	1-117-370-11	CERAMIC CHIP	10uF		10V
C4102	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V	C1018	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C4103	1-128-950-31	ELECT	1000uF	20%	16V	C1019	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
		< DIODE >				C1020	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
D4001	8-719-081-52	DIODE D5SBA20-4003				C1021	1-137-980-11	CERAMIC CHIP	0.47uF	10%	50V
D4803	8-719-080-53	DIODE RK36LF-B3				C1022	1-135-372-31	ELECT	470uF	20%	10V
D4804	8-719-059-21	DIODE RK46LF-T2				C1023	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
		< GROUND TERMINAL >				C1024	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
EB4001	1-537-738-21	TERMINAL, GROUND				C1025	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
		< IC >				C1026	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
IC4001	8-759-474-09	IC SI-8050S-LF1101				C1027	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
IC4100	8-759-659-28	IC SI-8033S				C1028	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
		< COIL >				C1029	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
L4000	1-456-545-11	INDUCTOR	100uH			C1030	1-117-370-11	CERAMIC CHIP	10uF		10V
L4001	1-456-545-11	INDUCTOR	100uH			C1031	1-137-980-11	CERAMIC CHIP	0.47uF	10%	50V
L4100	1-456-545-11	INDUCTOR	100uH			C1032	1-135-372-31	ELECT	470uF	20%	10V
L4102	1-456-721-11	INDUCTOR	100uH			C1034	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
		< RESISTOR >				C1035	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R4000	1-216-823-11	METAL CHIP	1.5K	5%	1/10W	C1036	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R4001	1-216-817-11	METAL CHIP	470	5%	1/10W	C1037	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R4002	1-216-819-11	METAL CHIP	680	5%	1/10W	C1038	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
R4100	1-216-823-11	METAL CHIP	1.5K	5%	1/10W	C1039	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R4101	1-216-817-11	METAL CHIP	470	5%	1/10W	C1040	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
R4102	1-216-819-11	METAL CHIP	680	5%	1/10W	C1041	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
*****						C1042	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
	A-1231-370-A	DIGITAL BOARD, COMPLETE (US,CND)				C1043	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
	A-1231-397-A	DIGITAL BOARD, COMPLETE (AEP,UK)				C1044	1-162-913-11	CERAMIC CHIP	8PF	0.5PF	50V
	A-1231-970-A	DIGITAL BOARD, COMPLETE (E2)				C1046	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
	A-1287-660-A	DIGITAL BOARD, COMPLETE (KR,TW)				C1047	1-126-965-11	ELECT	22uF	20%	50V
		*****				C1048	1-162-913-11	CERAMIC CHIP	8PF	0.5PF	50V
	7-685-646-79	SCREW +BVTP 3X8 TYPE2 IT-3				C1049	1-117-370-11	CERAMIC CHIP	10uF		10V
		< CAPACITOR >				C1050	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1001	1-112-080-11	ELECT	470uF	20%	10V (AEP,UK,KR,TW)	C1051	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1001	1-126-925-11	ELECT	470uF	20%	10V (US,CND,E2)	C1052	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1002	1-137-980-11	CERAMIC CHIP	0.47uF	10%	50V	C1053	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1004	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V	C1054	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1005	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V	C1055	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1006	1-126-965-11	ELECT	22uF	20%	50V	C1056	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1007	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C1057	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1008	1-165-722-11	ELECT	100uF	20%	10V	C1058	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1010	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)	C1059	1-117-370-11	CERAMIC CHIP	10uF		10V
C1010	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)	C1060	1-126-933-11	ELECT	100uF	20%	16V
C1011	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V	C1061	1-126-933-11	ELECT	100uF	20%	16V
C1012	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V	C1062	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1013	1-126-933-11	ELECT	100uF	20%	16V	C1063	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
						C1064	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
						C1065	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
						C1066	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
						C1067	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
						C1068	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
						C1069	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
						C1070	1-165-722-11	ELECT	100uF	20%	10V
						C1072	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
						C1073	1-126-933-11	ELECT	100uF	20%	16V
						C1074	1-137-980-11	CERAMIC CHIP	0.47uF	10%	50V

STR-DG910

Ver. 1.1

DIGITAL

Ref. No.	Part No.	Description	Remark		
C1075	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1076	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1077	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1078	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1079	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1080	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1081	1-126-960-11	ELECT	1uF	20%	50V
C1082	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1083	1-162-968-11	CERAMIC CHIP	0.0047uF	10%	50V
C1084	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C1085	1-126-965-11	ELECT	22uF	20%	50V
C1086	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1087	1-165-722-11	ELECT	100uF	20%	10V
C1088	1-112-100-11	ELECT	10uF	20%	50V
C1089	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1090	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1091	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)
C1091	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)
C1092	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1093	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1094	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1095	1-126-933-11	ELECT	100uF	20%	16V
C1096	1-117-370-11	CERAMIC CHIP	10uF		10V
C1097	1-117-370-11	CERAMIC CHIP	10uF		10V
C1101	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1102	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1103	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1104	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1106	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1107	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1108	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1118	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1119	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1122	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1123	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1128	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1131	1-162-974-11	CERAMIC CHIP	0.01uF		50V
C1132	1-162-974-11	CERAMIC CHIP	0.01uF		50V
C1133	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1135	1-126-947-11	ELECT	47uF	20%	35V
C1138	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1139	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1140	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1141	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1144	1-162-974-11	CERAMIC CHIP	0.01uF		50V
C1145	1-162-974-11	CERAMIC CHIP	0.01uF		50V
C1171	1-162-974-11	CERAMIC CHIP	0.01uF		50V
C1172	1-162-974-11	CERAMIC CHIP	0.01uF		50V
C1173	1-162-974-11	CERAMIC CHIP	0.01uF		50V
C1174	1-162-974-11	CERAMIC CHIP	0.01uF		50V
C1175	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1256	1-107-726-11	CERAMIC CHIP	0.01uF	10%	16V
C1257	1-107-726-11	CERAMIC CHIP	0.01uF	10%	16V
C1266	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C1267	1-162-960-11	CERAMIC CHIP	220PF	10%	50V
C1301	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V

Ref. No.	Part No.	Description	Remark		
C1303	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1304	1-110-563-11	CERAMIC CHIP	0.068uF	10%	16V
C1305	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1306	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)
C1306	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)
C1308	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1309	1-162-918-11	CERAMIC CHIP	18PF	5%	50V
C1310	1-162-918-11	CERAMIC CHIP	18PF	5%	50V
C1312	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1313	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C1314	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1315	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1316	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1317	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)
C1317	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)
C1318	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C1351	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1352	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1354	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1355	1-126-965-11	ELECT	22uF	20%	50V
C1358	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1359	1-112-077-11	ELECT	1000uF	20%	6.3V (AEP,UK,KR,TW)
C1359	1-126-916-11	ELECT	1000uF	20%	6.3V (US,CND,E2)
C1361	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1362	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1418	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)
C1418	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)
C1428	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)
C1428	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)
C1429	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)
C1429	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)
C1430	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)
C1430	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)
C1438	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)
C1438	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)
C1448	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)
C1448	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)
C1450	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1454	1-100-566-11	CERAMIC CHIP	0.1uF	10%	25V
C1457	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)
C1457	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
C1458	1-112-100-11	ELECT	10uF 20% 50V (AEP,UK,KR,TW)	C1670	1-126-964-11	ELECT	10uF 20% 50V (US,CND,E2)
C1458	1-126-964-11	ELECT	10uF 20% 50V (US,CND,E2)	C1671	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C1460	1-112-100-11	ELECT	10uF 20% 50V (AEP,UK,KR,TW)	C1672	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C1460	1-126-964-11	ELECT	10uF 20% 50V (US,CND,E2)	C1673	1-112-100-11	ELECT	10uF 20% 50V (AEP,UK,KR,TW)
C1468	1-112-100-11	ELECT	10uF 20% 50V (AEP,UK,KR,TW)	C1673	1-126-964-11	ELECT	10uF 20% 50V (US,CND,E2)
C1468	1-126-964-11	ELECT	10uF 20% 50V (US,CND,E2)	C1675	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C1478	1-112-100-11	ELECT	10uF 20% 50V (AEP,UK,KR,TW)	C1913	1-137-980-11	CERAMIC CHIP	0.47uF 10% 50V
C1478	1-126-964-11	ELECT	10uF 20% 50V (US,CND,E2)	C1914	1-126-947-11	ELECT	47uF 20% 35V
C1483	1-164-218-11	CERAMIC CHIP	180PF 5% 50V	< CONNECTOR >			
C1485	1-164-392-11	CERAMIC CHIP	390PF 5% 50V	* CNP500	1-564-510-11	PLUG, CONNECTOR	7P
C1486	1-164-218-11	CERAMIC CHIP	180PF 5% 50V	* CNP501	1-564-506-11	PLUG, CONNECTOR	3P
C1488	1-112-100-11	ELECT	10uF 20% 50V (AEP,UK,KR,TW)	CNP503	1-779-799-11	PIN, CONNECTOR	9P
C1488	1-126-964-11	ELECT	10uF 20% 50V (US,CND,E2)	CNS501	1-573-829-11	CONNECTOR, BOARD TO BOARD	15P
C1489	1-164-392-11	CERAMIC CHIP	390PF 5% 50V	CNS502	1-766-720-41	CONNECTOR, BOARD TO BOARD	17P
C1491	1-112-100-11	ELECT	10uF 20% 50V (AEP,UK,KR,TW)	CNS503	1-568-828-11	CONNECTOR, FFC	9P (US,CND)
C1491	1-126-964-11	ELECT	10uF 20% 50V (US,CND,E2)	CNS504	1-784-731-11	CONNECTOR, FFC	9P
C1492	1-164-218-11	CERAMIC CHIP	180PF 5% 50V	CNS505	1-784-788-11	CONNECTOR, FFC	27P
C1493	1-164-392-11	CERAMIC CHIP	390PF 5% 50V	CNS506	1-820-116-41	CONNECTOR, FFC/FPC	17P
C1494	1-100-566-11	CERAMIC CHIP	0.1uF 10% 25V	CNS508	1-568-828-11	CONNECTOR, FFC	9P (EXCEPT AEP,UK)
C1496	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	CNS508	1-568-830-11	CONNECTOR, FFC	11P (AEP,UK)
C1498	1-164-218-11	CERAMIC CHIP	180PF 5% 50V	CNS509	1-784-776-11	CONNECTOR, FFC	15P
C1500	1-164-392-11	CERAMIC CHIP	390PF 5% 50V	< DIODE >			
C1501	1-162-964-11	CERAMIC CHIP	0.001uF 10% 50V	D1001	8-719-053-18	DIODE	1SR154-400TE-25
C1502	1-164-218-11	CERAMIC CHIP	180PF 5% 50V	D1003	8-719-049-09	DIODE	1SS367-T3SONY
C1503	1-164-218-11	CERAMIC CHIP	180PF 5% 50V	D1004	8-719-049-09	DIODE	1SS367-T3SONY
C1504	1-164-392-11	CERAMIC CHIP	390PF 5% 50V	D1106	8-719-060-48	DIODE	RB751V-40TE-17
C1505	1-162-964-11	CERAMIC CHIP	0.001uF 10% 50V	D1107	8-719-404-50	DIODE	MA111-TX
C1506	1-164-218-11	CERAMIC CHIP	180PF 5% 50V	D1110	8-719-404-50	DIODE	MA111-TX
C1507	1-164-218-11	CERAMIC CHIP	180PF 5% 50V	D1111	8-719-404-50	DIODE	MA111-TX
C1508	1-164-392-11	CERAMIC CHIP	390PF 5% 50V	D1301	8-719-404-50	DIODE	MA111-TX
C1510	1-164-392-11	CERAMIC CHIP	390PF 5% 50V	D1302	8-719-404-50	DIODE	MA111-TX
C1512	1-164-392-11	CERAMIC CHIP	390PF 5% 50V	< FERRITE BEAD >			
C1605	1-100-566-11	CERAMIC CHIP	0.1uF 10% 25V	FB1053	1-469-139-21	FERRITE, EMI (SMD)	(2012)
C1620	1-100-566-11	CERAMIC CHIP	0.1uF 10% 25V	FB1101	1-400-862-11	BEAD, FERRITE	
C1653	1-112-100-11	ELECT	10uF 20% 50V (AEP,UK,KR,TW)	FB1102	1-400-862-11	BEAD, FERRITE	
C1653	1-126-964-11	ELECT	10uF 20% 50V (US,CND,E2)	FB1103	1-469-670-21	FERRITE, EMI (SMD)	(2012)
C1654	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	FB1104	1-469-670-21	FERRITE, EMI (SMD)	(2012)
C1656	1-112-100-11	ELECT	10uF 20% 50V (AEP,UK,KR,TW)	FB1105	1-400-862-11	BEAD, FERRITE	
C1656	1-126-964-11	ELECT	10uF 20% 50V (US,CND,E2)	FB1106	1-400-862-11	BEAD, FERRITE	
C1657	1-107-726-11	CERAMIC CHIP	0.01uF 10% 16V	FB1107	1-400-862-11	BEAD, FERRITE	
C1658	1-107-726-11	CERAMIC CHIP	0.01uF 10% 16V	FB1108	1-400-862-11	BEAD, FERRITE	
C1659	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	FB1109	1-400-862-11	BEAD, FERRITE	
C1670	1-112-100-11	ELECT	10uF 20% 50V (AEP,UK,KR,TW)	FB1112	1-469-670-21	FERRITE, EMI (SMD)	(2012)
				FB1113	1-400-862-11	BEAD, FERRITE	
				FB1114	1-400-862-11	BEAD, FERRITE	
				FB1115	1-400-862-11	BEAD, FERRITE	
				FB1116	1-400-862-11	BEAD, FERRITE	
				FB1117	1-400-862-11	BEAD, FERRITE	
				FB1305	1-469-139-21	FERRITE, EMI (SMD)	(2012)
				FB1306	1-400-862-11	BEAD, FERRITE	
				FB1308	1-400-862-11	BEAD, FERRITE	
				FB1309	1-400-862-11	BEAD, FERRITE	

DIGITAL

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
FB1452	1-400-862-11	BEAD, FERRITE		JR1023	1-216-296-11	SHORT CHIP 0	
FB1453	1-400-862-11	BEAD, FERRITE		JR1205	1-216-296-11	SHORT CHIP 0	
FB1503	1-469-139-21	FERRITE, EMI (SMD) (2012)		JR1511	1-469-139-21	FERRITE, EMI (SMD) (2012)	
< IC >				< TRANSISTOR >			
IC1001	6-703-547-01	IC TA7805LS		Q1103	8-729-027-43	TRANSISTOR DTC114EKA-T146	
IC1002	6-710-766-01	IC BD12KA5FP-E2		Q1104	8-729-620-13	TRANSISTOR 2SC4154TP-1EF	
IC1003	8-759-680-48	IC TC7WH157FK(TE85R)		Q1105	8-729-620-13	TRANSISTOR 2SC4154TP-1EF	
IC1004	8-759-831-52	IC TC7WH125FK(TE85R)		Q1106	8-729-620-10	TRANSISTOR 2SA1602TP-1EF	
IC1005	8-759-277-63	IC TC7W14FU(TE12R)		< RESISTOR >			
IC1006	8-759-058-62	IC TC7S08FU(TE85R)		R1010	1-216-809-11	METAL CHIP 100 5% 1/10W	
IC1007	6-702-913-01	IC S-80929CNMC-G8ZT2G		R1011	1-216-845-11	METAL CHIP 100K 5% 1/10W	
IC1008	8-759-524-10	IC TC74VHC157FT(EL)		R1012	1-216-809-11	METAL CHIP 100 5% 1/10W	
IC1009	6-706-764-01	IC ADSP21266SKSTZ-2C		R1013	1-216-809-11	METAL CHIP 100 5% 1/10W	
IC1010	6-807-508-01	IC MB91353APMT-G-115E1		R1014	1-216-809-11	METAL CHIP 100 5% 1/10W	
IC1011	6-807-120-01	IC SST25VF040B-50-4C-QAF-1		R1015	1-216-809-11	METAL CHIP 100 5% 1/10W	
IC1012	6-707-745-10	IC SI-3050KM-TL		R1016	1-216-809-11	METAL CHIP 100 5% 1/10W	
IC1013	6-707-744-01	IC SI-3033KM-TL		R1017	1-216-813-11	METAL CHIP 220 5% 1/10W	
IC1014	8-759-447-77	IC TC7WH74FU(TE12R)		R1018	1-216-805-11	METAL CHIP 47 5% 1/10W	
IC1016	8-759-524-48	IC TC74VHC393FT(EL)		R1019	1-216-864-11	SHORT CHIP 0	
IC1017	8-759-680-48	IC TC7WH157FK(TE85R)		R1021	1-216-809-11	METAL CHIP 100 5% 1/10W	
IC1031	6-705-469-01	IC BA50BC0FP-E2		R1023	1-216-813-11	METAL CHIP 220 5% 1/10W	
IC1131	6-704-005-01	IC BR24L32F-WE2		R1024	1-216-864-11	SHORT CHIP 0	
IC1301	6-805-692-01	IC LC890561W		R1025	1-216-864-11	SHORT CHIP 0	
IC1302	8-759-595-15	IC TC74ACT153F(EL)		R1026	1-216-864-11	SHORT CHIP 0	
IC1303	8-759-096-87	IC TC7WU04FU(TE12R)		R1027	1-216-864-11	SHORT CHIP 0	
IC1304	8-759-096-87	IC TC7WU04FU(TE12R)		R1028	1-216-801-11	METAL CHIP 22 5% 1/10W	
IC1351	6-600-466-01	IC TORX147L(SONY) (DIGITAL (ASSIGNABLE) VIDEO 2/BD IN (OPTICAL))		R1029	1-216-801-11	METAL CHIP 22 5% 1/10W	
IC1352	6-600-466-01	IC TORX147L(SONY) (DIGITAL (ASSIGNABLE) VIDEO 1 IN (OPTICAL))		R1030	1-216-801-11	METAL CHIP 22 5% 1/10W	
IC1354	6-600-466-01	IC TORX147L(SONY) (DIGITAL (ASSIGNABLE) SAT IN (OPTICAL))		R1031	1-216-801-11	METAL CHIP 22 5% 1/10W	
IC1403	8-759-710-97	IC NJM4565M-D		R1032	1-216-801-11	METAL CHIP 22 5% 1/10W	
IC1404	8-759-710-97	IC NJM4565M-D		R1033	1-216-833-11	METAL CHIP 10K 5% 1/10W	
IC1405	8-759-710-97	IC NJM4565M-D		R1034	1-216-821-11	METAL CHIP 1K 5% 1/10W	
IC1406	8-759-710-97	IC NJM4565M-D		R1035	1-216-801-11	METAL CHIP 22 5% 1/10W	
IC1452	6-708-785-01	IC PCM1609APT		R1036	1-216-864-11	SHORT CHIP 0	
IC1602	8-759-529-76	IC TC74VHC595FT(EL)		R1037	1-216-833-11	METAL CHIP 10K 5% 1/10W	
IC1603	6-707-608-01	IC PCM1803DBR		R1038	1-216-801-11	METAL CHIP 22 5% 1/10W	
IC1902	8-759-231-56	IC TA7809S		R1039	1-216-833-11	METAL CHIP 10K 5% 1/10W	
IC1904	6-705-463-01	IC BA33BC0T		R1040	1-216-801-11	METAL CHIP 22 5% 1/10W	
				R1041	1-216-809-11	METAL CHIP 100 5% 1/10W	
< JACK >				R1042	1-216-809-11	METAL CHIP 100 5% 1/10W	
J1301	1-818-314-11	JACK, PIN 2P (DIGITAL (ASSIGNABLE) SA-CD/CD/CD-R IN (COAXIAL), DVD IN (COAXIAL))		R1043	1-216-801-11	METAL CHIP 22 5% 1/10W	
< CONNECTOR >				R1044	1-216-833-11	METAL CHIP 10K 5% 1/10W	
J1302	1-817-615-21	CONNECTOR, BOARD TO BOARD 18P (DMPORT)		R1045	1-216-809-11	METAL CHIP 100 5% 1/10W	
< JUMPER RESISTOR >				R1046	1-216-801-11	METAL CHIP 22 5% 1/10W	
JR1000	1-216-296-11	SHORT CHIP 0		R1047	1-216-801-11	METAL CHIP 22 5% 1/10W	
JR1001	1-211-950-11	SHORT CHIP 0		R1048	1-216-857-11	METAL CHIP 1M 5% 1/10W	
JR1002	1-211-950-11	SHORT CHIP 0		R1049	1-216-817-11	METAL CHIP 470 5% 1/10W	
JR1003	1-211-950-11	SHORT CHIP 0		R1050	1-216-833-11	METAL CHIP 10K 5% 1/10W	
JR1019	1-216-296-11	SHORT CHIP 0		R1051	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
JR1020	1-469-139-21	FERRITE, EMI (SMD) (2012)		R1052	1-162-970-11	CERAMIC CHIP 0.01uF 10% 25V	
				R1053	1-216-833-11	METAL CHIP 10K 5% 1/10W	
				R1054	1-216-817-11	METAL CHIP 470 5% 1/10W	
				R1055	1-216-809-11	METAL CHIP 100 5% 1/10W	
				R1056	1-216-854-11	METAL CHIP 560K 5% 1/10W	
				R1057	1-216-837-11	METAL CHIP 22K 5% 1/10W	

Ref. No.	Part No.	Description				Remark	Ref. No.	Part No.	Description				Remark
R1058	1-216-813-11	METAL CHIP	220	5%	1/10W	(AEP,UK)	R1119	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R1059	1-216-813-11	METAL CHIP	220	5%	1/10W	(AEP,UK)	R1120	1-216-864-11	SHORT CHIP	0			
R1060	1-216-821-11	METAL CHIP	1K	5%	1/10W		R1122	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1061	1-216-809-11	METAL CHIP	100	5%	1/10W		R1123	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1062	1-216-801-11	METAL CHIP	22	5%	1/10W		R1124	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1063	1-216-809-11	METAL CHIP	100	5%	1/10W		R1125	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1064	1-216-833-11	METAL CHIP	10K	5%	1/10W		R1126	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1065	1-216-809-11	METAL CHIP	100	5%	1/10W		R1127	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1066	1-216-809-11	METAL CHIP	100	5%	1/10W		R1128	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1067	1-216-809-11	METAL CHIP	100	5%	1/10W		R1129	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1068	1-216-801-11	METAL CHIP	22	5%	1/10W		R1130	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1069	1-216-833-11	METAL CHIP	10K	5%	1/10W		R1131	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1070	1-216-864-11	SHORT CHIP	0				R1132	1-216-821-11	METAL CHIP	1K	5%	1/10W	
R1071	1-216-833-11	METAL CHIP	10K	5%	1/10W		R1133	1-216-813-11	METAL CHIP	220	5%	1/10W	
R1072	1-216-827-11	METAL CHIP	3.3K	5%	1/10W		R1134	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1073	1-216-827-11	METAL CHIP	3.3K	5%	1/10W		R1135	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	
R1074	1-216-809-11	METAL CHIP	100	5%	1/10W		R1136	1-216-864-11	SHORT CHIP	0			
R1075	1-216-833-11	METAL CHIP	10K	5%	1/10W		R1138	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1076	1-216-809-11	METAL CHIP	100	5%	1/10W		R1139	1-216-864-11	SHORT CHIP	0			
R1077	1-216-809-11	METAL CHIP	100	5%	1/10W		R1140	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1078	1-216-809-11	METAL CHIP	100	5%	1/10W		R1141	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1079	1-216-801-11	METAL CHIP	22	5%	1/10W		R1142	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1080	1-216-864-11	SHORT CHIP	0				R1143	1-216-864-11	SHORT CHIP	0			
R1081	1-216-833-11	METAL CHIP	10K	5%	1/10W		R1144	1-216-801-11	METAL CHIP	22	5%	1/10W	
R1082	1-216-841-11	METAL CHIP	47K	5%	1/10W		R1145	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R1083	1-216-833-11	METAL CHIP	10K	5%	1/10W		R1151	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1084	1-216-864-11	SHORT CHIP	0				R1153	1-216-864-11	SHORT CHIP	0			
R1085	1-243-227-11	RES-CHIP	0.33	1%	1/8W		R1154	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1086	1-216-833-11	METAL CHIP	10K	5%	1/10W		R1155	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1088	1-216-833-11	METAL CHIP	10K	5%	1/10W		R1156	1-216-864-11	SHORT CHIP	0			
R1090	1-216-833-11	METAL CHIP	10K	5%	1/10W		R1157	1-216-864-11	SHORT CHIP	0			
R1093	1-216-833-11	METAL CHIP	10K	5%	1/10W		R1158	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1094	1-216-833-11	METAL CHIP	10K	5%	1/10W		R1159	1-216-827-11	METAL CHIP	3.3K	5%	1/10W	
R1095	1-216-833-11	METAL CHIP	10K	5%	1/10W		R1160	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1096	1-216-833-11	METAL CHIP	10K	5%	1/10W		R1164	1-216-864-11	SHORT CHIP	0			
R1097	1-216-833-11	METAL CHIP	10K	5%	1/10W		R1168	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1098	1-216-833-11	METAL CHIP	10K	5%	1/10W		R1169	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1100	1-216-864-11	SHORT CHIP	0				R1171	1-216-864-11	SHORT CHIP	0			
R1101	1-216-864-11	SHORT CHIP	0				R1172	1-216-864-11	SHORT CHIP	0			
R1102	1-216-864-11	SHORT CHIP	0				R1173	1-216-864-11	SHORT CHIP	0			
R1103	1-216-864-11	SHORT CHIP	0				R1174	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1104	1-216-864-11	SHORT CHIP	0				R1175	1-216-821-11	METAL CHIP	1K	5%	1/10W	
R1105	1-216-833-11	METAL CHIP	10K	5%	1/10W		R1176	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1106	1-216-809-11	METAL CHIP	100	5%	1/10W		R1177	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1107	1-216-825-11	METAL CHIP	2.2K	5%	1/10W		R1178	1-216-809-11	METAL CHIP	100	5%	1/10W	
R1108	1-216-825-11	METAL CHIP	2.2K	5%	1/10W		R1179	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R1109	1-216-825-11	METAL CHIP	2.2K	5%	1/10W		R1180	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R1110	1-216-833-11	METAL CHIP	10K	5%	1/10W		R1181	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R1111	1-216-825-11	METAL CHIP	2.2K	5%	1/10W		R1182	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R1112	1-216-809-11	METAL CHIP	100	5%	1/10W		R1183	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R1113	1-216-833-11	METAL CHIP	10K	5%	1/10W		R1184	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R1114	1-216-825-11	METAL CHIP	2.2K	5%	1/10W		R1185	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R1115	1-216-809-11	METAL CHIP	100	5%	1/10W		R1186	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R1116	1-216-833-11	METAL CHIP	10K	5%	1/10W		R1187	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R1117	1-216-821-11	METAL CHIP	1K	5%	1/10W		R1188	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R1118	1-216-864-11	SHORT CHIP	0				R1189	1-216-833-11	METAL CHIP	10K	5%	1/10W	
							R1190	1-216-833-11	METAL CHIP	10K	5%	1/10W	
							R1191	1-216-833-11	METAL CHIP	10K	5%	1/10W	

STR-DG910

Ver. 1.1

DIGITAL

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
R1192	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1452	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R1193	1-216-841-11	METAL CHIP	47K	5%	1/10W	R1454	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
					(AEP,UK,E2)	R1456	1-216-809-11	METAL CHIP	100	5%	1/10W
R1193	1-216-864-11	SHORT CHIP	0 (KR,TW)			R1457	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R1194	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R1459	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
					(AEP,UK)						
R1194	1-216-837-11	METAL CHIP	22K	5%	1/10W	R1464	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
					(E2)	R1465	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
						R1466	1-216-809-11	METAL CHIP	100	5%	1/10W
R1194	1-216-864-11	SHORT CHIP	0 (US,CND)			R1468	1-216-824-11	METAL CHIP	1.8K	5%	1/10W
R1195	1-216-809-11	METAL CHIP	100	5%	1/10W	R1470	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R1196	1-216-809-11	METAL CHIP	100	5%	1/10W						
R1197	1-216-809-11	METAL CHIP	100	5%	1/10W	R1474	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1199	1-216-809-11	METAL CHIP	100	5%	1/10W	R1476	1-216-809-11	METAL CHIP	100	5%	1/10W
						R1486	1-216-809-11	METAL CHIP	100	5%	1/10W
R1260	1-216-821-11	METAL CHIP	1K	5%	1/10W	R1487	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R1261	1-216-821-11	METAL CHIP	1K	5%	1/10W	R1490	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R1304	1-216-813-11	METAL CHIP	220	5%	1/10W						
R1305	1-216-817-11	METAL CHIP	470	5%	1/10W	R1491	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R1306	1-216-801-11	METAL CHIP	22	5%	1/10W	R1492	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
						R1493	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R1307	1-216-809-11	METAL CHIP	100	5%	1/10W	R1494	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R1308	1-216-809-11	METAL CHIP	100	5%	1/10W	R1495	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W
R1309	1-216-809-11	METAL CHIP	100	5%	1/10W						
R1310	1-216-857-11	METAL CHIP	1M	5%	1/10W	R1508	1-216-864-11	SHORT CHIP	0		
R1311	1-216-809-11	METAL CHIP	100	5%	1/10W	R1509	1-216-864-11	SHORT CHIP	0		
						R1510	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1313	1-216-809-11	METAL CHIP	100	5%	1/10W	R1511	1-216-838-11	METAL CHIP	27K	5%	1/10W
R1314	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1512	1-216-813-11	METAL CHIP	220	5%	1/10W
R1315	1-216-809-11	METAL CHIP	100	5%	1/10W						
R1318	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1513	1-216-837-11	METAL CHIP	22K	5%	1/10W
R1319	1-216-817-11	METAL CHIP	470	5%	1/10W	R1514	1-216-837-11	METAL CHIP	22K	5%	1/10W
						R1515	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1320	1-216-833-11	METAL CHIP	10K	5%	1/10W	R1556	1-216-815-11	METAL CHIP	330	5%	1/10W
R1321	1-216-864-11	SHORT CHIP	0			R1557	1-216-809-11	METAL CHIP	100	5%	1/10W
R1322	1-216-809-11	METAL CHIP	100	5%	1/10W						
R1323	1-216-809-11	METAL CHIP	100	5%	1/10W	R1607	1-216-809-11	METAL CHIP	100	5%	1/10W
R1324	1-216-809-11	METAL CHIP	100	5%	1/10W	R1609	1-216-817-11	METAL CHIP	470	5%	1/10W
						R1610	1-216-864-11	SHORT CHIP	0		
R1325	1-216-864-11	SHORT CHIP	0			R1612	1-216-864-11	SHORT CHIP	0		
R1351	1-216-809-11	METAL CHIP	100	5%	1/10W	R1618	1-216-817-11	METAL CHIP	470	5%	1/10W
R1352	1-216-809-11	METAL CHIP	100	5%	1/10W						
R1354	1-216-809-11	METAL CHIP	100	5%	1/10W	R1635	1-216-833-11	METAL CHIP	10K	5%	1/10W
R1355	1-218-285-11	METAL CHIP	75	5%	1/10W	R1636	1-216-833-11	METAL CHIP	10K	5%	1/10W
						R1671	1-216-864-11	SHORT CHIP	0		
R1356	1-216-821-11	METAL CHIP	1K	5%	1/10W	R1801	1-216-809-11	METAL CHIP	100	5%	1/10W
R1357	1-216-837-11	METAL CHIP	22K	5%	1/10W						(US,CND)
R1358	1-216-854-11	METAL CHIP	560K	5%	1/10W	R1802	1-216-809-11	METAL CHIP	100	5%	1/10W
R1359	1-216-809-11	METAL CHIP	100	5%	1/10W						(US,CND)
R1360	1-216-809-11	METAL CHIP	100	5%	1/10W						
R1361	1-216-864-11	SHORT CHIP	0			R1804	1-216-809-11	METAL CHIP	100	5%	1/10W
R1362	1-216-809-11	METAL CHIP	100	5%	1/10W						(US,CND)
R1363	1-216-821-11	METAL CHIP	1K	5%	1/10W	R1806	1-216-809-11	METAL CHIP	100	5%	1/10W
R1364	1-216-821-11	METAL CHIP	1K	5%	1/10W						(US,CND)
R1366	1-218-285-11	METAL CHIP	75	5%	1/10W	R1807	1-216-809-11	METAL CHIP	100	5%	1/10W
											(US,CND)
R1367	1-216-821-11	METAL CHIP	1K	5%	1/10W	R1808	1-216-809-11	METAL CHIP	100	5%	1/10W
R1368	1-216-823-11	METAL CHIP	1.5K	5%	1/10W						(US,CND)
R1369	1-216-823-11	METAL CHIP	1.5K	5%	1/10W	R1809	1-216-809-11	METAL CHIP	100	5%	1/10W
R1416	1-216-809-11	METAL CHIP	100	5%	1/10W						(US,CND)
R1421	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W						
								< VIBRATOR >			
R1426	1-216-809-11	METAL CHIP	100	5%	1/10W	X1300	1-781-893-21	VIBRATOR, CERAMIC (CHIP TYPE) (12.5MHz)			
R1436	1-216-809-11	METAL CHIP	100	5%	1/10W	X1301	1-795-126-21	VIBRATOR, CRYSTAL (12.288MHz)			
R1446	1-216-809-11	METAL CHIP	100	5%	1/10W	X1302	1-795-807-11	VIBRATOR, CRYSTAL (25MHz)			
R1447	1-216-821-11	METAL CHIP	1K	5%	1/10W						*****
R1450	1-218-867-11	METAL CHIP	6.8K	0.5%	1/10W						

DISPLAY

HDMI RE

Ref. No.	Part No.	Description	Remark				Ref. No.	Part No.	Description	Remark			
	A-1231-379-A	DISPLAY BOARD, COMPLETE *****					R131	1-249-421-11	CARBON	2.2K	5%	1/4W	
							R197	1-249-387-81	CARBON	3.3	5%	1/4W	F
							R198	1-249-387-81	CARBON	3.3	5%	1/4W	F
		< CAPACITOR >							< ROTARY ENCODER >				
C110	1-162-286-31	CERAMIC	220PF	10%	50V		RV101	1-418-817-11	ENCODER, ROTARY (INPUT SELECTOR)				
C111	1-162-286-31	CERAMIC	220PF	10%	50V		RV102	1-418-725-41	ENCODER, ROTARY (12 TYPE)	(MASTER VOLUME)			
C112	1-162-286-31	CERAMIC	220PF	10%	50V				< SWITCH >				
C114	1-127-888-11	CERAMIC	0.1uF	10%	50V		S101	1-771-410-21	SWITCH, TACTILE (DIRECT)				
C115	1-126-964-11	ELECT	10uF	20%	50V		S102	1-771-410-21	SWITCH, TACTILE (AUTO CAL)				
							S103	1-771-410-21	SWITCH, TACTILE (INPUT MODE)				
C144	1-127-888-11	CERAMIC	0.1uF	10%	50V		S104	1-771-410-21	SWITCH, TACTILE (DISPLAY)				
C145	1-127-888-11	CERAMIC	0.1uF	10%	50V		S105	1-771-410-21	SWITCH, TACTILE (MUSIC)				
C147	1-162-286-31	CERAMIC	220PF	10%	50V		S106	1-771-410-21	SWITCH, TACTILE (MOVIE)				
C148	1-126-964-11	ELECT	10uF	20%	50V		S107	1-771-410-21	SWITCH, TACTILE (A.F.D.)				
C149	1-162-286-31	CERAMIC	220PF	10%	50V		S108	1-771-410-21	SWITCH, TACTILE (2CH)				
							S109	1-771-410-21	SWITCH, TACTILE (CATEGORY +) (US,CND)				
C160	1-127-888-11	CERAMIC	0.1uF	10%	50V		S109	1-771-410-21	SWITCH, TACTILE (SUR BACK DECODING)	(EXCEPT US,CND)			
C162	1-127-888-11	CERAMIC	0.1uF	10%	50V								
C164	1-162-286-31	CERAMIC	220PF	10%	50V		S110	1-771-410-21	SWITCH, TACTILE (CATEGORY -) (US,CND)				
C165	1-126-964-11	ELECT	10uF	20%	50V		S110	1-771-410-21	SWITCH, TACTILE (SLEEP) (EXCEPT US,CND)				
C171	1-162-286-31	CERAMIC	220PF	10%	50V		S111	1-771-410-21	SWITCH, TACTILE (CATEGORY MODE)	(US,CND)			
		< CONNECTOR >					S111	1-771-410-21	SWITCH, TACTILE (DIMMER)	(EXCEPT US,CND)			
* CN105	1-691-406-11	CONNECTOR, BOARD TO BOARD 7P					S112	1-771-410-21	SWITCH, TACTILE (MEMORY/ENTER)	*****			
CNS102	1-784-788-11	CONNECTOR, FFC 27P											
		< DIODE >					△	A-1237-655-A	HDMI RE BOARD, COMPLETE (for SERVICE)	*****			
D105	6-501-539-01	LED SELK5E20C-DTP15 (MULTI CHANNEL DECODING)							< CAPACITOR >				
		< VACUUM FLUORESCENT DISPLAY >					C3501	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
FL101	1-519-927-11	VACUUM FLUORESCENT DISPLAY					C3502	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
		< IC >					C3503	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
IC100	8-759-643-83	IC uPD16315GB-3BS					C3504	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
IC101	8-759-243-51	IC TC74ACT08P					C3505	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
IC103	6-600-349-31	IC NJL24H400A (IR)											
		< TRANSISTOR >					C3507	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
Q110	8-729-119-78	TRANSISTOR 2SC2785-HFE					C3508	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
		< RESISTOR >					C3509	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
R101	1-249-409-11	CARBON	220	5%	1/4W		C3510	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
R102	1-249-411-11	CARBON	330	5%	1/4W		C3511	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
R103	1-249-413-11	CARBON	470	5%	1/4W								
R104	1-249-415-11	CARBON	680	5%	1/4W		C3512	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
R105	1-247-831-11	CARBON	1K	5%	1/4W		C3513	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
							C3514	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
R106	1-249-419-11	CARBON	1.5K	5%	1/4W		C3516	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
R107	1-249-421-11	CARBON	2.2K	5%	1/4W		C3517	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
R108	1-249-409-11	CARBON	220	5%	1/4W								
R109	1-249-411-11	CARBON	330	5%	1/4W		C3518	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
R110	1-249-413-11	CARBON	470	5%	1/4W		C3519	1-126-210-21	ELECT CHIP	220uF	20%	4V	
							C3520	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
R115	1-247-807-31	CARBON	100	5%	1/4W		C3521	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
R116	1-247-807-31	CARBON	100	5%	1/4W		C3522	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
R117	1-247-807-31	CARBON	100	5%	1/4W								
R118	1-249-440-11	CARBON	82K	5%	1/4W		C3523	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
R119	1-247-807-31	CARBON	100	5%	1/4W		C3524	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
							C3525	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
R120	1-249-393-11	CARBON	10	5%	1/4W	F	C3526	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
R122	1-247-804-11	CARBON	75	5%	1/4W		C3527	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	

HDMI RE

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
C3529	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3620	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C3530	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3621	1-112-791-11	ELECT CHIP	100uF	20%	16V
C3531	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3625	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C3533	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3627	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C3534	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3630	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C3535	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3631	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C3536	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3632	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C3537	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3633	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C3538	1-162-916-11	CERAMIC CHIP	12PF	5%	50V	C3634	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C3539	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3635	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C3540	1-162-916-11	CERAMIC CHIP	12PF	5%	50V	C3636	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V
C3541	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3637	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V
C3542	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3638	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V
C3543	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3639	1-162-912-11	CERAMIC CHIP	7PF	0.5PF	50V
C3544	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3643	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C3545	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3644	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C3547	1-100-053-21	ELECT CHIP	220uF	20%	6.3V	C3800	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C3548	1-126-210-21	ELECT CHIP	220uF	20%	4V	C3801	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C3549	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3802	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C3550	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3803	1-165-672-21	ELECT CHIP	47uF	20%	10V
C3551	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3804	1-165-672-21	ELECT CHIP	47uF	20%	10V
C3552	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3805	1-112-788-11	ELECT CHIP	330uF	20%	6.3V
C3553	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3806	1-128-396-11	ELECT CHIP	470uF	20%	10V
C3555	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3807	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C3556	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3808	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C3557	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3810	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C3558	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3811	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C3561	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3812	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C3562	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3813	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C3563	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3814	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C3564	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3815	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C3566	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3816	1-165-176-11	CERAMIC CHIP	0.047uF	10%	16V
C3567	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3817	1-164-677-11	CERAMIC CHIP	0.033uF	10%	16V
C3568	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3818	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C3569	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3819	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C3570	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3820	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C3571	1-126-205-11	ELECT CHIP	47uF	20%	6.3V	C3821	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C3572	1-126-206-11	ELECT CHIP	100uF	20%	6.3V	C3822	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C3573	1-126-205-11	ELECT CHIP	47uF	20%	6.3V	C3823	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C3574	1-126-210-21	ELECT CHIP	220uF	20%	4V	C3824	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C3575	1-100-053-21	ELECT CHIP	220uF	20%	6.3V	C3825	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C3576	1-165-667-21	ELECT CHIP	100uF	20%	6.3V	C3826	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C3579	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C3827	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C3580	1-165-667-21	ELECT CHIP	100uF	20%	6.3V	C3828	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C3584	1-115-467-11	CERAMIC CHIP	0.22uF	10%	10V	C3829	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C3585	1-165-908-11	CERAMIC CHIP	1uF	10%	10V	C3830	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C3586	1-128-995-21	ELECT CHIP	100uF	20%	10V	C3831	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C3590	1-128-934-11	CERAMIC CHIP	0.33uF	20%	10V	C3832	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C3591	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3833	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C3593	1-128-994-21	ELECT CHIP	47uF	20%	10V	C3834	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C3594	1-128-994-21	ELECT CHIP	47uF	20%	10V	C3835	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C3596	1-128-994-21	ELECT CHIP	47uF	20%	10V	C3836	1-124-779-00	ELECT CHIP	10uF	20%	16V
C3597	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3837	1-124-779-00	ELECT CHIP	10uF	20%	16V
C3615	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3838	1-124-779-00	ELECT CHIP	10uF	20%	16V
C3616	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3839	1-124-779-00	ELECT CHIP	10uF	20%	16V
C3617	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3840	1-126-210-21	ELECT CHIP	220uF	20%	4V
C3618	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	C3841	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C3619	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C3842	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
C3843	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3904	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C3844	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3905	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C3845	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3906	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C3846	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3907	1-126-205-11	ELECT CHIP	47uF 20% 6.3V
C3847	1-115-416-11	CERAMIC CHIP	0.001uF 5% 25V	C3908	1-126-205-11	ELECT CHIP	47uF 20% 6.3V
C3851	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3909	1-126-205-11	ELECT CHIP	47uF 20% 6.3V
C3852	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3910	1-126-205-11	ELECT CHIP	47uF 20% 6.3V
C3853	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3911	1-126-205-11	ELECT CHIP	47uF 20% 6.3V
C3854	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3912	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C3855	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3913	1-162-971-11	CERAMIC CHIP	0.001uF 10% 50V
C3856	1-137-765-21	ELECT CHIP	47uF 20% 16V	C3914	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C3857	1-112-788-11	ELECT CHIP	330uF 20% 6.3V	C3915	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C3858	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3916	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C3859	1-126-393-11	ELECT CHIP	33uF 20% 10V	C3917	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C3860	1-112-788-11	ELECT CHIP	330uF 20% 6.3V	C3918	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C3861	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3919	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C3862	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	C3920	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C3863	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3921	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C3864	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3922	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C3865	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3923	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V
C3866	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3924	1-164-315-11	CERAMIC CHIP	470PF 5% 50V
C3867	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3925	1-164-315-11	CERAMIC CHIP	470PF 5% 50V
C3868	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3926	1-164-315-11	CERAMIC CHIP	470PF 5% 50V
C3869	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3927	1-115-416-11	CERAMIC CHIP	0.001uF 5% 25V
C3870	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3928	1-115-416-11	CERAMIC CHIP	0.001uF 5% 25V
C3871	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3929	1-115-416-11	CERAMIC CHIP	0.001uF 5% 25V
C3872	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3930	1-126-210-21	ELECT CHIP	220uF 20% 4V
C3873	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3931	1-128-995-21	ELECT CHIP	100uF 20% 10V
C3874	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	C3932	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V
C3875	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	< CONNECTOR >			
C3876	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	CN3501	1-820-735-11	CONNECTOR, HDMI 19P (HDMI SAT IN)	
C3877	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	CN3502	1-820-735-11	CONNECTOR, HDMI 19P (HDMI DVD IN)	
C3878	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	CN3503	1-820-735-11	CONNECTOR, HDMI 19P (HDMI VIDEO 2/BD IN)	
C3879	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	CN3504	1-820-735-11	CONNECTOR, HDMI 19P (HDMI OUT)	
C3880	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	CN3509	1-779-993-11	PIN, CONNECTOR (PWB) 5P	
C3881	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	CN3510	1-784-859-51	CONNECTOR, FFC (LIF(NON-ZIF)) 7P	
C3882	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	CN3511	1-820-116-41	CONNECTOR, FFC/FPC 17P	
C3883	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	CN3801	1-779-992-11	PIN, CONNECTOR (PWB) 8P	
C3884	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	< DIODE >			
C3885	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	D3501	8-719-988-61	DIODE 1SS355TE-17	
C3886	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	D3502	8-719-988-61	DIODE 1SS355TE-17	
C3887	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	D3511	8-719-988-61	DIODE 1SS355TE-17	
C3888	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	D3512	8-719-988-61	DIODE 1SS355TE-17	
C3889	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	D3513	8-719-988-61	DIODE 1SS355TE-17	
C3890	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	< TERMINAL >			
C3891	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	ET3503	1-780-318-11	TERMINAL	
C3892	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	ET3800	1-780-318-11	TERMINAL	
C3893	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	< FERRITE BEAD >			
C3894	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	FB3501	1-414-234-22	INDUCTOR, FERRITE BEAD	
C3895	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	FB3502	1-414-234-22	INDUCTOR, FERRITE BEAD	
C3896	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	FB3503	1-414-234-22	INDUCTOR, FERRITE BEAD	
C3897	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	FB3504	1-414-234-22	INDUCTOR, FERRITE BEAD	
C3898	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	FB3505	1-414-234-22	INDUCTOR, FERRITE BEAD	
C3899	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	FB3506	1-414-234-22	INDUCTOR, FERRITE BEAD	
C3900	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V				
C3901	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V				
C3902	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V				
C3903	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V				

STR-DG910

HDMI RE

Ref. No.	Part No.	Description	Remark
FB3508	1-414-234-22	INDUCTOR, FERRITE BEAD	
FB3509	1-469-152-11	FERRITE, EMI (SMD) (2012)	
FB3510	1-414-234-22	INDUCTOR, FERRITE BEAD	
FB3511	1-414-234-22	INDUCTOR, FERRITE BEAD	
FB3512	1-414-234-22	INDUCTOR, FERRITE BEAD	
FB3513	1-414-234-22	INDUCTOR, FERRITE BEAD	
FB3514	1-414-234-22	INDUCTOR, FERRITE BEAD	
FB3800	1-469-324-21	FERRITE, EMI (SMD) (2012)	
< IC >			
IC3501	8-759-389-26	IC 74LCX08MTCX	
IC3503	6-710-819-01	IC TMD5341APFCR	
IC3504	8-759-596-39	IC SN74LV4052APWR	
IC3507	6-708-758-01	IC PCA9517DP.118	
IC3509	6-704-001-01	IC BR24L02F-WE2	
IC3511	(Not supplied)	IC SI9011CLU	
IC3513	(Not supplied)	IC SI9030CTU-7	
IC3516	6-705-337-01	IC TK11150CSCL-G	
IC3519	6-807-548-01	IC M30620FCPGP-RNU01	
IC3521	8-759-596-39	IC SN74LV4052APWR	
IC3526	6-707-744-01	IC SI-3033KM-TL	
IC3527	6-707-744-01	IC SI-3033KM-TL	
IC3528	8-759-832-05	IC BA18BC0FP-E2	
IC3801	6-710-795-01	IC ADV7401BSTZ-80	
IC3802	6-710-796-01	IC SN74CB3Q3384APWR	
IC3803	6-706-521-01	IC CXD9837R	
IC3804	6-703-791-01	IC MSM56V16160F-8T3FM1	
IC3805	6-702-300-01	IC TK11118CSCL-G	
IC3806	6-705-468-01	IC BA33BC0FP-E2	
IC3807	6-705-468-01	IC BA33BC0FP-E2	
IC3808	6-700-398-01	IC uPC2918T-E1	
IC3811	6-710-796-01	IC SN74CB3Q3384APWR	
IC3812	6-710-796-01	IC SN74CB3Q3384APWR	
IC3813	6-710-796-01	IC SN74CB3Q3384APWR	
IC3814	6-710-796-01	IC SN74CB3Q3384APWR	
IC3815	6-705-468-01	IC BA33BC0FP-E2	
IC3816	6-707-149-01	IC BA25BC0WFP-E2	
< TRANSISTOR >			
Q3504	6-550-014-01	FET SSM6N15FU(TE85R)	
Q3505	8-729-600-22	TRANSISTOR 2SA1235-F	
Q3506	8-729-600-22	TRANSISTOR 2SA1235-F	
Q3507	8-729-600-22	TRANSISTOR 2SA1235-F	
< RESISTOR >			
R3500	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3502	1-216-864-11	SHORT CHIP 0	
R3504	1-216-864-11	SHORT CHIP 0	
R3506	1-216-864-11	SHORT CHIP 0	
R3509	1-216-805-11	METAL CHIP 47	5% 1/10W
R3511	1-216-841-11	METAL CHIP 47K	5% 1/10W
R3512	1-216-805-11	METAL CHIP 47	5% 1/10W
R3513	1-216-841-11	METAL CHIP 47K	5% 1/10W
R3514	1-216-841-11	METAL CHIP 47K	5% 1/10W
R3519	1-216-864-11	SHORT CHIP 0	
R3521	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3524	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3525	1-218-844-11	METAL CHIP 750	0.5% 1/10W

Ref. No.	Part No.	Description	Remark
R3526	1-218-861-11	METAL CHIP 3.9K	0.5% 1/10W
R3527	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3528	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3532	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3533	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3534	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3535	1-216-864-11	SHORT CHIP 0	
R3536	1-216-864-11	SHORT CHIP 0	
R3541	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3542	1-216-864-11	SHORT CHIP 0	
R3544	1-216-805-11	METAL CHIP 47	5% 1/10W
R3545	1-216-805-11	METAL CHIP 47	5% 1/10W
R3546	1-216-857-11	METAL CHIP 1M	5% 1/10W
R3548	1-216-803-11	METAL CHIP 33	5% 1/10W
R3549	1-216-809-11	METAL CHIP 100	5% 1/10W
R3550	1-216-809-11	METAL CHIP 100	5% 1/10W
R3551	1-216-809-11	METAL CHIP 100	5% 1/10W
R3552	1-216-809-11	METAL CHIP 100	5% 1/10W
R3554	1-216-809-11	METAL CHIP 100	5% 1/10W
R3556	1-216-809-11	METAL CHIP 100	5% 1/10W
R3557	1-216-805-11	METAL CHIP 47	5% 1/10W
R3558	1-216-864-11	SHORT CHIP 0	
R3562	1-216-864-11	SHORT CHIP 0	
R3563	1-216-809-11	METAL CHIP 100	5% 1/10W
R3564	1-216-805-11	METAL CHIP 47	5% 1/10W
R3565	1-216-803-11	METAL CHIP 33	5% 1/10W
R3566	1-216-805-11	METAL CHIP 47	5% 1/10W
R3567	1-216-805-11	METAL CHIP 47	5% 1/10W
R3570	1-216-809-11	METAL CHIP 100	5% 1/10W
R3575	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3576	1-216-805-11	METAL CHIP 47	5% 1/10W
R3577	1-216-805-11	METAL CHIP 47	5% 1/10W
R3578	1-216-809-11	METAL CHIP 100	5% 1/10W
R3579	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3580	1-218-839-11	METAL CHIP 470	0.5% 1/10W
R3581	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3582	1-216-793-11	METAL CHIP 4.7	5% 1/10W
R3583	1-216-829-11	METAL CHIP 4.7K	5% 1/10W
R3584	1-216-829-11	METAL CHIP 4.7K	5% 1/10W
R3585	1-216-864-11	SHORT CHIP 0	
R3586	1-216-864-11	SHORT CHIP 0	
R3587	1-216-864-11	SHORT CHIP 0	
R3588	1-216-864-11	SHORT CHIP 0	
R3589	1-216-864-11	SHORT CHIP 0	
R3590	1-216-864-11	SHORT CHIP 0	
R3591	1-216-864-11	SHORT CHIP 0	
R3592	1-216-864-11	SHORT CHIP 0	
R3593	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3594	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3595	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3597	1-216-864-11	SHORT CHIP 0	
R3598	1-216-864-11	SHORT CHIP 0	
R3599	1-216-824-11	METAL CHIP 1.8K	5% 1/10W
R3600	1-216-824-11	METAL CHIP 1.8K	5% 1/10W
R3601	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3602	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3603	1-216-833-11	METAL CHIP 10K	5% 1/10W
R3604	1-216-833-11	METAL CHIP 10K	5% 1/10W

Note: When IC3511 and IC3513 on the HDMI RE board are damaged, exchange the new HDMI RE board for the HDMI RE board which IC damaged.

Ref. No.	Part No.	Description			Remark	Ref. No.	Part No.	Description			Remark
R3605	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3791	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3608	1-216-805-11	METAL CHIP	47	5%	1/10W	R3793	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3609	1-216-805-11	METAL CHIP	47	5%	1/10W	R3796	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3610	1-216-805-11	METAL CHIP	47	5%	1/10W	R3797	1-216-833-11	METAL CHIP	10K	5%	1/10W
R3611	1-216-805-11	METAL CHIP	47	5%	1/10W	R3798	1-216-864-11	SHORT CHIP	0		
R3612	1-216-805-11	METAL CHIP	47	5%	1/10W	R3799	1-216-805-11	METAL CHIP	47	5%	1/10W
R3613	1-216-805-11	METAL CHIP	47	5%	1/10W	R3800	1-216-824-11	METAL CHIP	1.8K	5%	1/10W
R3614	1-216-805-11	METAL CHIP	47	5%	1/10W	R3801	1-216-838-11	METAL CHIP	27K	5%	1/10W
R3615	1-216-805-11	METAL CHIP	47	5%	1/10W	R3802	1-216-830-11	METAL CHIP	5.6K	5%	1/10W
R3616	1-216-805-11	METAL CHIP	47	5%	1/10W	R3803	1-216-826-11	METAL CHIP	2.7K	5%	1/10W
R3617	1-216-805-11	METAL CHIP	47	5%	1/10W	R3804	1-216-826-11	METAL CHIP	2.7K	5%	1/10W
R3618	1-216-805-11	METAL CHIP	47	5%	1/10W	R3805	1-216-864-11	SHORT CHIP	0		
R3619	1-216-805-11	METAL CHIP	47	5%	1/10W	R3806	1-216-864-11	SHORT CHIP	0		
R3620	1-216-805-11	METAL CHIP	47	5%	1/10W	R3807	1-216-864-11	SHORT CHIP	0		
R3621	1-216-805-11	METAL CHIP	47	5%	1/10W	R3808	1-216-864-11	SHORT CHIP	0		
R3622	1-216-805-11	METAL CHIP	47	5%	1/10W	R3809	1-216-864-11	SHORT CHIP	0		
R3623	1-216-805-11	METAL CHIP	47	5%	1/10W	R3810	1-218-285-11	METAL CHIP	75	5%	1/10W
R3624	1-216-801-11	METAL CHIP	22	5%	1/10W	R3811	1-216-821-11	METAL CHIP	1K	5%	1/10W
R3625	1-216-801-11	METAL CHIP	22	5%	1/10W	R3812	1-218-285-11	METAL CHIP	75	5%	1/10W
R3630	1-216-805-11	METAL CHIP	47	5%	1/10W	R3813	1-218-285-11	METAL CHIP	75	5%	1/10W
R3633	1-216-864-11	SHORT CHIP	0			R3814	1-216-864-11	SHORT CHIP	0		
R3639	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R3815	1-216-809-11	METAL CHIP	100	5%	1/10W
R3642	1-216-841-11	METAL CHIP	47K	5%	1/10W	R3816	1-216-809-11	METAL CHIP	100	5%	1/10W
R3645	1-216-809-11	METAL CHIP	100	5%	1/10W	R3817	1-216-803-11	METAL CHIP	33	5%	1/10W
R3652	1-216-821-11	METAL CHIP	1K	5%	1/10W	R3818	1-216-803-11	METAL CHIP	33	5%	1/10W
R3653	1-216-821-11	METAL CHIP	1K	5%	1/10W	R3825	1-216-809-11	METAL CHIP	100	5%	1/10W
R3654	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R3826	1-216-864-11	SHORT CHIP	0		
R3655	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R3827	1-216-864-11	SHORT CHIP	0		
R3660	1-216-864-11	SHORT CHIP	0			R3828	1-216-864-11	SHORT CHIP	0		
R3661	1-216-821-11	METAL CHIP	1K	5%	1/10W	R3829	1-216-864-11	SHORT CHIP	0		
R3662	1-216-821-11	METAL CHIP	1K	5%	1/10W	R3843	1-216-809-11	METAL CHIP	100	5%	1/10W
R3663	1-216-821-11	METAL CHIP	1K	5%	1/10W	R3846	1-216-797-11	METAL CHIP	10	5%	1/10W
R3675	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3867	1-216-864-11	SHORT CHIP	0		
R3677	1-216-807-11	METAL CHIP	68	5%	1/10W	R3868	1-216-864-11	SHORT CHIP	0		
R3678	1-216-807-11	METAL CHIP	68	5%	1/10W	R3869	1-216-864-11	SHORT CHIP	0		
R3679	1-216-807-11	METAL CHIP	68	5%	1/10W	R3870	1-216-864-11	SHORT CHIP	0		
R3680	1-216-807-11	METAL CHIP	68	5%	1/10W	R3871	1-216-864-11	SHORT CHIP	0		
R3700	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3872	1-216-789-11	METAL CHIP	2.2	5%	1/10W
R3711	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R3873	1-216-864-11	SHORT CHIP	0		
R3712	1-216-837-11	METAL CHIP	22K	5%	1/10W	R3874	1-216-864-11	SHORT CHIP	0		
R3713	1-216-837-11	METAL CHIP	22K	5%	1/10W	R3875	1-216-864-11	SHORT CHIP	0		
R3714	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R3876	1-216-801-11	METAL CHIP	22	5%	1/10W
R3715	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R3877	1-216-801-11	METAL CHIP	22	5%	1/10W
R3716	1-216-837-11	METAL CHIP	22K	5%	1/10W	R3902	1-216-864-11	SHORT CHIP	0		
R3741	1-216-817-11	METAL CHIP	470	5%	1/10W	R3903	1-216-864-11	SHORT CHIP	0		
R3744	1-216-805-11	METAL CHIP	47	5%	1/10W	R3904	1-216-864-11	SHORT CHIP	0		
R3745	1-216-805-11	METAL CHIP	47	5%	1/10W	R3906	1-216-805-11	METAL CHIP	47	5%	1/10W
R3747	1-216-864-11	SHORT CHIP	0			R3909	1-216-864-11	SHORT CHIP	0		
R3748	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R3910	1-216-864-11	SHORT CHIP	0		
R3749	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R3911	1-216-864-11	SHORT CHIP	0		
R3750	1-216-805-11	METAL CHIP	47	5%	1/10W	R3912	1-216-864-11	SHORT CHIP	0		
R3775	1-216-797-11	METAL CHIP	10	5%	1/10W	R3913	1-216-864-11	SHORT CHIP	0		
R3776	1-216-797-11	METAL CHIP	10	5%	1/10W	R3914	1-216-864-11	SHORT CHIP	0		
R3779	1-216-805-11	METAL CHIP	47	5%	1/10W	R3915	1-216-864-11	SHORT CHIP	0		
R3780	1-216-805-11	METAL CHIP	47	5%	1/10W	R3916	1-216-864-11	SHORT CHIP	0		
R3784	1-216-864-11	SHORT CHIP	0			R3917	1-216-864-11	SHORT CHIP	0		
R3788	1-216-864-11	SHORT CHIP	0			R3918	1-216-864-11	SHORT CHIP	0		
R3789	1-216-833-11	METAL CHIP	10K	5%	1/10W	R3919	1-216-864-11	SHORT CHIP	0		

STR-DG910

Ver. 1.1

HDMI RE HEADPHONE MAIN

Ref. No.	Part No.	Description	Remark			
R3920	1-216-864-11	SHORT CHIP	0			
R3921	1-216-864-11	SHORT CHIP	0			
R3922	1-216-864-11	SHORT CHIP	0			
R3923	1-216-864-11	SHORT CHIP	0			
R3924	1-216-864-11	SHORT CHIP	0			
R3925	1-216-801-11	METAL CHIP	22	5%	1/10W	
R3926	1-216-803-11	METAL CHIP	33	5%	1/10W	
R3927	1-216-805-11	METAL CHIP	47	5%	1/10W	
R3928	1-216-805-11	METAL CHIP	47	5%	1/10W	
R3929	1-216-809-11	METAL CHIP	100	5%	1/10W	
< NETWORK RESISTOR >						
RB3501	1-234-371-21	RES, NETWORK 47X4 (1005)				
RB3502	1-234-371-21	RES, NETWORK 47X4 (1005)				
RB3503	1-234-371-21	RES, NETWORK 47X4 (1005)				
RB3504	1-234-371-21	RES, NETWORK 47X4 (1005)				
RB3505	1-234-371-21	RES, NETWORK 47X4 (1005)				
RB3506	1-234-371-21	RES, NETWORK 47X4 (1005)				
RB3507	1-234-702-11	RES, NETWORK 68X4 (1005)				
RB3508	1-234-702-11	RES, NETWORK 68X4 (1005)				
RB3509	1-234-702-11	RES, NETWORK 68X4 (1005)				
RB3510	1-234-702-11	RES, NETWORK 68X4 (1005)				
RB3511	1-234-702-11	RES, NETWORK 68X4 (1005)				
RB3512	1-234-702-11	RES, NETWORK 68X4 (1005)				
RB3800	1-234-371-21	RES, NETWORK 47X4 (1005)				
RB3801	1-234-371-21	RES, NETWORK 47X4 (1005)				
RB3803	1-242-963-21	RES, NETWORK 33X4 (1005)				
RB3804	1-242-963-21	RES, NETWORK 33X4 (1005)				
RB3805	1-242-963-21	RES, NETWORK 33X4 (1005)				
RB3806	1-242-963-21	RES, NETWORK 33X4 (1005)				
RB3807	1-234-371-21	RES, NETWORK 47X4 (1005)				
RB3808	1-234-371-21	RES, NETWORK 47X4 (1005)				
RB3809	1-234-371-21	RES, NETWORK 47X4 (1005)				
RB3810	1-234-371-21	RES, NETWORK 47X4 (1005)				
RB3811	1-234-371-21	RES, NETWORK 47X4 (1005)				
RB3812	1-234-371-21	RES, NETWORK 47X4 (1005)				
RB3813	1-234-371-21	RES, NETWORK 47X4 (1005)				
RB3814	1-234-371-21	RES, NETWORK 47X4 (1005)				
RB3815	1-234-371-21	RES, NETWORK 47X4 (1005)				
RB3816	1-234-371-21	RES, NETWORK 47X4 (1005)				
RB3817	1-234-371-21	RES, NETWORK 47X4 (1005)				
< VIBRATOR >						
X3501	1-813-570-21	VIBRATOR, CRYSTAL (28.322MHz)				
X3502	1-795-244-11	VIBRATOR, CERAMIC (10MHz)				
X3801	1-813-715-11	OSCILLATOR, CRYSTAL (28.63636MHz)				

HEADPHONE BOARD						

< CAPACITOR >						
C790	1-127-888-11	CERAMIC	0.1uF	10%	50V	
C791	1-127-888-11	CERAMIC	0.1uF	10%	50V	
< CONNECTOR >						
* CNP790	1-564-508-11	PLUG, CONNECTOR 5P				

Ref. No.	Part No.	Description	Remark			
		< JACK >				
J790	1-815-313-21	JACK (PHONES)				
		< LEAD WIRE >				
* TP790	1-690-880-31	LEAD (WITH CONNECTOR)				

A-1231-364-A		MAIN BOARD, COMPLETE (US,CND)				
A-1231-396-A		MAIN BOARD, COMPLETE (AEP,UK,KR,TW)				
A-1271-028-A		MAIN BOARD, COMPLETE (E2)				

7-685-646-79		SCREW +BVTP 3X8 TYPE2 IT-3				
< CAPACITOR >						
C200	1-126-923-11	ELECT	220uF	20%	10V	
C201	1-126-964-11	ELECT	10uF	20%	50V	
C206	1-112-099-11	ELECT	4.7uF	20%	50V	
					(AEP,UK,KR,TW)	
C206	1-126-963-11	ELECT	4.7uF	20%	50V	
					(US,CND,E2)	
C209	1-165-908-11	CERAMIC CHIP	1uF	10%	10V	
C210	1-165-908-11	CERAMIC CHIP	1uF	10%	10V	
C211	1-165-908-11	CERAMIC CHIP	1uF	10%	10V	
C220	1-112-109-11	ELECT	22uF	20%	100V	
					(AEP,UK,KR,TW)	
C220	1-128-560-11	ELECT	22uF	20%	100V	
					(US,CND,E2)	
C221	1-112-109-11	ELECT	22uF	20%	100V	
					(AEP,UK,KR,TW)	
C221	1-128-560-11	ELECT	22uF	20%	100V	
					(US,CND,E2)	
C230	1-112-109-11	ELECT	22uF	20%	100V	
					(AEP,UK,KR,TW)	
C230	1-128-560-11	ELECT	22uF	20%	100V	
					(US,CND,E2)	
C231	1-112-109-11	ELECT	22uF	20%	100V	
					(AEP,UK,KR,TW)	
C231	1-128-560-11	ELECT	22uF	20%	100V	
					(US,CND,E2)	
C233	1-112-109-11	ELECT	22uF	20%	100V	
					(AEP,UK,KR,TW)	
C233	1-128-560-11	ELECT	22uF	20%	100V	
					(US,CND,E2)	
C234	1-112-109-11	ELECT	22uF	20%	100V	
					(AEP,UK,KR,TW)	
C234	1-128-560-11	ELECT	22uF	20%	100V	
					(US,CND,E2)	
C235	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V	
C250	1-126-967-11	ELECT	47uF	20%	50V	
C251	1-126-967-11	ELECT	47uF	20%	50V	
C252	1-112-089-11	ELECT	47uF	20%	25V	
					(AEP,UK,KR,TW)	
C252	1-126-947-11	ELECT	47uF	20%	35V	
					(US,CND,E2)	
C255	1-126-923-11	ELECT	220uF	20%	10V	
C256	1-112-099-11	ELECT	4.7uF	20%	50V	
					(AEP,UK,KR,TW)	
C256	1-126-963-11	ELECT	4.7uF	20%	50V	
					(US,CND,E2)	
C259	1-165-908-11	CERAMIC CHIP	1uF	10%	10V	

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
C260	1-137-194-81	FILM	0.47uF	5%	50V	C414	1-102-233-00	CERAMIC	33PF	10%	500V
C261	1-112-080-11	ELECT	470uF	20%	10V (AEP,UK,KR,TW)	C415	1-102-230-00	CERAMIC	4PF	0.25PF	500V
C261	1-126-925-11	ELECT	470uF	20%	10V (US,CND,E2)	C416	1-112-079-11	ELECT	220uF	20%	10V (AEP,UK,KR,TW)
C265	1-137-194-81	FILM	0.47uF	5%	50V	C416	1-126-923-11	ELECT	220uF	20%	10V (US,CND,E2)
C266	1-112-080-11	ELECT	470uF	20%	10V (AEP,UK,KR,TW)	C417	1-112-089-11	ELECT	47uF	20%	25V (AEP,UK,KR,TW)
C266	1-126-925-11	ELECT	470uF	20%	10V (US,CND,E2)	C417	1-126-947-11	ELECT	47uF	20%	35V (US,CND,E2)
C285	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V	C418	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V
C290	1-107-935-11	ELECT	330uF	20%	100V	C421	1-112-089-11	ELECT	47uF	20%	25V (AEP,UK,KR,TW)
C300	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	C421	1-126-947-11	ELECT	47uF	20%	35V (US,CND,E2)
C302	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)	C423	1-102-233-00	CERAMIC	33PF	10%	500V
C302	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)	C424	1-102-233-00	CERAMIC	33PF	10%	500V
C307	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)	C425	1-162-960-11	CERAMIC CHIP	220PF	10%	50V
C307	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)	C426	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C309	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)	C427	1-126-964-11	ELECT	10uF	20%	50V
C309	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)	C428	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V
C341	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V	C429	1-112-089-11	ELECT	47uF	20%	25V (AEP,UK,KR,TW)
C342	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V	C429	1-126-947-11	ELECT	47uF	20%	35V (US,CND,E2)
C343	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V	C431	1-136-497-81	FILM	0.1uF	5%	50V
C344	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V	C432	1-136-161-00	FILM	0.047uF	5%	50V
C352	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)	C433	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)
C352	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)	C433	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)
C357	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)	C434	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)
C357	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)	C434	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)
C359	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)	C440	1-112-099-11	ELECT	4.7uF	20%	50V (AEP,UK,KR,TW)
C359	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)	C440	1-126-963-11	ELECT	4.7uF	20%	50V (US,CND,E2)
C390	1-112-099-11	ELECT	4.7uF	20%	50V (AEP,UK,KR,TW)	C461	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)
C390	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)	C461	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)
C395	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)	C462	1-162-960-11	CERAMIC CHIP	220PF	10%	50V
C395	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)	C463	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C400	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	C464	1-102-233-00	CERAMIC	33PF	10%	500V
C403	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)	C465	1-102-230-00	CERAMIC	4PF	0.25PF	500V
C403	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)	C466	1-112-079-11	ELECT	220uF	20%	10V (AEP,UK,KR,TW)
C408	1-162-960-11	CERAMIC CHIP	220PF	10%	50V	C466	1-126-923-11	ELECT	220uF	20%	10V (US,CND,E2)
C409	1-162-960-11	CERAMIC CHIP	220PF	10%	50V	C471	1-112-089-11	ELECT	47uF	20%	25V (AEP,UK,KR,TW)
C411	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)	C471	1-126-947-11	ELECT	47uF	20%	35V (US,CND,E2)
C411	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)	C473	1-102-233-00	CERAMIC	33PF	10%	500V
C412	1-162-960-11	CERAMIC CHIP	220PF	10%	50V	C474	1-102-233-00	CERAMIC	33PF	10%	500V
C413	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	C475	1-162-960-11	CERAMIC CHIP	220PF	10%	50V
						C476	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
						C477	1-126-964-11	ELECT	10uF	20%	50V

STR-DG910

Ver. 1.1

MAIN

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
C478	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)	C545	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)
C478	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)	C545	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)
C479	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)	C546	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)
C479	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)	C546	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)
C481	1-136-497-81	FILM	0.1uF	5%	50V	C547	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)
C482	1-136-161-00	FILM	0.047uF	5%	50V	C547	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)
C483	1-112-089-11	ELECT	47uF	20%	25V (AEP,UK,KR,TW)	C548	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)
C483	1-126-947-11	ELECT	47uF	20%	35V (US,CND,E2)	C548	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)
C485	1-112-097-11	ELECT	2.2uF	20%	50V (AEP,UK,KR,TW)	C549	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)
C485	1-126-961-11	ELECT	2.2uF	20%	50V (US,CND,E2)	C549	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)
C486	1-112-097-11	ELECT	2.2uF	20%	50V (AEP,UK,KR,TW)	C550	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)
C486	1-124-257-00	ELECT	2.2uF	20%	50V (US,CND,E2)	C550	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)
C487	1-112-089-11	ELECT	47uF	20%	25V (AEP,UK,KR,TW)	C551	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)
C487	1-126-947-11	ELECT	47uF	20%	35V (US,CND,E2)	C551	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)
C490	1-112-099-11	ELECT	4.7uF	20%	50V (AEP,UK,KR,TW)	C552	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)
C490	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)	C552	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)
C503	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)	C561	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)
C503	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)	C561	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)
C511	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)	C562	1-162-960-11	CERAMIC CHIP	220PF	10%	50V
C511	1-126-964-11	ELECT	10uF	20%	50V (US,CND,E2)	C563	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C512	1-162-960-11	CERAMIC CHIP	220PF	10%	50V	C564	1-102-233-00	CERAMIC	33PF	10%	500V
C513	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	C565	1-102-230-00	CERAMIC	4PF	0.25PF	500V
C514	1-102-233-00	CERAMIC	33PF	10%	500V	C566	1-112-079-11	ELECT	220uF	20%	10V (AEP,UK,KR,TW)
C515	1-102-230-00	CERAMIC	4PF	0.25PF	500V	C566	1-126-923-11	ELECT	220uF	20%	10V (US,CND,E2)
C516	1-112-079-11	ELECT	220uF	20%	10V (AEP,UK,KR,TW)	C571	1-112-089-11	ELECT	47uF	20%	25V (AEP,UK,KR,TW)
C516	1-126-923-11	ELECT	220uF	20%	10V (US,CND,E2)	C571	1-126-947-11	ELECT	47uF	20%	35V (US,CND,E2)
C521	1-112-089-11	ELECT	47uF	20%	25V (AEP,UK,KR,TW)	C573	1-102-233-00	CERAMIC	33PF	10%	500V
C521	1-126-947-11	ELECT	47uF	20%	35V (US,CND,E2)	C575	1-102-233-00	CERAMIC	33PF	10%	500V
C523	1-102-233-00	CERAMIC	33PF	10%	500V	C576	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C524	1-102-233-00	CERAMIC	33PF	10%	500V	C577	1-126-964-11	ELECT	10uF	20%	50V
C525	1-162-960-11	CERAMIC CHIP	220PF	10%	50V	C578	1-162-960-11	CERAMIC CHIP	220PF	10%	50V
C526	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	C581	1-136-497-81	FILM	0.1uF	5%	50V
C527	1-126-964-11	ELECT	10uF	20%	50V	C582	1-136-161-00	FILM	0.047uF	5%	50V
C531	1-136-497-81	FILM	0.1uF	5%	50V	C590	1-112-099-11	ELECT	4.7uF	20%	50V (AEP,UK,KR,TW)
C532	1-136-161-00	FILM	0.047uF	5%	50V	C590	1-126-963-11	ELECT	4.7uF	20%	50V (US,CND,E2)
C540	1-112-099-11	ELECT	4.7uF	20%	50V (AEP,UK,KR,TW)	C600	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C540	1-126-963-11	ELECT	4.7uF	20%	50V (US,CND,E2)	C603	1-112-100-11	ELECT	10uF	20%	50V (AEP,UK,KR,TW)

Ref. No.	Part No.	Description	Remark		Ref. No.	Part No.	Description	Remark	
C603	1-126-964-11	ELECT	10uF	20% 50V (US,CND,E2)	C711	1-112-100-11	ELECT	10uF	20% 50V (AEP,UK,KR,TW)
C611	1-112-100-11	ELECT	10uF	20% 50V (AEP,UK,KR,TW)	C711	1-126-964-11	ELECT	10uF	20% 50V (US,CND,E2)
C611	1-126-964-11	ELECT	10uF	20% 50V (US,CND,E2)	C712	1-162-960-11	CERAMIC CHIP	220PF	10% 50V
C612	1-162-960-11	CERAMIC CHIP	220PF	10% 50V	C713	1-162-927-11	CERAMIC CHIP	100PF	5% 50V
C613	1-162-927-11	CERAMIC CHIP	100PF	5% 50V	C714	1-102-233-00	CERAMIC	33PF	10% 500V
C614	1-102-233-00	CERAMIC	33PF	10% 500V	C715	1-102-230-00	CERAMIC	4PF	0.25PF 500V
C615	1-102-230-00	CERAMIC	4PF	0.25PF 500V	C716	1-112-079-11	ELECT	220uF	20% 10V (AEP,UK,KR,TW)
C616	1-112-079-11	ELECT	220uF	20% 10V (AEP,UK,KR,TW)	C716	1-126-923-11	ELECT	220uF	20% 10V (US,CND,E2)
C616	1-126-923-11	ELECT	220uF	20% 10V (US,CND,E2)	C721	1-112-089-11	ELECT	47uF	20% 25V (AEP,UK,KR,TW)
C621	1-112-089-11	ELECT	47uF	20% 25V (AEP,UK,KR,TW)	C721	1-126-947-11	ELECT	47uF	20% 35V (US,CND,E2)
C621	1-126-947-11	ELECT	47uF	20% 35V (US,CND,E2)	C723	1-102-233-00	CERAMIC	33PF	10% 500V
C623	1-102-233-00	CERAMIC	33PF	10% 500V	C724	1-102-233-00	CERAMIC	33PF	10% 500V
C624	1-102-233-00	CERAMIC	33PF	10% 500V	C725	1-162-960-11	CERAMIC CHIP	220PF	10% 50V
C625	1-162-960-11	CERAMIC CHIP	220PF	10% 50V	C726	1-162-970-11	CERAMIC CHIP	0.01uF	10% 25V
C626	1-162-970-11	CERAMIC CHIP	0.01uF	10% 25V	C727	1-126-964-11	ELECT	10uF	20% 50V
C627	1-126-964-11	ELECT	10uF	20% 50V	C731	1-136-497-81	FILM	0.1uF	5% 50V
C631	1-136-497-81	FILM	0.1uF	5% 50V	C732	1-136-161-00	FILM	0.047uF	5% 50V
C632	1-136-161-00	FILM	0.047uF	5% 50V	C750	1-162-927-11	CERAMIC CHIP	100PF	5% 50V
C640	1-112-099-11	ELECT	4.7uF	20% 50V (AEP,UK,KR,TW)	C800	1-135-851-21	MYLAR	0.22uF	100V
C640	1-126-963-11	ELECT	4.7uF	20% 50V (US,CND,E2)	C802	1-135-851-21	MYLAR	0.22uF	100V
C661	1-112-100-11	ELECT	10uF	20% 50V (AEP,UK,KR,TW)	C803	1-109-932-14	ELECT(BLOCK)	0.01F	20% 71V
C661	1-126-964-11	ELECT	10uF	20% 50V (US,CND,E2)	C804	1-109-932-14	ELECT(BLOCK)	0.01F	20% 71V
C662	1-162-960-11	CERAMIC CHIP	220PF	10% 50V	C825	1-162-960-11	CERAMIC CHIP	220PF	10% 50V
C663	1-162-927-11	CERAMIC CHIP	100PF	5% 50V	C840	1-112-099-11	ELECT	4.7uF	20% 50V (AEP,UK,KR,TW)
C664	1-102-233-00	CERAMIC	33PF	10% 500V	C840	1-126-964-11	ELECT	10uF	20% 50V (US,CND,E2)
C665	1-102-230-00	CERAMIC	4PF	0.25PF 500V	C851	1-115-339-11	CERAMIC CHIP	0.1uF	10% 50V
C666	1-112-079-11	ELECT	220uF	20% 10V (AEP,UK,KR,TW)	C852	1-115-339-11	CERAMIC CHIP	0.1uF	10% 50V
C666	1-126-923-11	ELECT	220uF	20% 10V (US,CND,E2)	C853	1-126-936-11	ELECT	3300uF	20% 16V
C671	1-112-089-11	ELECT	47uF	20% 25V (AEP,UK,KR,TW)	C854	1-126-768-11	ELECT	2200uF	20% 16V
C671	1-126-947-11	ELECT	47uF	20% 35V (US,CND,E2)	C875	1-162-960-11	CERAMIC CHIP	220PF	10% 50V
C673	1-102-233-00	CERAMIC	33PF	10% 500V	CC11	1-162-968-11	CERAMIC CHIP	0.0047uF	10% 50V (EXCEPT US,CND)
C674	1-102-233-00	CERAMIC	33PF	10% 500V	CC21	1-162-968-11	CERAMIC CHIP	0.0047uF	10% 50V (EXCEPT US,CND)
C675	1-162-960-11	CERAMIC CHIP	220PF	10% 50V	CC61	1-162-968-11	CERAMIC CHIP	0.0047uF	10% 50V (EXCEPT US,CND)
C676	1-162-970-11	CERAMIC CHIP	0.01uF	10% 25V	CC71	1-162-968-11	CERAMIC CHIP	0.0047uF	10% 50V (EXCEPT US,CND)
C677	1-126-964-11	ELECT	10uF	20% 50V	CC81	1-162-968-11	CERAMIC CHIP	0.0047uF	10% 50V (EXCEPT US,CND)
C681	1-136-497-81	FILM	0.1uF	5% 50V	CC301	1-162-927-11	CERAMIC CHIP	100PF	5% 50V (EXCEPT US,CND)
C682	1-136-161-00	FILM	0.047uF	5% 50V	CC302	1-162-927-11	CERAMIC CHIP	100PF	5% 50V (EXCEPT US,CND)
C690	1-112-100-11	ELECT	10uF	20% 50V (AEP,UK,KR,TW)	CC303	1-162-927-11	CERAMIC CHIP	100PF	5% 50V (EXCEPT US,CND)
C690	1-126-964-11	ELECT	10uF	20% 50V (US,CND,E2)	CC304	1-162-927-11	CERAMIC CHIP	100PF	5% 50V (EXCEPT US,CND)
C700	1-162-927-11	CERAMIC CHIP	100PF	5% 50V	CC305	1-162-927-11	CERAMIC CHIP	100PF	5% 50V (EXCEPT US,CND)
C703	1-112-100-11	ELECT	10uF	20% 50V (AEP,UK,KR,TW)	CC306	1-162-927-11	CERAMIC CHIP	100PF	5% 50V (EXCEPT US,CND)
C703	1-126-964-11	ELECT	10uF	20% 50V (US,CND,E2)					

MAIN

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
CC307	1-162-927-11	CERAMIC CHIP 100PF	5% 50V (EXCEPT US,CND)	D426	8-719-404-50	DIODE MA111-TX	
CC308	1-162-927-11	CERAMIC CHIP 100PF	5% 50V (EXCEPT US,CND)	D475	8-719-404-50	DIODE MA111-TX	
CC309	1-162-927-11	CERAMIC CHIP 100PF	5% 50V (EXCEPT US,CND)	D476	8-719-404-50	DIODE MA111-TX	
CC318	1-162-927-11	CERAMIC CHIP 100PF	5% 50V (EXCEPT US,CND)	D500	8-719-404-50	DIODE MA111-TX	
CC319	1-162-927-11	CERAMIC CHIP 100PF	5% 50V (EXCEPT US,CND)	D525	8-719-404-50	DIODE MA111-TX	
CC351	1-162-927-11	CERAMIC CHIP 100PF	5% 50V (EXCEPT US,CND)	D526	8-719-404-50	DIODE MA111-TX	
CC352	1-162-927-11	CERAMIC CHIP 100PF	5% 50V (EXCEPT US,CND)	D575	8-719-404-50	DIODE MA111-TX	
CC353	1-162-927-11	CERAMIC CHIP 100PF	5% 50V (EXCEPT US,CND)	D576	8-719-404-50	DIODE MA111-TX	
CC354	1-162-927-11	CERAMIC CHIP 100PF	5% 50V (EXCEPT US,CND)	D600	8-719-404-50	DIODE MA111-TX	
CC355	1-162-927-11	CERAMIC CHIP 100PF	5% 50V (EXCEPT US,CND)	D625	8-719-404-50	DIODE MA111-TX	
CC356	1-162-927-11	CERAMIC CHIP 100PF	5% 50V (EXCEPT US,CND)	D626	8-719-404-50	DIODE MA111-TX	
CC357	1-162-927-11	CERAMIC CHIP 100PF	5% 50V (EXCEPT US,CND)	D675	8-719-404-50	DIODE MA111-TX	
CC368	1-162-927-11	CERAMIC CHIP 100PF	5% 50V (EXCEPT US,CND)	D676	8-719-404-50	DIODE MA111-TX	
CC369	1-162-927-11	CERAMIC CHIP 100PF	5% 50V (EXCEPT US,CND)	D700	8-719-404-50	DIODE MA111-TX	
CC501	1-162-927-11	CERAMIC CHIP 100PF	5% 50V (EXCEPT US,CND)	D725	8-719-404-50	DIODE MA111-TX	
< CONNECTOR >				D726	8-719-404-50	DIODE MA111-TX	
* CNP820	1-766-718-21	CONNECTOR, BOARD TO BOARD 17P		D801	6-501-003-21	DIODE D6SBN20-7003	
CNP821	1-573-847-11	CONNECTOR, BOARD TO BOARD 15P		D802	6-501-003-21	DIODE D6SBN20-7003	
CNP823	1-785-103-11	PIN, CONNECTOR (3.96mm PITCH) 5P		D818	8-719-404-50	DIODE MA111-TX	
* CNP824	1-564-507-11	PLUG, CONNECTOR 4P		D851	8-719-053-18	DIODE 1SR154-400TE-25	
CNP825	1-779-978-11	PIN, CONNECTOR 3P		D852	8-719-053-18	DIODE 1SR154-400TE-25	
* CNP826	1-564-510-11	PLUG, CONNECTOR 7P		D853	8-719-053-18	DIODE 1SR154-400TE-25	
* CNP827	1-564-506-11	PLUG, CONNECTOR 3P		D854	8-719-053-18	DIODE 1SR154-400TE-25	
* CNP828	1-564-509-11	PLUG, CONNECTOR 6P		< IC >			
CNS840	1-784-766-11	CONNECTOR, FFC 5P (US,CND)		IC210	8-759-710-97	IC NJM4565M-D	
< DIODE >				IC211	8-759-710-97	IC NJM4565M-D	
D201	8-719-404-50	DIODE MA111-TX		IC260	8-759-071-48	IC TA7807S	
D202	8-719-404-50	DIODE MA111-TX		IC265	8-759-071-47	IC TA79007S	
D203	8-719-404-50	DIODE MA111-TX		IC400	6-700-943-01	IC uPC2581V-S	
D204	8-719-404-50	DIODE MA111-TX		IC401	6-710-586-01	IC R2S15206FP	
D220	8-719-404-50	DIODE MA111-TX		IC500	6-700-943-01	IC uPC2581V-S	
D221	8-719-083-66	DIODE UDZSTE-1718B (US,CND)		IC600	6-700-943-01	IC uPC2581V-S	
D221	8-719-083-83	DIODE UDZS-TE17-15B (EXCEPT US,CND)		IC700	6-700-943-01	IC uPC2581V-S	
D224	8-719-083-66	DIODE UDZSTE-1718B (US,CND)		IC2560	6-703-518-01	IC BD3842FS-FD2	
D224	8-719-083-83	DIODE UDZS-TE17-15B (EXCEPT US,CND)		< JACK >			
D235	8-719-404-50	DIODE MA111-TX		J301	1-774-411-11	JACK, PIN 6P (AUX IN, SA-CD/CD/CD-R OUT(IN)	
D250	6-501-785-01	DIODE MAZ8200GMLS0		J302	1-774-411-11	JACK, PIN 6P (TV IN,SAT AUDIO IN, DVD AUDIO IN)	
D251	6-500-295-01	DIODE PTZ-TE25-5.6B		J303	1-794-981-11	JACK, PIN 4P (VIDEO 2/BD AUDIO OUT/AUDIO IN)	
D265	8-719-053-18	DIODE 1SR154-400TE-25		J304	1-794-981-11	JACK, PIN 4P (VIDEO 1 AUDIO OUT/AUDIO IN)	
D290	8-719-053-18	DIODE 1SR154-400TE-25		J305	1-820-948-11	JACK, PIN 4P (SUB WOOFER AUDIO OUT)	
D291	8-719-053-18	DIODE 1SR154-400TE-25		< JUMPER RESISTOR >			
D351	8-719-404-50	DIODE MA111-TX		JR218	1-216-864-11	SHORT CHIP 0	
D400	8-719-404-50	DIODE MA111-TX		JR219	1-216-864-11	SHORT CHIP 0	
D425	8-719-404-50	DIODE MA111-TX		< COIL >			
				L401	1-420-872-52	COIL, AIR-CORE	
				L451	1-420-872-52	COIL, AIR-CORE	
				L501	1-420-872-52	COIL, AIR-CORE	
				L551	1-420-872-52	COIL, AIR-CORE	
				L601	1-420-872-52	COIL, AIR-CORE	
				L651	1-420-872-52	COIL, AIR-CORE	
				L701	1-420-872-52	COIL, AIR-CORE	

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
< TRANSISTOR >				R203	1-216-841-11	METAL CHIP 47K 5%	1/10W
Q200	8-729-216-31	TRANSISTOR 2SA1163-G		R204	1-216-821-11	METAL CHIP 1K 5%	1/10W
Q201	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF		R205	1-216-833-11	METAL CHIP 10K 5%	1/10W
Q202	8-729-271-31	TRANSISTOR 2SC2713-G		R206	1-218-887-11	METAL CHIP 47K 0.5%	1/10W
Q210	8-729-901-00	TRANSISTOR DTC124EK		R207	1-216-841-11	METAL CHIP 47K 5%	1/10W
Q220	8-729-021-82	TRANSISTOR 2SD2396K		R208	1-216-841-11	METAL CHIP 47K 5%	1/10W
Q221	8-729-027-24	TRANSISTOR DTA114TKA-T146		R209	1-218-887-11	METAL CHIP 47K 0.5%	1/10W
Q225	8-729-271-31	TRANSISTOR 2SC2713-G		R210	1-216-833-11	METAL CHIP 10K 5%	1/10W
Q228	8-729-271-31	TRANSISTOR 2SC2713-G		R211	1-216-833-11	METAL CHIP 10K 5%	1/10W
Q235	8-729-024-93	TRANSISTOR 2SB1565E		R212	1-216-849-11	METAL CHIP 220K 5%	1/10W
Q250	8-729-140-97	TRANSISTOR 2SB734-34		R213	1-216-841-11	METAL CHIP 47K 5%	1/10W
Q255	8-729-216-31	TRANSISTOR 2SA1163-G		R214	1-216-833-11	METAL CHIP 10K 5%	1/10W
Q256	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF		R215	1-216-837-11	METAL CHIP 22K 5%	1/10W
Q351	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF		R220	1-249-381-11	CARBON 1 5%	1/4W F
Q400	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF		△ R221	1-215-873-00	METAL OXIDE 4.7K 5%	1W F
Q421	8-729-119-76	TRANSISTOR 2SA1175-HFE		R222	1-216-817-11	METAL CHIP 470 5%	1/10W
Q422	8-729-141-30	TRANSISTOR 2SC3623A-LK		R223	1-216-833-11	METAL CHIP 10K 5%	1/10W
Q425	8-729-216-31	TRANSISTOR 2SA1163-G		R225	1-216-833-11	METAL CHIP 10K 5%	1/10W
Q426	8-729-216-31	TRANSISTOR 2SA1163-G		R227	1-216-833-11	METAL CHIP 10K 5%	1/10W
Q427	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF		△ R233	1-215-873-00	METAL OXIDE 4.7K 5%	1W F
Q471	8-729-119-76	TRANSISTOR 2SA1175-HFE		R234	1-249-381-11	CARBON 1 5%	1/4W F
Q472	8-729-141-30	TRANSISTOR 2SC3623A-LK		R235	1-216-817-11	METAL CHIP 470 5%	1/10W
Q475	8-729-216-31	TRANSISTOR 2SA1163-G		R236	1-216-847-11	METAL CHIP 150K 5%	1/10W
Q476	8-729-216-31	TRANSISTOR 2SA1163-G		R237	1-216-847-11	METAL CHIP 150K 5%	1/10W
Q477	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF		R250	1-249-389-11	CARBON 4.7 5%	1/4W F
Q500	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF		R251	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
Q521	8-729-119-76	TRANSISTOR 2SA1175-HFE		R252	1-216-837-11	METAL CHIP 22K 5%	1/10W
Q522	8-729-141-30	TRANSISTOR 2SC3623A-LK		R256	1-218-887-11	METAL CHIP 47K 0.5%	1/10W
Q525	8-729-216-31	TRANSISTOR 2SA1163-G		R257	1-216-841-11	METAL CHIP 47K 5%	1/10W
Q526	8-729-216-31	TRANSISTOR 2SA1163-G		R258	1-216-841-11	METAL CHIP 47K 5%	1/10W
Q527	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF		R259	1-218-887-11	METAL CHIP 47K 0.5%	1/10W
Q571	8-729-119-76	TRANSISTOR 2SA1175-HFE		△ R277	1-249-387-11	CARBON 3.3 5%	1/4W F (EXCEPT US,CND)
Q572	8-729-141-30	TRANSISTOR 2SC3623A-LK		△ R277	1-249-389-11	CARBON 4.7 5%	1/4W F (US,CND)
Q575	8-729-216-31	TRANSISTOR 2SA1163-G		△ R278	1-249-387-11	CARBON 3.3 5%	1/4W F (EXCEPT US,CND)
Q576	8-729-216-31	TRANSISTOR 2SA1163-G		△ R278	1-249-389-11	CARBON 4.7 5%	1/4W F (US,CND)
Q577	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF		△ R290	1-219-121-51	FUSIBLE 0.22 5%	1/4W F
Q600	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF		△ R291	1-219-121-51	FUSIBLE 0.22 5%	1/4W F
Q621	8-729-119-76	TRANSISTOR 2SA1175-HFE		R301	1-216-821-11	METAL CHIP 1K 5%	1/10W
Q622	8-729-141-30	TRANSISTOR 2SC3623A-LK		R302	1-216-821-11	METAL CHIP 1K 5%	1/10W
Q625	8-729-216-31	TRANSISTOR 2SA1163-G		R303	1-216-821-11	METAL CHIP 1K 5%	1/10W
Q626	8-729-216-31	TRANSISTOR 2SA1163-G		R304	1-216-821-11	METAL CHIP 1K 5%	1/10W
Q627	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF		R305	1-216-821-11	METAL CHIP 1K 5%	1/10W
Q671	8-729-119-76	TRANSISTOR 2SA1175-HFE		R306	1-216-821-11	METAL CHIP 1K 5%	1/10W
Q672	8-729-141-30	TRANSISTOR 2SC3623A-LK		R307	1-216-821-11	METAL CHIP 1K 5%	1/10W
Q675	8-729-216-31	TRANSISTOR 2SA1163-G		R308	1-216-821-11	METAL CHIP 1K 5%	1/10W
Q676	8-729-216-31	TRANSISTOR 2SA1163-G		R309	1-216-821-11	METAL CHIP 1K 5%	1/10W
Q677	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF		R310	1-216-821-11	METAL CHIP 1K 5%	1/10W
Q700	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF		R312	1-216-841-11	METAL CHIP 47K 5%	1/10W
Q721	8-729-119-76	TRANSISTOR 2SA1175-HFE		R314	1-216-841-11	METAL CHIP 47K 5%	1/10W
Q722	8-729-141-30	TRANSISTOR 2SC3623A-LK		R315	1-216-841-11	METAL CHIP 47K 5%	1/10W
Q725	8-729-216-31	TRANSISTOR 2SA1163-G		R316	1-216-841-11	METAL CHIP 47K 5%	1/10W
Q726	8-729-216-31	TRANSISTOR 2SA1163-G		R317	1-216-841-11	METAL CHIP 47K 5%	1/10W
Q727	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF		R318	1-216-841-11	METAL CHIP 47K 5%	1/10W
Q809	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF		R319	1-216-841-11	METAL CHIP 47K 5%	1/10W
< RESISTOR >				R320	1-216-841-11	METAL CHIP 47K 5%	1/10W
R201	1-216-833-11	METAL CHIP 10K 5%	1/10W				

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
R351	1-216-821-11	METAL CHIP	1K	5%	1/10W	R471	1-216-844-11	METAL CHIP	82K	5%	1/10W
R352	1-216-821-11	METAL CHIP	1K	5%	1/10W	R472	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R353	1-216-821-11	METAL CHIP	1K	5%	1/10W	R473	1-249-405-11	CARBON	100	5%	1/4W F
R354	1-216-821-11	METAL CHIP	1K	5%	1/10W	R474	1-216-818-11	METAL CHIP	560	5%	1/10W
R355	1-216-821-11	METAL CHIP	1K	5%	1/10W	R475	1-249-405-11	CARBON	100	5%	1/4W F
R356	1-216-821-11	METAL CHIP	1K	5%	1/10W	R476	1-240-855-11	CARBON	6.2K	5%	1/4W F
R357	1-216-821-11	METAL CHIP	1K	5%	1/10W	R477	1-216-214-00	RES-CHIP	4.7K	2%	1/8W
R358	1-216-821-11	METAL CHIP	1K	5%	1/10W	R478	1-234-182-11	ENCAPSULATED COMPONENT 0.22X2 5W			
R359	1-216-821-11	METAL CHIP	1K	5%	1/10W	R479	1-216-823-11	METAL CHIP	1.5K	5%	1/10W
R360	1-216-821-11	METAL CHIP	1K	5%	1/10W	R480	1-216-845-11	METAL CHIP	100K	5%	1/10W
R362	1-216-841-11	METAL CHIP	47K	5%	1/10W	R481	1-249-393-11	CARBON	10	5%	1/4W F
R364	1-216-841-11	METAL CHIP	47K	5%	1/10W	R482	1-216-839-11	METAL CHIP	33K	5%	1/10W
R365	1-216-841-11	METAL CHIP	47K	5%	1/10W	R483	1-216-835-11	METAL CHIP	15K	5%	1/10W
R366	1-216-841-11	METAL CHIP	47K	5%	1/10W	R484	1-216-835-11	METAL CHIP	15K	5%	1/10W
R367	1-216-841-11	METAL CHIP	47K	5%	1/10W	R485	1-216-841-11	METAL CHIP	47K	5%	1/10W
R368	1-216-841-11	METAL CHIP	47K	5%	1/10W	R486	1-216-837-11	METAL CHIP	22K	5%	1/10W
R369	1-216-841-11	METAL CHIP	47K	5%	1/10W	R487	1-216-841-11	METAL CHIP	47K	5%	1/10W
R380	1-216-841-11	METAL CHIP	47K	5%	1/10W	R489	1-249-389-11	CARBON	4.7	5%	1/4W F
R396	1-216-845-11	METAL CHIP	100K	5%	1/10W	R496	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R397	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R500	1-216-230-00	RES-CHIP	22K	2%	1/8W
R398	1-249-409-11	CARBON	220	5%	1/4W F	R501	1-216-821-11	METAL CHIP	1K	5%	1/10W
R400	1-216-230-00	RES-CHIP	22K	2%	1/8W	R502	1-216-845-11	METAL CHIP	100K	5%	1/10W
R405	1-216-821-11	METAL CHIP	1K	5%	1/10W	R505	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R406	1-249-399-11	CARBON	33	5%	1/4W F	R506	1-249-399-11	CARBON	33	5%	1/4W F
R407	1-249-397-11	CARBON	22	5%	1/4W F	R507	1-249-397-11	CARBON	22	5%	1/4W F
R408	1-216-817-11	METAL CHIP	470	5%	1/10W	△ R510	1-215-891-11	METAL OXIDE	680	5%	2W F
R409	1-216-817-11	METAL CHIP	470	5%	1/10W	R511	1-216-821-11	METAL CHIP	1K	5%	1/10W
R411	1-216-821-11	METAL CHIP	1K	5%	1/10W	R512	1-216-843-11	METAL CHIP	68K	5%	1/10W
R412	1-216-843-11	METAL CHIP	68K	5%	1/10W	R515	1-208-826-11	METAL CHIP	68K	0.5%	1/10W
R415	1-208-826-11	METAL CHIP	68K	0.5%	1/10W	R516	1-208-445-41	RES-CHIP	2.2K	2%	1/10W
R416	1-208-445-41	RES-CHIP	2.2K	2%	1/10W	R521	1-216-844-11	METAL CHIP	82K	5%	1/10W
R419	1-216-821-11	METAL CHIP	1K	5%	1/10W	R522	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R420	1-216-821-11	METAL CHIP	1K	5%	1/10W	R523	1-249-405-11	CARBON	100	5%	1/4W F
R421	1-216-844-11	METAL CHIP	82K	5%	1/10W	R524	1-216-818-11	METAL CHIP	560	5%	1/10W
R422	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R525	1-249-405-11	CARBON	100	5%	1/4W F
R423	1-249-405-11	CARBON	100	5%	1/4W F	R526	1-240-855-11	CARBON	6.2K	5%	1/4W F
R424	1-216-818-11	METAL CHIP	560	5%	1/10W	R527	1-216-214-00	RES-CHIP	4.7K	2%	1/8W
R425	1-249-405-11	CARBON	100	5%	1/4W F	R528	1-234-182-11	ENCAPSULATED COMPONENT 0.22X2 5W			
R426	1-240-855-11	CARBON	6.2K	5%	1/4W F	R529	1-216-823-11	METAL CHIP	1.5K	5%	1/10W
R427	1-216-214-00	RES-CHIP	4.7K	2%	1/8W	R530	1-216-845-11	METAL CHIP	100K	5%	1/10W
R428	1-234-182-11	ENCAPSULATED COMPONENT 0.22X2 5W				R531	1-249-393-11	CARBON	10	5%	1/4W F
R429	1-216-823-11	METAL CHIP	1.5K	5%	1/10W	R532	1-216-839-11	METAL CHIP	33K	5%	1/10W
R430	1-216-845-11	METAL CHIP	100K	5%	1/10W	R533	1-216-835-11	METAL CHIP	15K	5%	1/10W
R431	1-249-393-11	CARBON	10	5%	1/4W F	R534	1-216-835-11	METAL CHIP	15K	5%	1/10W
R432	1-216-839-11	METAL CHIP	33K	5%	1/10W	R535	1-216-841-11	METAL CHIP	47K	5%	1/10W
R433	1-216-835-11	METAL CHIP	15K	5%	1/10W	R536	1-216-837-11	METAL CHIP	22K	5%	1/10W
R434	1-216-835-11	METAL CHIP	15K	5%	1/10W	R537	1-216-841-11	METAL CHIP	47K	5%	1/10W
R435	1-216-841-11	METAL CHIP	47K	5%	1/10W	R539	1-249-389-11	CARBON	4.7	5%	1/4W F
R436	1-216-837-11	METAL CHIP	22K	5%	1/10W	R546	1-216-829-11	METAL CHIP	4.7K	5%	1/10W
R437	1-216-841-11	METAL CHIP	47K	5%	1/10W	△ R560	1-215-891-11	METAL OXIDE	680	5%	2W F
R439	1-249-389-11	CARBON	4.7	5%	1/4W F	R561	1-216-821-11	METAL CHIP	1K	5%	1/10W
R440	1-216-841-11	METAL CHIP	47K	5%	1/10W	R562	1-216-843-11	METAL CHIP	68K	5%	1/10W
R441	1-216-841-11	METAL CHIP	47K	5%	1/10W	R565	1-208-826-11	METAL CHIP	68K	0.5%	1/10W
R446	1-216-829-11	METAL CHIP	4.7K	5%	1/10W	R566	1-208-445-41	RES-CHIP	2.2K	2%	1/10W
R461	1-216-821-11	METAL CHIP	1K	5%	1/10W	R571	1-216-844-11	METAL CHIP	82K	5%	1/10W
R462	1-216-843-11	METAL CHIP	68K	5%	1/10W	R572	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R465	1-208-826-11	METAL CHIP	68K	0.5%	1/10W	R573	1-249-405-11	CARBON	100	5%	1/4W F
R466	1-208-445-41	RES-CHIP	2.2K	2%	1/10W	R574	1-216-818-11	METAL CHIP	560	5%	1/10W

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
R575	1-249-405-11	CARBON 100 5%	1/4W F	R681	1-249-393-11	CARBON 10 5%	1/4W F
R576	1-240-855-11	CARBON 6.2K 5%	1/4W F	R682	1-216-839-11	METAL CHIP 33K 5%	1/10W
R577	1-216-214-00	RES-CHIP 4.7K 2%	1/8W	R683	1-216-835-11	METAL CHIP 15K 5%	1/10W
R578	1-234-182-11	ENCAPSULATED COMPONENT 0.22X2 5W		R684	1-216-835-11	METAL CHIP 15K 5%	1/10W
R579	1-216-823-11	METAL CHIP 1.5K 5%	1/10W	R685	1-216-841-11	METAL CHIP 47K 5%	1/10W
R580	1-216-845-11	METAL CHIP 100K 5%	1/10W	R686	1-216-837-11	METAL CHIP 22K 5%	1/10W
R581	1-249-393-11	CARBON 10 5%	1/4W F	R687	1-216-841-11	METAL CHIP 47K 5%	1/10W
R582	1-216-839-11	METAL CHIP 33K 5%	1/10W	R689	1-249-389-11	CARBON 4.7 5%	1/4W F
R583	1-216-835-11	METAL CHIP 15K 5%	1/10W	R696	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
R584	1-216-835-11	METAL CHIP 15K 5%	1/10W	R700	1-216-230-00	RES-CHIP 22K 2%	1/8W
R585	1-216-841-11	METAL CHIP 47K 5%	1/10W	R705	1-216-821-11	METAL CHIP 1K 5%	1/10W
R586	1-216-837-11	METAL CHIP 22K 5%	1/10W	R706	1-249-399-11	CARBON 33 5%	1/4W F
R587	1-216-841-11	METAL CHIP 47K 5%	1/10W	R707	1-249-397-11	CARBON 22 5%	1/4W F
R589	1-249-389-11	CARBON 4.7 5%	1/4W F	R711	1-216-821-11	METAL CHIP 1K 5%	1/10W
R596	1-216-829-11	METAL CHIP 4.7K 5%	1/10W	R712	1-216-843-11	METAL CHIP 68K 5%	1/10W
R600	1-216-230-00	RES-CHIP 22K 2%	1/8W	R715	1-208-826-11	METAL CHIP 68K 0.5%	1/10W
R605	1-216-821-11	METAL CHIP 1K 5%	1/10W	R716	1-208-445-41	RES-CHIP 2.2K 2%	1/10W
R606	1-249-399-11	CARBON 33 5%	1/4W F	R721	1-216-844-11	METAL CHIP 82K 5%	1/10W
R607	1-249-397-11	CARBON 22 5%	1/4W F	R722	1-216-825-11	METAL CHIP 2.2K 5%	1/10W
R611	1-216-821-11	METAL CHIP 1K 5%	1/10W	R723	1-249-405-11	CARBON 100 5%	1/4W F
R612	1-216-843-11	METAL CHIP 68K 5%	1/10W	R724	1-216-818-11	METAL CHIP 560 5%	1/10W
R615	1-208-826-11	METAL CHIP 68K 0.5%	1/10W	R725	1-249-405-11	CARBON 100 5%	1/4W F
R616	1-208-445-41	RES-CHIP 2.2K 2%	1/10W	R726	1-240-855-11	CARBON 6.2K 5%	1/4W F
R621	1-216-844-11	METAL CHIP 82K 5%	1/10W	R727	1-216-214-00	RES-CHIP 4.7K 2%	1/8W
R622	1-216-825-11	METAL CHIP 2.2K 5%	1/10W	R728	1-234-182-11	ENCAPSULATED COMPONENT 0.22X2 5W	
R623	1-249-405-11	CARBON 100 5%	1/4W F	R729	1-216-823-11	METAL CHIP 1.5K 5%	1/10W
R624	1-216-818-11	METAL CHIP 560 5%	1/10W	R730	1-216-845-11	METAL CHIP 100K 5%	1/10W
R625	1-249-405-11	CARBON 100 5%	1/4W F	R731	1-249-393-11	CARBON 10 5%	1/4W F
R626	1-240-855-11	CARBON 6.2K 5%	1/4W F	R732	1-216-839-11	METAL CHIP 33K 5%	1/10W
R627	1-216-214-00	RES-CHIP 4.7K 2%	1/8W	R733	1-216-835-11	METAL CHIP 15K 5%	1/10W
R628	1-234-182-11	ENCAPSULATED COMPONENT 0.22X2 5W		R734	1-216-835-11	METAL CHIP 15K 5%	1/10W
R629	1-216-823-11	METAL CHIP 1.5K 5%	1/10W	R735	1-216-841-11	METAL CHIP 47K 5%	1/10W
R630	1-216-845-11	METAL CHIP 100K 5%	1/10W	R736	1-216-837-11	METAL CHIP 22K 5%	1/10W
R631	1-249-393-11	CARBON 10 5%	1/4W F	R737	1-216-841-11	METAL CHIP 47K 5%	1/10W
R632	1-216-839-11	METAL CHIP 33K 5%	1/10W	R739	1-249-389-11	CARBON 4.7 5%	1/4W F
R633	1-216-835-11	METAL CHIP 15K 5%	1/10W	R746	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
R634	1-216-835-11	METAL CHIP 15K 5%	1/10W	R809	1-216-829-11	METAL CHIP 4.7K 5%	1/10W
R635	1-216-841-11	METAL CHIP 47K 5%	1/10W	R830	1-249-399-11	CARBON 33 5%	1/4W F
R636	1-216-837-11	METAL CHIP 22K 5%	1/10W	△ R851	1-240-877-11	FUSIBLE 0.15 5%	1/2W F
R637	1-216-841-11	METAL CHIP 47K 5%	1/10W	△ R852	1-240-877-11	FUSIBLE 0.15 5%	1/2W F
R639	1-249-389-11	CARBON 4.7 5%	1/4W F	RR11	1-249-393-11	CARBON 10 5%	1/4W F
R646	1-216-829-11	METAL CHIP 4.7K 5%	1/10W	RR21	1-249-393-11	CARBON 10 5%	1/4W F
R656	1-216-833-11	METAL CHIP 10K 5%	1/10W				(EXCEPT US,CND)
R658	1-216-833-11	METAL CHIP 10K 5%	1/10W	RR61	1-249-393-11	CARBON 10 5%	1/4W F
R661	1-216-821-11	METAL CHIP 1K 5%	1/10W				(EXCEPT US,CND)
R662	1-216-843-11	METAL CHIP 68K 5%	1/10W	RR71	1-249-393-11	CARBON 10 5%	1/4W F
R665	1-208-826-11	METAL CHIP 68K 0.5%	1/10W				(EXCEPT US,CND)
R666	1-208-445-41	RES-CHIP 2.2K 2%	1/10W	RR81	1-249-393-11	CARBON 10 5%	1/4W F
R671	1-216-844-11	METAL CHIP 82K 5%	1/10W				(EXCEPT US,CND)
R672	1-216-825-11	METAL CHIP 2.2K 5%	1/10W				
R673	1-249-405-11	CARBON 100 5%	1/4W F				< RELAY >
R674	1-216-818-11	METAL CHIP 560 5%	1/10W	RY351	1-755-267-11	RELAY	
R675	1-249-405-11	CARBON 100 5%	1/4W F	RY400	1-755-170-11	RELAY (12V)	
R676	1-240-855-11	CARBON 6.2K 5%	1/4W F	RY500	1-755-170-11	RELAY (12V)	
R677	1-216-214-00	RES-CHIP 4.7K 2%	1/8W	RY600	1-755-170-11	RELAY (12V)	
R678	1-234-182-11	ENCAPSULATED COMPONENT 0.22X2 5W		RY700	1-755-170-11	RELAY (12V)	
R679	1-216-823-11	METAL CHIP 1.5K 5%	1/10W	RY801	1-755-593-11	RELAY	
R680	1-216-845-11	METAL CHIP 100K 5%	1/10W				

STR-DG910

Ver. 1.1

MAIN	POWER KEY	SPEAKER	STANDBY
------	-----------	---------	---------

Ref. No.	Part No.	Description	Remark
< TERMINAL BOARD >			
TM601	1-780-214-11	TERMINAL BOARD (SP) (2P) (SPEAKERS CENTER)	
TM602	1-780-364-11	TERMINAL BOARD (SP) (8P) (SPEAKERS SURROUND BACK,SURROUND)	

POWER KEY BOARD *****			
< CONNECTOR >			
* CN102	1-691-408-11	CONNECTOR, BOARD TO BOARD 7P	
< RESISTOR >			
R111	1-249-415-11	CARBON 680 5% 1/4W	
R112	1-247-831-11	CARBON 1K 5% 1/4W	
R113	1-249-419-11	CARBON 1.5K 5% 1/4W	
< ROTARY ENCODER >			
RV103	1-418-817-11	ENCODER, ROTARY (- TUNING +)	
RV104	1-418-817-11	ENCODER, ROTARY (- TONE +)	
< SWITCH >			
S100	1-771-410-21	SWITCH, TACTILE (I/⏏)	
S113	1-771-410-21	SWITCH, TACTILE (TUNING MODE)	
S114	1-771-410-21	SWITCH, TACTILE (TONE MODE)	
S115	1-771-410-21	SWITCH, TACTILE (SPEAKERS (OFF/A/B/A+B))	

SPEAKER BOARD *****			
< CAPACITOR >			
C2850	1-162-927-11	CERAMIC CHIP 100PF 5% 50V	
C2851	1-162-927-11	CERAMIC CHIP 100PF 5% 50V	
C2860	1-162-927-11	CERAMIC CHIP 100PF 5% 50V	
C2861	1-162-927-11	CERAMIC CHIP 100PF 5% 50V	
CC101	1-162-968-11	CERAMIC CHIP 0.0047uF 10% 50V (EXCEPT US,CND)	
CC102	1-162-968-11	CERAMIC CHIP 0.0047uF 10% 50V (EXCEPT US,CND)	
CC111	1-162-968-11	CERAMIC CHIP 0.0047uF 10% 50V (EXCEPT US,CND)	
CC112	1-162-968-11	CERAMIC CHIP 0.0047uF 10% 50V (EXCEPT US,CND)	
< CONNECTOR >			
CNP285	1-785-102-11	PIN, CONNECTOR (3.96mm PITCH) 4P	
* CNP286	1-564-508-11	PLUG, CONNECTOR 5P	
< DIODE >			
D2881	8-719-404-50	DIODE MA111-TX	
D2891	8-719-404-50	DIODE MA111-TX	
< TRANSISTOR >			
Q2880	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF	
Q2890	8-729-620-07	TRANSISTOR 2SC3052EF-T1-LEF	

Ref. No.	Part No.	Description	Remark
< RESISTOR >			
R2871	1-249-397-11	CARBON 22 5% 1/4W F	
R2872	1-249-399-11	CARBON 33 5% 1/4W F	
R2873	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
R2881	1-249-397-11	CARBON 22 5% 1/4W F	
R2882	1-249-399-11	CARBON 33 5% 1/4W F	
R2883	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
RR101	1-249-393-11	CARBON 10 5% 1/4W F (EXCEPT US,CND)	
RR102	1-249-393-11	CARBON 10 5% 1/4W F (EXCEPT US,CND)	
RR111	1-249-393-11	CARBON 10 5% 1/4W F (EXCEPT US,CND)	
RR112	1-249-393-11	CARBON 10 5% 1/4W F (EXCEPT US,CND)	
< RELAY >			
RY2881	1-755-170-11	RELAY (12V)	
RY2891	1-755-170-11	RELAY (12V)	
< TERMINAL BOARD >			
TM2880	1-780-364-11	TERMINAL BOARD (SP) (8P) (SPEAKERS FRONT A,FRONT B)	

A-1231-380-A		STANDBY BOARD, COMPLETE (US,CND)	
A-1236-403-A		STANDBY BOARD, COMPLETE (AEP,UK,KR)	
A-1236-404-A		STANDBY BOARD, COMPLETE (E2)	
A-1287-665-A		STANDBY BOARD, COMPLETE (TW) *****	
1-533-217-41		HOLDER, FUSE	
< CAPACITOR >			
C913	1-127-888-11	CERAMIC 0.1uF 10% 50V	
C914	1-127-888-11	CERAMIC 0.1uF 10% 50V	
C915	1-126-943-11	ELECT 2200uF 20% 25V	
C916	1-126-942-61	ELECT 1000uF 20% 25V	
C920	1-127-888-11	CERAMIC 0.1uF 10% 50V	
C921	1-127-888-11	CERAMIC 0.1uF 10% 50V	
C922	1-127-888-11	CERAMIC 0.1uF 10% 50V (US,CND)	
C924	1-126-960-11	ELECT 1uF 20% 50V	
C951	1-127-888-11	CERAMIC 0.1uF 10% 50V	
C952	1-126-942-61	ELECT 1000uF 20% 25V (EXCEPT E2)	
C952	1-126-943-11	ELECT 2200uF 20% 25V (E2)	
C954	1-128-547-11	ELECT 6800uF 20% 16V	
< AC OUTLET >			
△ CN005	1-251-718-11	OUTLET (2 GANG), AC (AC OUTLET) (US,CND)	
< CONNECTOR >			
CNP002	1-568-106-11	PIN, CONNECTOR (3.96mm PITCH) 4P (E2)	
* CNP802	1-564-509-11	PLUG, CONNECTOR 6P	
* CNP804	1-564-506-11	PLUG, CONNECTOR 3P	
* CNP805	1-564-506-11	PLUG, CONNECTOR 3P	
CNP901	1-564-321-00	PIN, CONNECTOR (3.96mm PITCH) 2P	
* CNP902	1-565-792-11	PIN, CONNECTOR (3.96mm PITCH) 2P	

Ref. No.	Part No.	Description	Remark				Ref. No.	Part No.	Description	Remark			
* CNP903	1-564-508-11	PLUG, CONNECTOR 5P					C6102	1-126-964-11	ELECT	10uF	20%	50V	
		< DIODE >					C6103	1-126-964-11	ELECT	10uF	20%	50V	
							C6104	1-126-964-11	ELECT	10uF	20%	50V	
							C6105	1-126-964-11	ELECT	10uF	20%	50V	
							C6106	1-126-964-11	ELECT	10uF	20%	50V	
D901	8-719-991-33	DIODE 1SS133T-77					C6107	1-126-964-11	ELECT	10uF	20%	50V	
D910	8-719-043-76	DIODE AK04V0					C6108	1-126-964-11	ELECT	10uF	20%	50V	
D911	8-719-043-76	DIODE AK04V0					C6109	1-126-964-11	ELECT	10uF	20%	50V	
D912	8-719-043-76	DIODE AK04V0					C6110	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
D913	8-719-043-76	DIODE AK04V0					C6111	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
D914	8-719-991-33	DIODE 1SS133T-77					C6112	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
D915	8-719-991-33	DIODE 1SS133T-77					C6113	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
D920	6-500-522-11	DIODE 10EDB40-TA2B5					C6114	1-126-947-11	ELECT	47uF	20%	35V	
D921	6-500-522-11	DIODE 10EDB40-TA2B5					C6115	1-126-947-11	ELECT	47uF	20%	35V	
D922	6-500-522-11	DIODE 10EDB40-TA2B5					C6201	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
D923	6-500-522-11	DIODE 10EDB40-TA2B5					C6202	1-126-947-11	ELECT	47uF	20%	35V	
D924	8-719-043-76	DIODE AK04V0					C6203	1-162-927-11	CERAMIC CHIP	100PF	5%	50V	
		< GROUND TERMINAL >					C6301	1-126-947-11	ELECT	47uF	20%	35V	
							C6302	1-126-947-11	ELECT	47uF	20%	35V	
G901	1-537-738-21	TERMINAL, GROUND (US,CND)					C6305	1-126-947-11	ELECT	47uF	20%	35V	
		< AC OUTLET >											
△ J911	1-785-834-11	OUTLET (1P), AC (AC OUTLET) (E2)					C6306	1-126-947-11	ELECT	47uF	20%	35V	
		< TRANSISTOR >					C6318	1-126-947-11	ELECT	47uF	20%	35V	
							C6320	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V	
							C6321	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	
							C6323	1-104-658-11	ELECT	100uF	20%	10V	
Q901	8-729-119-78	TRANSISTOR 2SC2785-HFE					C6324	1-165-732-31	ELECT	47uF	20%	25V	
Q921	8-729-119-78	TRANSISTOR 2SC2785-HFE					C6325	1-100-385-11	CERAMIC CHIP	0.47uF		25V	
Q922	8-729-140-93	TRANSISTOR 2SB733-34					C6326	1-126-947-11	ELECT	47uF	20%	35V	
Q923	8-729-119-79	TRANSISTOR 2SC2785-FEK					C6329	1-104-658-11	ELECT	100uF	20%	10V	
		< RESISTOR >					C6332	1-125-837-11	CERAMIC CHIP	1uF	10%	6.3V	
△ R810	1-243-634-91	FUSIBLE 0.22 5% 1/2W F					C6333	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
△ R811	1-243-634-91	FUSIBLE 0.22 5% 1/2W F					C6334	1-125-837-11	CERAMIC CHIP	1uF	10%	6.3V	
△ R901	1-219-237-91	SOLID 3.3M 20% 1/2W F					C6335	1-125-837-11	CERAMIC CHIP	1uF	10%	6.3V	
		(US,CND)					C6336	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
R902	1-247-871-11	CARBON 47K 5% 1/4W					C6337	1-125-837-11	CERAMIC CHIP	1uF	10%	6.3V	
R903	1-249-421-11	CARBON 2.2K 5% 1/4W											
							C6338	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
R904	1-249-381-11	CARBON 1 5% 1/4W F					C6339	1-162-915-11	CERAMIC CHIP	10PF	0.5PF	50V	
R920	1-249-421-11	CARBON 2.2K 5% 1/4W					C6340	1-162-915-11	CERAMIC CHIP	10PF	0.5PF	50V	
R921	1-247-871-11	CARBON 47K 5% 1/4W					C6341	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
R922	1-247-863-11	CARBON 22K 5% 1/4W					C6342	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V	
R923	1-249-429-11	CARBON 10K 5% 1/4W											
		< RELAY >					C6344	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	
							C6346	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
△ RY901	1-755-541-11	RELAY					C6347	1-162-921-11	CERAMIC CHIP	33PF	5%	50V	
		< TRANSFORMER >					C6348	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
							C6349	1-162-921-11	CERAMIC CHIP	33PF	5%	50V	
△ T903	1-437-311-11	TRANSFORMER, POWER (SUB) (TW)					C6350	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
△ T903	1-437-312-11	TRANSFORMER, POWER (SUB) (US,CND)					C6352	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
△ T903	1-437-313-11	TRANSFORMER, POWER (SUB) (AEP,UK,KR)					C6403	1-162-923-11	CERAMIC CHIP	47PF	5%	50V	
△ T903	1-437-314-11	TRANSFORMER, POWER (SUB) (E2)					C6405	1-126-964-11	ELECT	10uF	20%	50V	

							C6407	1-126-964-11	ELECT	10uF	20%	50V	
	A-1231-372-A	VIDEO BOARD, COMPLETE (US,CND,KR,TW)					C6409	1-126-964-11	ELECT	10uF	20%	50V	
	A-1231-977-A	VIDEO BOARD, COMPLETE (AEP,UK,E2)					C6411	1-126-964-11	ELECT	10uF	20%	50V	
		*****					C6414	1-126-947-11	ELECT	47uF	20%	35V	
							C6415	1-126-947-11	ELECT	47uF	20%	35V	
	7-685-646-79	SCREW +BVTP 3X8 TYPE2 IT-3					C6423	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
		< CAPACITOR >					C6424	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
							C6430	1-126-964-11	ELECT	10uF	20%	50V	
C6101	1-126-964-11	ELECT 10uF 20% 50V					C6501	1-162-921-11	CERAMIC CHIP	33PF	5%	50V	

Ref. No.	Part No.	Description	Remark		
C6502	1-162-917-11	CERAMIC CHIP	15PF	5%	50V
C6503	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C6504	1-162-927-11	CERAMIC CHIP	100PF	5%	50V
C6507	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C6508	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C6509	1-162-919-11	CERAMIC CHIP	22PF	5%	50V (US,CND,KR,TW)
C6510	1-162-913-11	CERAMIC CHIP	8PF	0.5PF	50V (US,CND,KR,TW)
C6511	1-126-916-11	ELECT	1000uF	20%	6.3V
C6512	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C6513	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V (AEP,UK,E2)
C6514	1-126-947-11	ELECT	47uF	20%	35V (AEP,UK,E2)
C6515	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V (AEP,UK,E2)
C6516	1-162-919-11	CERAMIC CHIP	22PF	5%	50V (AEP,UK,E2)
C6517	1-162-913-11	CERAMIC CHIP	8PF	0.5PF	50V (AEP,UK,E2)
C6518	1-162-919-11	CERAMIC CHIP	22PF	5%	50V (AEP,UK,E2)
C6519	1-162-915-11	CERAMIC CHIP	10PF	0.5PF	50V
C6601	1-100-385-11	CERAMIC CHIP	0.47uF		25V
C6602	1-100-385-11	CERAMIC CHIP	0.47uF		25V
C6603	1-126-925-11	ELECT	470uF	20%	10V
C6604	1-126-925-11	ELECT	470uF	20%	10V
C6701	1-162-923-11	CERAMIC CHIP	47PF	5%	50V
C6702	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
C6703	1-126-947-11	ELECT	47uF	20%	35V
C6704	1-126-947-11	ELECT	47uF	20%	35V
C6705	1-126-947-11	ELECT	47uF	20%	35V
C6804	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
< CONNECTOR >					
CN6802	1-784-776-11	CONNECTOR, FFC	15P		
CN6803	1-784-924-11	PIN, CONNECTOR	8P		
* CN6805	1-564-506-11	PLUG, CONNECTOR	3P		
* CN6806	1-564-507-11	PLUG, CONNECTOR	4P		
CN6807	1-564-705-11	PIN, CONNECTOR (SMALL TYPE)	3P		
< TRIMMER >					
CT6501	1-141-442-91	CAP, CERAMIC TRIMMER	20PF		(US,CND,KR,TW)
CT6502	1-141-442-91	CAP, CERAMIC TRIMMER	20PF		(AEP,UK,E2)
CT6503	1-141-442-91	CAP, CERAMIC TRIMMER	20PF		(AEP,UK,E2)
< DIODE >					
D6401	8-719-016-74	DIODE	1SS352		
D6402	8-719-016-74	DIODE	1SS352		
< FERRITE BEAD >					
FB6201	1-469-710-21	FERRITE, EMI (SMD)	(2012)		
FB6301	1-469-710-21	FERRITE, EMI (SMD)	(2012)		
FB6302	1-469-710-21	FERRITE, EMI (SMD)	(2012)		
FB6305	1-216-295-11	SHORT CHIP	0		
FB6306	1-469-710-21	FERRITE, EMI (SMD)	(2012)		

Ref. No.	Part No.	Description	Remark		
FB6308	1-469-710-21	FERRITE, EMI (SMD)	(2012)		
FB6309	1-469-710-21	FERRITE, EMI (SMD)	(2012)		
FB6310	1-469-710-21	FERRITE, EMI (SMD)	(2012)		
FB6311	1-469-710-21	FERRITE, EMI (SMD)	(2012)		
FB6312	1-469-710-21	FERRITE, EMI (SMD)	(2012)		
FB6313	1-469-710-21	FERRITE, EMI (SMD)	(2012)		
FB6501	1-469-710-21	FERRITE, EMI (SMD)	(2012)		(AEP,UK,E2)
FB6502	1-414-813-11	FERRITE, EMI (SMD)	(2012)		(AEP,UK,E2)
< IC >					
IC6101	6-706-767-01	IC	NJM2586AM		
IC6201	8-759-529-76	IC	TC74VHC595FT(EL)		
IC6202	8-759-491-47	IC	TC74VHC08AFT(EL)		
IC6307	6-706-928-01	IC	TE8200PF		
IC6308	6-705-468-01	IC	BA33BC0FP-E2		
IC6402	6-704-199-01	IC	NJM2595M-TE2		
IC6501	6-700-367-01	IC	MB90089PF-G-238-BND		
IC6502	8-759-032-01	IC	MC74HC00AF (AEP,UK,E2)		
IC6503	8-759-242-70	IC	TC7WU04F (AEP,UK,E2)		
IC6601	8-759-231-53	IC	TA7805S		
IC6602	8-759-245-79	IC	TA79005S		
IC6701	8-759-474-37	IC	NJM2279M-TE2		
< JACK >					
J6101	1-815-360-11	JACK, PIN 3P (COMPONENT VIDEO			MONITOR OUT)
J6102	1-816-592-11	JACK, PIN 9P (COMPONENT VIDEO			SAT IN,DVD IN,VIDEO 1 IN)
J6401	1-770-337-11	JACK, PIN 3P (VIDEO 1 VIDEO OUT/VIDEO IN,			MONITOR VIDEO OUT)
J6402	1-518-043-11	JACK, PIN 2P (VIDEO 2/BD			VIDEO OUT/VIDEO IN)
J6403	1-518-043-11	JACK, PIN 2P (SAT VIDEO IN,DVD VIDEO IN)			
< JUMPER RESISTOR >					
JW6803	1-216-864-11	SHORT CHIP	0		
JW6815	1-216-864-11	SHORT CHIP	0		
JW6816	1-216-864-11	SHORT CHIP	0		
JW6817	1-216-864-11	SHORT CHIP	0		
JW6818	1-216-864-11	SHORT CHIP	0		
< COIL >					
L6501	1-408-781-00	INDUCTOR	22uH		
< TRANSISTOR >					
Q6304	8-729-216-31	TRANSISTOR	2SA1163-G		
Q6306	8-729-216-31	TRANSISTOR	2SA1163-G		
Q6501	8-729-140-97	TRANSISTOR	2SB734-34		
Q6502	8-729-027-46	TRANSISTOR	DTC114YKA-T146		
Q6504	8-729-216-31	TRANSISTOR	2SA1163-G		
< RESISTOR >					
R6101	1-211-990-11	METAL CHIP	75	0.5%	1/10W
R6102	1-211-990-11	METAL CHIP	75	0.5%	1/10W
R6103	1-211-990-11	METAL CHIP	75	0.5%	1/10W
R6104	1-211-990-11	METAL CHIP	75	0.5%	1/10W
R6105	1-211-990-11	METAL CHIP	75	0.5%	1/10W

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
R6106	1-211-990-11	METAL CHIP	75 0.5% 1/10W	R6502	1-216-813-11	METAL CHIP	220 5% 1/10W
R6107	1-211-990-11	METAL CHIP	75 0.5% 1/10W	R6507	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R6108	1-211-990-11	METAL CHIP	75 0.5% 1/10W	R6508	1-216-814-11	METAL CHIP	270 5% 1/10W
R6109	1-211-990-11	METAL CHIP	75 0.5% 1/10W				(US,CND,KR,TW)
R6110	1-211-990-11	METAL CHIP	75 0.5% 1/10W	R6509	1-216-833-11	METAL CHIP	10K 5% 1/10W
				R6510	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
R6111	1-211-990-11	METAL CHIP	75 0.5% 1/10W	R6511	1-216-809-11	METAL CHIP	100 5% 1/10W
R6112	1-211-990-11	METAL CHIP	75 0.5% 1/10W				(AEP,UK,E2)
R6113	1-211-990-11	METAL CHIP	75 0.5% 1/10W	R6512	1-216-814-11	METAL CHIP	270 5% 1/10W
R6114	1-211-990-11	METAL CHIP	75 0.5% 1/10W				(AEP,UK,E2)
R6115	1-211-990-11	METAL CHIP	75 0.5% 1/10W	R6513	1-216-809-11	METAL CHIP	100 5% 1/10W
							(AEP,UK,E2)
R6116	1-216-833-11	METAL CHIP	10K 5% 1/10W	R6514	1-216-809-11	METAL CHIP	100 5% 1/10W
R6201	1-216-809-11	METAL CHIP	100 5% 1/10W				(AEP,UK,E2)
R6202	1-216-809-11	METAL CHIP	100 5% 1/10W	R6515	1-216-857-11	METAL CHIP	1M 5% 1/10W
R6203	1-216-809-11	METAL CHIP	100 5% 1/10W				(AEP,UK,E2)
R6204	1-216-833-11	METAL CHIP	10K 5% 1/10W				
R6301	1-216-840-11	METAL CHIP	39K 5% 1/10W	R6516	1-216-857-11	METAL CHIP	1M 5% 1/10W
R6302	1-216-837-11	METAL CHIP	22K 5% 1/10W				(AEP,UK,E2)
R6304	1-216-821-11	METAL CHIP	1K 5% 1/10W	R6517	1-216-814-11	METAL CHIP	270 5% 1/10W
R6305	1-216-837-11	METAL CHIP	22K 5% 1/10W				(AEP,UK,E2)
R6306	1-216-840-11	METAL CHIP	39K 5% 1/10W	R6519	1-216-813-11	METAL CHIP	220 5% 1/10W
				R6701	1-211-990-11	METAL CHIP	75 0.5% 1/10W
R6308	1-216-797-11	METAL CHIP	10 5% 1/10W	R6703	1-216-833-11	METAL CHIP	10K 5% 1/10W
R6309	1-216-797-11	METAL CHIP	10 5% 1/10W				
R6311	1-216-821-11	METAL CHIP	1K 5% 1/10W	R6704	1-216-833-11	METAL CHIP	10K 5% 1/10W
R6317	1-216-821-11	METAL CHIP	1K 5% 1/10W	R6705	1-211-973-11	METAL CHIP	15 0.5% 1/10W
R6319	1-216-809-11	METAL CHIP	100 5% 1/10W	R6706	1-211-987-11	METAL CHIP	56 0.5% 1/10W
				R6802	1-216-809-11	METAL CHIP	100 5% 1/10W
R6324	1-216-833-11	METAL CHIP	10K 5% 1/10W	R6810	1-216-805-11	METAL CHIP	47 5% 1/10W
R6325	1-216-833-11	METAL CHIP	10K 5% 1/10W				
R6326	1-216-797-11	METAL CHIP	10 5% 1/10W	R6812	1-216-809-11	METAL CHIP	100 5% 1/10W
R6327	1-216-797-11	METAL CHIP	10 5% 1/10W	R6813	1-216-809-11	METAL CHIP	100 5% 1/10W
R6328	1-216-797-11	METAL CHIP	10 5% 1/10W	R6814	1-216-809-11	METAL CHIP	100 5% 1/10W
				R6815	1-216-809-11	METAL CHIP	100 5% 1/10W
R6329	1-216-797-11	METAL CHIP	10 5% 1/10W	R6816	1-216-809-11	METAL CHIP	100 5% 1/10W
R6330	1-216-813-11	METAL CHIP	220 5% 1/10W				
R6331	1-216-857-11	METAL CHIP	1M 5% 1/10W	R6817	1-216-809-11	METAL CHIP	100 5% 1/10W
R6332	1-216-827-11	METAL CHIP	3.3K 5% 1/10W	R6818	1-216-809-11	METAL CHIP	100 5% 1/10W
R6333	1-216-827-11	METAL CHIP	3.3K 5% 1/10W	R6819	1-216-805-11	METAL CHIP	47 5% 1/10W
R6334	1-216-833-11	METAL CHIP	10K 5% 1/10W			< CONNECTOR >	
R6335	1-216-833-11	METAL CHIP	10K 5% 1/10W	TP6501	1-784-921-11	PIN, CONNECTOR 4P	
R6336	1-218-879-11	METAL CHIP	22K 0.5% 1/10W			< VIBRATOR >	
R6337	1-218-879-11	METAL CHIP	22K 0.5% 1/10W				
R6338	1-216-864-11	SHORT CHIP	0	X6301	1-795-219-21	VIBRATOR, CRYSTAL (24.576MHz)	
				X6501	1-781-821-21	VIBRATOR, CRYSTAL (14.31MHz)	
R6340	1-216-833-11	METAL CHIP	10K 5% 1/10W				(US,CND,KR,TW)
R6341	1-216-833-11	METAL CHIP	10K 5% 1/10W	X6502	1-781-821-21	VIBRATOR, CRYSTAL (14.31MHz)	(AEP,UK,E2)
R6343	1-216-821-11	METAL CHIP	1K 5% 1/10W	X6503	1-781-820-21	VIBRATOR, CRYSTAL (17.3734MHz)	(AEP,UK,E2)
R6346	1-216-809-11	METAL CHIP	100 5% 1/10W				*****
R6350	1-216-809-11	METAL CHIP	100 5% 1/10W				
						VIDEO 3 BOARD	
R6351	1-216-809-11	METAL CHIP	100 5% 1/10W			*****	
R6352	1-216-809-11	METAL CHIP	100 5% 1/10W			< CAPACITOR >	
R6405	1-211-990-11	METAL CHIP	75 0.5% 1/10W	C293	1-100-566-11	CERAMIC CHIP	0.1uF 10% 25V
R6406	1-211-990-11	METAL CHIP	75 0.5% 1/10W	C294	1-100-566-11	CERAMIC CHIP	0.1uF 10% 25V
R6407	1-211-990-11	METAL CHIP	75 0.5% 1/10W	C298	1-162-960-11	CERAMIC CHIP	220PF 10% 50V
				C299	1-162-960-11	CERAMIC CHIP	220PF 10% 50V
R6408	1-211-990-11	METAL CHIP	75 0.5% 1/10W			< CONNECTOR >	
R6409	1-211-990-11	METAL CHIP	75 0.5% 1/10W	CN201	1-564-721-11	PIN, CONNECTOR (SMALL TYPE) 5P	
R6411	1-211-990-11	METAL CHIP	75 0.5% 1/10W				
R6412	1-211-990-11	METAL CHIP	75 0.5% 1/10W				
R6413	1-211-990-11	METAL CHIP	75 0.5% 1/10W				
R6414	1-211-990-11	METAL CHIP	75 0.5% 1/10W				
R6415	1-211-990-11	METAL CHIP	75 0.5% 1/10W				
R6501	1-216-809-11	METAL CHIP	100 5% 1/10W				

STR-DG910

VIDEO 3 XM

Ref. No.	Part No.	Description	Remark			
* CN202	1-690-880-31	LEAD (WITH CONNECTOR)				
		< JACK >				
J298	1-819-189-11	JACK, PIN 3P (VIDEO 3 IN/PORTABLE AV IN VIDEO,AUDIO)				
		< RESISTOR >				
R298	1-216-821-11	METAL CHIP	1K	5%	1/10W	
R299	1-216-821-11	METAL CHIP	1K	5%	1/10W	

	A-1222-793-A	XM BOARD, COMPLETE (US,CND)				

		< CAPACITOR >				
C101	1-137-649-31	ELECT	220uF	20%	10V	
C102	1-125-891-11	CERAMIC CHIP	0.47uF	10%	10V	
C103	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C104	1-112-100-11	ELECT	10uF	20%	50V	
C105	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C106	1-115-416-11	CERAMIC CHIP	0.001uF	5%	25V	
C107	1-115-416-11	CERAMIC CHIP	0.001uF	5%	25V	
C108	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C109	1-115-416-11	CERAMIC CHIP	0.001uF	5%	25V	
C110	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C111	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C112	1-216-864-11	SHORT CHIP	0			
C113	1-126-964-11	ELECT	10uF	20%	50V	
C114	1-216-864-11	SHORT CHIP	0			
C115	1-216-864-11	SHORT CHIP	0			
C116	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C117	1-216-864-11	SHORT CHIP	0			
C118	1-162-963-11	CERAMIC CHIP	680PF	10%	50V	
C119	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C120	1-162-969-11	CERAMIC CHIP	0.0068uF	10%	25V	
C121	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C122	1-112-100-11	ELECT	10uF	20%	50V	
C123	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C124	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C125	1-112-100-11	ELECT	10uF	20%	50V	
C126	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C127	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C128	1-162-969-11	CERAMIC CHIP	0.0068uF	10%	25V	
C129	1-162-963-11	CERAMIC CHIP	680PF	10%	50V	
C130	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C131	1-162-919-11	CERAMIC CHIP	22PF	5%	50V	
C132	1-162-919-11	CERAMIC CHIP	22PF	5%	50V	
C133	1-162-919-11	CERAMIC CHIP	22PF	5%	50V	
C134	1-162-919-11	CERAMIC CHIP	22PF	5%	50V	
C135	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V	
C136	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C137	1-126-964-11	ELECT	10uF	20%	50V	
C138	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C139	1-126-964-11	ELECT	10uF	20%	50V	
C140	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C142	1-126-964-11	ELECT	10uF	20%	50V	
C143	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C144	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	

Ref. No.	Part No.	Description	Remark			
C145	1-126-933-11	ELECT	100uF	20%	16V	
C153	1-126-933-11	ELECT	100uF	20%	16V	
C157	1-107-823-11	CERAMIC CHIP	0.47uF	10%	16V	
C159	1-137-649-31	ELECT	220uF	20%	10V	
C161	1-107-823-11	CERAMIC CHIP	0.47uF	10%	16V	
C163	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C164	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C165	1-162-910-11	CERAMIC CHIP	5PF	0.25PF	50V	
C166	1-162-910-11	CERAMIC CHIP	5PF	0.25PF	50V	
C167	1-216-864-11	SHORT CHIP	0			
C168	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
C169	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V	
		< CONNECTOR >				
CN101	1-568-828-11	CONNECTOR, FFC 9P				
CN102	1-784-766-11	CONNECTOR, FFC 5P				
CNP103	1-779-978-11	PIN, CONNECTOR 3P				
		< DIODE >				
D101	6-500-462-01	DIODE NSAD500F-T1B				
D103	8-719-083-02	DIODE KDS160-RTK				
		< FERRITE BEAD >				
FB101	1-469-152-11	FERRITE, EMI (SMD) (2012)				
FB104	1-469-152-11	FERRITE, EMI (SMD) (2012)				
		< IC >				
IC101	6-705-468-01	IC BA33BC0FP-E2				
IC102	6-709-251-01	IC F2602E-01-TR				
IC104	8-759-710-97	IC NJM4565M-D				
IC105	6-707-111-01	IC PCM1753DBQR				
IC106	6-707-802-01	IC BA00CC0WT(-V5)				
IC107	6-705-469-01	IC BA50BC0FP-E2				
		< CONNECTOR >				
J101	1-793-642-21	CONNECTOR (USB) (4P), SQUARE (XM)				
		< JUMPER RESISTOR >				
JR101	1-216-296-11	SHORT CHIP	0			
L101	1-216-295-11	SHORT CHIP	0			
L102	1-216-295-11	SHORT CHIP	0			
		< TRANSISTOR >				
Q105	8-729-027-46	TRANSISTOR DTC114YKA-T146				
Q106	8-729-140-93	TRANSISTOR 2SB733-34				
		< RESISTOR >				
R101	1-216-845-11	METAL CHIP	100K	5%	1/10W	
R102	1-216-845-11	METAL CHIP	100K	5%	1/10W	
R103	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R104	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R107	1-216-809-11	METAL CHIP	100	5%	1/10W	
R108	1-216-809-11	METAL CHIP	100	5%	1/10W	
R109	1-216-841-11	METAL CHIP	47K	5%	1/10W	
R110	1-216-809-11	METAL CHIP	100	5%	1/10W	
R112	1-216-833-11	METAL CHIP	10K	5%	1/10W	
R113	1-216-864-11	SHORT CHIP	0			

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>	<u>Remark</u>
		ACCESSORIES *****	
	1-480-100-11	STANDARD COMMANDER (RM-AAP016) (including BATTERY LID) (US,CND)	
	1-480-101-11	STANDARD COMMANDER (RM-AAP017) (including BATTERY LID) (EXCEPT US,CND)	
	1-501-374-12	ANTENNA, LOOP (AM)	
	1-501-807-12	ANTENNA (FM) (AEP,UK,KR,TW)	
	1-542-670-11	MEASUREMENT MIC (MONO) (ECM-AC2)	
△	1-569-008-22	ADAPTOR, CONVERSION 2P (E2)	
△	1-770-019-61	ADAPTOR, CONVERSION PLUG (UK)	
	1-793-184-23	CONNECTOR (F TYPE ADAPTOR) (FM) (US,CND,E2)	
	3-094-430-11	MANUAL, INSTRUCTION (ENGLISH) (US,CND)	
	3-094-430-21	MANUAL, INSTRUCTION (FRENCH) (US,CND)	
	3-094-430-31	MANUAL, INSTRUCTION (ENGLISH) (AEP,UK,E2,TW)	
	3-094-430-41	MANUAL, INSTRUCTION (FRENCH) (AEP,E2)	
	3-094-430-51	MANUAL, INSTRUCTION (SPANISH) (AEP,E2)	
	3-094-430-61	MANUAL, INSTRUCTION (GERMAN,DUTCH, SWEDISH) (AEP)	
	3-094-430-71	MANUAL, INSTRUCTION (ITALIAN,POLISH) (AEP)	
	3-094-455-11	MANUAL, INSTRUCTION (DANISH,FINNISH) (AEP)	
	3-094-455-21	MANUAL, INSTRUCTION (PORTUGUESE) (AEP)	
	3-094-455-31	MANUAL, INSTRUCTION (RUSSIAN) (AEP)	
	3-094-455-41	MANUAL, INSTRUCTION (GREEK) (AEP)	
	3-094-455-51	MANUAL, INSTRUCTION (TURKISH) (AEP)	
	3-094-455-61	MANUAL, INSTRUCTION (HUNGARIAN,CZECH) (AEP)	
	3-094-455-71	MANUAL, INSTRUCTION (SLOVAKIAN) (AEP)	
	3-094-455-81	MANUAL, INSTRUCTION (KOREAN) (KR)	
	3-094-455-91	MANUAL, INSTRUCTION (TRADITIONAL CHINESE) (TW)	

MEMO

REVISION HISTORY

Clicking the version allows you to jump to the revised page.

Also, clicking the version at the top of the revised page allows you to jump to the next revised page.

[illegible]