

---


## **5. Exploded View and Parts List**

---

**5-1 Cabinet Assembly----- 5-2**

**5-2 Electrical Parts List----- 5-4**

## 5-1 Cabinet Assembly

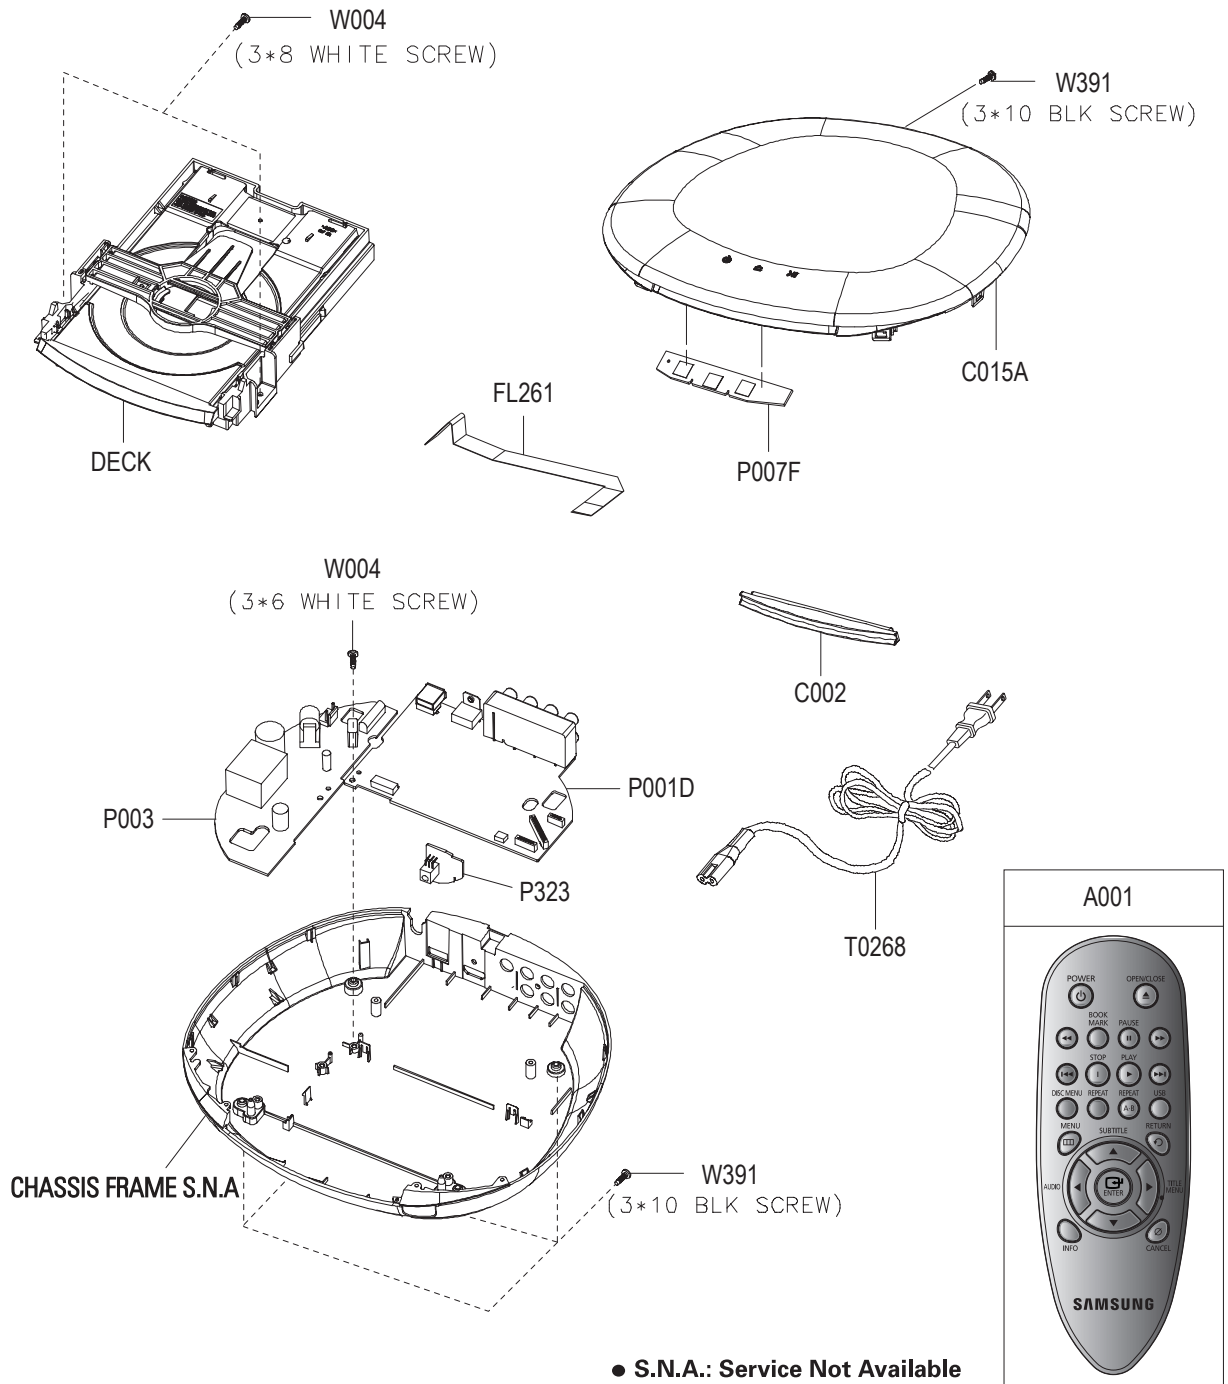

Loc. No	Parts No.	Description ; Specification	Q ty	SNA	Remark
A001	AK59-00103A	REMOCON-ASSY;DVD-H1080,SAMSUNG,120*42,	1	SA	
C002	AK64-02329B	DOOR-TRAY;DVD-H1080W,ABS,T2.0,H6.0,W13	1	SA	
C015A	AK97-02451E	ASSY CABINET-TOP;DVD PLAYER,DVD-H1080W	1	SA	
DECK	AK97-02255G	ASSY DECK-DVD;DP-24A,S78RFL-DL5FL,FFC	1	SA	
FL261	3809-002343	FFC CABLE-FLAT;30V,80C,217mm,23P,1.0mm,2896	1	SA	
P001	AK92-01769M	ASSY PCB MAIN-DVD;STYLISH'09,-,DVD-H10	1	SA	
P003	AK94-00129G	ASSY PCB SMPS;STYLISH'09,DVD-H1080,SER	1	SA	
P007F	AK92-01771A	ASSY PCB FRONT-KEY;DVD-H1080,DVD-H1080	1	SA	
P323	AK92-01773A	ASSY PCB-REMOCON MODULE;DVD-H1080,DVD-	1	SA	
T0268	AC39-10019A	CBF-POWER CORD;KKP-419C,H03VVH2-F,VDE/	1	SA	
W004	6003-000283	SCREW-TAPTYPE;BH,+,-,B,M3,L8,ZPC(WHT),	3	SA	
W391	6003-000275	SCREW-TAPTYPE;BH,+,-,B,M3,L10,ZPC(BLK),S	4	SA	

## 5-2 Electrical Parts List

Loc.No	Parts No.	Description : Specification	Q'ty	S.N.A	Remark	Loc.No	Parts No.	Description : Specification	Q'ty	S.N.A	Remark
<b>P001</b>	<b>AK92-01769M</b>	<b>ASSY PCB MAIN-DVD,STYLISH'09,-DVD-</b>	<b>1</b>	<b>SA</b>		FE1	2401-001479	C-AL;470uF,20%,10V,GP,TP,6.3*11mm,5	1	SA	
AC1	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,100	1	SA		FL1	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm70MH	1	SA	
AC11	2203-002443	C-CER,CHIP;0.33nF,10%,50V,X7R,1005	1	SA		FL2	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm70MH	1	SA	
AC2	2203-000233	C-CER,CHIP;0.1nF,5%,50V,COG,TP,1005	1	SA		FL3	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm70MH	1	SA	
AC3	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA		FL4	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm70MH	1	SA	
AC4	2203-002443	C-CER,CHIP;0.33nF,10%,50V,X7R,1005	1	SA		FL5	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm70MH	1	SA	
AC5	2203-002687	C-CER,CHIP;1.2nF,10%,50V,X7R,TP,100	1	SA		FL6	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm70MH	1	SA	
AC6	2203-000233	C-CER,CHIP;0.1nF,5%,50V,COG,TP,1005	1	SA		FQ1	0501-000342	TR-SMALL SIGNAL;KSC1623-Y,NPN,200mW	1	SA	
AC7	2203-002443	C-CER,CHIP;0.33nF,10%,50V,X7R,1005	1	SA		FR1	2007-000123	R-CHIP;1.5Kohm,5%,1/10W,TP,1608	1	SA	
AC8	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA		FZ1	0403-001064	DIODE-ZENER;RLZ5.1B,4.94-5.2V,500mW	1	SA	
AC9	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,1005	1	SA		FZ2	0401-000133	DIODE-SWITCHING;RLS4148,75V,150mA,L	1	SA	
AE1	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SC		GASKET	AK63-00588A	GASKET-EMI;DVD-H1080R/XAA,CONDUCTAN	1	SNA	
AE2	2401-003221	C-AL;100uF,20%,16V,GP,TP,8X5,2.5	1	SA		GR-MAI	AK63-00581A	GROUND-MAIN;DVD-H1080,SPT,TO.3,W70	1	SNA	
AE3	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,T	1	SA		HC1	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	
AE4	2203-006361	C-CER,CHIP;1000nF,10%,10V,X5R,TP,2	1	SC		HC2	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	
AE5	2203-005384	C-CER,CHIP;4700nF,+80-20%,10V,Y5V,T	1	SA		HD1	0401-000008	DIODE-SWITCHING;DAN217,80V,100MA,SO	1	SA	
AIC1	1201-000163	IC-OP AMP;4560,SOP,8P,173MIL,DUAL,1	1	SA		HD2	0401-000008	DIODE-SWITCHING;DAN217,80V,100MA,SO	1	SA	
AL2	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm70MH	1	SA		HD3	0401-000008	DIODE-SWITCHING;DAN217,80V,100MA,SO	1	SA	
AQ1	0501-000341	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW	1	SA		HDMI	3701-001313	CONNECTOR-HDMI;19P,2R,PLUG,ANGLE,AU	1	SA	
AQ2	0501-000341	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW	1	SA		HL1	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm70MH	1	SA	
AQ4	0504-000128	TR-DIGITAL;-NPN,200MW,22K/22K,SOT-	1	SA		HR1	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	SA	
AQ5	0504-000156	TR-DIGITAL;KSR2103,PNP,200MW,22K/22	1	SA		HR3	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	SA	
AR1	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA		HR6	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	SA	
AR10	2007-000144	R-CHIP;5.1Kohm,5%,1/16W,TP,1005	1	SA		HR7	2007-001320	R-CHIP;1.8Kohm,5%,1/16W,TP,1005	1	SA	
AR11	2007-000152	R-CHIP;20Kohm,5%,1/16W,TP,1005	1	SA		HR8	2007-000129	R-CHIP;27Kohm,5%,1/10W,TP,1608	1	SA	
AR12	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	SA		HR9	2007-001320	R-CHIP;1.8Kohm,5%,1/16W,TP,1005	1	SA	
AR13	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	SA		IRR1	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm70MH	1	SA	
AR14	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	SA		JACK1	3722-002586	JACK-PIN;7P(8P),NI,BK(RD)/BU/GN(RD)/W	1	SA	
AR18	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	SA		MC1	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	
AR19	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	SA		MC10	2203-002443	C-CER,CHIP;0.33nF,10%,50V,X7R,1005	1	SA	
AR2	2007-000144	R-CHIP;5.1Kohm,5%,1/16W,TP,1005	1	SA		MC11	2203-002443	C-CER,CHIP;0.33nF,10%,50V,X7R,1005	1	SA	
AR20	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	SA		MC12	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	
AR21	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	SA		MC13	2203-006378	C-CER,CHIP;4700nF,10%,6.3V,X5R,1608	1	SA	
AR22	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	SA		MC14	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	
AR23	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA		MC15	2203-006378	C-CER,CHIP;4700nF,10%,6.3V,X5R,1608	1	SA	
AR24	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA		MC16	2203-000233	C-CER,CHIP;0.1nF,5%,50V,COG,TP,1005	1	SA	
AR3	2007-000152	R-CHIP;20Kohm,5%,1/16W,TP,1005	1	SA		MC17	2203-000233	C-CER,CHIP;0.1nF,5%,50V,COG,TP,1005	1	SA	
AR4	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	SA		MC18	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	
AR5	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	SA		MC19	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	
AR6	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	SA		MC2	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	
AR7	2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	SA		MC20	2203-000233	C-CER,CHIP;0.1nF,5%,50V,COG,TP,1005	1	SA	
AR8	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	1	SA		MC21	2203-000233	C-CER,CHIP;0.1nF,5%,50V,COG,TP,1005	1	SA	
AR9	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA		MC22	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	
CAPTON	0203-001814	TAPE-POLY;ANT-2301,TO.065,W16,W1250	0.05	SNA		MC23	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	
CON2	3708-001439	CONNECTOR-FPC/FPC/PIC;4P,1mm,STRAIG	1	SA		MC24	2203-000292	C-CER,CHIP;0.01nF,5%,50V,COG,1608	1	SA	
DCN1	3708-000491	CONNECTOR-FPC/FPC/PIC;23P,1mm,STRAI	1	SA		MC25	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	
DCN2	3708-001616	CONNECTOR-FPC/FPC/PIC;9P,1mm,STRAIG	1	SA		MC26	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	
E-PASS	AK68-00156W	LABEL;LABEL-E Pass DVD-VCR,SEIN,ART	1	SNA		MC27	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	
FC1	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA		MC28	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	
FC10	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA		MC29	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	
FC11	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA		MC3	2203-000679	C-CER,CHIP;0.027nF,5%,50V,COG,1005	1	SNA	
FC12	2203-005061	C-CER,CHIP;100nF,+80-20%,16V,Y5V,10	1	SC		MC30	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	
FC2	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA		MC31	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	
FC3	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA		MC32	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	
FC4	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA		MC33	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	
FC5	2203-000233	C-CER,CHIP;0.1nF,5%,50V,COG,TP,1005	1	SA		MC34	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	
FC6	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA		MC35	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	
FC7	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA		MC36	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	
FC8	2203-000233	C-CER,CHIP;0.1nF,5%,50V,COG,TP,1005	1	SA		MC37	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	
FC9	2203-000233	C-CER,CHIP;0.1nF,5%,50V,COG,TP,1005	1	SA		MC38	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,100	1	SNA	

Loc.No	Parts No.	Description : Specification	Q'ty	S.N.A	Remark
MC4	2203-000679	C-CER,CHIP:0.027nF,5%,50V,COG,1005	1	SNA	
MC44	2203-000138	C-CER,CHIP:1.5nF,10%,50V,X7R,TP,100	1	SA	
MC46	2203-006048	C-CER,CHIP:100nF,10%,10V,X7R,TP,100	1	SNA	
MC48	2203-006048	C-CER,CHIP:100nF,10%,10V,X7R,TP,100	1	SNA	
MC49	2203-001607	C-CER,CHIP:0.22nF,5%,50V,NP0,1608	1	SA	
MC5	2203-006378	C-CER,CHIP:4700nF,10%,6.3V,X5R,1608	1	SA	
MC50	2203-005918	C-CER,CHIP:100nF,10%,6.3V,X7R,1608	1	SA	
MC52	2203-006048	C-CER,CHIP:100nF,10%,10V,X7R,TP,100	1	SNA	
MC59	2203-005061	C-CER,CHIP:100nF,+80-20%,16V,Y5V,10	1	SC	
MC6	2203-006048	C-CER,CHIP:100nF,10%,10V,X7R,TP,100	1	SNA	
MC61	2203-006048	C-CER,CHIP:100nF,10%,10V,X7R,TP,100	1	SNA	
MC63	2203-006048	C-CER,CHIP:100nF,10%,10V,X7R,TP,100	1	SNA	
MC64	2203-006361	C-CER,CHIP:1000nF,10%,10V,X5R,TP,2	1	SC	
MC65	2203-000815	C-CER,CHIP:0.033nF,5%,50V,COG,1608	1	SA	
MC7	2203-006378	C-CER,CHIP:4700nF,10%,6.3V,X5R,1608	1	SA	
MC8	2203-002759	C-CER,CHIP:15nF,+80-20%,50V,Y5V,TP,	1	SA	
MC9	2203-006048	C-CER,CHIP:100nF,10%,10V,X7R,TP,100	1	SNA	
MCN4	3708-001741	CONNECTOR-FPC/FFC/PIC;6P,1mm,STRAIG	1	SA	
MCN5	3711-006472	HEADER-BOARD TO CABLE;BOX,7P,1R,2mm	1	SA	
MCN6	3722-002868	JACK-USB;4P1C,BLK,ANGLE	1	SA	
ME1	2401-003221	C-AL;100uF,20%,16V,GP,TP,8X5,2.5	1	SA	
ME13	2401-003221	C-AL;100uF,20%,16V,GP,TP,8X5,2.5	1	SA	
ME15	2401-001479	C-AL;470uF,20%,10V,GP,TP,6.3*11mm,5	1	SA	
ME3	2203-006378	C-CER,CHIP:4700nF,10%,6.3V,X5R,1608	1	SA	
ME4	2401-003221	C-AL;100uF,20%,16V,GP,TP,8X5,2.5	1	SA	
ME5	2401-003221	C-AL;100uF,20%,16V,GP,TP,8X5,2.5	1	SA	
ME6	2203-006361	C-CER,CHIP:1000nF,10%,10V,X5R,TP,2	1	SC	
ME7	2401-003221	C-AL;100uF,20%,16V,GP,TP,8X5,2.5	1	SA	
ME8	2401-000909	C-AL;22uF,20%,16V,GP,TP,5x5,2.5	1	SA	
MIC1	1204-002945	IC-DECODER;MT1389M,TR,128P,14x14mm,	1	SA	
MIC2	1105-001585	IC-DRAM;M12L64164, K4S641632,64Mbit	1	SA	
MIC3	1107-001709	IC-FLASH MEMORY;MX25L1605,16Mbit,2M	1	SNA	
MIC4	1203-002779	IC-POSIFIXED REG.;G952T63U,SOT-223	1	SA	
ML10	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm/70MH	1	SA	
ML11	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm/70MH	1	SA	
ML13	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm/70MH	1	SA	
ML18	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm/70MH	1	SA	
ML23	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	SA	
ML25	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm/70MH	1	SA	
ML30	2007-000033	R-CHIP;0ohm,5%,1/16W,TP,3216	1	SA	
ML31	2703-000398	INDUCTOR-SMD;10uH,10%,3225	1	SA	
ML32	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm/70MH	1	SA	
MQ1	0505-001174	FET-SILICON;SI2302ADS,N,20V,2.4A,65	1	SNA	
MQ2	0501-000341	TR-SMALL SIGNAL;KSC1623-L,NPN,200mW	1	SA	
MR1	2007-000162	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA	
MR10	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA	
MR13	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	SA	
MR14	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA	
MR15	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA	
MR16	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA	
MR17	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA	
MR18	2007-000309	R-CHIP;10ohm,5%,1/10W,TP,1608	1	SA	
MR19	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA	
MR2	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA	
MR20	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	SA	
MR21	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	SA	
MR24	3301-001309	BEAD-SMD;47ohm,1608,TP,-,-	1	SA	
MR25	3301-001309	BEAD-SMD;47ohm,1608,TP,-,-	1	SA	
MR26	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA	
MR27	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA	
MR28	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	SA	
MR29	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	SA	
MR3	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA	
MR33	2007-008202	R-CHIP;2.55Kohm,1%,1/10W,TP,1608	1	SA	

Loc.No	Parts No.	Description : Specification	Q'ty	S.N.A	Remark
MR35	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	SA	
MR36	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	SA	
MR37	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	SA	
MR38	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	SA	
MR39	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	SA	
MR4	2007-000151	R-CHIP;15Kohm,5%,1/16W,TP,1005	1	SA	
MR40	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	SA	
MR41	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	SA	
MR42	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	1	SA	
MR43	2007-001119	R-CHIP;560ohm,5%,1/10W,TP,1608	1	SA	
MR45	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm/70MH	1	SA	
MR46	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm/70MH	1	SA	
MR49	3301-001419	BEAD-SMD;220ohm,1608,TP,133ohm/70MH	1	SA	
MR5	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA	
MR50	2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	1	SA	
MR51	2007-000076	R-CHIP;330ohm,5%,1/10W,TP,1608	1	SA	
MR52	2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	SA	
MR53	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	SA	
MR6	2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	SA	
MR7	2007-000155	R-CHIP;27Kohm,5%,1/16W,TP,1005	1	SA	
MR8	2007-007698	R-CHIP;5.1Kohm,1%,1/16W,TP,1005	1	SA	
MR9	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	1	SA	
MTC1	2203-006048	C-CER,CHIP:100nF,10%,10V,X7R,TP,100	1	SNA	
MTC2	2203-006048	C-CER,CHIP:100nF,10%,10V,X7R,TP,100	1	SNA	
MTC3	2203-006048	C-CER,CHIP:100nF,10%,10V,X7R,TP,100	1	SNA	
MTC4	2203-006048	C-CER,CHIP:100nF,10%,10V,X7R,TP,100	1	SNA	
MTD1	0407-000114	DIODE-SWITCHING;KDS184.80V,100mA,SO	1	SA	
MTE1	2203-005061	C-CER,CHIP:100nF,+80-20%,16V,Y5V,10	1	SC	
MTC1	1003-001978	IC-MOTOR DRIVER;AM5766,HSOP28H,28P,	1	SNA	
MTR1	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA	
MTR2	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA	
MTR3	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA	
MTR4	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA	
MTR5	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA	
MTR6	2007-000503	R-CHIP;2.2ohm,5%,1/10W,TP,1608	1	SA	
MTR7	2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	1	SA	
MTR8	2007-000503	R-CHIP;2.2ohm,5%,1/10W,TP,1608	1	SA	
MY1	2801-004279	CRYSTAL-UNIT;27.00MHz,10ppm,28-AAA,	1	SA	
RC1	2203-006048	C-CER,CHIP:100nF,10%,10V,X7R,TP,100	1	SNA	
RC2	2203-006048	C-CER,CHIP:100nF,10%,10V,X7R,TP,100	1	SNA	
RC3	2203-006048	C-CER,CHIP:100nF,10%,10V,X7R,TP,100	1	SNA	
RC4	2203-000233	C-CER,CHIP:0.1nF,5%,50V,COG,TP,1005	1	SA	
RC5	2203-006378	C-CER,CHIP:4700nF,10%,6.3V,X5R,1608	1	SA	
RC6	2203-000236	C-CER,CHIP:0.1nF,5%,50V,COG,1608	1	SA	
RD1	0407-000116	DIODE-SWITCHING;KDS181,DAP202K,SDS2	1	SA	
RE1	2401-003221	C-AL;100uF,20%,16V,GP,TP,8X5,2.5	1	SA	
RE2	2401-003221	C-AL;100uF,20%,16V,GP,TP,8X5,2.5	1	SA	
REV02	AK41-00838A	PCB-MAIN DVD;DVD-H1080,PHENOL,2L,00	0.5	SNA	
RQ4	0501-000279	TR-SMALL SIGNAL;KSA1182-Y,PNP,150mW	1	SA	
RQ5	0501-000279	TR-SMALL SIGNAL;KSA1182-Y,PNP,150mW	1	SA	
RR7	2007-000881	R-CHIP;4.7ohm,5%,1/8W,TP,2012	1	SA	
RR8	2007-000881	R-CHIP;4.7ohm,5%,1/8W,TP,2012	1	SA	
SUB	BN90-02221K	ASSY SUB MATERIAL-MAIN;DVD-H1080,SE	1	SNA	
UE1	2401-003498	C-AL;220uF,20%,10V,GP,TP,6.3X7MM,5	1	SA	
VC1	2203-000627	C-CER,CHIP;.022nF,5%,50V,COG,TP,100	1	SNA	
VC2	2203-000627	C-CER,CHIP;.022nF,5%,50V,COG,TP,100	1	SNA	
VC4	2203-000627	C-CER,CHIP;.022nF,5%,50V,COG,TP,100	1	SNA	
VC5	2203-000627	C-CER,CHIP;.022nF,5%,50V,COG,TP,100	1	SNA	
VC6	2203-000627	C-CER,CHIP;.022nF,5%,50V,COG,TP,100	1	SNA	
VC7	2203-000627	C-CER,CHIP;.022nF,5%,50V,COG,TP,100	1	SNA	
VC8	2203-000627	C-CER,CHIP;.022nF,5%,50V,COG,TP,100	1	SNA	
VC9	2203-000627	C-CER,CHIP;.022nF,5%,50V,COG,TP,100	1	SNA	
VD1	0401-000008	DIODE-SWITCHING;DAN217.80V,100MA,SO	1	SA	





Loc.No	Parts No.	Description : Specification	Q'ty	S.N.A	Remark	Loc.No	Parts No.	Description : Specification	Q'ty	S.N.A	Remark
	AK99-01011A	ASSY MANUAL INSERT-KEY;DVD-H1080,DV	1	SNA		Q1	0501-000534	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,	1	SA	
	0202-001214	SOLDER-WIRE FLUX;HSE04 SR-34 SUPER,	0.003	SNA		R1	2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	1	SA	
	0202-001459	SOLDER-CREAM;S3X58-M405,D20-38um,96	0.074	SNA		R2	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	1	SA	
	AK99-01012A	ASSY SMD INSERT-KEY;DVD-H1080,DVD-H	1	SNA		RUB-KE	AK73-00074A	RUBBER-KEY REMOCON;DVD-H1080,SILICO	1	SNA	
						SPRING	AK61-00933A	SPRING ETC-C;DVD-H1080,SUS304,0.5,7	1	SNA	
						SPRING	AK61-00932A	SPRING ETC-(-);DVD-H1080,SUS304,0.5	1	SNA	
						SPRING	AK61-00931A	SPRING ETC-+;DVD-H1080,SUS304,0.5,7	1	SNA	
						C-RCA	AC39-22017Z	CABLE-RCA PHONE CORD;1500MM,YEL,15	1	SA	
						C-RCA	AC39-42001U	CABLE-RCA PHONE CORD;DOUBLE	1	SA	
						T0153	AK69-00686M	PACKING CASE;DVD-H1080W/XEL,SEIN,PA	1	SA	
						W004	6003-000283	SCREW-TAPTYP;BH,+,-,B,M3,L8,ZPC(WH	2	SA	
						W391	6003-000275	SCREW-TAPTYP;BH,+,-,B,M3,L10,ZPC(BLK	4	SA	
<b>P323</b>	<b>AK92-01773A</b>	<b>ASSY PCB-REMOCON MODULE;DVD-H1080,D</b>	<b>1</b>	<b>SA</b>							
FCO2	3809-002238	FFC CABLE-FLAT;30V,80C,163MM,4P,1.0	1	SA							
FILEMA	0203-001509	TAPE-FILAMENT;T0.15,W50,L55M,TRP	0.105	SNA							
RMCC1	2203-000440	C-CER,CHIP;1nF,10%,50V,X7R,1608	1	SA							
RMCE1	2203-005644	C-CER,CHIP;1000nF,10%,6.3V,X5R,321	1	SNA							
RMC-EY	0609-001202	MODULE REMOCON;HORIZONTAL,12.4mm,TR	1	SA							
RMCR1	2007-000071	R-CHIP;22ohm,5%,1/10W,TP,1608	1	SA							
RMCR2	2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	1	SA							
RMCR3	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	1	SA							
SUB	BN90-02221M	ASSY SUB MATERIAL-REM-MODULE;DVD-H1	1	SNA							
	AK99-01019A	ASSY MANUAL INSERT-REMOCON MODULE;D	1	SNA							
	0202-001214	SOLDER-WIRE FLUX;HSE04 SR-34 SUPER,	0.003	SNA							
	0202-001459	SOLDER-CREAM;S3X58-M405,D20-38um,96	0.014	SNA							
	0202-001463	SOLDER-WIRE;LFC2-W3.0,-,D3,99.79Sn/	0.191	SNA							
	AK99-01020A	ASSY SMD INSERT-REMOCON MODULE;DVD-	1	SNA							
<b>DECK</b>	<b>AK97-022556</b>	<b>ASSY DECK-DVD-DP-24A,S78RFL-DL5FLF</b>	<b>1</b>	<b>SA</b>							
FL261	3809-002343	FFC CABLE-FLAT;30V,80C,217mm,23P,1.	1	SA							
H102	AK61-00778A	BODY-CLAMPER DISC;DP-21,POM,1.0,4.5	1	SNA							
H212	AK61-00777A	HOLDER-CHUCK;DP-21,ABS,1.6,137.0,87	1	SNA							
H213	AK61-00779A	SPRING ETC-CLAMPER;DP-21,SUS304CSP,	1	SNA							
S.N.A	AK31-00037A	MOTOR DC-LOADING;JQ24-35H440L,DP-21	1	SNA							
S.N.A	AK66-00096A	PULLEY MOTOR;DP-21,POM,GRY,1.9,7.0,	1	SNA							
	0205-001033	GREASE;PL-30G,W050030019	0.5	SNA							
	AK97-02033A	ASSY HOLDER-CHUCK,-,DP-21,-,-	1	SNA							
	AK97-02034C	ASSY HOUSING;DP-24A,9P,RIGHT-SIDE,-	1	SNA							
	6001-001730	SCREW-MACHINE;BH,+,-,M1.7,L2.5,ZPC(WH	2	SNA							
	6003-001620	SCREW-TAPTYP;CH,+,-,B,M1.4,L5,NL PLT	1	SNA							
	6602-001076	BELT-RECTANGULAR;CR,T1.2,4.3%,1.2X2	1	SNA							
	AK61-00780A	FRAME-MAIN;DP-21,ABS,BLK,34.0,150.0	1	SNA							
	AK63-00478A	TRAY-DISC;DP-21,ABS,T6.0,124.4,186.	1	SNA							
	AK66-00093A	SLIDER-CAM;DP-21,POM,1.8,87.0,20.6,	1	SNA							
	AK66-00094A	GEAR-TRAY;DP-21,POM,0.4(A)0.8(B),8	1	SNA							
	AK66-00095A	GEAR-PULLY;DP-21,POM,0.4,14,19.2(OD	1	SNA							
	AK97-02035C	ASSY PCB DECK-DP-24A;9P,DP-24A,RIGH	1	SNA							
	3409-001201	SWITCH-LEVER;5V,1mA,2,72deg	1	SNA							
	AK41-00693B	PCB-DECK;DP-26,PHENOL,1,T1.6,T1.6*1	1	SNA							
	AK41-00706E	FFC-DECK;DP-24A,PITCH1.0,PET,9P,180	1	SNA							
	AK97-02036A	ASSY MOTOR;DP-21,-,-,-	1	SNA							
	AK97-02037C	ASSY PICK UP-DECK;CMS-S78RFL	1	SNA							
	AK81-00015A	MOTOR-SPINDLE DVDP;JQ24-35I350,3V,A	1	SA							
	AK81-00016A	MOTOR-FEED DVDP;JQ24-35H440,2V,3101	1	SNA							
	AK90-00008A	ASSY SUB MATERIAL-TRAVERSE DECK;DP-	1	SNA							
	AK97-02231A	ASSY PICK UP;SOH-DL5FL,-,PICK-UP,-	1	SNA							
<b>A001</b>	<b>AK59-00103A</b>	<b>REMOCON-ASSY;DVD-H1080,SAMSUNG,120'</b>	<b>1</b>	<b>SA</b>							
C1	2401-002144	C-AL;47uF,20%,16V,GP,TP,5x11,5	1	SA							
C2	2203-000189	C-CER,CHIP;100nF,+80-20%,25V,Y5V,16	1	SA							
CASE-T	AK61-00929A	CASE-TOP REMOCON;DVD-H1080,ABS,T1.8	1	SNA							
CASE-T	AK61-00930A	CASE-BOTTOM REMOCON;DVD-H1080,ABS,T	1	SNA							
DOOR-B	AK64-02370A	DOOR-BATTERY REMOCON;DVD-H1080,ABS,	1	SNA							
IC1	AK09-00153F	IC MICOM-REMOCON MCU;NEC,BLANK-OTP,	1	SNA							
LD1	0601-000519	LED-IR;ROUND,5mm,170mW,4V,950nm,TP	1	SA							
PCB-RM	AK41-00886A	PCB-REMOCON;DVD-H1080,FR1,T1.6,103.	0.25	SNA							
PE-RMC	AC69-30118A	BAG PE;LDPE,T0.08,WHT	1	SNA							

# M E M O