
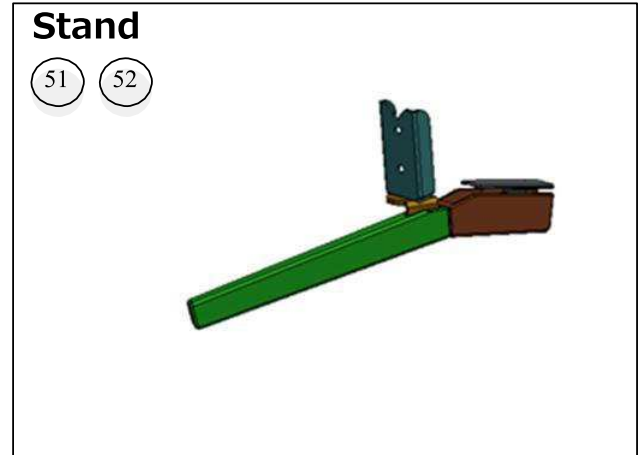



3-3. KD-55XF8*/FW-55BZ35F

Disassembly, Exploded View

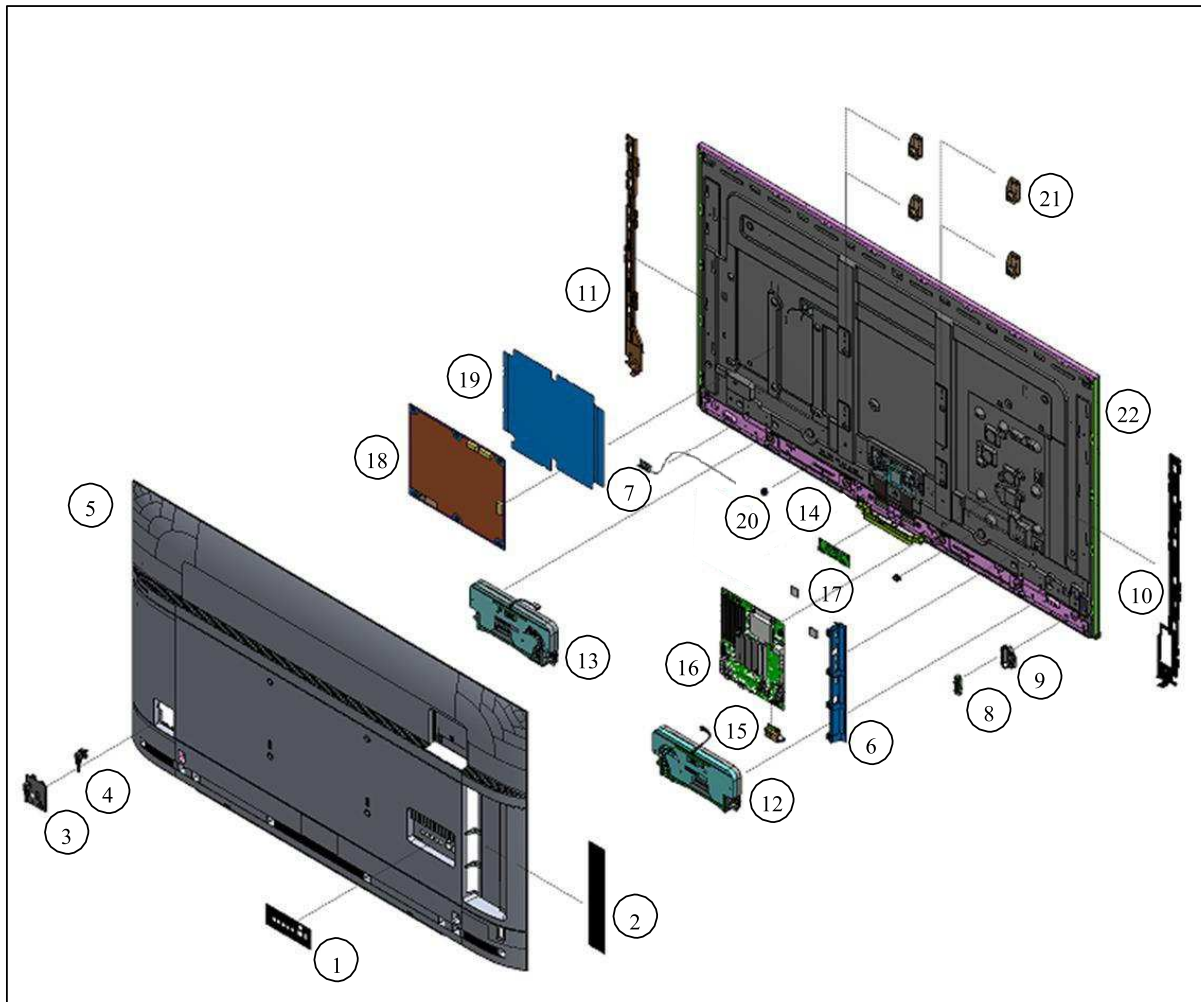


3-3. KD-55XF8*/FW-55BZ35F

Screws

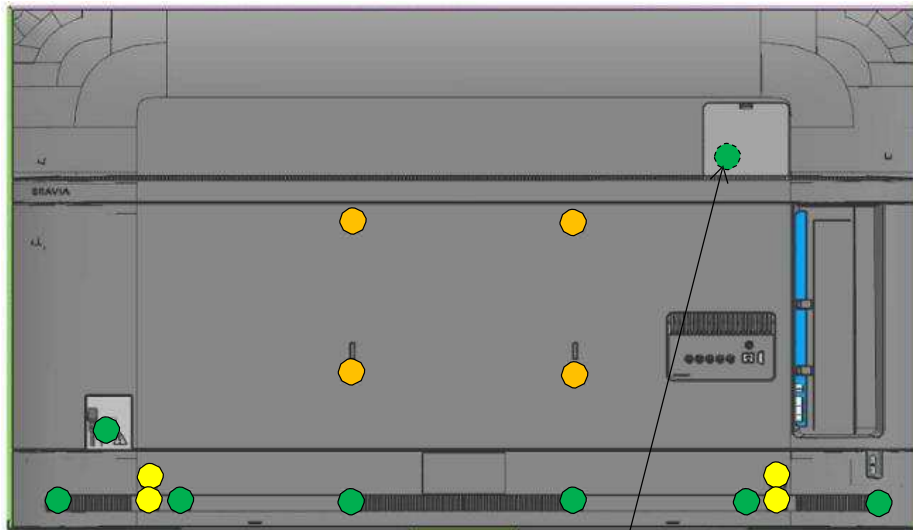


※J/EU only

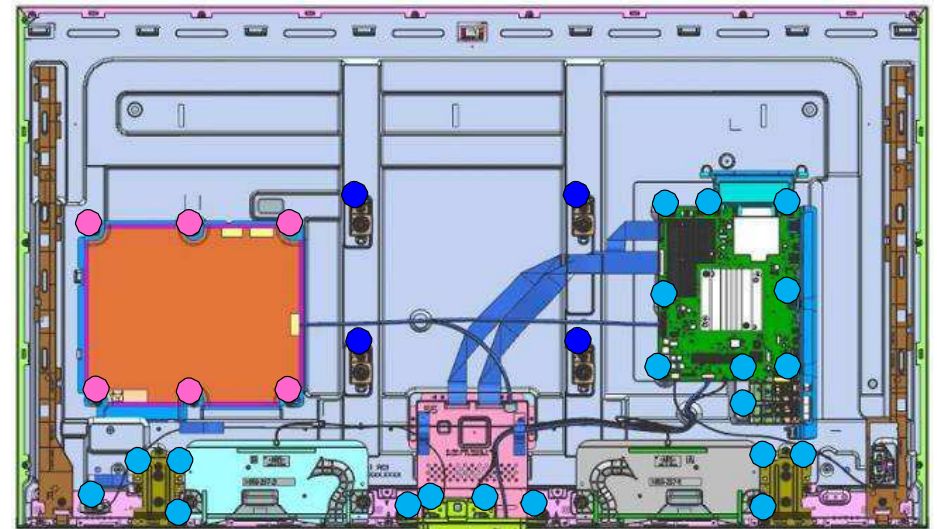

	Description	P/N	Q'ty	Torque
●	SCREW M3X3.0 STEP	4-579-926-01	(J/EU) 8 (Except J/EU) 7	0.5 ± 0.05 [N·m]
●	SCREW, +PSW M5×12	2-580-607-01	4	-
●	SCREW, ORNAMENTAL M6X12	4-268-126-02	4	1.2 ± 0.1 [N·m]
●	SCREW, +PSW M3X6 W12	4-256-393-12	6	0.4 ± 0.05 [N·m]
●	SCREW +PSW, M4x8	2-580-600-01	4	0.65 ± 0.1 [N·m]
●	SCREW, +PSW M3X6	4-472-518-11	20	0.4 ± 0.05 [N·m]

3-3. KD-55XF8*/FW-55BZ35F

Connector

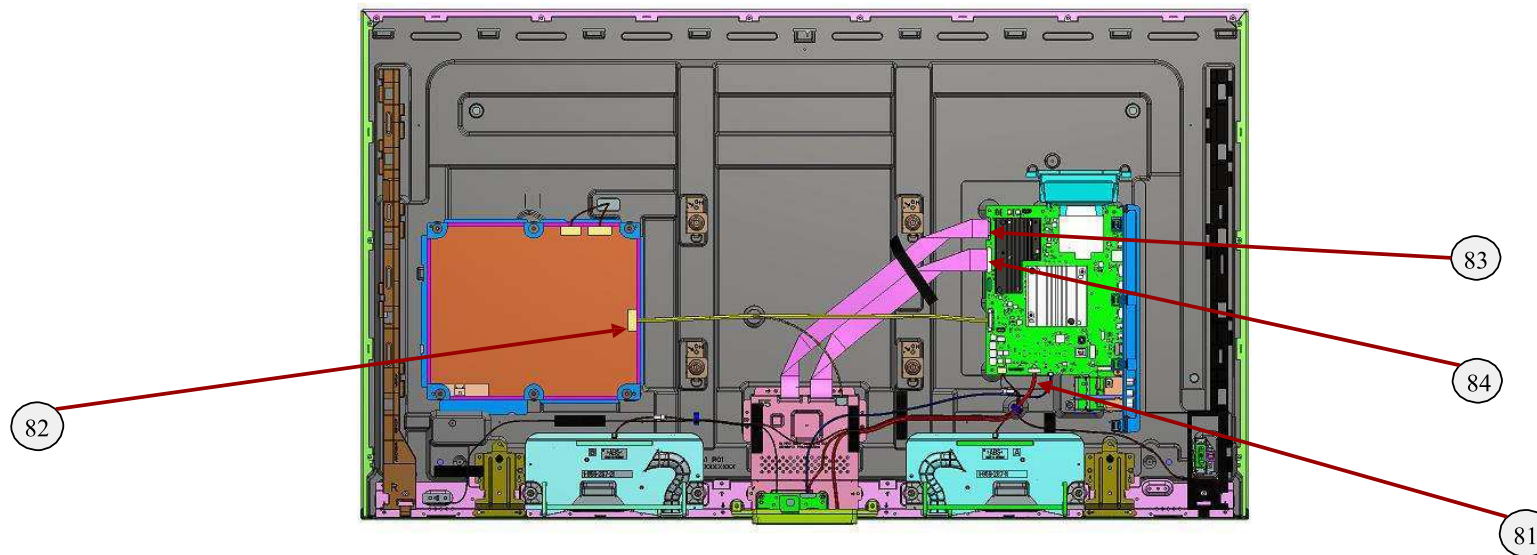

REF. NO.	PART NO.	DESCRIPTION	REMARKS	REMARKS
81	1-910-806-38	HARNESS ASSY	CN1000(BCH)-CN1(3M-P)-CN001(HCA)-WIFI/BT-CN1002(BCH)/CN3201(BCH)-SP(1)	
82	1-910-806-39	CONNECTOR ASSY 30P	CN400(BCH)-CN6401(PUSU1)-CON3(T-CON)(1)	
83	1-912-529-11	FLEXIBLE FLAT CABLE 41P	CN4400(BCH)-U2(T-CON)(1)	KD-55XF8505/8577/8588/8599/8596/8796
83	1-912-537-11	FLEXIBLE FLAT CABLE 41P	CN4400(BCH)-U2(T-CON)(1)	KD-55XF8577/8596(RU3)
84	1-912-558-11	FLEXIBLE FLAT CABLE 51P	CN4401(BCH)-U1(T-CON)(1)	KD-55XF8505/8577/8588/8599/8596/8796
84	1-912-541-11	FLEXIBLE FLAT CABLE 51P	CN4401(BCH)-U1(T-CON)(1)	KD-55XF8577/8596(RU3)