

SECTION 5 EXPLODED VIEWS


NOTE:

- The mechanical parts with no reference number in the exploded views are not supplied.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- -XX and -X mean standardized parts, so they may have some difference from the original one.

- Color Indication of Appearance Parts
Example :
KNOB, BALANCE (WHITE) ... (RED)
Parts Color Cabinet's Color
- Accessories are given in the last of this parts list.
- Abbreviation
RU : Russia model


The components identified by mark $\triangle$ or dotted line with mark $\triangle$ are critical for safety. Replace only with part number specified.

5-1. MAIN SECTION

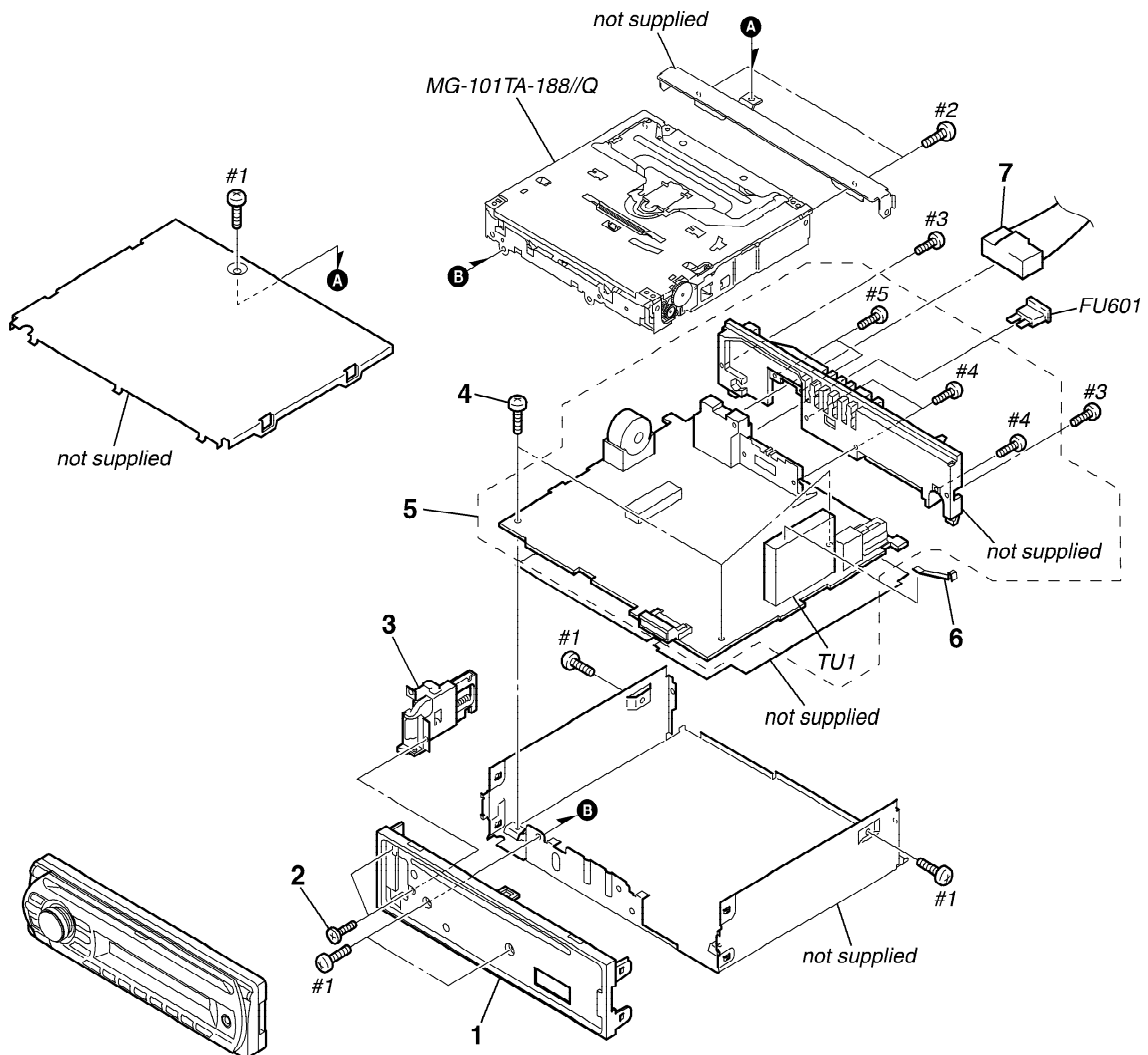


Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
1	X-2149-122-1	PANEL (LCD) ASSY, SUB		7	1-833-655-11	CORD (WITH CONNECTOR) (POWER) (GT262/GT262S)	
2	3-042-244-11	SCREW (T)		FU601	1-532-877-11	FUSE (BLADE TYPE) (AUTO FUSE) 10A	
3	X-2108-670-1	LOCK ASSY (S)		TU1	A-3220-960-B	TUNER UNIT (TUX-032) (GT262/GT262S)	
4	2-050-124-01	SCREW +BTT 2.6X5		TU1	A-3220-961-B	TUNER UNIT (TUX-032) (GT210/GT212)	
5	A-1204-657-A	MAIN BOARD, COMPLETE (GT210:AEP,UK/GT212:AEP,UK)		#1	7-685-792-09	SCREW +PTT 2.6X6 (S)	
5	A-1204-930-A	MAIN BOARD, COMPLETE (GT262S)		#2	7-685-790-01	SCREW +PTT 2.6X4 (S)	
5	A-1205-059-A	MAIN BOARD, COMPLETE (GT262)		#3	7-685-793-09	SCREW +PTT 2.6X8 (S)	
5	A-1221-694-A	MAIN BOARD, COMPLETE (GT210:RU/GT212:RU)		#4	7-685-794-09	SCREW +PTT 2.6X10 (S)	
6	2-021-848-01	SHEET (TU), GROUND		#5	7-685-134-19	SCREW +P 2.6X8 TYPE2 NON-SLIT	
7	1-831-836-11	CORD (WITH CONNECTOR) (ISO) (POWER) (GT210/GT212)					

5-2. FRONT PANEL SECTION

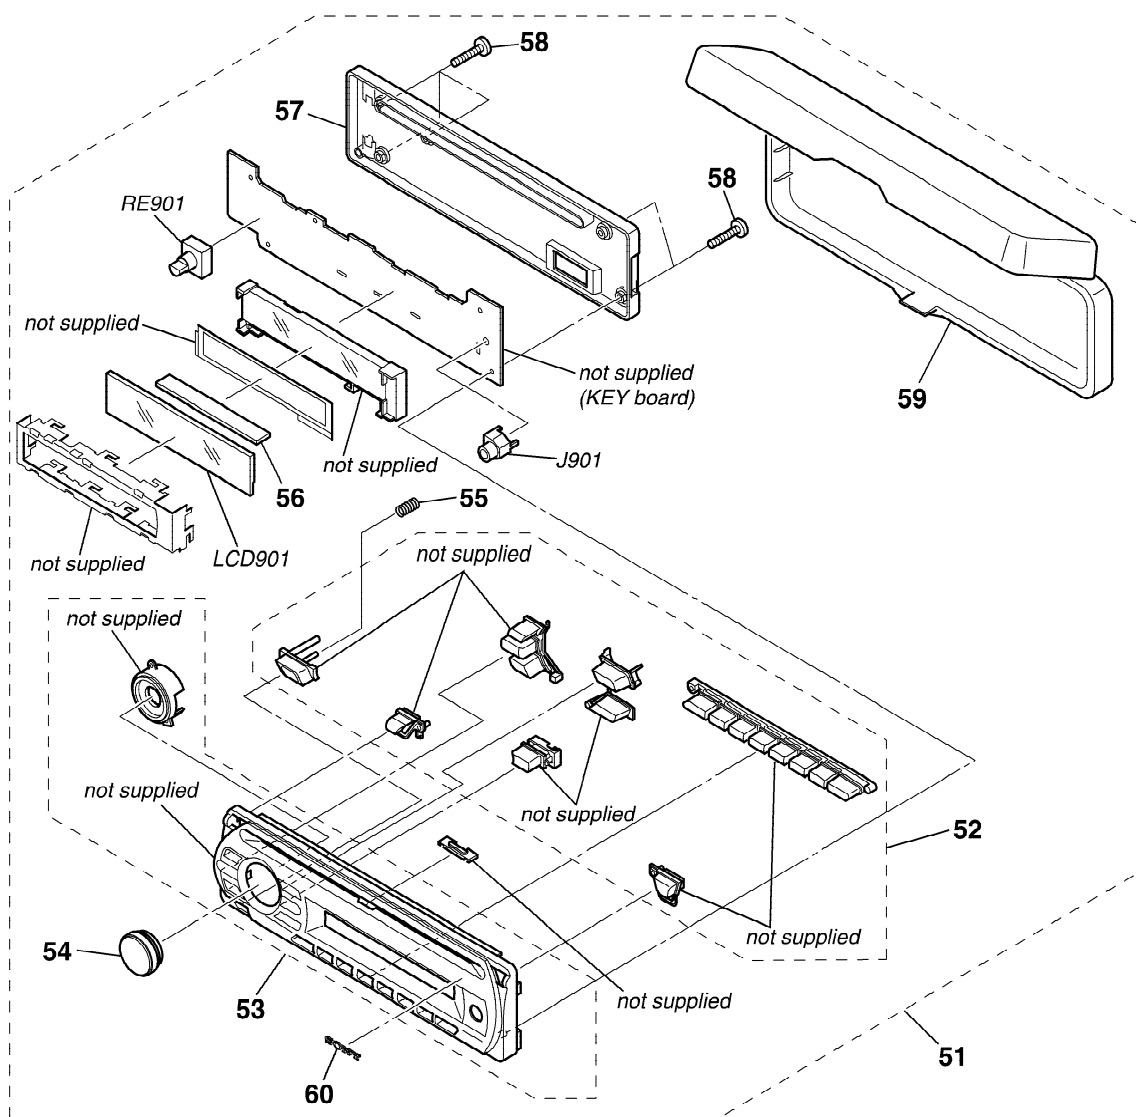

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
51	A-1204-661-A	PANEL COMPLETE ASSY, FRONT (GT212:AEP,UK)		53	X-2103-007-1	PANEL SUB ASSY, FRONT (GT262)	
51	A-1204-664-A	PANEL COMPLETE ASSY, FRONT (GT210:AEP,UK)		53	X-2148-915-1	PANEL SUB ASSY, FRONT (GT212)	
51	A-1204-932-A	PANEL COMPLETE ASSY, FRONT (GT262S)		53	X-2148-916-1	PANEL SUB ASSY, FRONT (GT210)	
51	A-1205-062-A	PANEL COMPLETE ASSY, FRONT (GT262)		54	X-2149-185-1	KNOB (SV) ASSY	
51	A-1225-151-A	PANEL COMPLETE ASSY, FRONT (GT212:RU)		55	2-693-599-01	SPRING (RELEASE)	
51	A-1225-153-A	PANEL COMPLETE ASSY, FRONT (GT210:RU)		56	1-780-433-11	CONDUCTIVE BOARD, CONNECTION	
52	X-2048-892-1	BUTTON ASSY (S) (GT262S)		57	2-683-964-01	PANEL (LCD), BACK	
52	X-2103-265-1	BUTTON ASSY (S) (GT210)		58	3-250-543-21	SCREW (+B P-TITE M2)	
52	X-2103-266-1	BUTTON ASSY (S) (GT262)		59	X-2149-228-1	CASE ASSY (for FRONT PANEL)	
52	X-2149-102-1	BUTTON ASSY (S) (GT212)		60	3-251-320-01	EMBLEM (NO.2.5), SONY	
53	X-2103-004-1	PANEL SUB ASSY, FRONT (GT262S)		J901	1-820-624-11	JACK (SMALL TYPE) (VERTICAL) (AUX)	
				LCD901	1-802-231-11	DISPLAY PANEL, LIQUID CRYSTAL	
				RE901	1-479-902-11	ENCODER, ROTARY (PUSH SELECT (VOLUME))	

5-3. CD MECHANISM SECTION (MG-101TA-188//Q)

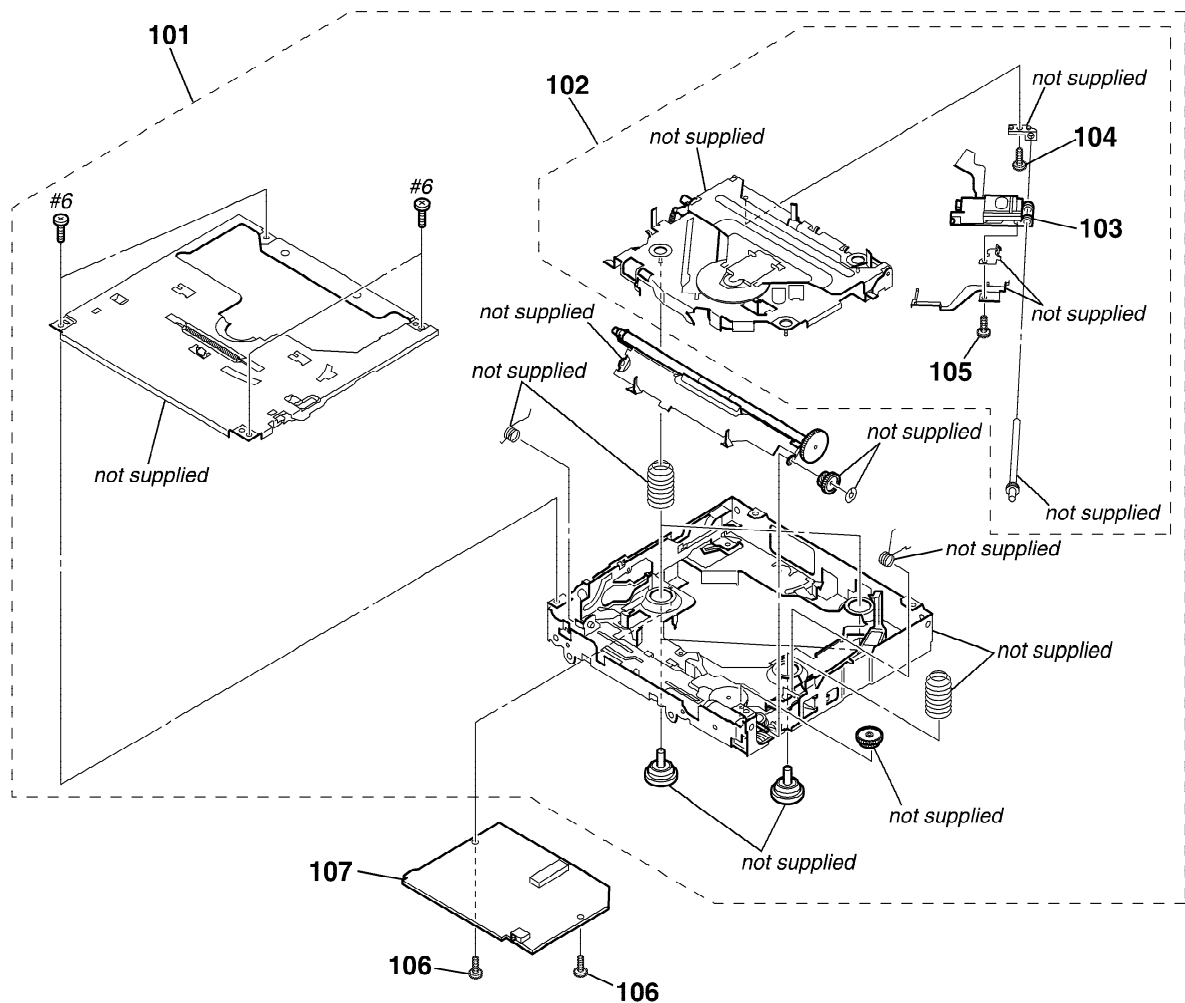

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
101	A-1177-168-A	MECHANICAL BLOCK ASSY		105	3-348-998-31	SCREW (M1.4X2.5), TAPPING, PAN	
102	A-1177-169-A	DAXEV//Q		106	3-352-758-31	SCREW (M1.7X2.5), TOOTHED LOCK	
△ 103	X-2149-672-1	SERVICE ASSY, OP (DAX-25A)		107	A-1177-201-A	SERVO BOARD, COMPLETE	
104	2-626-869-01	SCREW (M2X3), SERRATION		#6	7-627-000-08	SCREW, PRECISION +P 1.7X2.2 TYPE3	

SECTION 6 ELECTRICAL PARTS LIST

NOTE:

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- -XX and -X mean standardized parts, so they may have some difference from the original one.
- RESISTORS
All resistors are in ohms.
METAL: Metal-film resistor.
METAL OXIDE: Metal oxide-film resistor.
F: nonflammable
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- SEMICONDUCTORS
In each case, u : μ , for example:
uA.. : μ A.. uPA.. : μ PA..
uPB.. : μ PB.. uPC.. : μ PC.. uPD.. : μ PD..
- CAPACITORS
uF : μ F
- COILS
uH : μ H

The components identified by mark $\triangle$ or dotted line with mark. $\triangle$ are critical for safety. Replace only with part number specified.

When indicating parts by reference number, please include the board.

- Abbreviation
RU : Russia model

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
		KEY BOARD *****					
	1-780-433-11	CONDUCTIVE BOARD, CONNECTION					
		< CAPACITOR >					
C971	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V	(GT262/GT262S)	LED943	8-719-053-09	LED SML-310VTT86 (OFF)	
C981	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V		LED944	8-719-053-09	LED SML-310VTT86 (SOURCE)	
C983	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V		LED945	8-719-053-09	LED SML-310VTT86 (MODE)	
C984	1-107-826-11	CERAMIC CHIP 0.1uF 10% 16V		LED951	8-719-053-09	LED SML-310VTT86 (VOLUME ILLUMINATE)	
C985	1-131-664-11	CERAMIC CHIP 0.15uF 10% 10V		LED952	8-719-053-09	LED SML-310VTT86 (VOLUME ILLUMINATE)	
C986	1-127-715-11	CERAMIC CHIP 0.22uF 10% 16V		LED953	8-719-053-09	LED SML-310VTT86 (VOLUME ILLUMINATE)	
C987	1-162-964-11	CERAMIC CHIP 0.001uF 10% 50V				< SWITCH >	
		< CONNECTOR >		LSW901	1-786-805-12	SWITCH, TACTILE (WITH LED) (EQ)	
CN901	1-819-758-12	PLUG, CONNECTOR 15P		LSW902	1-786-805-12	SWITCH, TACTILE (WITH LED) (PTY)	(GT210/GT212)
		< DIODE >		LSW902	1-786-805-12	SWITCH, TACTILE (WITH LED) (BTM)	(GT262/GT262S)
D903	8-719-057-80	DIODE MA8180-M-TX		LSW903	1-786-805-12	SWITCH, TACTILE (WITH LED)	(▶▶▶▶/SEEK+)
D981	8-719-420-90	DIODE MA8051-M		LSW904	1-786-805-12	SWITCH, TACTILE (WITH LED)	(◀◀◀◀/SEEK-)
D982	8-719-988-61	DIODE 1SS355TE-17		LSW905	1-786-805-12	SWITCH, TACTILE (WITH LED) (DSPL/DIM)	
D991	8-719-977-12	DIODE DTZ6.8B		LSW906	1-786-805-12	SWITCH, TACTILE (WITH LED) (1/ALBM -)	
D992	8-719-977-12	DIODE DTZ6.8B		LSW907	1-786-805-12	SWITCH, TACTILE (WITH LED) (2/ALBM +)	
D993	8-719-977-12	DIODE DTZ6.8B		LSW908	1-786-805-12	SWITCH, TACTILE (WITH LED) (3/REP)	
D994	8-719-977-12	DIODE DTZ6.8B (GT262/GT262S)		LSW909	1-786-805-12	SWITCH, TACTILE (WITH LED) (4/SHUF)	
D998	1-216-295-11	SHORT CHIP 0		LSW910	1-786-805-12	SWITCH, TACTILE (WITH LED) (5)	
		< JUMPER RESISTOR >		LSW911	1-786-805-12	SWITCH, TACTILE (WITH LED) (6/PAUSE)	
FB901	1-216-864-11	SHORT CHIP 0		LSW912	1-786-805-12	SWITCH, TACTILE (WITH LED) (AF/TA)	(GT210/GT212)
FB902	1-216-864-11	SHORT CHIP 0		LSW912	1-786-805-12	SWITCH, TACTILE (WITH LED) (SCRL)	(GT262/GT262S)
FB903	1-216-295-11	SHORT CHIP 0				< TRANSISTOR >	
		< IC >		Q931	8-729-027-44	TRANSISTOR DTC114TKA-T146	
IC901	6-710-047-01	IC LC75836WH-US-E		Q932	6-551-444-01	TRANSISTOR RT1N436C-TP-1	
IC971	6-600-163-01	IC RS-770 (IR) (GT262/GT262S)				< RESISTOR >	
		< LIQUID CRYSTAL DISPLAY >		R901	1-216-820-11	METAL CHIP 820 5% 1/10W	
LCD901	1-802-231-11	DISPLAY PANEL, LIQUID CRYSTAL		R902	1-216-821-11	METAL CHIP 1K 5% 1/10W	
		< DIODE >		R903	1-216-821-11	METAL CHIP 1K 5% 1/10W	
LED931	6-501-339-01	LED NESW505CT-AST (LCD BACK LIGHT)		R904	1-216-822-11	METAL CHIP 1.2K 5% 1/10W	
LED941	8-719-053-09	LED SML-310VTT86 ($\triangle$)		R905	1-216-823-11	METAL CHIP 1.5K 5% 1/10W	
LED942	8-719-053-09	LED SML-310VTT86 (DISC-SLOT)		R907	1-216-820-11	METAL CHIP 820 5% 1/10W	
				R908	1-216-821-11	METAL CHIP 1K 5% 1/10W	
				R909	1-216-821-11	METAL CHIP 1K 5% 1/10W	
				R910	1-216-822-11	METAL CHIP 1.2K 5% 1/10W	
				R911	1-216-823-11	METAL CHIP 1.5K 5% 1/10W	
				R912	1-216-824-11	METAL CHIP 1.8K 5% 1/10W	

Ref. No.	Part No.	Description	Remark		
R913	1-216-825-11	METAL CHIP	2.2K	5%	1/10W
R914	1-216-827-11	METAL CHIP	3.3K	5%	1/10W
R915	1-216-828-11	METAL CHIP	3.9K	5%	1/10W
R916	1-216-830-11	METAL CHIP	5.6K	5%	1/10W
R921	1-216-295-11	SHORT CHIP	0		
R922	1-216-295-11	SHORT CHIP	0		
R931	1-216-812-11	METAL CHIP	180	5%	1/10W
R932	1-216-812-11	METAL CHIP	180	5%	1/10W
R933	1-216-812-11	METAL CHIP	180	5%	1/10W
R934	1-216-822-11	METAL CHIP	1.2K	5%	1/10W
R941	1-216-813-11	METAL CHIP	220	5%	1/10W
R942	1-216-813-11	METAL CHIP	220	5%	1/10W
R943	1-216-812-11	METAL CHIP	180	5%	1/10W
R944	1-216-811-11	METAL CHIP	150	5%	1/10W
R945	1-216-812-11	METAL CHIP	180	5%	1/10W
R946	1-216-811-11	METAL CHIP	150	5%	1/10W
R947	1-216-812-11	METAL CHIP	180	5%	1/10W
R948	1-216-811-11	METAL CHIP	150	5%	1/10W
R949	1-216-809-11	METAL CHIP	100	5%	1/10W
R950	1-216-809-11	METAL CHIP	100	5%	1/10W
R951	1-216-809-11	METAL CHIP	100	5%	1/10W
R952	1-216-809-11	METAL CHIP	100	5%	1/10W
R953	1-216-812-11	METAL CHIP	180	5%	1/10W
R954	1-216-811-11	METAL CHIP	150	5%	1/10W
R961	1-216-812-11	METAL CHIP	180	5%	1/10W
R962	1-216-811-11	METAL CHIP	150	5%	1/10W
R974	1-216-809-11	METAL CHIP	100	5%	1/10W
R975	1-216-809-11	METAL CHIP	100	5%	1/10W
R977	1-216-809-11	METAL CHIP	100	5%	1/10W
R978	1-216-809-11	METAL CHIP	100	5%	1/10W
R979	1-216-809-11	METAL CHIP	100	5%	1/10W
R981	1-216-811-11	METAL CHIP	150	5%	1/10W
R982	1-216-811-11	METAL CHIP	150	5%	1/10W
R984	1-216-821-11	METAL CHIP	1K	5%	1/10W
R985	1-216-821-11	METAL CHIP	1K	5%	1/10W
R986	1-216-821-11	METAL CHIP	1K	5%	1/10W
R987	1-216-857-11	METAL CHIP	1M	5%	1/10W
R988	1-216-840-11	METAL CHIP	39K	5%	1/10W
R992	1-216-864-11	SHORT CHIP	0		
< ROTARY ENCODER >					
RE901	1-479-902-11	ENCODER, ROTARY (PUSH SELECT (VOLUME))			
< SWITCH >					
S901	1-786-653-11	SWITCH, TACTILE (▲)			
S902	1-786-653-11	SWITCH, TACTILE (OFF)			
S903	1-786-653-11	SWITCH, TACTILE (SOURCE)			
S904	1-786-653-11	SWITCH, TACTILE (MODE)			

Ref. No.	Part No.	Description	Remark		
	A-1204-657-A	MAIN BOARD, COMPLETE			
		(GT210:AEP,UK/GT212:AEP,UK)			
	A-1204-930-A	MAIN BOARD, COMPLETE (GT262S)			
	A-1205-059-A	MAIN BOARD, COMPLETE (GT262)			
	A-1221-694-A	MAIN BOARD, COMPLETE			
		(GT210:RU/GT212:RU)			

7-685-134-19		SCREW +P 2.6X8 TYPE2 NON-SLIT			
7-685-794-09		SCREW +PTT 2.6X10 (S)			
< CAPACITOR >					
C1	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
					(GT210/GT212)
C2	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
					(GT210/GT212)
C3	1-126-963-11	ELECT	4.7uF	20%	50V
					(GT210/GT212)
C4	1-126-947-11	ELECT	47uF	20%	35V
C5	1-126-947-11	ELECT	47uF	20%	35V
C6	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C7	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C8	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
					(GT262/GT262S)
C12	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C13	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C51	1-126-947-11	ELECT	47uF	20%	35V
					(GT210/GT212)
C53	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
					(GT210/GT212)
C54	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
					(GT210/GT212)
C55	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
					(GT210/GT212)
C56	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
					(GT210/GT212)
C57	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
					(GT210/GT212)
C58	1-107-826-11	CERAMIC CHIP	0.1uF	10%	16V
					(GT210/GT212)
C59	1-164-237-11	CERAMIC CHIP	16PF	5%	50V
					(GT210/GT212)
C60	1-162-916-11	CERAMIC CHIP	12PF	5%	50V
					(GT210/GT212)
C62	1-162-959-11	CERAMIC CHIP	330PF	5%	50V
					(GT210/GT212)
C63	1-162-923-11	CERAMIC CHIP	47PF	5%	50V
					(GT210/GT212)
C64	1-162-923-11	CERAMIC CHIP	47PF	5%	50V
					(GT210/GT212)
C301	1-124-248-00	ELECT	22uF	20%	25V
C302	1-124-584-00	ELECT	100uF	20%	10V
C305	1-124-584-00	ELECT	100uF	20%	10V
C306	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C308	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C309	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V
C310	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V
C312	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C343	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C401	1-126-964-11	ELECT	10uF	20%	50V
C404	1-127-715-11	CERAMIC CHIP	0.22uF	10%	16V
C405	1-127-715-11	CERAMIC CHIP	0.22uF	10%	16V
C406	1-126-160-11	ELECT	1uF	20%	50V
C407	1-126-160-11	ELECT	1uF	20%	50V

CDX-GT210/GT212/GT262/GT262S

MAIN

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
C412	1-126-934-11	ELECT	220uF 20% 16V	C917	1-163-017-00	CERAMIC CHIP 0.0047uF 10% 50V	
C413	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	C918	1-163-017-00	CERAMIC CHIP 0.0047uF 10% 50V	
C422	1-216-864-11	SHORT CHIP	0			< CONNECTOR >	
C423	1-216-864-11	SHORT CHIP	0				
C431	1-126-964-11	ELECT	10uF 20% 50V	CN601	1-774-701-21	PIN, CONNECTOR 16P	
C432	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	CN701	1-819-773-13	SOCKET, CONNECTOR 15P	
C435	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	CNP301	1-820-611-11	CONNECTOR, BOARD TO BOARD 28P	
C441	1-126-964-11	ELECT	10uF 20% 50V			< DIODE >	
C442	1-165-908-11	CERAMIC CHIP	1uF 10% 10V				
C445	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	D1	6-501-168-01	DIODE UDZW-TE17-5.6B (GT262/GT262S)	
C451	1-126-964-11	ELECT	10uF 20% 50V	D1	8-719-977-03	DIODE DTZ5.6B (GT210/GT212)	
C452	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	D479	6-501-193-01	DIODE 1SS355WTE-17 (GT262/GT262S)	
C455	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	D479	8-719-988-61	DIODE 1SS355TE-17 (GT210/GT212)	
C461	1-126-964-11	ELECT	10uF 20% 50V	D502	8-719-060-48	DIODE RB751V-40TE-17 (GT262/GT262S)	
C462	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	D503	6-501-193-01	DIODE 1SS355WTE-17 (GT262/GT262S)	
C465	1-165-908-11	CERAMIC CHIP	1uF 10% 10V	D503	8-719-988-61	DIODE 1SS355TE-17 (GT210/GT212)	
C479	1-124-589-11	ELECT	47uF 20% 16V	D510	6-501-013-01	DIODE BAT54ALT1G	
C501	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	D511	6-500-335-01	DIODE MC2838-T112-1	
C503	1-124-584-00	ELECT	100uF 20% 10V	D512	6-501-051-01	DIODE BAT54CLT1G	
C504	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	D580	6-501-171-01	DIODE UDZW-TE17-7.5B (GT262/GT262S)	
C507	1-162-917-11	CERAMIC CHIP	15PF 5% 50V	D580	8-719-422-76	DIODE MA8075-M (GT210/GT212)	
C508	1-162-917-11	CERAMIC CHIP	15PF 5% 50V	D581	6-501-180-01	DIODE UDZW-TE17-18B (GT262/GT262S)	
C509	1-162-966-11	CERAMIC CHIP	0.0022uF 10% 50V	D581	8-719-057-80	DIODE MA8180-M-TX (GT210/GT212)	
C510	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	D601	6-501-571-01	DIODE 1N5404-C311-3	
C511	1-124-584-00	ELECT	100uF 20% 10V	D609	6-501-170-01	DIODE UDZW-TE17-6.8B (GT262/GT262S)	
C512	1-162-964-11	CERAMIC CHIP	0.001uF 10% 50V	D609	8-719-977-12	DIODE DTZ6.8B (GT210/GT212)	
C513	1-162-964-11	CERAMIC CHIP	0.001uF 10% 50V	D617	6-501-180-01	DIODE UDZW-TE17-18B (GT262/GT262S)	
C514	1-162-964-11	CERAMIC CHIP	0.001uF 10% 50V	D617	8-719-057-80	DIODE MA8180-M-TX (GT210/GT212)	
C516	1-162-964-11	CERAMIC CHIP	0.001uF 10% 50V	D651	8-719-057-80	DIODE MA8180-M-TX (GT210/GT212)	
C519	1-107-826-11	CERAMIC CHIP	0.1uF 10% 16V	D704	6-501-170-01	DIODE UDZW-TE17-6.8B (GT262/GT262S)	
C522	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	D704	8-719-977-12	DIODE DTZ6.8B (GT210/GT212)	
C523	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V	D719	6-501-180-01	DIODE UDZW-TE17-18B (GT262/GT262S)	
C601	1-131-868-81	ELECT	3300uF 20% 16V	D719	8-719-057-80	DIODE MA8180-M-TX (GT210/GT212)	
C602	1-165-319-11	CERAMIC CHIP	0.1uF 50V	D751	6-501-362-01	DIODE 1A4-TA26	
C617	1-163-009-11	CERAMIC CHIP	0.001uF 10% 50V	D752	6-501-362-01	DIODE 1A4-TA26	
C622	1-126-916-11	ELECT	1000uF 20% 6.3V	D753	6-501-362-01	DIODE 1A4-TA26	
C623	1-126-916-11	ELECT	1000uF 20% 6.3V	D754	6-501-362-01	DIODE 1A4-TA26	
C631	1-126-160-11	ELECT	1uF 20% 50V	D755	6-501-362-01	DIODE 1A4-TA26	
C750	1-115-340-11	CERAMIC CHIP	0.22uF 10% 25V	D756	6-501-362-01	DIODE 1A4-TA26	
C751	1-115-340-11	CERAMIC CHIP	0.22uF 10% 25V	D757	6-501-362-01	DIODE 1A4-TA26	
C753	1-128-551-11	ELECT	22uF 20% 63V	D758	6-501-362-01	DIODE 1A4-TA26	
C754	1-124-257-00	ELECT	2.2uF 20% 50V	D760	6-501-362-01	DIODE 1A4-TA26	
C755	1-162-964-11	CERAMIC CHIP	0.001uF 10% 50V	D762	6-501-362-01	DIODE 1A4-TA26	
C756	1-127-715-11	CERAMIC CHIP	0.22uF 10% 16V	D903	6-501-170-01	DIODE UDZW-TE17-6.8B (GT262/GT262S)	
C758	1-124-261-00	ELECT	10uF 20% 50V	D903	8-719-977-12	DIODE DTZ6.8B (GT210/GT212)	
C763	1-127-715-11	CERAMIC CHIP	0.22uF 10% 16V			< FERRITE BEAD >	
C764	1-115-340-11	CERAMIC CHIP	0.22uF 10% 25V	FB1	1-500-245-11	INDUCTOR, FERRITE BEAD	
C765	1-115-340-11	CERAMIC CHIP	0.22uF 10% 25V	FB302	1-216-864-11	SHORT CHIP 0	
C769	1-127-715-11	CERAMIC CHIP	0.22uF 10% 16V	FB303	1-216-864-11	SHORT CHIP 0	
C770	1-127-715-11	CERAMIC CHIP	0.22uF 10% 16V	FB304	1-216-295-11	SHORT CHIP 0	
C771	1-127-715-11	CERAMIC CHIP	0.22uF 10% 16V	FB305	1-216-295-11	SHORT CHIP 0	
C774	1-115-340-11	CERAMIC CHIP	0.22uF 10% 25V	FB307	1-216-864-11	SHORT CHIP 0	
C775	1-115-340-11	CERAMIC CHIP	0.22uF 10% 25V	FB308	1-216-295-11	SHORT CHIP 0	
C776	1-162-964-11	CERAMIC CHIP	0.001uF 10% 50V	FB309	1-216-864-11	SHORT CHIP 0	
C901	1-109-982-11	CERAMIC CHIP	1uF 10% 10V	FB310	1-216-864-11	SHORT CHIP 0	
C902	1-109-982-11	CERAMIC CHIP	1uF 10% 10V	FB501	1-216-295-11	SHORT CHIP 0	
C903	1-126-961-11	ELECT	2.2uF 20% 50V				
C905	1-162-970-11	CERAMIC CHIP	0.01uF 10% 25V				

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
FB604	1-500-245-11	INDUCTOR, FERRITE BEAD		< RESISTOR >			
FB605	1-216-864-11	SHORT CHIP 0		R1	1-216-821-11	METAL CHIP 1K 5%	1/10W
FB606	1-216-864-11	SHORT CHIP 0		R2	1-414-595-11	INDUCTOR, FERRITE BEAD	
		< IC >		R3	1-414-595-11	INDUCTOR, FERRITE BEAD	
IC51	6-803-747-01	IC TDA733013TR (GT210/GT212)		R4	1-216-839-11	METAL CHIP 33K 5%	1/10W
IC401	6-710-048-01	IC BD3444FS-E2		R5	1-216-843-11	METAL CHIP 68K 5%	1/10W
IC501	6-806-944-01	IC MB90F045PF-G-9014-SPE1		R6	1-216-839-11	METAL CHIP 33K 5%	1/10W
IC602	6-709-458-01	IC XC61CN2802NR				(GT210/GT212)	
IC750	6-705-360-02	IC TDA8588BJ/N2/R1		R7	1-216-843-11	METAL CHIP 68K 5%	1/10W
		(GT210:RU/GT212:RU/GT262/GT262S)				(GT210/GT212)	
IC750	6-705-363-11	IC TDA8589BJ/N2/R1/M5		R8	1-216-839-11	METAL CHIP 33K 5%	1/10W
		(GT210:AEP,UK/GT212:AEP,UK)		R9	1-216-843-11	METAL CHIP 68K 5%	1/10W
IC901	8-759-681-42	IC NJM12902V(Te2)		R12	1-414-595-11	INDUCTOR, FERRITE BEAD	
		< JACK >		R13	1-414-595-11	INDUCTOR, FERRITE BEAD	
J1	1-815-185-13	JACK (ANTENNA)		R29	1-216-809-11	METAL CHIP 100 5%	1/10W
		< JUMPER RESISTOR >				(GT210/GT212)	
JC1	1-216-864-11	SHORT CHIP 0		R51	1-216-797-11	METAL CHIP 10 5%	1/10W
JC501	1-216-864-11	SHORT CHIP 0				(GT210/GT212)	
JC504	1-216-864-11	SHORT CHIP 0		R52	1-216-803-11	METAL CHIP 33 5%	1/10W
JC527	1-216-821-11	METAL CHIP 1K 5%	1/10W			(GT210/GT212)	
JC533	1-216-864-11	SHORT CHIP 0		R53	1-414-595-11	INDUCTOR, FERRITE BEAD (GT210/GT212)	
JC681	1-216-864-11	SHORT CHIP 0		R54	1-216-845-11	METAL CHIP 100K 5%	1/10W
JC753	1-216-296-11	SHORT CHIP 0				(GT210/GT212)	
JC754	1-216-296-11	SHORT CHIP 0		R55	1-216-864-11	SHORT CHIP 0 (GT210/GT212)	
JC755	1-216-296-11	SHORT CHIP 0		R56	1-414-595-11	INDUCTOR, FERRITE BEAD (GT210/GT212)	
JC756	1-216-864-11	SHORT CHIP 0		R57	1-414-595-11	INDUCTOR, FERRITE BEAD (GT210/GT212)	
JC795	1-216-864-11	SHORT CHIP 0		R58	1-216-864-11	SHORT CHIP 0 (GT210/GT212)	
JC796	1-216-864-11	SHORT CHIP 0		R59	1-216-833-11	METAL CHIP 10K 5%	1/10W
		< RESISTOR >				(GT210/GT212)	
JW52	1-249-425-11	CARBON 4.7K 5%	1/4W	R60	1-216-833-11	METAL CHIP 10K 5%	1/10W
		< COIL >				(GT210/GT212)	
L1	1-469-844-11	INDUCTOR 2.2uH		R61	1-216-821-11	METAL CHIP 1K 5%	1/10W
L51	1-216-295-11	SHORT CHIP 0 (GT210/GT212)				(GT210/GT212)	
L301	1-216-295-11	SHORT CHIP 0		R301	1-216-821-11	METAL CHIP 1K 5%	1/10W
L501	1-216-295-11	SHORT CHIP 0		R302	1-216-821-11	METAL CHIP 1K 5%	1/10W
L601	1-456-617-11	COIL, CHOKE		R401	1-216-797-11	METAL CHIP 10 5%	1/10W
		< TRANSISTOR >		R402	1-216-864-11	SHORT CHIP 0	
Q1	6-551-431-01	TRANSISTOR 2SC6027T100-QR		R403	1-216-864-11	SHORT CHIP 0	
Q22	1-801-806-11	TRANSISTOR DTC144EKA (GT210/GT212)		R406	1-216-809-11	METAL CHIP 100 5%	1/10W
Q51	8-729-600-22	TRANSISTOR 2SA1235-F (GT210/GT212)		R407	1-216-809-11	METAL CHIP 100 5%	1/10W
Q431	8-729-027-44	TRANSISTOR DTC114TKA-T146		R408	1-216-809-11	METAL CHIP 100 5%	1/10W
Q441	8-729-027-44	TRANSISTOR DTC114TKA-T146		R409	1-216-809-11	METAL CHIP 100 5%	1/10W
Q451	8-729-027-44	TRANSISTOR DTC114TKA-T146		R431	1-216-821-11	METAL CHIP 1K 5%	1/10W
Q461	8-729-027-44	TRANSISTOR DTC114TKA-T146		R432	1-216-833-11	METAL CHIP 10K 5%	1/10W
Q478	8-729-027-43	TRANSISTOR DTC114EKA-T146		R441	1-216-821-11	METAL CHIP 1K 5%	1/10W
Q479	8-729-027-23	TRANSISTOR DTA114EKA-T146		R442	1-216-833-11	METAL CHIP 10K 5%	1/10W
Q580	8-729-027-43	TRANSISTOR DTC114EKA-T146		R451	1-216-821-11	METAL CHIP 1K 5%	1/10W
Q581	1-801-806-11	TRANSISTOR DTC144EKA		R452	1-216-833-11	METAL CHIP 10K 5%	1/10W
Q582	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R461	1-216-821-11	METAL CHIP 1K 5%	1/10W
Q631	8-729-120-28	TRANSISTOR 2SC1623-L5L6		R462	1-216-833-11	METAL CHIP 10K 5%	1/10W
Q651	8-729-120-28	TRANSISTOR 2SC1623-L5L6 (GT210/GT212)		R479	1-216-805-11	METAL CHIP 47 5%	1/10W
Q664	8-729-027-23	TRANSISTOR DTA114EKA-T146		R502	1-216-821-11	METAL CHIP 1K 5%	1/10W
				R503	1-216-821-11	METAL CHIP 1K 5%	1/10W
				R504	1-218-871-11	METAL CHIP 10K 0.5%	1/10W
				R505	1-218-871-11	METAL CHIP 10K 0.5%	1/10W
				R506	1-216-845-11	METAL CHIP 100K 5%	1/10W
				R507	1-216-845-11	METAL CHIP 100K 5%	1/10W
						(GT262/GT262S)	
				R508	1-216-864-11	SHORT CHIP 0	

CDX-GT210/GT212/GT262/GT262S

MAIN

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
R509	1-216-812-11	METAL CHIP	180 5% 1/10W	R577	1-216-845-11	METAL CHIP	100K 5% 1/10W
R510	1-216-821-11	METAL CHIP	1K 5% 1/10W	R578	1-216-821-11	METAL CHIP	1K 5% 1/10W
R511	1-216-821-11	METAL CHIP	1K 5% 1/10W	R582	1-216-821-11	METAL CHIP	1K 5% 1/10W
R512	1-216-821-11	METAL CHIP	1K 5% 1/10W	R583	1-216-821-11	METAL CHIP	1K 5% 1/10W
R513	1-216-845-11	METAL CHIP	100K 5% 1/10W	R584	1-216-841-11	METAL CHIP	47K 5% 1/10W
R514	1-216-845-11	METAL CHIP	100K 5% 1/10W	R585	1-216-849-11	METAL CHIP	220K 5% 1/10W
R517	1-216-841-11	METAL CHIP	47K 5% 1/10W	R601	1-216-845-11	METAL CHIP	100K 5% 1/10W
R518	1-216-864-11	SHORT CHIP	0	R609	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R519	1-216-845-11	METAL CHIP	100K 5% 1/10W	R631	1-249-425-11	CARBON	4.7K 5% 1/4W
R521	1-216-825-11	METAL CHIP	2.2K 5% 1/10W	R632	1-216-841-11	METAL CHIP	47K 5% 1/10W
R522	1-216-825-11	METAL CHIP	2.2K 5% 1/10W	R633	1-216-841-11	METAL CHIP	47K 5% 1/10W
R524	1-216-845-11	METAL CHIP	100K 5% 1/10W	R634	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R526	1-216-845-11	METAL CHIP	100K 5% 1/10W	R636	1-216-845-11	METAL CHIP	100K 5% 1/10W
R527	1-216-845-11	METAL CHIP	100K 5% 1/10W	R651	1-216-821-11	METAL CHIP	1K 5% 1/10W
R528	1-216-845-11	METAL CHIP	100K 5% 1/10W				(GT210/GT212)
R529	1-216-821-11	METAL CHIP	1K 5% 1/10W	R652	1-216-841-11	METAL CHIP	47K 5% 1/10W
R531	1-216-845-11	METAL CHIP	100K 5% 1/10W				(GT210/GT212)
R532	1-216-845-11	METAL CHIP	100K 5% 1/10W	R653	1-216-833-11	METAL CHIP	10K 5% 1/10W
R533	1-216-845-11	METAL CHIP	100K 5% 1/10W				(GT210/GT212)
R534	1-216-833-11	METAL CHIP	10K 5% 1/10W	R654	1-216-833-11	METAL CHIP	10K 5% 1/10W
R535	1-216-833-11	METAL CHIP	10K 5% 1/10W				(GT210/GT212)
R536	1-216-833-11	METAL CHIP	10K 5% 1/10W	R661	1-216-821-11	METAL CHIP	1K 5% 1/10W
R537	1-216-845-11	METAL CHIP	100K 5% 1/10W	R662	1-216-833-11	METAL CHIP	10K 5% 1/10W
R539	1-216-845-11	METAL CHIP	100K 5% 1/10W	R663	1-216-821-11	METAL CHIP	1K 5% 1/10W
R540	1-216-845-11	METAL CHIP	100K 5% 1/10W	R664	1-216-833-11	METAL CHIP	10K 5% 1/10W
R541	1-216-845-11	METAL CHIP	100K 5% 1/10W	R671	1-216-809-11	METAL CHIP	100 5% 1/10W
R542	1-216-864-11	SHORT CHIP	0	R672	1-216-809-11	METAL CHIP	100 5% 1/10W
R543	1-216-821-11	METAL CHIP	1K 5% 1/10W	R673	1-218-871-11	METAL CHIP	10K 0.5% 1/10W
R544	1-216-821-11	METAL CHIP	1K 5% 1/10W	R674	1-216-845-11	METAL CHIP	100K 5% 1/10W
R545	1-216-845-11	METAL CHIP	100K 5% 1/10W	R675	1-216-821-11	METAL CHIP	1K 5% 1/10W
			(GT262S)	R676	1-216-821-11	METAL CHIP	1K 5% 1/10W
R546	1-216-845-11	METAL CHIP	100K 5% 1/10W	R677	1-216-821-11	METAL CHIP	1K 5% 1/10W
			(GT262S)	R679	1-216-821-11	METAL CHIP	1K 5% 1/10W
R547	1-216-864-11	SHORT CHIP	0	R681	1-216-864-11	SHORT CHIP	0
R548	1-216-845-11	METAL CHIP	100K 5% 1/10W	R691	1-216-845-11	METAL CHIP	100K 5% 1/10W
			(GT262/GT262S)	R692	1-216-845-11	METAL CHIP	100K 5% 1/10W
R550	1-216-845-11	METAL CHIP	100K 5% 1/10W	R694	1-216-821-11	METAL CHIP	1K 5% 1/10W
			(GT210/GT212)				(GT210/GT212)
R551	1-216-845-11	METAL CHIP	100K 5% 1/10W	R752	1-216-811-11	METAL CHIP	150 5% 1/10W
			(EXCEPT GT262S)	R756	1-216-841-11	METAL CHIP	47K 5% 1/10W
R556	1-216-833-11	METAL CHIP	10K 5% 1/10W	R757	1-216-864-11	SHORT CHIP	0
			(GT262/GT262S)	R901	1-216-817-11	METAL CHIP	470 5% 1/10W
R557	1-216-825-11	METAL CHIP	2.2K 5% 1/10W	R902	1-216-817-11	METAL CHIP	470 5% 1/10W
R558	1-216-821-11	METAL CHIP	1K 5% 1/10W	R903	1-216-834-11	METAL CHIP	12K 5% 1/10W
			(GT262/GT262S)	R904	1-216-834-11	METAL CHIP	12K 5% 1/10W
R559	1-216-845-11	METAL CHIP	100K 5% 1/10W	R905	1-216-841-11	METAL CHIP	47K 5% 1/10W
			(GT210/GT212)	R906	1-216-841-11	METAL CHIP	47K 5% 1/10W
R561	1-216-845-11	METAL CHIP	100K 5% 1/10W	R907	1-216-845-11	METAL CHIP	100K 5% 1/10W
R563	1-216-845-11	METAL CHIP	100K 5% 1/10W	R910	1-216-789-11	METAL CHIP	2.2 5% 1/10W
R564	1-216-845-11	METAL CHIP	100K 5% 1/10W	R911	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
			(GT210/GT212)	R912	1-216-864-11	SHORT CHIP	0
R565	1-216-845-11	METAL CHIP	100K 5% 1/10W	R913	1-216-864-11	SHORT CHIP	0
R566	1-216-845-11	METAL CHIP	100K 5% 1/10W	R914	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
R567	1-216-845-11	METAL CHIP	100K 5% 1/10W				< SWITCH >
R568	1-216-821-11	METAL CHIP	1K 5% 1/10W				
			(GT262/GT262S)	S502	1-571-478-11	SWITCH, SLIDE (FREQUENCY SELECT)	
R570	1-216-817-11	METAL CHIP	470 5% 1/10W				(GT262S)
R573	1-216-845-11	METAL CHIP	100K 5% 1/10W				
			(GT210/GT212)				
R575	1-216-845-11	METAL CHIP	100K 5% 1/10W				

Ref. No.	Part No.	Description	Remark
< TUNER UNIT >			
TU1	A-3220-960-B	TUNER UNIT (TUX-032) (GT262/GT262S)	
TU1	A-3220-961-B	TUNER UNIT (TUX-032) (GT210/GT212)	
< VIBRATOR >			
X51	1-813-173-11	VIBRATOR, CRYSTAL (8.664MHz)	(GT210/GT212)
X501	1-813-524-21	VIBRATOR, CERAMIC (18.432MHz)	
X502	1-813-202-11	VIBRATOR, CRYSTAL (32.768kHz)	

A-1177-201-A		SERVO BOARD, COMPLETE	

MISCELLANEOUS			

7	1-831-836-11	CORD (WITH CONNECTOR) (ISO) (POWER)	(GT210/GT212)
7	1-833-655-11	CORD (WITH CONNECTOR) (POWER)	(GT262/GT262S)
△ 103	X-2149-672-1	SERVICE ASSY, OP (DAX-25A)	
FU601	1-532-877-11	FUSE (BLADE TYPE) (AUTO FUSE) 10A	
J901	1-820-624-11	JACK (SMALL TYPE) (VERTICAL) (AUX)	

ACCESSORIES			

2-699-134-11	MANUAL, INSTRUCTION (ENGLISH,GERMAN, FRENCH,ITALIAN,DUTCH)		
	(GT210/GT212)		
2-699-134-21	MANUAL, INSTRUCTION (ENGLISH,SPANISH, SIMPLIFIED CHINESE) (GT262S)		
2-699-134-31	MANUAL, INSTRUCTION (ENGLISH,ARABIC, PERSIAN) (GT262)		
2-699-134-51	MANUAL, INSTRUCTION (RUSSIAN)		
	(GT210:RU/GT212:RU)		
2-699-135-11	MANUAL, INSTRUCTION, INSTALL (ENGLISH, GERMAN,FRENCH,ITALIAN,DUTCH)		
	(GT210/GT212)		
2-699-135-21	MANUAL, INSTRUCTION, INSTALL (ENGLISH, SPANISH,SIMPLIFIED CHINESE)		
	(GT262S)		
2-699-135-31	MANUAL, INSTRUCTION, INSTALL (ENGLISH, ARABIC,PERSIAN) (GT262)		
2-699-135-51	MANUAL, INSTRUCTION, INSTALL (RUSSIAN)		
	(GT210:RU/GT212:RU)		
X-2149-228-1	CASE ASSY (for FRONT PANEL)		

Ref. No.	Part No.	Description	Remark
PARTS FOR INSTALLATION AND CONNECTIONS *****			
151	X-3382-647-1	FRAME ASSY, FITTING	
152	1-465-459-31	ADAPTOR, ANTENNA (GT210/GT212)	
153	1-831-836-11	CORD (WITH CONNECTOR) (ISO) (POWER) (GT210/GT212)	
154	1-833-655-11	CORD (WITH CONNECTOR) (POWER) (GT262/GT262S)	
155	3-246-471-01	KEY (FRAME)	
156	2-686-803-01	COLLAR	
157	X-3382-926-1	SCREW ASSY (BS), FITTING (GT210/GT212)	
158	3-349-410-11	BUSHING	
159	X-3381-154-1	SCREW ASSY (BS4), FITTING (GT262/GT262S)	

