


6-2. Exploded Views

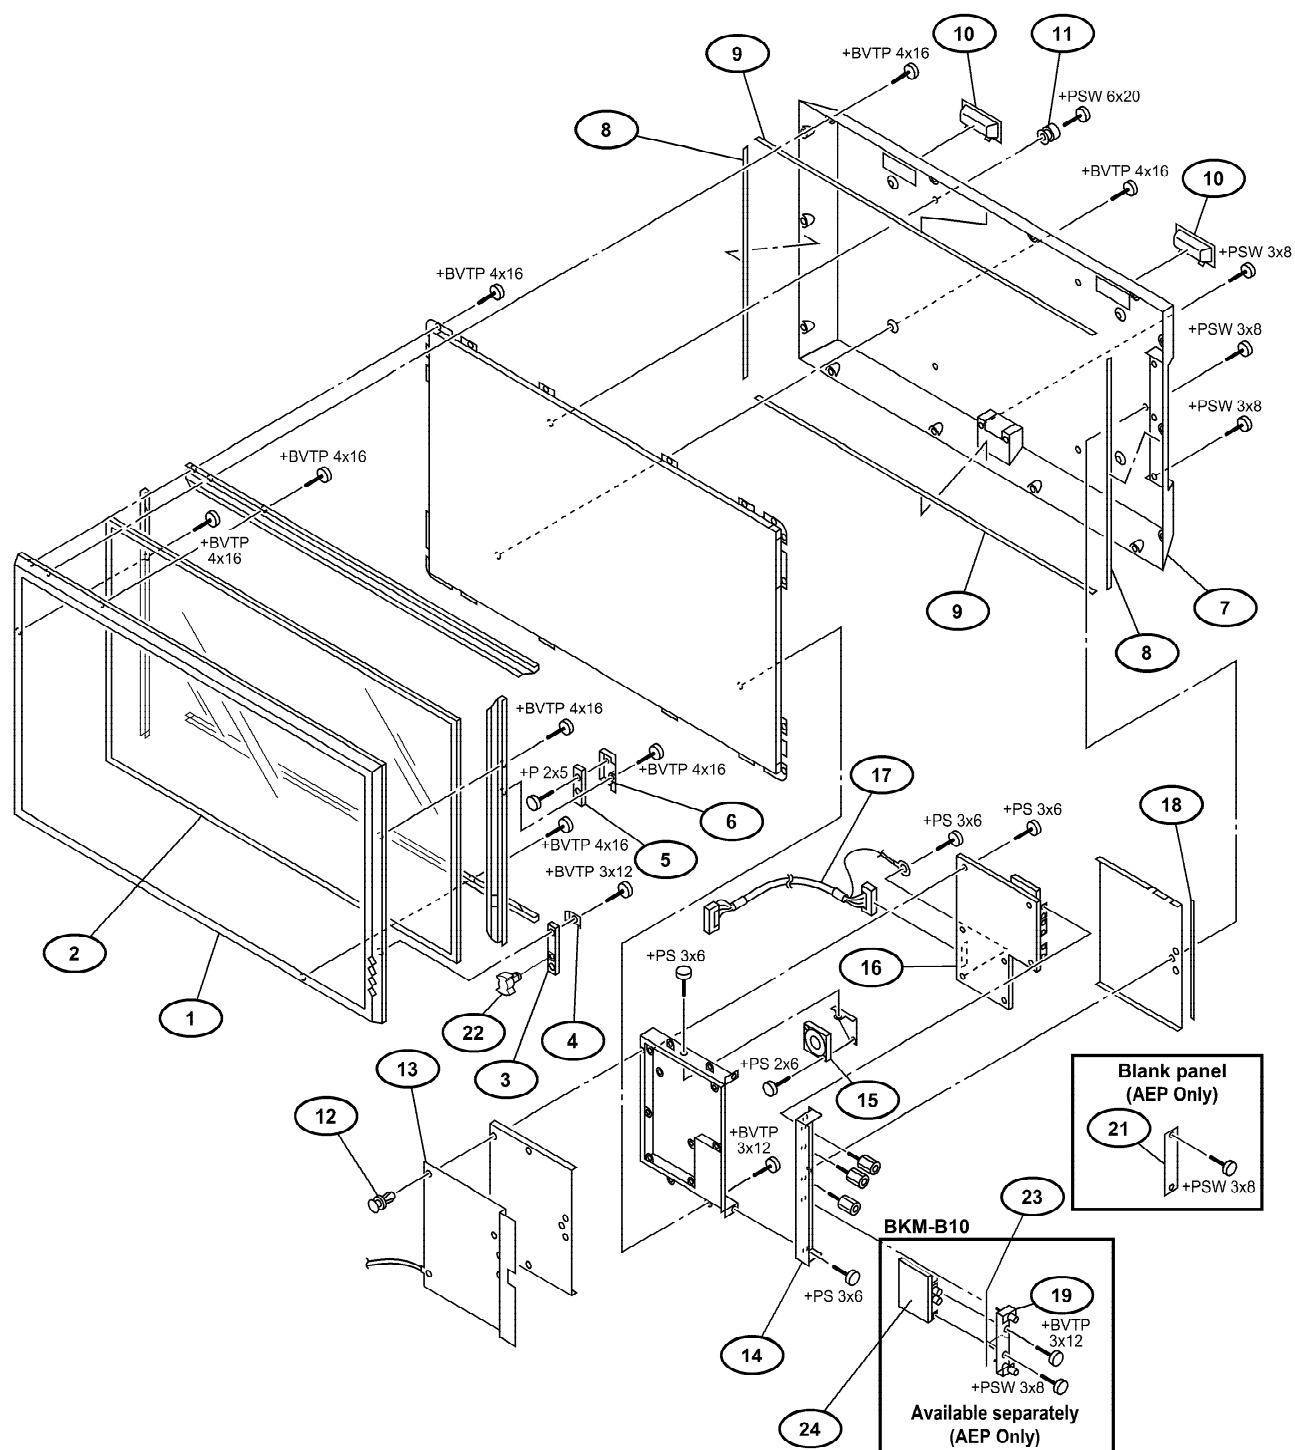


No.	Part No.	SP Description
1	X-4038-606-1	s BEZEL ASSY (SILVER)
1	X-4038-606-2	s BEZEL ASSY (GRAY)
2	1-758-596-11	o GLASS, OPTICAL FILTER
3	A-1373-841-A	o MOUNTED CIRCUIT BOARD, YA
4	4-081-423-01	o PLATE, EARTH
5	A-1373-842-A	o MOUNTED CIRCUIT BOARD, YB
6	4-080-980-01	o BRACKET, Y PWB
7	X-4038-607-1	o COVER ASSY, REAR (SILVER)
7	X-4038-607-2	o COVER ASSY, REAR (GRAY)
8	4-080-966-01	s GASKET (1X5)
9	4-080-966-11	s GASKET (1X5)
10	4-043-825-01	s HANDLE
11	4-081-315-01	s KNOB
12	4-049-122-01	s RIVET
13	4-081-318-01	o SHEET, SHIELD
14	4-080-989-01	s PANEL, S/C
15	1-763-670-11	s DC FAN
16	A-1136-195-A	o MOUNTED CIRCUIT BOARD, B
17	1-900-257-96	o CONNECTOR ASSY 80P
18	4-081-317-01	o GASKET, EMI
19	X-4038-605-1	o PANEL ASSY, QA
20	X-4038-608-1	o PANEL ASSY, QB
21	4-080-962-01	o PANEL, BLANK (AEP ONLY)
22	4-081-302-01	o SPACER
23	4-081-636-01	o GASKET, EMI
24	A-1270-443-A	o MOUNTED CIRCUIT BOARD, QA

Screws/Washers

7-628-000-10	s SCREW +PSW M6X20
7-628-253-20	s SCREW +PS 2X6
7-682-647-09	s SCREW +PS 3X6
7-682-948-09	s SCREW +PSW 3X8
7-685-103-19	s SCREW +P 2X5 TYPE2 NON-SLIT
7-685-648-79	s SCREW +BVTP 3X12 TYPE2 IT-3
7-685-663-79	s SCREW +BVTP 4X16 TYPE2 IT-3

Chassis




No.	Part No.	SP Description
101	A-1391-081-A	o MOUNTED CIRCUIT BOARD, T
102	4-049-122-01	s RIVET
103	4-081-421-01	o BRACKET, S PWB
104	A-1391-080-A	o MOUNTED CIRCUIT BOARD, S
105	4-066-309-01	s SCREW, MACHINE, (+) P M4X8
106	4-353-620-11	o HINGE, PC BOARD
107	1-763-659-11	s FAN, DC (WITH SENSOR)
108	1-763-659-11	s FAN, DC (WITH SENSOR)
109	4-066-309-01	s SCREW, MACHINE, (+) P M4X8
110	△ 1-468-447-11	s REGULATOR, SWITCHING
111	4-081-424-01	o SHEET, INSULATING
112	△ 1-815-560-11	s INLET, AC WITH NOISE FILTER
113	2-990-241-02	s HOLDER (A), PLUG
114	3-659-682-11	o HOLDER, PC BOARD
115	4-321-929-00	o HOLDER, PC BOARD
116	1-680-712-11	o PRINTED WIRING BOARD, F
117	3-701-474-02	s LOCK, PURSE
118	4-957-517-01	s SCREW (5X40), +PSW

Screws/Washers

7-682-565-04	s SCREW +P 4X16
7-682-947-01	s SCREW +PSW 3X6
7-682-948-09	s SCREW +PSW 3X8
7-682-950-09	s SCREW +PSW 3X12
7-682-952-09	s SCREW +PSW 3X16
7-682-961-01	s SCREW +PSW 4X8
7-682-965-01	s SCREW +PSW 4X16
7-685-648-79	s SCREW +BVTP 3X12 TYPE2 IT-3
7-685-663-79	s SCREW +BVTP 4X16 TYPE2 IT-3

Packing Materials

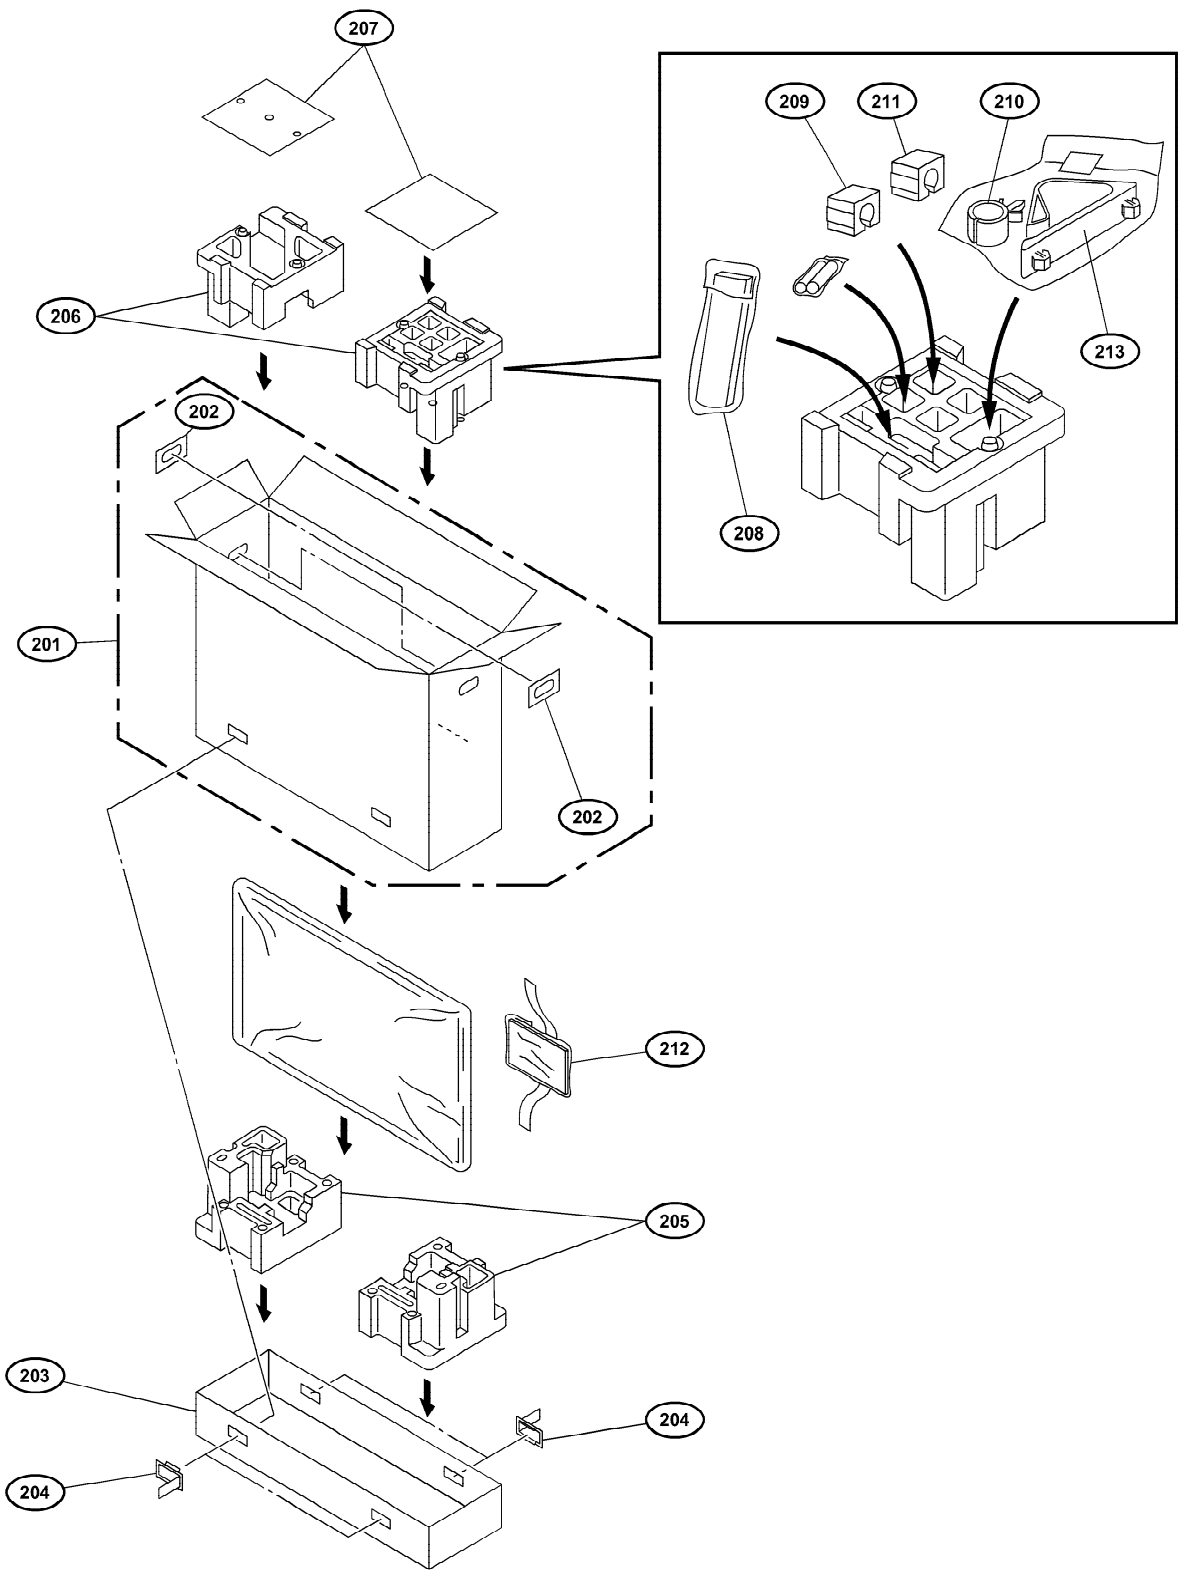

No.	Part No.	SP Description
201	4-080-651-01	o INDIVIDUAL CARTON
202	3-704-066-01	o HANDLE (B)
203	4-080-652-01	o TRAY
204	3-674-673-01	o STOPPER (A)
205	4-080-646-01	o CUSHION (LOWER) (ASSY)
206	4-080-645-01	o CUSHION (UPPER) (ASSY)
207	4-080-653-01	o HOLDER
208	1-476-545-11	s REMOTE COMMANDER (RM-42B)
209	2-990-242-01	s HOLDER (B), PLUG
210	4-066-900-01	s CLAMP, MINI
211	3-613-640-01	o PLUG,HOLDER C
212	4-080-938-01	s OPERATING, INSTRUCTIONS (JAPANESE, ENGLISH, FRENCH, GERMAN, SPANISH, ITALIAN, SIMPLIFIED CHINESE)
213	4-081-316-01	s HOLDER, CABLE

6-3. Electrical Parts List

B BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1136-195-A	o MOUNTED CIRCUIT BOARD, B
1pc	1-251-093-11	s SOCKET, IC
BAT500	1-550-104-11	s HOLDER, BATTERY
C1	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C
C2	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C
C3	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C
C4	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C
C6	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C7	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C8	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C9	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C10	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C12	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C
C13	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C14	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C15	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C16	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C18	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C19	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C
C20	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C
C21	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C
C23	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C
C24	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C25	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C
C26	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C27	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C
C100	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C101	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C102	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C103	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C104	1-115-566-11	s CAPACITOR, CERAMIC 4.7MF B/6.3V
C105	1-115-566-11	s CAPACITOR, CERAMIC 4.7MF B/6.3V
C106	1-115-566-11	s CAPACITOR, CERAMIC 4.7MF B/6.3V
C107	1-115-566-11	s CAPACITOR, CERAMIC 4.7MF B/6.3V
C108	1-117-148-11	s CAPACITOR, ELECT 4.7MF 50V
C109	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C110	1-126-405-11	s CAPACITOR, ELECT 10MF/50V(CHIP
C111	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C113	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C114	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C115	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C116	1-163-259-91	s CAPACITOR, CHIP CERAMIC 220PF
C117	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C200	1-125-889-11	s CAPACITOR, C.CERAMIC 2.2MF
C201	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C202	1-125-889-11	s CAPACITOR, C.CERAMIC 2.2MF
C203	1-125-889-11	s CAPACITOR, C.CERAMIC 2.2MF
C204	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C205	1-126-400-11	s CAPACITOR ELECT 22MF/35V(CHIP)
C206	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C207	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C208	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C209	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C210	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C211	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C212	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C213	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C214	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C215	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C216	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C217	1-164-489-11	s CAPACITOR, CHIP CERAMIC 0.22MF
C218	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C219	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C220	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C221	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C222	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C223	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C224	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C225	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C226	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C227	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C228	1-126-400-11	s CAPACITOR ELECT 22MF/35V(CHIP)
C229	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C230	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C231	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C232	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C233	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C234	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C235	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C236	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C237	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C238	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C239	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C240	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C241	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C242	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C243	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C244	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C245	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C246	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C247	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C248	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C249	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C250	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C251	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C252	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C253	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C254	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C255	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C256	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C257	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C258	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C259	1-135-216-11	s CAPACITOR TANTATUM 10MF/10V
C260	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C262	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C264	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C265	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C266	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C267	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C268	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C269	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C270	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C271	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C272	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C273	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C274	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C275	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C276	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C277	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C279	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C280	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C281	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C282	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C283	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C284	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C285	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C286	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C287	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C288	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C289	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C290	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C291	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C292	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C293	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C294	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C295	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C296	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C297	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C298	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C299	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C300	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C304	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C305	1-163-243-11	s CAPACITOR CHIP CERAMIC 47PF/50
C312	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C313	1-163-113-00	s CAPACITOR,CHIP CERAMIC 68PF/50
C314	1-163-113-00	s CAPACITOR,CHIP CERAMIC 68PF/50
C315	1-163-113-00	s CAPACITOR,CHIP CERAMIC 68PF/50
C317	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C318	1-164-161-11	s CAPACITOR, CERAMIC 2200PF/100V
C320	1-126-401-11	s CAPACITOR, ELECT 1MF/50V(CHIP)
C500	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C501	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C502	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C
C503	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C504	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C506	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C507	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C508	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C509	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C510	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C511	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C512	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C513	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C514	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C515	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C516	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C517	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C519	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C520	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C521	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C522	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C523	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C524	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C525	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C526	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C527	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C528	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C529	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C530	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C531	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C532	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C533	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C534	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C535	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C536	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C537	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C538	1-163-133-00	s CAPACITOR,CHIP CERAMIC 470PF
C539	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C540	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C541	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C542	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C543	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C544	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C545	1-125-838-11	s CAPACITOR, CERAMIC 2.2MF/6.3V
C546	1-125-838-11	s CAPACITOR, CERAMIC 2.2MF/6.3V
C547	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C548	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C549	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C550	1-163-253-11	s CAPACITOR CERAMIC 120PF/50V
C551	1-163-253-11	s CAPACITOR CERAMIC 120PF/50V
C552	1-163-253-11	s CAPACITOR CERAMIC 120PF/50V
C553	1-163-253-11	s CAPACITOR CERAMIC 120PF/50V
C554	1-163-275-11	s CAPACITOR CERAMIC 1000PF/50V
C555	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C556	1-163-253-11	s CAPACITOR CERAMIC 120PF/50V
C557	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C560	1-163-233-11	s CAPACITOR,CHIP CERAMIC 18PF/50
C703	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C704	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C705	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C706	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C707	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C708	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C709	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C710	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C711	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C712	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C713	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C714	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C715	1-126-400-11	s CAPACITOR ELECT 22MF/35V(CHIP)
C716	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C717	1-126-400-11	s CAPACITOR ELECT 22MF/35V(CHIP)
C718	1-115-670-11	s CAPACITOR ELECT 220MF/35V(CHIP)
C719	1-115-670-11	s CAPACITOR ELECT 220MF/35V(CHIP)
C720	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C721	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C801	1-128-396-11	s CAPACITOR,ELECT 470MF/10V CHIP
C927	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C928	1-115-459-11	s CAPACITOR,ELECT 47MF/6.3V(BP)
C937	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C938	1-115-459-11	s CAPACITOR,ELECT 47MF/6.3V(BP)
C1000	1-163-229-11	s CAPACITOR CHIP 12PF/50V(2125)
C1001	1-163-089-00	s CAPACITOR,CHIP CERAMIC 6.0PF

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C1002	1-107-781-11	s CAPACITOR,ELECT 47MF/16V(BP)
C1003	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1004	1-107-781-11	s CAPACITOR,ELECT 47MF/16V(BP)
C1005	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1006	1-107-781-11	s CAPACITOR,ELECT 47MF/16V(BP)
C1007	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1008	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C1009	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C1010	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C1011	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1012	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1013	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C1014	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1015	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C1016	1-126-401-11	s CAPACITOR, ELECT 1MF/50V(CHIP)
C1017	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1018	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C1019	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1020	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1021	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C1022	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1023	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1024	1-126-396-11	s CAPACITOR ELECT 4.7MF/35V(CHIP)
C1025	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C1026	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1027	1-107-781-11	s CAPACITOR,ELECT 47MF/16V(BP)
C1028	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1029	1-107-781-11	s CAPACITOR,ELECT 47MF/16V(BP)
C1030	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1031	1-126-405-11	s CAPACITOR,ELECT 10MF/50V(CHIP)
C1032	1-126-405-11	s CAPACITOR,ELECT 10MF/50V(CHIP)
C1033	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1034	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C1035	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1036	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1037	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C1038	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C)
C1039	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1040	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1041	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1042	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1043	1-126-401-11	s CAPACITOR, ELECT 1MF/50V(CHIP)
C1044	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C)
C1045	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C1046	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1047	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1048	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1049	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C1050	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C1051	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C1052	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C1053	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1055	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C1056	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1057	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1058	1-163-102-00	s CAPACITOR,CHIP CERAMIC 24PF/50
C1059	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1060	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1061	1-163-102-00	s CAPACITOR,CHIP CERAMIC 24PF/50

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C1062	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1063	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1064	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C1065	1-163-113-00	s CAPACITOR CERAMIC 68PF/50V
C1066	1-163-231-11	s CAPACITOR,CHIP CERAMIC15PF/50V
C1067	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1068	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C1069	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C1070	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1071	1-115-154-11	s CAPACITOR ELECT 10MF/16V(BP)
C1072	1-163-241-11	s CAPACITOR,CHIP CERAMIC 39PF/50
C1073	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1074	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1075	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1076	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1077	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1078	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1079	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C1080	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1081	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1082	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C1083	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1084	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1085	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C1086	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1087	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1088	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C1089	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1090	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1091	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1092	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1093	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1094	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1095	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1096	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1097	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1098	1-163-809-11	s CAPACITOR,CHIP CERAMIC 0.047MF
C1099	1-107-781-11	s CAPACITOR,ELECT 47MF/16V(BP)
C1100	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1101	1-163-809-11	s CAPACITOR,CHIP CERAMIC 0.047MF
C1102	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1103	1-163-809-11	s CAPACITOR,CHIP CERAMIC 0.047MF
C1104	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1105	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1106	1-163-253-11	s CAPACITOR CERAMIC 120PF/50V
C1107	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C1108	1-107-781-11	s CAPACITOR,ELECT 47MF/16V(BP)
C1109	1-126-401-11	s CAPACITOR, ELECT 1MF/50V(CHIP)
C1110	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1111	1-164-162-11	s CAPACITOR,CHIP CERAMIC 100PF
C1112	1-126-401-11	s CAPACITOR, ELECT 1MF/50V(CHIP)
C1113	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1115	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C1116	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1117	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1118	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1119	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1120	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C1121	1-107-781-11	s CAPACITOR,ELECT 47MF/16V(BP)

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C1245	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C1246	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C1247	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C1248	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C1249	1-126-405-11	s CAPACITOR, ELECT 10MF/50V(CHIP
C1250	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C1251	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C1252	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C1260	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C1261	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C1262	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C1263	1-163-243-11	s CAPACITOR CHIP CERAMIC 47PF/50
C1264	1-163-243-11	s CAPACITOR CHIP CERAMIC 47PF/50
C1265	1-163-243-11	s CAPACITOR CHIP CERAMIC 47PF/50
C1266	1-163-243-11	s CAPACITOR CHIP CERAMIC 47PF/50
C1267	1-163-243-11	s CAPACITOR CHIP CERAMIC 47PF/50
C1268	1-163-243-11	s CAPACITOR CHIP CERAMIC 47PF/50
C1269	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C1270	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C1271	1-163-235-11	s CAPACITOR, CHIP CERAMIC 22PF/50V
C1278	1-126-392-11	s CAPACITOR, CHIP ELECT 100MF/6.3V
C1282	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C1283	1-128-416-11	s CAPACITOR ELECT 100MF/16V
C4000	1-126-405-11	s CAPACITOR, ELECT 10MF/50V(CHIP
C4001	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C
C4002	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4003	1-163-275-11	s CAPACITOR CERAMIC 1000PF/50V
C4004	1-126-405-11	s CAPACITOR, ELECT 10MF/50V(CHIP
C4005	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4006	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4007	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4008	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C4009	1-126-405-11	s CAPACITOR, ELECT 10MF/50V(CHIP
C4010	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4011	1-126-405-11	s CAPACITOR, ELECT 10MF/50V(CHIP
C4012	1-126-405-11	s CAPACITOR, ELECT 10MF/50V(CHIP
C4013	1-126-405-11	s CAPACITOR, ELECT 10MF/50V(CHIP
C4014	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C4015	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C
C4016	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4017	1-164-489-11	s CAPACITOR, CHIP CERAMIC 0.22MF
C4018	1-163-275-11	s CAPACITOR CERAMIC 1000PF/50V
C4019	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C4020	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C4021	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4022	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C
C4023	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C
C4024	1-163-113-00	s CAPACITOR, CHIP CERAMIC 68PF/50
C4025	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4026	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4027	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4028	1-163-275-11	s CAPACITOR CERAMIC 1000PF/50V
C4029	1-163-233-11	s CAPACITOR, CHIP CERAMIC 18PF/50
C4030	1-163-235-11	s CAPACITOR, CHIP CERAMIC 22PF/50V
C4031	1-115-670-11	s CAPACITOR ELECT 220MF/35V(CHIP
C4032	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4033	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C4034	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4035	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C4036	1-163-245-11	s CAPACITOR CERAMIC 56PF/50V
C4037	1-163-809-11	s CAPACITOR, CHIP CERAMIC 0.047MF
C4038	1-163-275-11	s CAPACITOR CERAMIC 1000PF/50V
C4039	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4040	1-163-133-00	s CAPACITOR, CHIP CERAMIC 470PF
C4041	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4042	1-126-405-11	s CAPACITOR, ELECT 10MF/50V(CHIP
C4043	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4044	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4045	1-163-127-00	s CAPACITOR, CHIP CERAMIC 270PF
C4046	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4047	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4048	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4049	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4050	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4051	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4052	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4053	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4054	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4055	1-163-253-11	s CAPACITOR CERAMIC 120PF/50V
C4056	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C4057	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C4058	1-163-137-00	s CAPACITOR, CHIP CERAMIC 680PF
C4059	1-163-263-11	s CAPACITOR CERAMIC 330PF/50V
C4060	1-163-137-00	s CAPACITOR, CHIP CERAMIC 680PF
C4061	1-163-092-00	s CAPACITOR, CHIP CERAMIC 9PF/50V
C4062	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C4063	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH
C4064	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C4065	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4066	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4067	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4068	1-117-148-11	s CAPACITOR, ELECT 4.7MF 50V
C4069	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C4070	1-163-275-11	s CAPACITOR CERAMIC 1000PF/50V
C4071	1-126-402-11	s CAPACITOR, ELECT 2.2MF/50V
C4072	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4073	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4074	1-126-401-11	s CAPACITOR, ELECT 1MF/50V(CHIP)
C4075	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C4076	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4077	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4078	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH
C4079	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C4080	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C4081	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4082	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4083	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C4084	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C4085	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C4086	1-126-398-11	s CAPACITOR ELECT 4.7MF/35V(CHIP
C4088	1-128-235-11	s CAPACITOR ELECT 0.47MF/50V
C4089	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C4090	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4091	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4092	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C4093	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C4094	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C4095	1-163-259-91	s CAPACITOR, CHIP CERAMIC 220PF

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C4096	1-126-398-11	s CAPACITOR ELECT 4.7MF/35V(CHIP
C4097	1-163-145-00	s CAPACITOR,CHIP CERAMIC 1500PF
C4098	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C4099	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C4100	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C4103	1-163-137-00	s CAPACITOR,CHIP CERAMIC 680PF
C4104	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C4105	1-163-263-11	s CAPACITOR CERAMIC 330PF/50V
C4106	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C4107	1-163-131-00	s CAPACITOR,CHIP CERAMIC 390PF
C4108	1-163-131-00	s CAPACITOR,CHIP CERAMIC 390PF
C4109	1-104-760-11	s CAPACITOR CERAMIC 0.047MF/50V
C4110	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C4111	1-104-760-11	s CAPACITOR CERAMIC 0.047MF/50V
C4112	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C4113	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C4114	1-163-137-00	s CAPACITOR,CHIP CERAMIC 680PF
C6142	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C
C6143	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C6144	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C6145	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C6181	1-127-573-11	s CAPACITOR, .CERAMIC 1MFB(2012)
C6182	1-127-573-11	s CAPACITOR, .CERAMIC 1MFB(2012)
C6183	1-127-573-11	s CAPACITOR, .CERAMIC 1MFB(2012)
C6184	1-127-573-11	s CAPACITOR, .CERAMIC 1MFB(2012)
C6951	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C6952	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C6953	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C6971	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C6972	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C6973	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C6974	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C6981	1-126-394-11	s CAPACITOR,ELECT 10MF/16V(CHIP)
C6982	1-126-394-11	s CAPACITOR,ELECT 10MF/16V(CHIP)
C6985	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C6986	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C6991	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C6992	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C6993	1-126-394-11	s CAPACITOR,ELECT 10MF/16V(CHIP)
C8001	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C8002	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C8003	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C8004	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C8005	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C9001	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C9002	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C9003	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C9004	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C9005	1-126-394-11	s CAPACITOR,ELECT 10MF/16V(CHIP)
C9006	1-126-394-11	s CAPACITOR,ELECT 10MF/16V(CHIP)
C9007	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C9008	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C9101	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C9102	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C9103	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C9104	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C9105	1-126-394-11	s CAPACITOR,ELECT 10MF/16V(CHIP)
C9106	1-126-394-11	s CAPACITOR,ELECT 10MF/16V(CHIP)
C9107	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C9108	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C9109	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C9110	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C9111	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C9112	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C9201	1-163-005-11	s CAP,CHIP CERAMIC 470PF
C9202	1-163-005-11	s CAP,CHIP CERAMIC 470PF
C9203	1-163-005-11	s CAP,CHIP CERAMIC 470PF
C9204	1-163-005-11	s CAP,CHIP CERAMIC 470PF
C9205	1-163-005-11	s CAP,CHIP CERAMIC 470PF
C9206	1-163-005-11	s CAP,CHIP CERAMIC 470PF
CN103	1-815-257-11	o HEADER, CONNECTOR
CN104	1-506-474-11	s PIN,CONNECTOR 9P
CN105	1-506-468-11	s PIN,CONNECTOR (3P)
CN106	1-564-877-31	o PIN, CONNECTOR 15P
CN109	1-506-491-11	s PIN,CONNECTOR 12P
CN110	1-506-487-11	s PIN,CONNECTOR 8P
CN112	1-506-494-11	s PIN,CONNECTOR (15P)
CN115	1-506-473-11	s PIN,CONNECTOR 8P
CN118	1-506-468-11	s PIN,CONNECTOR (3P)
CN801	1-766-809-11	o PIN, CONNECTOR (PC BOARD) 3P
CN6102	1-770-418-11	o CONNECTOR, BOARD TO BOARD 30P
CN6103	1-778-529-11	s PIN, CONNECTOR (PC BOARD) 7P
CN6104	1-778-529-11	s PIN, CONNECTOR (PC BOARD) 7P
CN6910	1-815-410-11	o CONNECTOR SOCKET 44P
CN8001	1-506-492-11	o PIN,CONNECTOR 13P
D1	8-719-073-01	s DIODE MA111-(K8).S0
D100	8-719-914-43	s DIODE DAN202K
D101	8-719-158-49	s DIODE RD12SB2
D102	8-719-158-49	s DIODE RD12SB2
D103	8-719-914-43	s DIODE DAN202K
D201	8-719-073-01	s DIODE MA111-(K8).S0
D504	8-719-158-15	s DIODE RD5.6SB
D505	8-719-158-15	s DIODE RD5.6SB
D506	8-719-158-15	s DIODE RD5.6SB
D507	8-719-158-15	s DIODE RD5.6SB
D508	8-719-158-15	s DIODE RD5.6SB
D509	8-719-158-15	s DIODE RD5.6SB
D510	8-719-073-01	s DIODE MA111-(K8).S0
D511	8-719-073-01	s DIODE MA111-(K8).S0
D512	8-719-073-01	s DIODE MA111-(K8).S0
D513	8-719-073-01	s DIODE MA111-(K8).S0
D514	8-719-073-01	s DIODE MA111-(K8).S0
D515	8-719-073-01	s DIODE MA111-(K8).S0
D516	8-719-073-01	s DIODE MA111-(K8).S0
D700	8-719-158-15	s DIODE RD5.6SB
D701	8-719-073-01	s DIODE MA111-(K8).S0
D702	8-719-059-22	s DIODE NSQ03A06-TE16L
D703	8-719-073-01	s DIODE MA111-(K8).S0
D704	8-719-073-01	s DIODE MA111-(K8).S0
D705	8-719-073-01	s DIODE MA111-(K8).S0
D804	8-719-158-49	s DIODE RD12SB2
D805	8-719-158-49	s DIODE RD12SB2
D940	8-719-976-96	s DIODE DTZ4.7B
D941	8-719-976-96	s DIODE DTZ4.7B
D942	8-719-976-96	s DIODE DTZ4.7B
D943	8-719-976-96	s DIODE DTZ4.7B
D944	8-719-976-96	s DIODE DTZ4.7B
D945	8-719-976-96	s DIODE DTZ4.7B
D946	8-719-976-96	s DIODE DTZ4.7B
D947	8-719-976-96	s DIODE DTZ4.7B

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
D948	8-719-073-01	s DIODE MA111-(K8).S0
D1000	8-719-800-76	s DIODE 1SS226
D1001	8-719-800-76	s DIODE 1SS226
D1002	8-719-800-76	s DIODE 1SS226
D1003	8-719-073-01	s DIODE MA111-(K8).S0
D1004	8-719-073-01	s DIODE MA111-(K8).S0
D1005	8-719-988-61	s DIODE 1SS355TE-17
D1006	8-719-073-01	s DIODE MA111-(K8).S0
D1007	8-719-422-12	s DIODE MA8039
D4000	8-719-073-01	s DIODE MA111-(K8).S0
D4001	8-719-073-01	s DIODE MA111-(K8).S0
D4002	8-719-914-43	s DIODE DAN202K
D4003	8-719-914-43	s DIODE DAN202K
D4004	8-719-073-01	s DIODE MA111-(K8).S0
D4005	8-719-914-43	s DIODE DAN202K
D4006	8-719-031-68	s DIODE HVU359-TRU(VARI-CAP)
D4007	8-719-031-68	s DIODE HVU359-TRU(VARI-CAP)
D4008	8-719-031-68	s DIODE HVU359-TRU(VARI-CAP)
D6181	8-719-073-01	s DIODE MA111-(K8).S0
D6182	8-719-073-01	s DIODE MA111-(K8).S0
D6183	8-719-073-01	s DIODE MA111-(K8).S0
D6184	8-719-158-49	s DIODE RD12SB2
D8001	8-719-158-15	s DIODE RD5.6SB
D8002	8-719-800-76	s DIODE 1SS226
D8003	8-719-800-76	s DIODE 1SS226
D8004	8-719-800-76	s DIODE 1SS226
D9001	8-719-800-76	s DIODE 1SS226
D9004	8-719-800-76	s DIODE 1SS226
D9005	8-719-402-16	s DIODE MA3100-TX
D9006	8-719-402-16	s DIODE MA3100-TX
D9007	8-719-800-76	s DIODE 1SS226
D9008	8-719-800-76	s DIODE 1SS226
D9009	8-719-800-76	s DIODE 1SS226
D9010	8-719-977-28	s DIODE DTZ10B
D9011	8-719-977-28	s DIODE DTZ10B
D9101	8-719-800-76	s DIODE 1SS226
D9104	8-719-800-76	s DIODE 1SS226
D9105	8-719-402-16	s DIODE MA3100-TX
D9106	8-719-402-16	s DIODE MA3100-TX
D9107	8-719-800-76	s DIODE 1SS226
D9108	8-719-800-76	s DIODE 1SS226
D9109	8-719-800-76	s DIODE 1SS226
D9110	8-719-977-28	s DIODE DTZ10B
D9111	8-719-977-28	s DIODE DTZ10B
D9201	8-719-402-16	s DIODE MA3100-TX
D9202	8-719-402-16	s DIODE MA3100-TX
D9203	8-719-402-16	s DIODE MA3100-TX
D9204	8-719-402-16	s DIODE MA3100-TX
D9301	8-719-025-47	s DIODE 02CZ12-TE85L
D9302	8-719-025-47	s DIODE 02CZ12-TE85L
D9303	8-719-025-47	s DIODE 02CZ12-TE85L
D9304	8-719-025-47	s DIODE 02CZ12-TE85L
D9305	8-719-025-47	s DIODE 02CZ12-TE85L
D9306	8-719-025-47	s DIODE 02CZ12-TE85L
D9307	8-719-025-47	s DIODE 02CZ12-TE85L
D9308	8-719-025-47	s DIODE 02CZ12-TE85L
D9309	8-719-158-15	s DIODE RD5.6SB
D9310	8-719-158-15	s DIODE RD5.6SB

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
FB101	1-414-234-11	s INDUCTOR,FERRITE BEAD
FB200	1-414-234-11	s INDUCTOR,FERRITE BEAD
FB201	1-414-234-11	s INDUCTOR,FERRITE BEAD
FB202	1-414-234-11	s INDUCTOR,FERRITE BEAD
FB203	1-414-234-11	s INDUCTOR,FERRITE BEAD
FB204	1-414-234-11	s INDUCTOR,FERRITE BEAD
FB205	1-414-234-11	s INDUCTOR,FERRITE BEAD
FB700	1-410-396-41	s FERRITE BEAD INDUCTOR (0.45UH)
FB701	1-414-230-11	s INDUCTOR, FERRITE BEAD
FL1000	1-414-234-11	s INDUCTOR,FERRITE BEAD
FL1001	1-414-234-11	s INDUCTOR,FERRITE BEAD
FL1002	1-543-775-11	s BEAD, FERRITE
FL1003	1-543-775-11	s BEAD, FERRITE
FL1004	1-239-847-11	s FILTER, LOW PASS
FL1005	1-233-505-21	s FILTER, LOW PASS
FL1006	1-233-504-21	s FILTER, LOW PASS
FL1007	1-233-504-21	s FILTER, LOW PASS
FL4000	1-233-736-21	s FILTER, EMI
FL4001	1-233-736-21	s FILTER, EMI
FL4002	1-233-736-21	s FILTER, EMI
FL4003	1-233-434-11	s FILTER, LOW PASS
FL4004	1-233-736-21	s FILTER, EMI
FL4005	1-233-736-21	s FILTER, EMI
FL4006	1-233-434-11	s FILTER, LOW PASS
FL4007	1-233-505-21	s FILTER, LOW PASS
FL4008	1-233-504-21	s FILTER, LOW PASS
FL4009	1-233-504-21	s FILTER, LOW PASS
IC1	8-759-460-72	s IC BA033FP
IC2	8-759-581-89	s IC LM317SX
IC3	8-759-460-72	s IC BA033FP
IC4	8-759-539-90	s IC LM2940SX-5.0
IC6	8-759-460-79	s IC BA09FP-E2
IC7	8-759-460-72	s IC BA033FP
IC100	8-759-595-97	s IC SN74LV4053ANSR
IC101	8-759-646-02	s IC M52347FP-TE
IC102	8-759-475-21	s IC TC74LCX244F(EL)
IC103	8-759-442-20	s IC 24LC21A/SN
IC200	8-759-645-12	s IC AD9884AKS-140
IC202	8-759-481-73	s IC SN74LVC125APW (E20)
IC204	8-759-362-35	s IC ICS9161A-01CW16T
IC205	8-759-575-71	s IC M24C04-WMN6T
IC206	8-759-669-11	o IC MBM29LV400TC-70PFTN-SV9695
IC207	8-759-646-32	s IC PW164-20W
IC208	8-759-712-67	o IC EP1K50TC144-3
IC209	8-759-475-21	s IC TC74LCX244F(EL)
IC210	8-759-491-51	s IC TC74VHCT245AFT(EL)
IC211	8-759-491-51	s IC TC74VHCT245AFT(EL)
IC212	8-759-491-51	s IC TC74VHCT245AFT(EL)
IC213	8-759-491-51	s IC TC74VHCT245AFT(EL)
IC214	8-759-599-99	s IC MB90096PF-G-182
IC215	8-759-491-51	s IC TC74VHCT245AFT(EL)
IC216	8-759-829-32	s IC EPC1LC20-42B1-V100
IC218	8-759-646-15	s IC ST49C101ACF8-05-TR
IC219	8-759-058-62	s IC TC7S08FU-TE85R
IC220	8-759-239-34	s IC TC74HC4538AF
IC221	8-759-439-67	s IC TC7W126FU(TE12R)
IC222	8-759-491-32	s IC TC74VHCT04AF(EL)

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC223	8-759-058-58	s IC TC7S04FU-TE85R
IC500	8-759-232-46	s IC TC74HC126AF
IC501	8-759-635-27	s IC M62352GP
IC502	8-759-475-21	s IC TC74LCX244F(EL)
IC503	8-759-252-59	s IC MAX202CSE
IC504	8-759-560-17	s IC RS5C348A-E2
IC505	8-759-232-46	s IC TC74HC126AF
IC506	8-759-232-44	s IC TC74HC125AF
IC507	8-759-233-73	s IC TC74HCT244AF
IC508	8-759-186-30	s IC TC74VHC14F
IC509	8-759-648-10	s IC HD64F2633TE
IC510	8-759-058-62	s IC TC7S08FU-TE85R
IC511	8-759-684-72	o IC M24C64-WMN6T(A)
IC512	8-759-582-91	s IC S-80842ANNP-ED6-T2
IC513	8-759-582-91	s IC S-80842ANNP-ED6-T2
IC703	8-759-700-07	s IC NJM2903M
IC831	8-759-581-89	s IC LM317SX
IC1000	8-752-053-21	s IC CXA1211M
IC1001	8-752-053-21	s IC CXA1211M
IC1002	8-759-595-97	s IC SN74LV4053ANSR
IC1003	8-759-595-97	s IC SN74LV4053ANSR
IC1004	8-759-082-61	s IC TC4W53FU
IC1005	8-752-053-21	s IC CXA1211M
IC1006	8-759-987-27	s IC LM1881M
IC1007	8-759-568-27	s IC MSM514265C-60JSDR1
IC1008	8-759-460-72	s IC BA033FP
IC1009	8-759-460-72	s IC BA033FP
IC1010	8-759-031-84	s IC SC7S04F
IC1011	8-759-594-44	s IC UPD64082GF-3BA
IC1012	8-759-031-84	s IC SC7S04F
IC1013	8-759-645-68	o IC ISPLSI2023E-110LT48
IC1027	8-759-970-89	s IC BA10358F
IC1028	8-759-970-89	s IC BA10358F
IC1029	8-759-970-89	s IC BA10358F
IC1030	8-752-067-05	s IC CXA1739S
IC1031	8-759-595-97	s IC SN74LV4053ANSR
IC1032	8-759-328-12	s IC Z8622812PSC
IC1033	8-759-539-90	s IC LM2940SX-5.0
IC1034	8-759-460-81	s IC BA12FP-E2
IC1035	8-752-082-49	s IC CXA2119M
IC1036	8-749-015-18	s IC PQ07VZ012P
IC1037	8-759-669-78	s IC TLC2933IPWR-12
IC1038	8-759-431-14	s IC PQ3TZ53U
IC1039	8-759-676-70	s IC MSM56V16160F-10TS-K
IC1040	8-752-398-47	s IC CXD2090Q
IC1041	8-759-669-75	s IC TLC2932IPWR
IC1042	8-759-447-90	s IC TLC5733AIPM
IC1043	8-759-528-48	s IC NJU7032M-TE2
IC1044	8-759-082-61	s IC TC4W53FU
IC4000	8-759-430-79	s IC TDA8395T/N3
IC4001	8-752-070-58	s IC CXA1860Q(T4)
IC4003	8-752-352-09	s IC CXD2300Q
IC4004	8-752-369-15	s IC CXD2030R
IC4005	8-759-595-97	s IC SN74LV4053ANSR
IC4006	8-752-369-84	s IC CXD2309Q (T6)
IC4007	8-759-296-53	s IC UPC1862GS-E2
IC4008	8-759-239-55	s IC TC74HC123AF
IC4009	8-759-239-55	s IC TC74HC123AF
IC4010	8-759-235-14	s IC TC74HC04AF (TP2)
IC4011	8-759-239-55	s IC TC74HC123AF

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC4012	8-759-232-65	s IC TC74HC157AF
IC4013	8-759-442-20	s IC 24LC21A/SN
IC6105	8-759-460-81	s IC BA12FP-E2
IC6903	8-759-446-66	s IC MM1113XFBE
IC6904	8-759-446-66	s IC MM1113XFBE
IC6905	8-759-360-07	s IC BA7657F-E2
IC6906	8-759-011-64	s IC MC74HC4052F
IC6907	8-759-360-07	s IC BA7657F-E2
IC6908	8-759-439-67	s IC TC7W126FU(Te12R)
IC6909	8-759-232-44	s IC TC74HC125AF
IC8001	8-759-439-67	s IC TC7W126FU(Te12R)
J9001	1-774-361-11	s CONNECTOR, D SUB 15P (INPUT1 IN)
J9002	1-774-361-11	s CONNECTOR, D SUB 15P (INPUT2 IN)
J9101	1-566-822-21	s JACK (INPUT1 AUDIO IN)
J9102	1-566-822-21	s JACK (INPUT2 AUDIO IN)
J9103	1-566-822-21	s JACK (AUDIO OUT)
J9201	1-565-269-11	s SOCKET,CONNECTOR 9P (REMOTE)
JR6102	1-216-295-00	s CONDUCTOR, CHIP (2012)
L200	1-414-752-11	s INDUCTOR 2.2UH
L700	1-410-482-31	s MICRO INDUCTOR 100UH
L701	1-406-666-21	s COIL, CHOKE 150UH
L702	1-406-666-21	s COIL, CHOKE 150UH
L704	1-410-671-31	s MICRO INDUCTOR 47UH
L801	1-414-404-11	s INDUCTOR (SMD) 100UH
L1001	1-410-200-31	s CHIP INDUCTOR
L1002	1-414-042-21	s INDUCTOR,LEAD LESS
L1003	1-410-210-21	s CHIP INDUCTOR
L1004	1-414-754-11	s INDUCTOR 10.0UH
L1005	1-414-754-11	s INDUCTOR 10.0UH
L1006	1-414-757-11	s INDUCTOR 100.0UH
L1007	1-412-052-21	s INDUCTOR, SMALL TYPE 1.00UH
L1008	1-414-757-11	s INDUCTOR 100.0UH
L1009	1-414-754-11	s INDUCTOR 10.0UH
L1010	1-414-754-11	s INDUCTOR 10.0UH
L1011	1-410-663-31	s MICRO INDUCTOR 10UH
L1012	1-414-754-11	s INDUCTOR 10.0UH
L1013	1-414-757-11	s INDUCTOR 100.0UH
L1014	1-414-757-11	s INDUCTOR 100.0UH
L1015	1-414-757-11	s INDUCTOR 100.0UH
L1016	1-414-754-11	s INDUCTOR 10.0UH
L1017	1-414-754-11	s INDUCTOR 10.0UH
L1018	1-414-754-11	s INDUCTOR 10.0UH
L4000	1-408-595-31	s MICRO INDUCTOR 2.2UH
L4001	1-408-591-11	s MICRO INDUCTOR 1UH
L4002	1-410-373-31	s MICRO INDUCTOR 2.2UH
L4003	1-408-595-31	s MICRO INDUCTOR 2.2UH
L4004	1-410-373-31	s MICRO INDUCTOR 2.2UH
L4005	1-408-591-11	s MICRO INDUCTOR 1UH
L4006	1-414-248-11	s INDUCTOR,CHIP 2.2UH
L4007	1-414-248-11	s INDUCTOR,CHIP 2.2UH
L4008	1-408-591-11	s MICRO INDUCTOR 1UH
L4009	1-410-193-51	s CHIP INDUCTOR 1.2UH
L4010	1-410-193-51	s CHIP INDUCTOR 1.2UH
L4011	1-410-193-51	s CHIP INDUCTOR 1.2UH
L4012	1-410-193-51	s CHIP INDUCTOR 1.2UH
L4013	1-410-193-51	s CHIP INDUCTOR 1.2UH
L4014	1-410-193-51	s CHIP INDUCTOR 1.2UH
L4017	1-410-193-51	s CHIP INDUCTOR 1.2UH

(B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L4018	1-414-248-11	s	INDUCTOR,CHIP 2.2UH
L4019	1-416-668-11	s	COIL, CHOKE 10UH
Q100	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q101	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q102	8-729-026-49	s	TRANSISTOR 2SA1037AK-T146-R
Q103	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q104	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q200	8-729-026-49	s	TRANSISTOR 2SA1037AK-T146-R
Q203	8-729-027-38	s	TRANSISTOR DTA144EKA-T146
Q502	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q503	8-729-101-07	s	TRANSISTOR 2SB798
Q506	8-729-027-38	s	TRANSISTOR DTA144EKA-T146
Q507	8-729-900-53	s	TRANSISTOR DTC114EK
Q700	8-729-026-49	s	TRANSISTOR 2SA1037AK-T146-R
Q701	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q702	8-729-041-37	s	TRANSISTOR 2SJ377 (TE16L)
Q1000	8-729-026-49	s	TRANSISTOR 2SA1037AK-T146-R
Q1001	8-729-026-49	s	TRANSISTOR 2SA1037AK-T146-R
Q1002	8-729-026-49	s	TRANSISTOR 2SA1037AK-T146-R
Q1003	8-729-026-49	s	TRANSISTOR 2SA1037AK-T146-R
Q1004	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1005	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1006	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1007	8-729-026-49	s	TRANSISTOR 2SA1037AK-T146-R
Q1008	8-729-026-49	s	TRANSISTOR 2SA1037AK-T146-R
Q1009	8-729-026-49	s	TRANSISTOR 2SA1037AK-T146-R
Q1010	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1011	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1012	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1013	1-801-806-11	s	TRANSISTOR DTC144EKA
Q1014	8-729-026-49	s	TRANSISTOR 2SA1037AK-T146-R
Q1015	1-801-806-11	s	TRANSISTOR DTC144EKA
Q1016	8-729-026-49	s	TRANSISTOR 2SA1037AK-T146-R
Q1017	1-801-806-11	s	TRANSISTOR DTC144EKA
Q1018	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1019	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1020	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1021	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1022	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1023	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1024	8-729-026-49	s	TRANSISTOR 2SA1037AK-T146-R
Q1025	8-729-026-49	s	TRANSISTOR 2SA1037AK-T146-R
Q1026	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1027	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1028	8-729-026-49	s	TRANSISTOR 2SA1037AK-T146-R
Q1029	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1030	8-729-026-49	s	TRANSISTOR 2SA1037AK-T146-R
Q1031	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1032	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1033	8-729-026-49	s	TRANSISTOR 2SA1037AK-T146-R
Q1034	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1035	1-801-806-11	s	TRANSISTOR DTC144EKA
Q1036	1-801-806-11	s	TRANSISTOR DTC144EKA
Q1037	1-801-806-11	s	TRANSISTOR DTC144EKA
Q1038	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1039	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1040	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6

(B BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q1041	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1042	8-729-026-49	s	TRANSISTOR 2SA1037AK-T146-R
Q1043	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1044	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1045	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1046	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1047	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q1048	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1049	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q1050	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q1051	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1052	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1053	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1054	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q1055	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q1056	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q1057	8-729-026-49	s	TRANSISTOR 2SA1037AK-T146-R
Q1058	8-729-900-53	s	TRANSISTOR DTC114EK
Q1059	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1060	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1061	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1062	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1063	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1064	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q1065	8-729-026-49	s	TRANSISTOR 2SA1037AK-T146-R
Q1066	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q1067	8-729-027-38	s	TRANSISTOR DTA144EKA-T146
Q4000	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q4001	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q4002	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q4003	8-729-900-53	s	TRANSISTOR DTC114EK
Q4004	8-729-900-53	s	TRANSISTOR DTC114EK
Q4005	8-729-027-23	s	TRANSISTOR DTA114EKA-T146
Q4006	8-729-900-53	s	TRANSISTOR DTC114EK
Q4007	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q4008	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q4009	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q4010	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q4011	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q4012	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q4013	8-729-027-23	s	TRANSISTOR DTA114EKA-T146
Q4014	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q4015	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q4016	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q4017	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q4018	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q4019	8-729-900-53	s	TRANSISTOR DTC114EK
Q4020	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q4021	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q4022	8-729-027-23	s	TRANSISTOR DTA114EKA-T146
Q4023	8-729-900-53	s	TRANSISTOR DTC114EK
Q4024	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q4025	1-801-806-11	s	TRANSISTOR DTC144EKA
Q4026	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q4027	8-729-026-49	s	TRANSISTOR 2SA1037AK-T146-R
Q4028	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q4029	8-729-120-28	s	TRANSISTOR 2SC1623-L5L6
Q4030	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q4031	8-729-216-22	s	TRANSISTOR 2SA1162-G
Q4032	8-729-216-22	s	TRANSISTOR 2SA1162-G

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q4033	8-729-216-22	s TRANSISTOR 2SA1162-G
Q4034	8-729-216-22	s TRANSISTOR 2SA1162-G
Q4035	8-729-216-22	s TRANSISTOR 2SA1162-G
Q4036	8-729-027-38	s TRANSISTOR DTA144EKA-T146
Q4037	8-729-027-38	s TRANSISTOR DTA144EKA-T146
Q4038	1-801-806-11	s TRANSISTOR DTC144EKA
Q4039	1-801-806-11	s TRANSISTOR DTC144EKA
Q6181	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6182	1-801-806-11	s TRANSISTOR DTC144EKA
Q6193	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6901	8-729-027-38	s TRANSISTOR DTA144EKA-T146
Q6902	8-729-027-38	s TRANSISTOR DTA144EKA-T146
Q6903	8-729-027-38	s TRANSISTOR DTA144EKA-T146
Q6904	1-801-806-11	s TRANSISTOR DTC144EKA
Q6905	8-729-203-31	s TRANSISTOR 2SJ106N-GR
Q6906	8-729-203-31	s TRANSISTOR 2SJ106N-GR
Q6907	1-801-806-11	s TRANSISTOR DTC144EKA
Q6908	1-801-806-11	s TRANSISTOR DTC144EKA
Q6909	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6910	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6911	8-729-026-49	s TRANSISTOR 2SA1037AK-T146-R
Q6912	8-729-027-38	s TRANSISTOR DTA144EKA-T146
Q8001	1-801-806-11	s TRANSISTOR DTC144EKA
Q8002	1-801-806-11	s TRANSISTOR DTC144EKA
R1	1-216-341-11	s RESISTOR,METAL FILM 0.22 1W
R3	1-216-644-11	s RESISTOR,CHIP 510 1/10W (2012)
R4	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R5	1-215-880-00	s RESISTOR,METAL FILM 10/2W
R100	1-216-041-00	s RESISTOR, CHIP 470 1/10W(2012)
R101	1-216-041-00	s RESISTOR, CHIP 470 1/10W(2012)
R103	1-216-681-11	s RESISTOR,CHIP 18K 1/10W (2012)
R105	1-216-681-11	s RESISTOR,CHIP 18K 1/10W (2012)
R106	1-218-756-11	s RESISTOR,CHIP 150K 1/10W(2012)
R107	1-216-697-91	s RESISTOR,CHIP 82K 1/10W
R108	1-216-666-11	s RESISTOR,CHIP 4.3K 1/10W(2012)
R109	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R110	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R111	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R112	1-216-017-91	s RESISTOR, CHIP 47 1/10W(2012)
R114	1-216-017-91	s RESISTOR, CHIP 47 1/10W(2012)
R115	1-216-017-91	s RESISTOR, CHIP 47 1/10W(2012)
R116	1-216-089-00	s RESISTOR CHIP 47K 1/10W(2012)
R117	1-216-017-91	s RESISTOR, CHIP 47 1/10W(2012)
R204	1-216-001-00	s RESISTOR, CHIP 10 1/10W(2012)
R205	1-216-001-00	s RESISTOR, CHIP 10 1/10W(2012)
R206	1-216-061-00	s RESISTOR CHIP 3.3K 1/10W(2012)
R207	1-216-295-00	s CONDUCTOR, CHIP (2012)
R208	1-216-061-00	s RESISTOR CHIP 3.3K 1/10W(2012)
R211	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R212	1-216-653-11	s RESISTOR,CHIP 1.2K 1/10W(2012)
R213	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R214	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R216	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R217	1-216-017-91	s RESISTOR, CHIP 47 1/10W(2012)
R218	1-216-017-91	s RESISTOR, CHIP 47 1/10W(2012)
R219	1-216-295-00	s CONDUCTOR, CHIP (2012)
R220	1-216-017-91	s RESISTOR, CHIP 47 1/10W(2012)
R221	1-216-295-00	s CONDUCTOR, CHIP (2012)
R222	1-216-017-91	s RESISTOR, CHIP 47 1/10W(2012)

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R223	1-216-017-91	s RESISTOR, CHIP 47 1/10W(2012)
R224	1-216-017-91	s RESISTOR, CHIP 47 1/10W(2012)
R225	1-216-017-91	s RESISTOR, CHIP 47 1/10W(2012)
R226	1-216-057-00	s RESISTOR CHIP 2.2K 1/10W(2012)
R230	1-216-067-00	s RESISTOR,CHIP 5.6K 1/10W(2012)
R231	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R232	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R233	1-216-061-00	s RESISTOR CHIP 3.3K 1/10W(2012)
R234	1-216-061-00	s RESISTOR CHIP 3.3K 1/10W(2012)
R235	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R236	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R238	1-216-295-00	s CONDUCTOR, CHIP (2012)
R239	1-216-295-00	s CONDUCTOR, CHIP (2012)
R240	1-216-295-00	s CONDUCTOR, CHIP (2012)
R244	1-216-295-00	s CONDUCTOR, CHIP (2012)
R245	1-216-295-00	s CONDUCTOR, CHIP (2012)
R246	1-216-295-00	s CONDUCTOR, CHIP (2012)
R248	1-216-295-00	s CONDUCTOR, CHIP (2012)
R249	1-216-295-00	s CONDUCTOR, CHIP (2012)
R250	1-216-295-00	s CONDUCTOR, CHIP (2012)
R251	1-216-295-00	s CONDUCTOR, CHIP (2012)
R252	1-216-295-00	s CONDUCTOR, CHIP (2012)
R253	1-216-295-00	s CONDUCTOR, CHIP (2012)
R254	1-216-295-00	s CONDUCTOR, CHIP (2012)
R255	1-216-295-00	s CONDUCTOR, CHIP (2012)
R256	1-216-295-00	s CONDUCTOR, CHIP (2012)
R259	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R262	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R263	1-216-681-11	s RESISTOR,CHIP 18K 1/10W (2012)
R269	1-216-295-00	s CONDUCTOR, CHIP (2012)
R270	1-216-295-00	s CONDUCTOR, CHIP (2012)
R271	1-216-295-00	s CONDUCTOR, CHIP (2012)
R272	1-216-295-00	s CONDUCTOR, CHIP (2012)
R274	1-216-295-00	s CONDUCTOR, CHIP (2012)
R275	1-216-295-00	s CONDUCTOR, CHIP (2012)
R276	1-216-295-00	s CONDUCTOR, CHIP (2012)
R278	1-216-295-00	s CONDUCTOR, CHIP (2012)
R281	1-216-295-00	s CONDUCTOR, CHIP (2012)
R282	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R283	1-216-631-11	s RESISTOR,CHIP 150 1/10W (2012)
R284	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R286	1-216-089-00	s RESISTOR CHIP 47K 1/10W(2012)
R287	1-216-017-91	s RESISTOR, CHIP 47 1/10W(2012)
R288	1-216-017-91	s RESISTOR, CHIP 47 1/10W(2012)
R289	1-216-017-91	s RESISTOR, CHIP 47 1/10W(2012)
R290	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R291	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R292	1-216-057-00	s RESISTOR CHIP 2.2K 1/10W(2012)
R293	1-216-017-91	s RESISTOR, CHIP 47 1/10W(2012)
R294	1-216-673-11	s RESISTOR,CHIP 8.2K 1/10W(2012)
R295	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R296	1-216-697-91	s RESISTOR,CHIP 82K 1/10W
R297	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R437	1-216-037-00	s RESISTOR,CHIP 330 1/10W(2012)
R438	1-216-037-00	s RESISTOR,CHIP 330 1/10W(2012)
R439	1-216-037-00	s RESISTOR,CHIP 330 1/10W(2012)
R440	1-216-029-00	s RESISTOR,CHIP 150 1/10W(2012)
R441	1-216-029-00	s RESISTOR,CHIP 150 1/10W(2012)
R442	1-216-029-00	s RESISTOR,CHIP 150 1/10W(2012)
R443	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R616	1-216-083-00	s RESISTOR CHIP 27K 1/10W(2012)
R617	1-216-097-00	s RESISTOR CHIP 100K 1/10W(2012)
R618	1-216-083-00	s RESISTOR CHIP 27K 1/10W(2012)
R619	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R620	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R621	1-216-113-00	s RESISTOR CHIP 470K 1/10W(2012)
R624	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R632	1-216-001-00	s RESISTOR, CHIP 10 1/10W(2012)
R633	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R634	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R635	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R636	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R637	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R700	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R701	1-216-681-11	s RESISTOR,CHIP 18K 1/10W (2012)
R702	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R703	1-216-071-00	s RESISTOR,CHIP 8.2K 1/10W(2012)
R704	1-216-085-00	s RESISTOR CHIP 33K 1/10W(2012)
R705	1-216-097-00	s RESISTOR CHIP 100K 1/10W(2012)
R706	1-216-097-00	s RESISTOR CHIP 100K 1/10W(2012)
R707	1-216-097-00	s RESISTOR CHIP 100K 1/10W(2012)
R708	1-216-097-00	s RESISTOR CHIP 100K 1/10W(2012)
R709	1-216-059-00	s RESISTOR,CHIP 2.7K 1/10W(2012)
R710	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R711	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R712	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R713	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R714	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R715	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R716	1-249-381-11	s RES,CARBON 1 (1/4W)
R717	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R718	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R719	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R720	1-216-001-00	s RESISTOR, CHIP 10 1/10W(2012)
R721	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R722	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R723	1-216-001-00	s RESISTOR, CHIP 10 1/10W(2012)
R724	1-216-001-00	s RESISTOR, CHIP 10 1/10W(2012)
R725	1-216-001-00	s RESISTOR, CHIP 10 1/10W(2012)
R726	1-216-001-00	s RESISTOR, CHIP 10 1/10W(2012)
R727	1-216-001-00	s RESISTOR, CHIP 10 1/10W(2012)
R728	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R729	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R830	1-216-369-00	s RESISTOR,METAL FILM 1.00 2W
R831	1-249-377-11	s RES,CARBON 0.47 1/4W
R832	1-249-377-11	s RES,CARBON 0.47 1/4W
R901	1-216-033-00	s RESISTOR,CHIP 220 1/10W(2012)
R902	1-216-033-00	s RESISTOR,CHIP 220 1/10W(2012)
R918	1-216-057-00	s RESISTOR CHIP 2.2K 1/10W(2012)
R919	1-216-033-00	s RESISTOR,CHIP 220 1/10W(2012)
R921	1-216-057-00	s RESISTOR CHIP 2.2K 1/10W(2012)
R922	1-216-033-00	s RESISTOR,CHIP 220 1/10W(2012)
R931	1-216-057-00	s RESISTOR CHIP 2.2K 1/10W(2012)
R932	1-216-033-00	s RESISTOR,CHIP 220 1/10W(2012)
R934	1-216-057-00	s RESISTOR CHIP 2.2K 1/10W(2012)
R935	1-216-033-00	s RESISTOR,CHIP 220 1/10W(2012)
R941	1-216-017-91	s RESISTOR,CHIP 47K 1/10W
R942	1-216-017-91	s RESISTOR,CHIP 47K 1/10W
R1000	1-216-681-11	s RESISTOR,CHIP 18K 1/10W (2012)
R1001	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1002	1-216-681-11	s RESISTOR,CHIP 18K 1/10W (2012)
R1003	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R1004	1-216-681-11	s RESISTOR,CHIP 18K 1/10W (2012)
R1005	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R1006	1-216-055-00	s RESISTOR CHIP 1.8K 1/10W(2012)
R1007	1-216-061-00	s RESISTOR CHIP 3.3K 1/10W(2012)
R1008	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R1009	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R1010	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R1011	1-216-681-11	s RESISTOR,CHIP 18K 1/10W (2012)
R1012	1-216-041-00	s RESISTOR, CHIP 470 1/10W(2012)
R1013	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R1014	1-216-069-00	s RESISTOR,CHIP 6.8K 1/10W(2012)
R1015	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R1016	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R1017	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R1018	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1019	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R1020	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1021	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R1022	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1023	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R1024	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1025	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R1026	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1027	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R1028	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1029	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R1030	1-216-045-00	s RESISTOR,CHIP 680 1/10W(2012)
R1031	1-216-045-00	s RESISTOR,CHIP 680 1/10W(2012)
R1032	1-216-045-00	s RESISTOR,CHIP 680 1/10W(2012)
R1033	1-216-009-91	s RESISTOR,CHIP 22 1/10W(2012)
R1034	1-216-009-91	s RESISTOR,CHIP 22 1/10W(2012)
R1035	1-216-069-00	s RESISTOR,CHIP 6.8K 1/10W(2012)
R1036	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R1037	1-216-069-00	s RESISTOR,CHIP 6.8K 1/10W(2012)
R1038	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R1039	1-216-097-00	s RESISTOR CHIP 100K 1/10W(2012)
R1040	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R1041	1-216-683-11	s RESISTOR,CHIP 22K 1/10W (2012)
R1043	1-216-057-00	s RESISTOR CHIP 2.2K 1/10W(2012)
R1044	1-216-065-91	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1045	1-216-057-00	s RESISTOR CHIP 2.2K 1/10W(2012)
R1046	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R1047	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1048	1-216-676-11	s RESISTOR,CHIP 11K 1/10W(2012)
R1049	1-216-661-11	s RESISTOR,CHIP 2.7K 1/10W(2012)
R1050	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1051	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1052	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R1053	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1054	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1055	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R1056	1-216-652-11	s RESISTOR,CHIP 1.1K 1/10W(2012)
R1057	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R1058	1-216-661-11	s RESISTOR,CHIP 2.7K 1/10W(2012)
R1059	1-216-653-11	s RESISTOR,CHIP 1.2K 1/10W(2012)
R1060	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R1062	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R1063	1-216-631-11	s RESISTOR,CHIP 150 1/10W (2012)

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1064	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R1065	1-216-661-11	s RESISTOR,CHIP 2.7K 1/10W(2012)
R1066	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1067	1-216-017-91	s RESISTOR, CHIP 47 1/10W(2012)
R1068	1-216-117-00	s RESISTOR,CHIP 680K 1/10W(2012)
R1069	1-216-017-91	s RESISTOR, CHIP 47 1/10W(2012)
R1070	1-216-021-00	s RESISTOR,CHIP 68 1/10W(2012)
R1071	1-216-053-00	s RESISTOR CHIP 1.5K 1/10W(2012)
R1073	1-216-041-00	s RESISTOR, CHIP 470 1/10W(2012)
R1074	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1075	1-216-055-00	s RESISTOR CHIP 1.8K 1/10W(2012)
R1076	1-216-055-00	s RESISTOR CHIP 1.8K 1/10W(2012)
R1077	1-216-055-00	s RESISTOR CHIP 1.8K 1/10W(2012)
R1078	1-216-055-00	s RESISTOR CHIP 1.8K 1/10W(2012)
R1079	1-216-079-00	s RESISTOR CHIP 18K 1/10W(2012)
R1080	1-216-077-00	s RESISTOR,CHIP 15K 1/10W(2012)
R1081	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R1082	1-216-055-00	s RESISTOR CHIP 1.8K 1/10W(2012)
R1083	1-216-001-00	s RESISTOR, CHIP 10 1/10W(2012)
R1084	1-216-043-91	s RESISTOR, CHIP 560 1/10W(2125)
R1085	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1086	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1087	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1088	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R1090	1-216-067-00	s RESISTOR,CHIP 5.6K 1/10W(2012)
R1091	1-216-077-00	s RESISTOR,CHIP 15K 1/10W(2012)
R1092	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1093	1-216-055-00	s RESISTOR CHIP 1.8K 1/10W(2012)
R1094	1-216-001-00	s RESISTOR, CHIP 10 1/10W(2012)
R1095	1-216-645-11	s RESISTOR,CHIP 560 1/10W(2012)
R1096	1-216-045-00	s RESISTOR,CHIP 680 1/10W(2012)
R1097	1-216-057-00	s RESISTOR CHIP 2.2K 1/10W(2012)
R1098	1-216-023-00	s RESISTOR,CHIP 82 1/10W(2012)
R1099	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R1100	1-216-053-00	s RESISTOR CHIP 1.5K 1/10W(2012)
R1101	1-216-053-00	s RESISTOR CHIP 1.5K 1/10W(2012)
R1102	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R1103	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R1104	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R1105	1-216-069-00	s RESISTOR,CHIP 6.8K 1/10W(2012)
R1109	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R1110	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R1111	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R1115	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R1116	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R1117	1-216-053-00	s RESISTOR CHIP 1.5K 1/10W(2012)
R1118	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R1119	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R1120	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R1121	1-216-065-91	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1122	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
R1123	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R1124	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R1126	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R1127	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R1129	1-216-676-11	s RESISTOR,CHIP 11K 1/10W(2012)
R1130	1-216-045-00	s RESISTOR,CHIP 680 1/10W(2012)
R1131	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R1132	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R1133	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1134	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R1135	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1136	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R1137	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R1138	1-216-061-00	s RESISTOR CHIP 3.3K 1/10W(2012)
R1139	1-216-037-00	s RESISTOR,CHIP 330 1/10W(2012)
R1140	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R1141	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1142	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R1143	1-216-065-91	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1144	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1145	1-216-673-11	s RESISTOR,CHIP 8.2K 1/10W(2012)
R1146	1-216-045-00	s RESISTOR,CHIP 680 1/10W(2012)
R1147	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R1148	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R1149	1-216-661-11	s RESISTOR,CHIP 2.7K 1/10W(2012)
R1150	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1151	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R1152	1-216-061-00	s RESISTOR CHIP 3.3K 1/10W(2012)
R1153	1-216-057-00	s RESISTOR CHIP 2.2K 1/10W(2012)
R1154	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R1155	1-216-681-11	s RESISTOR,CHIP 18K 1/10W (2012)
R1156	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R1157	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1158	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1159	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R1160	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1161	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R1162	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1163	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R1164	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R1165	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R1166	1-216-069-00	s RESISTOR,CHIP 6.8K 1/10W(2012)
R1167	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R1168	1-216-069-00	s RESISTOR,CHIP 6.8K 1/10W(2012)
R1169	1-216-061-00	s RESISTOR CHIP 3.3K 1/10W(2012)
R1170	1-216-069-00	s RESISTOR,CHIP 6.8K 1/10W(2012)
R1171	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R1172	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1173	1-216-061-00	s RESISTOR CHIP 3.3K 1/10W(2012)
R1174	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R1175	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R1176	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R1177	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R1178	1-216-681-11	s RESISTOR,CHIP 18K 1/10W (2012)
R1179	1-218-758-11	s RESISTOR,CHIP 180K 1/10W(2012)
R1180	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R1181	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R1182	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R1183	1-218-756-11	s RESISTOR,CHIP 150K 1/10W(2012)
R1184	1-216-065-91	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1185	1-216-065-91	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1186	1-216-065-91	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1187	1-216-065-91	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1188	1-216-065-91	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1189	1-216-065-91	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1190	1-216-071-00	s RESISTOR,CHIP 8.2K 1/10W(2012)
R1191	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R1192	1-216-077-00	s RESISTOR,CHIP 15K 1/10W(2012)
R1193	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1194	1-216-077-00	s RESISTOR,CHIP 15K 1/10W(2012)
R1195	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R1196	1-216-649-11	s RESISTOR,CHIP 820 1/10W (2012)
R1197	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R1198	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1199	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R1200	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R1201	1-216-649-11	s RESISTOR,CHIP 820 1/10W (2012)
R1202	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R1203	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1204	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R1205	1-216-649-11	s RESISTOR,CHIP 820 1/10W (2012)
R1206	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R1207	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1208	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R1209	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R1210	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R1211	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1212	1-216-645-11	s RESISTOR,CHIP 560 1/10W(2012)
R1213	1-216-641-11	s RESISTOR,CHIP 390 1/10W(2012)
R1214	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1215	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R1216	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1217	1-216-645-11	s RESISTOR,CHIP 560 1/10W(2012)
R1218	1-216-645-11	s RESISTOR,CHIP 560 1/10W(2012)
R1219	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R1220	1-216-043-91	s RESISTOR, CHIP 560 1/10W(2125)
R1221	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R1222	1-216-043-91	s RESISTOR, CHIP 560 1/10W(2125)
R1223	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R1224	1-216-043-91	s RESISTOR, CHIP 560 1/10W(2125)
R1225	1-216-113-00	s RESISTOR CHIP 470K 1/10W(2012)
R1226	1-216-081-00	s RESISTOR,CHIP 22K 1/10W(2012)
R1227	1-216-033-00	s RESISTOR,CHIP 220 1/10W(2012)
R1228	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R1229	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R1230	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R1231	1-216-037-00	s RESISTOR,CHIP 330 1/10W(2012)
R1232	1-216-033-00	s RESISTOR,CHIP 220 1/10W(2012)
R1233	1-216-061-00	s RESISTOR CHIP 3.3K 1/10W(2012)
R1234	1-216-653-11	s RESISTOR,CHIP 1.2K 1/10W(2012)
R1235	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R1236	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1237	1-216-057-00	s RESISTOR CHIP 2.2K 1/10W(2012)
R1238	1-216-062-00	s RESISTOR,CHIP 3.6K 1/10W(2012)
R1240	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1241	1-216-113-00	s RESISTOR CHIP 470K 1/10W(2012)
R1242	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1243	1-216-057-00	s RESISTOR CHIP 2.2K 1/10W(2012)
R1244	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R1247	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1249	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1250	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1251	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R1252	1-216-061-00	s RESISTOR CHIP 3.3K 1/10W(2012)
R1253	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1254	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1256	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1261	1-216-646-11	s RESISTOR,CHIP 620 1/10W (2012)
R1262	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1263	1-216-035-00	s RESISTOR, CHIP 270 1/10W(2012)
R1264	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R1265	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R1266	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R1267	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1269	1-216-057-00	s RESISTOR CHIP 2.2K 1/10W(2012)
R1270	1-216-045-00	s RESISTOR,CHIP 680 1/10W(2012)
R1271	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R1272	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R1273	1-216-047-91	s RESISTOR, CHIP 820 1/10W(2125)
R1274	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R1275	1-216-057-00	s RESISTOR CHIP 2.2K 1/10W(2012)
R1276	1-216-045-00	s RESISTOR,CHIP 680 1/10W(2012)
R1277	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R1278	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R1279	1-216-117-00	s RESISTOR,CHIP 680K 1/10W(2012)
R1280	1-216-066-00	s RESISTOR,CHIP 5.1K 1/10W(2012)
R1281	1-216-057-00	s RESISTOR CHIP 2.2K 1/10W(2012)
R1282	1-216-045-00	s RESISTOR,CHIP 680 1/10W(2012)
R1283	1-216-117-00	s RESISTOR,CHIP 680K 1/10W(2012)
R1284	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1286	1-216-089-00	s RESISTOR CHIP 47K 1/10W(2012)
R1287	1-216-037-00	s RESISTOR,CHIP 330 1/10W(2012)
R1288	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1289	1-216-037-00	s RESISTOR,CHIP 330 1/10W(2012)
R1290	1-216-077-00	s RESISTOR,CHIP 15K 1/10W(2012)
R1291	1-216-673-11	s RESISTOR,CHIP 8.2K 1/10W(2012)
R1292	1-216-668-11	s RESISTOR,CHIP 5.1K 1/10W(2012)
R1293	1-216-077-00	s RESISTOR,CHIP 15K 1/10W(2012)
R1294	1-216-077-00	s RESISTOR,CHIP 15K 1/10W(2012)
R1295	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1296	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1297	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R1298	1-216-666-11	s RESISTOR,CHIP 4.3K 1/10W(2012)
R1301	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1305	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R1306	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1308	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R1309	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1311	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1313	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R1314	1-216-093-00	s RESISTOR, CHIP 68K 1/10W(2012)
R1315	1-216-683-11	s RESISTOR,CHIP 22K 1/10W (2012)
R1316	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R1317	1-216-661-11	s RESISTOR,CHIP 2.7K 1/10W(2012)
R1318	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R1319	1-216-683-11	s RESISTOR,CHIP 22K 1/10W (2012)
R1320	1-216-661-11	s RESISTOR,CHIP 2.7K 1/10W(2012)
R1322	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1323	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R1324	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R1326	1-216-295-00	s CONDUCTOR, CHIP (2012)
R1327	1-218-758-11	s RESISTOR,CHIP 180K 1/10W(2012)
R4000	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R4001	1-216-681-11	s RESISTOR,CHIP 18K 1/10W (2012)
R4002	1-216-057-00	s RESISTOR CHIP 2.2K 1/10W(2012)
R4003	1-216-055-00	s RESISTOR CHIP 1.8K 1/10W(2012)
R4004	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R4005	1-216-061-00	s RESISTOR CHIP 3.3K 1/10W(2012)
R4006	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R4007	1-216-061-00	s RESISTOR,CHIP 3.3K 1/10W(2012)
R4008	1-216-053-00	s RESISTOR,CHIP 1.5K 1/10W(2012)
R4009	1-216-049-11	s RESISTOR,CHIP 1K 1/10W(2012)
R4010	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R4011	1-216-075-00	s RESISTOR,CHIP 12K 1/10W(2012)
R4012	1-216-063-91	s RESISTOR,CHIP 3.9K 1/10W(2125)
R4013	1-216-061-00	s RESISTOR,CHIP 3.3K 1/10W(2012)
R4014	1-216-081-00	s RESISTOR,CHIP 22K 1/10W(2012)
R4015	1-216-053-00	s RESISTOR,CHIP 1.5K 1/10W(2012)
R4016	1-216-085-00	s RESISTOR,CHIP 33K 1/10W(2012)
R4017	1-216-001-00	s RESISTOR,CHIP 10 1/10W(2012)
R4018	1-216-049-11	s RESISTOR,CHIP 1K 1/10W(2012)
R4019	1-216-069-00	s RESISTOR,CHIP 6.8K 1/10W(2012)
R4020	1-216-065-91	s RESISTOR,CHIP 4.7K 1/10W(2012)
R4021	1-216-049-11	s RESISTOR,CHIP 1K 1/10W(2012)
R4022	1-216-648-11	s RESISTOR,CHIP 750 1/10W (2012)
R4023	1-216-636-11	s RESISTOR,CHIP 240 1/10W (2012)
R4024	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R4025	1-216-057-00	s RESISTOR,CHIP 2.2K 1/10W(2012)
R4026	1-216-001-00	s RESISTOR,CHIP 10 1/10W(2012)
R4027	1-216-049-11	s RESISTOR,CHIP 1K 1/10W(2012)
R4028	1-216-049-11	s RESISTOR,CHIP 1K 1/10W(2012)
R4029	1-216-077-00	s RESISTOR,CHIP 15K 1/10W(2012)
R4030	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R4031	1-216-063-91	s RESISTOR,CHIP 3.9K 1/10W(2125)
R4032	1-216-065-91	s RESISTOR,CHIP 4.7K 1/10W(2012)
R4033	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R4034	1-216-049-11	s RESISTOR,CHIP 1K 1/10W(2012)
R4035	1-216-063-91	s RESISTOR,CHIP 3.9K 1/10W(2125)
R4036	1-216-053-00	s RESISTOR,CHIP 1.5K 1/10W(2012)
R4037	1-216-049-11	s RESISTOR,CHIP 1K 1/10W(2012)
R4038	1-216-049-11	s RESISTOR,CHIP 1K 1/10W(2012)
R4039	1-216-105-91	s RESISTOR,CHIP 220K 1/10W(2125)
R4040	1-216-097-00	s RESISTOR,CHIP 100K 1/10W(2012)
R4041	1-216-065-91	s RESISTOR,CHIP 4.7K 1/10W(2012)
R4042	1-216-081-00	s RESISTOR,CHIP 22K 1/10W(2012)
R4043	1-216-049-11	s RESISTOR,CHIP 1K 1/10W(2012)
R4044	1-216-049-11	s RESISTOR,CHIP 1K 1/10W(2012)
R4045	1-216-049-11	s RESISTOR,CHIP 1K 1/10W(2012)
R4046	1-216-049-11	s RESISTOR,CHIP 1K 1/10W(2012)
R4047	1-216-063-91	s RESISTOR,CHIP 3.9K 1/10W(2125)
R4048	1-216-650-11	s RESISTOR,CHIP 910 1/10W(2012)
R4049	1-216-626-11	s RESISTOR,CHIP 91 1/10W(2012)
R4050	1-216-057-00	s RESISTOR,CHIP 2.2K 1/10W(2012)
R4051	1-216-049-11	s RESISTOR,CHIP 1K 1/10W(2012)
R4052	1-216-049-11	s RESISTOR,CHIP 1K 1/10W(2012)
R4053	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R4054	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R4055	1-216-083-00	s RESISTOR,CHIP 27K 1/10W(2012)
R4056	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R4057	1-216-065-91	s RESISTOR,CHIP 4.7K 1/10W(2012)
R4058	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R4059	1-216-053-00	s RESISTOR,CHIP 1.5K 1/10W(2012)
R4060	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R4061	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R4062	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R4063	1-216-636-11	s RESISTOR,CHIP 240 1/10W (2012)
R4064	1-216-059-00	s RESISTOR,CHIP 2.7K 1/10W(2012)
R4065	1-216-051-00	s RESISTOR,CHIP 1.2K 1/10W(2012)
R4066	1-216-664-11	s RESISTOR,CHIP 3.6K 1/10W(2125)

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R4067	1-216-636-11	s RESISTOR,CHIP 240 1/10W (2012)
R4068	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R4069	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R4070	1-216-057-00	s RESISTOR,CHIP 2.2K 1/10W(2012)
R4071	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R4072	1-216-097-00	s RESISTOR,CHIP 100K 1/10W(2012)
R4073	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R4074	1-216-063-91	s RESISTOR,CHIP 3.9K 1/10W(2125)
R4078	1-216-091-00	s RESISTOR,CHIP 56K 1/10W(2012)
R4079	1-216-091-00	s RESISTOR,CHIP 56K 1/10W(2012)
R4080	1-216-097-00	s RESISTOR,CHIP 100K 1/10W(2012)
R4081	1-216-091-00	s RESISTOR,CHIP 56K 1/10W(2012)
R4082	1-216-097-00	s RESISTOR,CHIP 100K 1/10W(2012)
R4083	1-216-049-11	s RESISTOR,CHIP 1K 1/10W(2012)
R4084	1-216-049-11	s RESISTOR,CHIP 1K 1/10W(2012)
R4085	1-216-091-00	s RESISTOR,CHIP 56K 1/10W(2012)
R4086	1-216-295-00	s CONDUCTOR,CHIP (2012)
R4088	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R4089	1-216-081-00	s RESISTOR,CHIP 22K 1/10W(2012)
R4090	1-216-069-00	s RESISTOR,CHIP 6.8K 1/10W(2012)
R4091	1-216-049-11	s RESISTOR,CHIP 1K 1/10W(2012)
R4092	1-216-682-11	s RESISTOR,CHIP 20K 1/10W (2012)
R4093	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R4094	1-216-089-00	s RESISTOR,CHIP 47K 1/10W(2012)
R4095	1-216-033-00	s RESISTOR,CHIP 220 1/10W(2012)
R4096	1-216-133-00	s RESISTOR,CHIP 3.3M 1/10W(2012)
R4097	1-216-644-11	s RESISTOR,CHIP 510 1/10W (2012)
R4098	1-216-057-00	s RESISTOR,CHIP 2.2K 1/10W(2012)
R4099	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R4100	1-216-660-11	s RESISTOR,CHIP 2.4K 1/10W(2012)
R4101	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R4102	1-216-097-00	s RESISTOR,CHIP 100K 1/10W(2012)
R4103	1-216-059-00	s RESISTOR,CHIP 2.7K 1/10W(2012)
R4104	1-216-031-00	s RESISTOR,CHIP 180 1/10W(2012)
R4105	1-216-057-00	s RESISTOR,CHIP 2.2K 1/10W(2012)
R4106	1-216-071-00	s RESISTOR,CHIP 8.2K 1/10W(2012)
R4107	1-216-053-00	s RESISTOR,CHIP 1.5K 1/10W(2012)
R4109	1-216-631-11	s RESISTOR,CHIP 150 1/10W (2012)
R4110	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R4111	1-216-637-11	s RESISTOR,CHIP 270 1/10W (2012)
R4112	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R4113	1-216-631-11	s RESISTOR,CHIP 150 1/10W (2012)
R4114	1-216-045-00	s RESISTOR,CHIP 680 1/10W(2012)
R4115	1-216-043-91	s RESISTOR,CHIP 560 1/10W(2125)
R4116	1-216-045-00	s RESISTOR,CHIP 680 1/10W(2012)
R4117	1-216-045-00	s RESISTOR,CHIP 680 1/10W(2012)
R4118	1-216-645-11	s RESISTOR,CHIP 560 1/10W(2012)
R4119	1-216-645-11	s RESISTOR,CHIP 560 1/10W(2012)
R4120	1-216-067-00	s RESISTOR,CHIP 5.6K 1/10W(2012)
R4121	1-216-045-00	s RESISTOR,CHIP 680 1/10W(2012)
R4122	1-216-045-00	s RESISTOR,CHIP 680 1/10W(2012)
R4123	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R4124	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R4125	1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R4126	1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R4127	1-216-045-00	s RESISTOR,CHIP 680 1/10W(2012)
R4128	1-216-677-11	s RESISTOR,CHIP 12K 1/10W(2012)
R4129	1-216-677-11	s RESISTOR,CHIP 12K 1/10W(2012)
R4130	1-216-295-00	s CONDUCTOR,CHIP (2012)
R4131	1-216-295-00	s CONDUCTOR,CHIP (2012)

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R4132	1-216-295-00	s CONDUCTOR, CHIP (2012)
R4133	1-216-677-11	s RESISTOR,CHIP 12K 1/10W(2012)
R4134	1-216-677-11	s RESISTOR,CHIP 12K 1/10W(2012)
R4135	1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R4136	1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R4137	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R4138	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R4139	1-216-069-00	s RESISTOR,CHIP 6.8K 1/10W(2012)
R4140	1-216-683-11	s RESISTOR,CHIP 22K 1/10W (2012)
R4141	1-216-069-00	s RESISTOR,CHIP 6.8K 1/10W(2012)
R4142	1-216-677-11	s RESISTOR,CHIP 12K 1/10W(2012)
R4143	1-216-645-11	s RESISTOR,CHIP 560 1/10W(2012)
R4144	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R4145	1-216-673-11	s RESISTOR,CHIP 8.2K 1/10W(2012)
R4146	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R4147	1-216-097-00	s RESISTOR CHIP 100K 1/10W(2012)
R4148	1-216-091-00	s RESISTOR CHIP 56K 1/10W(2012)
R6164	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R6165	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R6201	1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R6202	1-216-693-11	s RESISTOR CHIP 56K 1/10W (2012)
R6203	1-216-683-11	s RESISTOR,CHIP 22K 1/10W (2012)
R6204	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R6205	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R6206	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R6207	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R6208	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R6209	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R6220	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R6941	1-216-081-00	s RESISTOR,CHIP 22K 1/10W(2012)
R6942	1-216-081-00	s RESISTOR,CHIP 22K 1/10W(2012)
R6943	1-216-121-00	s RESISTOR CHIP 1M 1/10W(2012)
R6944	1-216-121-00	s RESISTOR CHIP 1M 1/10W(2012)
R6945	1-216-121-00	s RESISTOR CHIP 1M 1/10W(2012)
R6946	1-216-295-00	s CONDUCTOR, CHIP (2012)
R6947	1-216-295-00	s CONDUCTOR, CHIP (2012)
R6948	1-216-295-00	s CONDUCTOR, CHIP (2012)
R6950	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R6952	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R6953	1-216-121-00	s RESISTOR CHIP 1M 1/10W(2012)
R6954	1-216-121-00	s RESISTOR CHIP 1M 1/10W(2012)
R6955	1-216-121-00	s RESISTOR CHIP 1M 1/10W(2012)
R6956	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R6957	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R6971	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R6985	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R6986	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R6987	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R6988	1-216-089-00	s RESISTOR CHIP 47K 1/10W(2012)
R6989	1-216-113-00	s RESISTOR CHIP 470K 1/10W(2012)
R6991	1-216-073-00	s RESISTOR,CHIP 10K 1/10W
R6992	1-216-073-00	s RESISTOR,CHIP 10K 1/10W
R8001	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R8002	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R8003	1-216-097-00	s RESISTOR CHIP 100K 1/10W(2012)
R8004	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R8005	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R8006	1-216-089-00	s RESISTOR CHIP 47K 1/10W(2012)
R8007	1-216-001-00	s RESISTOR, CHIP 10 1/10W(2012)
R8008	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R9001	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R9002	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R9003	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R9004	1-216-089-00	s RESISTOR CHIP 47K 1/10W(2012)
R9005	1-216-089-00	s RESISTOR CHIP 47K 1/10W(2012)
R9101	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R9102	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R9103	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R9104	1-216-089-00	s RESISTOR CHIP 47K 1/10W(2012)
R9105	1-216-089-00	s RESISTOR CHIP 47K 1/10W(2012)
R9106	1-216-089-00	s RESISTOR CHIP 47K 1/10W(2012)
R9107	1-216-097-00	s RESISTOR CHIP 100K 1/10W(2012)
R9108	1-216-089-00	s RESISTOR CHIP 47K 1/10W(2012)
R9109	1-216-097-00	s RESISTOR CHIP 100K 1/10W(2012)
R9110	1-216-065-91	s RESISTOR,CHIP 4.7K 1/10W(2012)
R9111	1-216-065-91	s RESISTOR,CHIP 4.7K 1/10W(2012)
R9301	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R9302	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R9311	1-216-025-11	s RESISTOR,CHIP 100 1/10W
RB200	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB201	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB202	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB203	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB204	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB205	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB206	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB207	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB208	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB209	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB210	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB211	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB212	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB213	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB214	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB215	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB216	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB218	1-233-575-11	s RES, CHIP NETWORK 22
RB219	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB220	1-233-575-11	s RES, CHIP NETWORK 22
RB221	1-233-575-11	s RES, CHIP NETWORK 22
RB222	1-233-575-11	s RES, CHIP NETWORK 22
RB223	1-233-575-11	s RES, CHIP NETWORK 22
RB224	1-233-575-11	s RES, CHIP NETWORK 22
RB225	1-233-575-11	s RES, CHIP NETWORK 22
RB226	1-233-575-11	s RES, CHIP NETWORK 22
RB227	1-233-575-11	s RES, CHIP NETWORK 22
RB228	1-233-575-11	s RES, CHIP NETWORK 22
RB229	1-233-575-11	s RES, CHIP NETWORK 22
RB230	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB236	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB237	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB238	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB239	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB240	1-233-576-11	s RESISTOR,CHIP NETWORK 100
RB241	1-233-576-11	s RESISTOR,CHIP NETWORK 100

(B BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RFC9	1-400-061-11	s BEAD, FERRITE (WITH CASE)
S1	1-553-510-11	s SWITCH, SLIDE
TH100	1-809-350-21	s THERMISTOR
X200	1-527-722-00	s CRYSTAL OSCILLATOR (14.31818MHz)
X500	1-579-886-11	s VIBRATOR, CRYSTAL (32.768kHz)
X501	1-781-659-11	s VIBRATOR, CRYSTAL (12.288MHz)
X4000	1-760-457-11	s VIBRATOR, CRYSTAL (VCO) (17.7MHz)
X4001	1-527-722-00	s CRYSTAL OSCILLATOR (14.31818MHz)
X4002	1-579-583-11	s OSCILLATOR, CERAMIC (503kHz)
X4003	1-577-611-11	s VIBRATOR, CERAMIC (500kHz)
X4004	1-767-147-11	s VIBRATOR, CRYSTAL (FOR VCO) (14.302MHz)

B1 BOARD (Included in B MOUNTED CIRCUIT BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C6101	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C
C6102	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C6103	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C6104	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C6105	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C
C6106	1-163-113-00	s CAPACITOR, CHIP CERAMIC 68PF/50
C6107	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C6108	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C6109	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C6110	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C6111	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C6112	1-107-781-11	s CAPACITOR, ELECT 47MF/16V(BP)
C6113	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C6114	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C6115	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C6116	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C6117	1-107-781-11	s CAPACITOR, ELECT 47MF/16V(BP)
C6118	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C6119	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C6120	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C
C6121	1-163-113-00	s CAPACITOR, CHIP CERAMIC 68PF/50
C6122	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C6123	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C6124	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C6125	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C6126	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C6127	1-107-781-11	s CAPACITOR, ELECT 47MF/16V(BP)
C6128	1-107-781-11	s CAPACITOR, ELECT 47MF/16V(BP)
C6129	1-107-781-11	s CAPACITOR, ELECT 47MF/16V(BP)
C6130	1-107-781-11	s CAPACITOR, ELECT 47MF/16V(BP)
C6131	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C6132	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C
C6133	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C
C6134	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C6135	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C6136	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C6137	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C6138	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C6139	1-163-263-11	s CAPACITOR CERAMIC 330PF/50V
C6140	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C6141	1-128-416-11	s CAPACITOR ELECT 100MF/16V(105C
C6146	1-163-253-11	s CAPACITOR CERAMIC 120PF/50V
C6147	1-163-253-11	s CAPACITOR CERAMIC 120PF/50V
C6148	1-163-253-11	s CAPACITOR CERAMIC 120PF/50V
C6200	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C6201	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C6401	1-115-153-11	s CAPACITOR, ELECT 4.7MF/16V(BP)
C6402	1-115-153-11	s CAPACITOR, ELECT 4.7MF/16V(BP)
C6403	1-115-153-11	s CAPACITOR, ELECT 4.7MF/16V(BP)
C6404	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C6405	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C6406	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C6407	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C6408	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C6409	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C6410	1-163-243-11	s CAPACITOR CHIP CERAMIC 47PF/50
C6411	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C6412	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C6413	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V

(B1 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C6414	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C6415	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C6416	1-163-243-11	s CAPACITOR CHIP CERAMIC 47PF/50
CN6101	1-815-258-11	o CONNECTOR, BOARD TO BOARD
D6101	8-719-977-95	s DIODE DTZ2.4B-TT11 (5MA)
D6102	8-719-977-95	s DIODE DTZ2.4B-TT11 (5MA)
D6103	8-719-977-95	s DIODE DTZ2.4B-TT11 (5MA)
D6104	8-719-977-95	s DIODE DTZ2.4B-TT11 (5MA)
IC6101	8-759-360-07	s IC BA7657F-E2
IC6102	8-759-383-61	s IC TL026CPS(E05)
IC6103	8-759-383-61	s IC TL026CPS(E05)
IC6104	8-759-970-89	s IC BA10358F
IC6106	8-759-366-35	s IC TC4W66F (TE12R)
IC6107	8-759-366-35	s IC TC4W66F (TE12R)
IC6401	8-759-239-55	s IC TC74HC123AF
IC6402	8-759-035-87	s IC SC7S00F
L101	1-406-580-11	s MICRO INDUCTOR 100UH
Q6101	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6102	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6103	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6104	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6105	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6106	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6107	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6108	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6109	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6110	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6111	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6112	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6113	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6114	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6200	1-801-806-11	s TRANSISTOR DTC144EKA
Q6201	1-801-806-11	s TRANSISTOR DTC144EKA
Q6401	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6402	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6403	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6404	8-729-026-49	s TRANSISTOR 2SA1037AK-T146-R
Q6405	8-729-026-49	s TRANSISTOR 2SA1037AK-T146-R
Q6406	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6407	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6408	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6409	8-729-026-49	s TRANSISTOR 2SA1037AK-T146-R
Q6410	8-729-026-49	s TRANSISTOR 2SA1037AK-T146-R
Q6411	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6412	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6413	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6414	8-729-026-49	s TRANSISTOR 2SA1037AK-T146-R
Q6415	8-729-026-49	s TRANSISTOR 2SA1037AK-T146-R
Q6416	8-729-026-49	s TRANSISTOR 2SA1037AK-T146-R
Q6417	8-729-026-49	s TRANSISTOR 2SA1037AK-T146-R
Q6418	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6419	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6420	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q6421	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
R6101	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R6102	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)

(B1 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R6103	1-216-649-11	s RESISTOR,CHIP 820 1/10W (2012)
R6104	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R6105	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R6106	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R6107	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R6108	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R6109	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R6110	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R6111	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R6112	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R6113	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R6114	1-216-642-11	s RESISTOR,CHIP 430 1/10W (2012)
R6115	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R6116	1-216-641-11	s RESISTOR,CHIP 390 1/10W(2012)
R6117	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
R6118	1-216-641-11	s RESISTOR,CHIP 390 1/10W(2012)
R6119	1-216-645-11	s RESISTOR,CHIP 560 1/10W(2012)
R6120	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R6121	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R6122	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R6123	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R6124	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R6125	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R6126	1-216-649-11	s RESISTOR,CHIP 820 1/10W (2012)
R6127	1-216-633-11	s RESISTOR,CHIP 180 1/10W (2012)
R6128	1-216-649-11	s RESISTOR,CHIP 820 1/10W (2012)
R6129	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
R6130	1-216-641-11	s RESISTOR,CHIP 390 1/10W(2012)
R6131	1-216-637-11	s RESISTOR,CHIP 270 1/10W (2012)
R6132	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R6133	1-216-645-11	s RESISTOR,CHIP 560 1/10W(2012)
R6134	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R6135	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R6136	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R6137	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R6138	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R6139	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R6140	1-216-649-11	s RESISTOR,CHIP 820 1/10W (2012)
R6141	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R6142	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R6143	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R6144	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R6145	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R6146	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R6147	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R6148	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R6149	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R6150	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R6151	1-216-642-11	s RESISTOR,CHIP 430 1/10W (2012)
R6152	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
R6153	1-216-641-11	s RESISTOR,CHIP 390 1/10W(2012)
R6154	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
R6155	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R6156	1-216-645-11	s RESISTOR,CHIP 560 1/10W(2012)
R6157	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R6158	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R6159	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R6160	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R6161	1-218-776-11	s RESISTOR CHIP 1M 1/10W (2012)

(B1 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R6162	1-218-776-11 s	RESISTOR,CHIP 1M 1/10W (2012)
R6163	1-218-776-11 s	RESISTOR,CHIP 1M 1/10W (2012)
R6166	1-216-619-11 s	RESISTOR,CHIP 47 1/10W(2012)
R6167	1-216-619-11 s	RESISTOR,CHIP 47 1/10W(2012)
R6168	1-216-619-11 s	RESISTOR,CHIP 47 1/10W(2012)
R6169	1-216-631-11 s	RESISTOR,CHIP 150 1/10W (2012)
R6170	1-216-631-11 s	RESISTOR,CHIP 150 1/10W (2012)
R6171	1-216-631-11 s	RESISTOR,CHIP 150 1/10W (2012)
R6172	1-216-675-11 s	RESISTOR,CHIP 10K 1/10W(2012)
R6173	1-216-675-11 s	RESISTOR,CHIP 10K 1/10W(2012)
R6174	1-216-681-11 s	RESISTOR,CHIP 18K 1/10W (2012)
R6175	1-216-657-11 s	RESISTOR,CHIP 1.8K 1/10W(2012)
R6176	1-216-669-11 s	RESISTOR,CHIP 5.6K 1/10W(2012)
R6177	1-216-675-11 s	RESISTOR,CHIP 10K 1/10W(2012)
R6178	1-216-675-11 s	RESISTOR,CHIP 10K 1/10W(2012)
R6179	1-216-675-11 s	RESISTOR,CHIP 10K 1/10W(2012)
R6180	1-216-677-11 s	RESISTOR,CHIP 12K 1/10W(2012)
R6181	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R6182	1-216-619-11 s	RESISTOR,CHIP 47 1/10W(2012)
R6183	1-216-629-11 s	RESISTOR,CHIP 120 1/10W (2012)
R6184	1-216-629-11 s	RESISTOR,CHIP 120 1/10W (2012)
R6185	1-216-629-11 s	RESISTOR,CHIP 120 1/10W(2012)
R6210	1-216-619-11 s	RESISTOR,CHIP 47 1/10W(2012)
R6211	1-216-645-11 s	RESISTOR,CHIP 560 1/10W(2012)
R6212	1-216-073-00 s	RESISTOR,CHIP 10K 1/10W(2012)
R6213	1-216-657-11 s	RESISTOR,CHIP 1.8K 1/10W(2012)
R6214	1-216-613-11 s	RESISTOR,CHIP 27 1/10W(2012)
R6215	1-216-649-11 s	RESISTOR,CHIP 820 1/10W (2012)
R6216	1-216-653-11 s	RESISTOR,CHIP 1.2K 1/10W(2012)
R6217	1-216-671-11 s	RESISTOR,CHIP 6.8K 1/10W(2012)
R6218	1-216-073-00 s	RESISTOR,CHIP 10K 1/10W(2012)
R6219	1-216-073-00 s	RESISTOR,CHIP 10K 1/10W(2012)
R6401	1-216-025-00 s	RESISTOR,CHIP 100 1/10W(2012)
R6402	1-216-049-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R6403	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R6404	1-216-661-11 s	RESISTOR,CHIP 2.7K 1/10W(2012)
R6405	1-216-025-00 s	RESISTOR,CHIP 100 1/10W(2012)
R6406	1-216-049-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R6407	1-216-661-11 s	RESISTOR,CHIP 2.7K 1/10W(2012)
R6408	1-216-025-00 s	RESISTOR,CHIP 100 1/10W(2012)
R6409	1-216-049-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R6410	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R6411	1-216-661-11 s	RESISTOR,CHIP 2.7K 1/10W(2012)
R6412	1-216-025-00 s	RESISTOR,CHIP 100 1/10W(2012)
R6413	1-216-049-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R6414	1-216-655-11 s	RESISTOR,CHIP 1.5K 1/10W(2012)
R6415	1-216-661-11 s	RESISTOR,CHIP 2.7K 1/10W(2012)
R6416	1-216-025-00 s	RESISTOR,CHIP 100 1/10W(2012)
R6417	1-216-049-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R6418	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R6419	1-216-661-11 s	RESISTOR,CHIP 2.7K 1/10W(2012)
R6420	1-216-025-00 s	RESISTOR,CHIP 100 1/10W(2012)
R6421	1-216-049-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R6422	1-216-009-00 s	RESISTOR,CHIP 22 1/10W (2012)
R6423	1-216-009-00 s	RESISTOR,CHIP 22 1/10W (2012)
R6424	1-216-009-00 s	RESISTOR,CHIP 22 1/10W (2012)
R6425	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R6426	1-216-679-11 s	RESISTOR,CHIP 15K 1/10W (2012)
R6427	1-216-677-11 s	RESISTOR,CHIP 12K 1/10W(2012)

(B1 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R6428	1-216-685-11 s	RESISTOR,CHIP 27K 1/10W(2012)
R6429	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R6431	1-216-661-11 s	RESISTOR,CHIP 2.7K 1/10W(2012)
R6432	1-216-655-11 s	RESISTOR,CHIP 1.5K 1/10W(2012)
R6433	1-216-659-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R6434	1-216-659-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R6435	1-216-675-11 s	RESISTOR,CHIP 10K 1/10W(2012)
R6436	1-216-677-11 s	RESISTOR,CHIP 12K 1/10W(2012)
----- F BOARD -----		
Ref. No. or Q'ty	Part No.	SP Description
1pc	1-680-712-11 o	PRINTED WIRING BOARD, F
C7001	△ 1-131-955-11 s	CAP, FILM METALLIZED 1.5MF
C7002	△ 1-131-955-11 s	CAP, FILM METALLIZED 1.5MF
CN7001	1-580-843-11 s	PIN,CONNECTOR(POWER)
F7001	△ 1-576-365-11 s	FUSE (15A/250V)
L7001	△ 1-433-843-11 s	TRANSFORMER, LINE FILTER
L7002	△ 1-433-843-11 s	TRANSFORMER, LINE FILTER
R7000	△ 1-220-825-11 s	RES, (SURGE RESISTANT) 330K
SFC4	△ 1-500-051-11 s	BEAD, FERRITE (WITH CASE)
VDR7001	△ 1-801-073-31 s	VARISTOR ERZV14D471

QA BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1270-443-A	o MOUNTED CIRCUIT BOARD, QA
C9501	1-126-964-11	s CAPACITOR, ELECT 10MF/50V
C9502	1-126-964-11	s CAPACITOR, ELECT 10MF/50V
C9503	1-102-129-00	s CAPACITOR, CERAMIC;50V/0.01MF
C9504	1-104-664-11	s CAPACITOR, ELECT 47MF/25V
C9505	1-104-664-11	s CAPACITOR, ELECT 47MF/25V
C9506	1-104-664-11	s CAPACITOR, ELECT 47MF/25V
C9507	1-104-664-11	s CAPACITOR, ELECT 47MF/25V
C9508	1-102-129-00	s CAPACITOR, CERAMIC;50V/0.01MF
C9509	1-104-664-11	s CAPACITOR, ELECT 47MF/25V
C9510	1-102-129-00	s CAPACITOR, CERAMIC;50V/0.01MF
C9511	1-102-129-00	s CAPACITOR, CERAMIC;50V/0.01MF
C9512	1-102-129-00	s CAPACITOR, CERAMIC;50V/0.01MF
CN9501	1-815-409-11	o CONNECTOR, PIN HEADER 44P
CN9502	1-566-849-11	s CONNECTOR, (S) TERMINAL 4P (Y/C IN)
CN9503	1-794-872-11	o CONNECTOR, BNC 2P (VIDEO IN/OUT)
D9501	8-719-110-17	s DIODE RD10ES-B2
D9502	8-719-110-17	s DIODE RD10ES-B2
D9503	8-719-110-17	s DIODE RD10ES-B2
D9504	8-719-110-17	s DIODE RD10ES-B2
D9505	8-719-110-17	s DIODE RD10ES-B2
J9501	1-566-822-21	s JACK ((AUDIO IN)
Q9501	8-729-119-78	s TRANSISTOR 2SC2785-HFE
Q9502	8-729-119-78	s TRANSISTOR 2SC2785-HFE
Q9503	8-729-119-78	s TRANSISTOR 2SC2785-HFE
R9501	1-215-394-00	s RESISTOR METAL FILM 75 1/4W
R9502	1-249-437-11	s RESISTOR, CARBON 47K 1/4W SMALL
R9503	1-249-437-11	s RESISTOR, CARBON 47K 1/4W SMALL
R9504	1-215-394-00	s RESISTOR METAL FILM 75 1/4W
R9505	1-215-394-00	s RESISTOR METAL FILM 75 1/4W
R9506	1-249-417-11	s RESISTOR, CARBON 1K 1/4W (SMALL)
R9507	1-249-417-11	s RESISTOR, CARBON 1K 1/4W (SMALL)
R9508	1-249-417-11	s RESISTOR, CARBON 1K 1/4W (SMALL)
R9510	1-249-437-11	s RESISTOR, CARBON 47K 1/4W SMALL
R9511	1-249-437-11	s RESISTOR, CARBON 47K 1/4W SMALL
R9512	1-247-843-11	s RESISTOR CARBON (SMALL) 3.3K
R9513	1-249-411-11	s RES, CARBON 330 1/4W SMALL
R9514	1-249-437-11	s RESISTOR, CARBON 47K 1/4W SMALL
R9515	1-249-437-11	s RESISTOR, CARBON 47K 1/4W SMALL
R9516	1-247-843-11	s RESISTOR CARBON (SMALL) 3.3K
R9517	1-249-411-11	s RES, CARBON 330 1/4W SMALL
R9518	1-249-437-11	s RESISTOR, CARBON 47K 1/4W SMALL
R9519	1-249-437-11	s RESISTOR, CARBON 47K 1/4W SMALL
R9520	1-247-843-11	s RESISTOR CARBON (SMALL) 3.3K
R9521	1-249-411-11	s RES, CARBON 330 1/4W SMALL

S BOARD

Ref. No. or Q'ty	Part No.	SP Description
4pcs	A-1391-080-A	o MOUNTED CIRCUIT BOARD, S
C1501	1-126-392-11	s CAPACITOR, CHIP ELECT 100MF/6.3V
C1502	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C1503	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C1504	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
CN1501	1-506-482-11	s PIN, CONNECTOR 3P
IC1501	8-759-947-34	s IC LM35DZ
IC1502	8-759-144-72	s IC UPC358G2-E2
R1501	1-216-627-11	s RESISTOR, CHIP 100 1/10W (2012)
R1502	1-216-659-11	s RESISTOR, CHIP 2.2K 1/10W (2012)
R1503	1-216-671-11	s RESISTOR, CHIP 6.8K 1/10W (2012)
R1504	1-216-025-00	s RESISTOR, CHIP 100 1/10W (2012)

T BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1391-081-A	o MOUNTED CIRCUIT BOARD, T
1pc	1-900-257-89	o CONNECTOR ASSY, SDN 4P
CN9001	1-815-408-11	o CONNECTOR 20P
CN9002	1-506-480-11	s PIN, CONNECTOR 15P
CN9003	1-506-473-11	s PIN, CONNECTOR 8P
CN9004	1-779-092-11	s PIN, CONNECTOR (PC BOARD) 10P
CN9005	1-564-241-11	s PIN, CONNECTOR (B4P-VH)
CN9006	1-580-838-11	o PIN, CONNECTOR (PC BOARD) 4P
CN9007	1-815-408-11	o CONNECTOR 20P
CN9008	1-564-596-11	o PLUG, CONNECTOR (15P)
CN9009	1-564-510-11	o PLUG, CONNECTOR (7P)
CN9011	1-506-599-11	o PIN, CONNECTOR 10P
CN9012	1-564-241-11	o PIN, CONNECTOR (B4P-VH)
CN9014	1-506-474-11	s PIN, CONNECTOR 9P
CN9015	1-506-474-11	s PIN, CONNECTOR 9P

YA BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1373-841-A	o MOUNTED CIRCUIT BOARD, YA
C8501	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C8502	1-125-838-11	s CAPACITOR, CERAMIC 2.2MF/6.3V
CN8501	1-506-486-11	s PIN, CONNECTOR 7P
D8502	8-719-158-15	s DIODE RD5.6SB
D8503	8-719-053-43	s LED SLR-325VCT31
D8504	8-719-060-27	s LED SLR-325MCT31
D8505	8-719-158-15	s DIODE RD5.6SB
D8506	8-719-158-15	s DIODE RD5.6SB
D8507	8-719-158-15	s DIODE RD5.6SB
D8508	8-719-158-15	s DIODE RD5.6SB
IC8501	8-748-035-08	s IC SBX8035-H
R8501	1-216-047-91	s RESISTOR, CHIP 820 1/10W(2125)
R8503	1-216-043-91	s RESISTOR, CHIP 560 1/10W(2125)
R8505	1-216-017-91	s RESISTOR, CHIP 47 1/10W(2012)
S8501	1-571-737-21	s SWITCH, KEY BOARD (REFLOW) (POWER)

△1-468-447-11 SWITCHING REGULATOR
(APS-132 M BOARD)

HEAT SINK A ASSY
2-434-993-21 SCREW (3X6), RS TIGHT SPRING WASHER

<DIODE>

D101	△8-719-073-32	DIODE D25XB60
D102	8-719-073-56	TRIAC BT139X-600
D104	8-719-073-58	DIODE 20JL2C41A
D105	8-719-073-58	DIODE 20JL2C41A

<TRANSISTOR>

Q100	8-729-035-65	TRANSISTOR 2SK2370(2)
Q101	8-729-035-65	TRANSISTOR 2SK2370(2)
Q102	8-729-035-65	TRANSISTOR 2SK2370(2)

<THERMISTOR>

THP100	1-809-789-61	THERMISTOR, POSITIVE
THP101	1-809-789-51	THERMISTOR, POSITIVE

HEAT SINK B ASSY

2-434-993-21 SCREW (3X6), RS TIGHT SPRINGWASHER

<TRANSISTOR>

Q502	8-729-035-65	TRANSISTOR 2SK2370(2)
Q503	8-729-035-65	TRANSISTOR 2SK2370(2)
Q702	8-729-035-65	TRANSISTOR 2SK2370(2)
Q703	8-729-035-65	TRANSISTOR 2SK2370(2)

HEAT SINK C ASSY

2-434-993-21 SCREW (3X6), RS TIGHT SPRINGWASHER
2-625-794-01 RUBBER (TO-3P), INSULATING

<DIODE>

D200	8-719-062-31	DIODE 20DL2C41A
D250	8-719-061-49	DIODE FCH20A10
D251	8-719-075-55	DIODE FCH30A06
D252	8-719-074-61	DIODE FCH30A04

<IC>

IC251	8-759-098-24	IC PQ30RV11
IC253	8-759-098-24	IC PQ30RV11
IC254	8-759-284-06	IC PQ30RV31

<TRANSISTOR>

Q204	8-729-047-67	TRANSISTOR 2SK3142-01
Q207	8-729-047-67	TRANSISTOR 2SK3142-01

HEAT SINK D ASSY

2-434-993-21 SCREW (3X6), RS TIGHT SPRINGWASHER

YB BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1373-842-A	o MOUNTED CIRCUIT BOARD, YB
CN8601	1-564-013-11	o PIN, CONNECTOR 3P
R8601	1-216-649-11	s RESISTOR, CHIP 820 1/10W (2012)
R8602	1-216-641-11	s RESISTOR, CHIP 390 1/10W (2012)
R8603	1-216-635-11	s RESISTOR, CHIP 220 1/10W (2012)
R8604	1-216-651-11	s RESISTOR, CHIP 1K 1/10W (2012)
S8601	1-571-737-21	s SWITCH, KEY BOARD (REFLOW) (MENU)
S8602	1-571-737-21	s SWITCH, KEY BOARD (REFLOW) (UP)
S8603	1-571-737-21	s SWITCH, KEY BOARD (REFLOW) (DOWN)
S8604	1-571-737-21	s SWITCH, KEY BOARD (REFLOW) (ENTER)

<TRANSISTOR>					C171	Δ1-113-924-91 CERAMIC	4700pF	20%	250V
Q105	8-729-047-46	TRANSISTOR	FS7KM-16A		C200	1-115-339-11 CERAMIC CHIP	0.1uF	10%	50V
Q152	8-729-039-41	TRANSISTOR	FS10KM-10		C201	1-117-279-51 ELECT	3900uF	20%	10V
Q153	8-729-039-41	TRANSISTOR	FS10KM-10		C202	1-117-350-91 ELECT	56uF	20%	35V
					C204	1-117-279-51 ELECT	3900uF	20%	10V
HEAT SINK E ASSY					C205	1-117-325-91 ELECT	330uF	20%	25V
2-434-993-21 SCREW (3X6), RS TIGHT SPRINGWASHER					C206	1-117-301-51 ELECT	820uF	20%	16V
<DIODE>					C207	1-115-339-11 CERAMIC CHIP	0.1uF	10%	50V
D400	8-719-073-58	DIODE	20JL2C41A		C208	1-107-904-11 ELECT	3.3uF	20%	50V
D401	8-719-073-58	DIODE	20JL2C41A		C209	1-163-037-11 CERAMIC CHIP	0.022uF	10%	50V
D604	8-719-077-10	DIODE	20FL2C41A		C210	1-117-247-91 ELECT	820uF	20%	6.3V
					C211	1-107-904-11 ELECT	3.3uF	20%	50V
					C212	1-117-247-91 ELECT	820uF	20%	6.3V
					C214	1-117-247-91 ELECT	820uF	20%	6.3V
					C215	1-117-301-51 ELECT	820uF	20%	16V
<CAPACITOR>					C250	1-115-339-11 CERAMIC CHIP	0.1uF	10%	50V
C100	Δ1-115-380-91	CERAMIC	100pF	10%	C252	1-117-276-51 ELECT	1500uF	20%	10V
C101	Δ1-115-380-91	CERAMIC	100pF	10%	C253	1-117-329-51 ELECT	1500uF	20%	25V
C102	Δ1-113-920-91	CERAMIC	2200pF	20%	C254	1-117-329-51 ELECT	1500uF	20%	25V
C103	Δ1-113-920-91	CERAMIC	2200pF	20%	C255	1-163-021-91 CERAMIC CHIP	0.01uF	10%	50V
C104	Δ1-131-955-51	FILM	1.5uF	10%	C256	1-117-344-51 ELECT	1000uF	20%	35V
C105	Δ1-125-933-51	FILM	1uF	10%	C257	1-163-021-91 CERAMIC CHIP	0.01uF	10%	50V
C107	Δ1-125-933-51	FILM	1uF	10%	C258	1-115-185-11 CERAMIC	0.033uF	10%	50V
C108	1-163-021-91	CERAMIC CHIP	0.01uF	10%	C259	1-163-021-91 CERAMIC CHIP	0.01uF	10%	50V
C109	1-127-822-51	FILM	1uF	10%	C260	1-117-266-91 ELECT	470uF	20%	10V
C110	1-127-822-51	FILM	1uF	10%	C261	1-117-325-91 ELECT	330uF	20%	25V
C111	1-127-822-51	FILM	1uF	10%	C262	1-117-328-51 ELECT	820uF	20%	25V
C112	1-165-127-11	CERAMIC	470pF	10%	C263	1-117-355-51 ELECT	560uF	20%	35V
C113	1-165-127-11	CERAMIC	470pF	10%	C264	1-115-339-11 CERAMIC CHIP	0.1uF	10%	50V
C114	1-117-716-51	FILM	2.2uF	10%	C268	1-115-339-11 CERAMIC CHIP	0.1uF	10%	50V
C115	1-131-942-11	ELECT	270uF	30%	C300	1-163-021-91 CERAMIC CHIP	0.01uF	10%	50V
C116	1-131-942-11	ELECT	270uF	30%	C301	1-115-339-11 CERAMIC CHIP	0.1uF	10%	50V
C117	1-113-920-11	CERAMIC	2200pF	20%	C302	1-107-823-11 CERAMIC CHIP	0.47uF	10%	16V
C118	1-115-339-11	CERAMIC CHIP	0.1uF	10%	C303	1-163-133-00 CERAMIC CHIP	470pF	5%	50V
C119	1-115-339-11	CERAMIC CHIP	0.1uF	10%	C304	1-163-275-11 CERAMIC CHIP	1000pF	5%	50V
C120	1-115-340-11	CERAMIC CHIP	0.22uF	10%	C305	1-163-275-11 CERAMIC CHIP	1000pF	5%	50V
C121	1-163-263-91	CERAMIC CHIP	330pF	5%	C306	1-163-275-11 CERAMIC CHIP	1000pF	5%	50V
C122	1-115-339-11	CERAMIC CHIP	0.1uF	10%	C307	1-107-909-11 ELECT	47uF	20%	50V
C123	1-164-645-11	CERAMIC	1000pF	10%	C308	1-115-339-11 CERAMIC CHIP	0.1uF	10%	50V
C124	1-163-275-11	CERAMIC CHIP	1000pF	5%	C309	1-115-339-11 CERAMIC CHIP	0.1uF	10%	50V
C125	1-163-021-91	CERAMIC CHIP	0.01uF	10%	C310	1-107-909-11 ELECT	47uF	20%	50V
C150	1-136-165-00	FILM	0.1uF	5%	C311	1-115-339-11 CERAMIC CHIP	0.1uF	10%	50V
C151	1-163-275-11	CERAMIC CHIP	1000pF	5%	C312	1-104-760-11 CERAMIC CHIP	0.047uF	10%	50V
C152	1-163-275-11	CERAMIC CHIP	1000pF	5%	C313	1-163-143-00 CERAMIC	1200pF	5%	50V
C153	1-163-275-11	CERAMIC CHIP	1000pF	5%	C314	1-115-339-11 CERAMIC CHIP	0.1uF	10%	50V
C154	1-107-909-11	ELECT	47uF	20%	C315	1-115-339-11 CERAMIC CHIP	0.1uF	10%	50V
C155	1-115-340-11	CERAMIC CHIP	0.22uF	10%	C316	1-115-339-11 CERAMIC CHIP	0.1uF	10%	50V
C156	1-117-351-91	ELECT	82uF	20%	C317	1-115-340-11 CERAMIC CHIP	0.22uF	10%	25V
C157	1-117-350-91	ELECT	56uF	20%	C400	1-115-339-11 CERAMIC CHIP	0.1uF	10%	50V
C158	1-163-133-00	CERAMIC CHIP	470pF	5%	C401	1-163-021-91 CERAMIC CHIP	0.01uF	10%	50V
C159	1-163-133-00	CERAMIC CHIP	470pF	5%	C402	1-115-339-11 CERAMIC CHIP	0.1uF	10%	50V
C160	1-115-339-11	CERAMIC CHIP	0.1uF	10%	C404	1-163-037-11 CERAMIC CHIP	0.022uF	10%	50V
C161	1-163-275-11	CERAMIC CHIP	1000pF	5%	C405	1-164-344-11 CERAMIC CHIP	0.068uF	10%	25V
C162	1-163-275-11	CERAMIC CHIP	1000pF	5%	C406	1-131-944-11 ELECT	470uF	20%	200V
C163	1-163-263-91	CERAMIC CHIP	330pF	5%	C407	1-163-021-91 CERAMIC CHIP	0.01uF	10%	50V
C164	1-163-017-00	CERAMIC CHIP	4700pF	10%	C408	1-163-021-91 CERAMIC CHIP	0.01uF	10%	50V
C165	1-117-350-91	ELECT	56uF	20%	C409	1-117-272-11 ELECT	180uF	20%	10V
C166	1-115-339-11	CERAMIC CHIP	0.1uF	10%	C410	1-107-906-11 ELECT	10uF	20%	50V
C167	1-127-761-11	FILM	0.0082uF	5%	C411	1-107-906-11 ELECT	10uF	20%	50V
C169	1-107-903-11	ELECT	2.2uF	20%	C412	1-107-906-11 ELECT	10uF	20%	50V
C170	Δ1-113-924-91	CERAMIC	4700pF	20%	C413	1-163-021-91 CERAMIC CHIP	0.01uF	10%	50V
					C414	1-163-021-91 CERAMIC CHIP	0.01uF	10%	50V
					C415	1-163-021-91 CERAMIC CHIP	0.01uF	10%	50V
					C416	1-163-021-91 CERAMIC CHIP	0.01uF	10%	50V
					C417	1-115-339-11 CERAMIC CHIP	0.1uF	10%	50V

C418	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V	C717	1-125-916-11	FILM	0.018uF	5%	1.25KV
C419	1-131-943-11	ELECT	1200uF	30%	200V	C718	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V
C420	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V						
C422	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V						
C423	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V			<CONNECTOR>			
C500	1-127-822-51	FILM	1uF	10%	420V	CN1	*1-691-960-11	PIN, CONNECTOR	3P		
C501	1-127-835-11	ELECT	22uF	20%	450V	CN2	*1-580-843-11	PIN, CONNECTOR	(POWER)		
C502	1-136-165-00	FILM	0.1uF	5%	50V	CN4	*1-691-757-11	PIN, CONNECTOR	8P		
C503	1-163-275-11	CERAMIC CHIP	1000pF	5%	50V	CN5	*1-770-291-11	PIN, CONNECTOR	7P		
C504	1-163-275-11	CERAMIC CHIP	1000pF	5%	50V	CN6	*1-564-507-11	PLUG, CONNECTOR	4P		
C505	1-163-275-11	CERAMIC CHIP	1000pF	5%	50V	CN7	*1-564-596-11	PLUG, CONNECTOR	15P		
C506	1-107-909-11	ELECT	47uF	20%	50V	CN8	*1-564-511-11	PLUG, CONNECTOR	8P		
C507	1-163-133-00	CERAMIC CHIP	470pF	5%	50V						
C508	1-163-133-00	CERAMIC CHIP	470pF	5%	50V						
C509	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V			<DIODE>			
C510	1-115-340-11	CERAMIC CHIP	0.22uF	10%	25V	D100	△8-719-055-11	DIODE	05NH46		
C511	1-163-275-11	CERAMIC CHIP	1000pF	5%	50V	D103	△8-719-055-11	DIODE	05NH46		
C512	1-163-275-11	CERAMIC CHIP	1000pF	5%	50V	D106	8-719-988-61	DIODE	1SS355TE-17		
C513	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V	D107	8-719-056-84	DIODE	UDZ-TE-17-7.5B		
C514	1-163-263-91	CERAMIC CHIP	330pF	5%	50V	D108	8-719-071-79	DIODE	HZU22B2TRF		
C515	1-115-340-11	CERAMIC CHIP	0.22uF	10%	25V	D109	8-719-988-61	DIODE	1SS355TE-17		
C516	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V	D110	8-719-313-16	DIODE	AU02A		
C517	1-131-924-11	FILM	0.068uF	5%	1.25KV	D111	8-719-313-16	DIODE	AU02A		
C518	1-131-924-11	FILM	0.068uF	5%	1.25KV	D112	8-719-988-61	DIODE	1SS355TE-17		
C519	1-131-924-11	FILM	0.068uF	5%	1.25KV	D113	8-719-063-70	DIODE	D1NL20U		
C600	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V	D114	8-719-063-70	DIODE	D1NL20U		
C601	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V	D116	8-719-071-81	DIODE	HZU30BTRF		
C602	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V	D150	8-719-988-61	DIODE	1SS355TE-17		
C604	1-131-945-11	ELECT	470uF	20%	100V	D151	8-719-988-61	DIODE	1SS355TE-17		
C605	1-104-760-11	CERAMIC CHIP	0.047uF	10%	50V	D152	8-719-988-61	DIODE	1SS355TE-17		
C606	1-164-344-11	CERAMIC CHIP	0.068uF	10%	25V	D153	8-719-063-70	DIODE	D1NL20U		
C607	1-131-945-11	ELECT	470uF	20%	100V	D154	8-719-988-61	DIODE	1SS355TE-17		
C608	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V	D155	8-719-988-61	DIODE	1SS355TE-17		
C609	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V	D201	8-719-063-70	DIODE	D1NL20U		
C610	1-107-906-11	ELECT	10uF	20%	50V	D202	8-719-063-70	DIODE	D1NL20U		
C611	1-117-272-11	ELECT	180uF	20%	10V	D203	8-719-988-61	DIODE	1SS355TE-17		
C612	1-107-906-11	ELECT	10uF	20%	50V	D205	8-719-071-94	DIODE	HRU0103ATRF		
C613	1-107-906-11	ELECT	10uF	20%	50V	D206	8-719-071-94	DIODE	HRU0103ATRF		
C614	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V	D253	8-719-988-61	DIODE	1SS355TE-17		
C615	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V	D254	8-719-988-61	DIODE	1SS355TE-17		
C616	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V	D255	8-719-988-61	DIODE	1SS355TE-17		
C617	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V	D256	8-719-988-61	DIODE	1SS355TE-17		
C618	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V	D257	8-719-988-61	DIODE	1SS355TE-17		
C619	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V	D258	8-719-988-61	DIODE	1SS355TE-17		
C620	1-131-945-11	ELECT	470uF	20%	100V	D259	8-719-988-61	DIODE	1SS355TE-17		
C621	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V	D260	8-719-988-61	DIODE	1SS355TE-17		
C623	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V	D261	8-719-988-61	DIODE	1SS355TE-17		
C624	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V	D262	8-719-988-61	DIODE	1SS355TE-17		
C700	1-127-822-51	FILM	1uF	10%	420V	D263	8-719-988-61	DIODE	1SS355TE-17		
C701	1-127-835-11	ELECT	22uF	20%	450V	D300	8-719-056-84	DIODE	UDZ-TE-17-7.5B		
C702	1-136-165-00	FILM	0.1uF	5%	50V	D301	8-719-071-94	DIODE	HRU0103ATRF		
C703	1-163-275-11	CERAMIC CHIP	1000pF	5%	50V	D302	8-719-071-94	DIODE	HRU0103ATRF		
C704	1-163-275-11	CERAMIC CHIP	1000pF	5%	50V	D303	8-719-056-84	DIODE	UDZ-TE-17-7.5B		
C705	1-163-275-11	CERAMIC CHIP	1000pF	5%	50V	D304	8-719-071-94	DIODE	HRU0103ATRF		
C706	1-107-909-11	ELECT	47uF	20%	50V	D305	8-719-988-61	DIODE	1SS355TE-17		
C707	1-163-133-00	CERAMIC CHIP	470pF	5%	50V	D306	8-719-988-61	DIODE	1SS355TE-17		
C708	1-163-133-00	CERAMIC CHIP	470pF	5%	50V	D307	8-719-988-61	DIODE	1SS355TE-17		
C709	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V	D402	8-719-071-63	DIODE	HZU6.2BTRF		
C710	1-115-340-11	CERAMIC CHIP	0.22uF	10%	25V	D403	8-719-988-61	DIODE	1SS355TE-17		
C711	1-163-275-11	CERAMIC CHIP	1000pF	5%	50V	D404	8-719-988-61	DIODE	1SS355TE-17		
C712	1-163-275-11	CERAMIC CHIP	1000pF	5%	50V	D405	8-719-988-61	DIODE	1SS355TE-17		
C713	1-115-339-11	CERAMIC CHIP	0.1uF	10%	50V	D406	8-719-071-63	DIODE	HZU6.2BTRF		
C714	1-163-263-91	CERAMIC CHIP	330pF	5%	50V	D407	8-719-988-61	DIODE	1SS355TE-17		
C715	1-115-340-11	CERAMIC CHIP	0.22uF	10%	25V	D408	8-719-988-61	DIODE	1SS355TE-17		
C716	1-125-916-11	FILM	0.018uF	5%	1.25KV	D409	8-719-988-61	DIODE	1SS355TE-17		

R306	1-260-130-91 CARBON	390K	5%	1/2W	R429	1-216-081-00 RES,CHIP	22K	5%	1/10W
R307	1-260-130-91 CARBON	390K	5%	1/2W	R430	1-216-073-00 RES,CHIP	10K	5%	1/10W
R309	1-216-097-91 RES,CHIP	100K	5%	1/10W	R431	1-216-081-00 RES,CHIP	22K	5%	1/10W
R310	1-216-081-00 RES,CHIP	22K	5%	1/10W	R433	1-208-830-11 RES,CHIP	100K	0.5%	1/10W
R311	1-260-130-91 CARBON	390K	5%	1/2W	R434	1-216-085-00 RES,CHIP	33K	5%	1/10W
R312	1-260-130-91 CARBON	390K	5%	1/2W	R436	1-216-073-00 RES,CHIP	10K	5%	1/10W
R313	1-216-061-00 RES,CHIP	3.3K	5%	1/10W	R437	1-216-073-00 RES,CHIP	10K	5%	1/10W
R314	1-216-052-00 RES,CHIP	1.3K	5%	1/10W	R438	1-216-049-11 RES,CHIP	1K	5%	1/10W
R315	1-216-073-00 RES,CHIP	10K	5%	1/10W	R439	1-216-073-00 RES,CHIP	10K	5%	1/10W
R316	1-216-062-00 RES,CHIP	3.6K	5%	1/10W	R441	1-214-924-00 METAL	300K	1%	1/2W
R317	1-216-121-91 RES,CHIP	1M	5%	1/10W	R442	1-214-900-00 METAL	30K	1%	1/2W
R318	1-216-081-00 RES,CHIP	22K	5%	1/10W	R443	1-208-783-11 RES,CHIP	1.1K	0.5%	1/10W
R319	1-216-105-91 RES,CHIP	220K	5%	1/10W	R444	1-208-798-11 RES,CHIP	4.7K	0.5%	1/10W
R320	1-216-065-91 RES,CHIP	4.7K	5%	1/10W	R445	1-216-073-00 RES,CHIP	10K	5%	1/10W
R321	1-249-413-11 CARBON	470	5%	1/4W	R446	1-216-049-11 RES,CHIP	1K	5%	1/10W
R322	1-216-049-11 RES,CHIP	1K	5%	1/10W	R447	1-208-805-11 RES,CHIP	9.1K	0.5%	1/10W
R323	1-216-073-00 RES,CHIP	10K	5%	1/10W	R448	1-216-655-11 METAL	1.5K	0.5%	1/10W
R324	1-249-393-11 CARBON	10	5%	1/4W	R449	1-216-073-00 RES,CHIP	10K	5%	1/10W
R325	1-216-057-00 RES,CHIP	2.2K	5%	1/10W	R450	1-216-049-11 RES,CHIP	1K	5%	1/10W
R326	1-216-101-00 RES,CHIP	150K	5%	1/10W	R451	1-242-914-11 CEMENT	100	5%	5W
R327	1-216-081-00 RES,CHIP	22K	5%	1/10W	R452	1-208-806-11 RES,CHIP	10K	0.5%	1/10W
R328	1-216-065-91 RES,CHIP	4.7K	5%	1/10W	R453	1-216-655-11 METAL	1.5K	0.5%	1/10W
R329	1-260-128-11 CARBON	270K	5%	1/2W	R454	1-208-830-11 RES,CHIP	100K	0.5%	1/10W
R339	1-260-128-11 CARBON	270K	5%	1/2W	R455	1-208-830-11 RES,CHIP	100K	0.5%	1/10W
R340	1-216-049-11 RES,CHIP	1K	5%	1/10W	R456	1-216-073-00 RES,CHIP	10K	5%	1/10W
R341	1-216-042-00 RES,CHIP	510	5%	1/10W	R457	1-208-830-11 RES,CHIP	100K	0.5%	1/10W
R342	1-216-073-00 RES,CHIP	10K	5%	1/10W	R459	1-208-802-11 RES,CHIP	6.8K	0.5%	1/10W
R343	1-216-077-91 RES,CHIP	15K	5%	1/10W	R460	1-242-916-11 CEMENT	16K	5%	5W
R344	1-214-929-00 METAL	470K	1%	1/2W	R461	1-216-113-00 RES,CHIP	470K	5%	1/10W
R345	1-214-929-00 METAL	470K	1%	1/2W	R462	1-242-916-11 CEMENT	16K	5%	5W
R346	1-208-799-11 RES,CHIP	5.1K	0.5%	1/10W	R465	1-216-389-91 METAL OXIDE	1	5%	3W
R347	1-216-037-00 RES,CHIP	330	5%	1/10W	R466	1-216-389-91 METAL OXIDE	1	5%	3W
R348	1-216-073-00 RES,CHIP	10K	5%	1/10W	R467	1-242-916-11 CEMENT	16K	5%	5W
R349	1-247-791-91 CARBON	22	5%	1/4W	R468	1-242-914-11 CEMENT	100	5%	5W
R351	1-216-065-91 RES,CHIP	4.7K	5%	1/10W	R469	1-242-914-11 CEMENT	100	5%	5W
R352	1-216-113-00 RES,CHIP	470K	5%	1/10W	R500	1-247-807-31 CARBON	100	5%	1/4W
R400	1-216-065-91 RES,CHIP	4.7K	5%	1/10W	R501	1-249-401-11 CARBON	47	5%	1/4W
R401	1-216-065-91 RES,CHIP	4.7K	5%	1/10W	R502	1-216-073-00 RES,CHIP	10K	5%	1/10W
R402	1-216-049-11 RES,CHIP	1K	5%	1/10W	R503	1-216-037-00 RES,CHIP	330	5%	1/10W
R403	1-216-081-00 RES,CHIP	22K	5%	1/10W	R504	1-208-766-11 RES,CHIP	220	0.5%	1/10W
R404	1-216-065-91 RES,CHIP	4.7K	5%	1/10W	R505	1-216-065-91 RES,CHIP	4.7K	5%	1/10W
R405	1-216-081-00 RES,CHIP	22K	5%	1/10W	R506	1-216-065-91 RES,CHIP	4.7K	5%	1/10W
R406	1-216-070-00 RES,CHIP	7.5K	5%	1/10W	R507	1-216-081-00 RES,CHIP	22K	5%	1/10W
R407	1-216-073-00 RES,CHIP	10K	5%	1/10W	R508	1-216-308-00 RES,CHIP	4.7	5%	1/10W
R408	1-216-065-91 RES,CHIP	4.7K	5%	1/10W	R509	1-216-308-00 RES,CHIP	4.7	5%	1/10W
R409	1-216-049-11 RES,CHIP	1K	5%	1/10W	R510	1-216-073-00 RES,CHIP	10K	5%	1/10W
R410	1-216-049-11 RES,CHIP	1K	5%	1/10W	R511	1-216-061-00 RES,CHIP	3.3K	5%	1/10W
R411	1-216-081-00 RES,CHIP	22K	5%	1/10W	R512	1-216-049-11 RES,CHIP	1K	5%	1/10W
R412	1-214-914-11 METAL	110K	1%	1/2W	R513	1-216-081-00 RES,CHIP	22K	5%	1/10W
R413	1-214-914-11 METAL	110K	1%	1/2W	R514	1-216-081-00 RES,CHIP	22K	5%	1/10W
R414	1-208-795-11 RES,CHIP	3.6K	0.5%	1/10W	R515	1-217-625-00 METAL PLATE	0.05	10%	2W F
R415	1-216-057-00 RES,CHIP	2.2K	5%	1/10W	R516	1-216-081-00 RES,CHIP	22K	5%	1/10W
R416	1-208-782-11 RES,CHIP	1K	0.5%	1/10W	R517	1-216-073-00 RES,CHIP	10K	5%	1/10W
R417	1-216-065-91 RES,CHIP	4.7K	5%	1/10W	R600	1-216-065-91 RES,CHIP	4.7K	5%	1/10W
R418	1-208-782-11 RES,CHIP	1K	0.5%	1/10W	R601	1-216-065-91 RES,CHIP	4.7K	5%	1/10W
R419	1-208-782-11 RES,CHIP	1K	0.5%	1/10W	R602	1-216-049-11 RES,CHIP	1K	5%	1/10W
R420	1-208-806-11 RES,CHIP	10K	0.5%	1/10W	R603	1-216-081-00 RES,CHIP	22K	5%	1/10W
R421	1-217-625-00 METAL PLATE	0.05	10%	2W F	R604	1-216-065-91 RES,CHIP	4.7K	5%	1/10W
R422	1-208-807-11 RES,CHIP	11K	0.5%	1/10W	R605	1-216-081-00 RES,CHIP	22K	5%	1/10W
R423	1-216-105-91 RES,CHIP	220K	5%	1/10W	R606	1-216-073-00 RES,CHIP	10K	5%	1/10W
R424	1-216-061-00 RES,CHIP	3.3K	5%	1/10W	R607	1-216-073-00 RES,CHIP	10K	5%	1/10W
R425	1-216-061-00 RES,CHIP	3.3K	5%	1/10W	R608	1-216-065-91 RES,CHIP	4.7K	5%	1/10W
R426	1-216-081-00 RES,CHIP	22K	5%	1/10W	R609	1-216-049-11 RES,CHIP	1K	5%	1/10W
R427	1-216-089-91 RES,CHIP	47K	5%	1/10W	R610	1-216-049-11 RES,CHIP	1K	5%	1/10W
R428	1-216-049-11 RES,CHIP	1K	5%	1/10W	R611	1-216-081-00 RES,CHIP	22K	5%	1/10W

R612	1-215-459-00 METAL	39K	1%	1/4W		<VARIABLE RESISTOR>
R613	1-215-457-00 METAL	33K	1%	1/4W		
R614	1-208-795-11 RES,CHIP	3.6K	0.5%	1/10W	RV150	1-241-764-11 RES,ADJ,CERMET 10K
R615	1-216-057-00 RES,CHIP	2.2K	5%	1/10W	RV201	1-241-762-11 RES,ADJ,CERMET 2.2K
R616	1-208-782-11 RES,CHIP	1K	0.5%	1/10W	RV250	1-241-762-11 RES,ADJ,CERMET 2.2K
					RV300	1-241-762-11 RES,ADJ,CERMET 2.2K
					RV400	1-241-759-11 RES,ADJ,CERMET 220
R617	1-216-065-91 RES,CHIP	4.7K	5%	1/10W		
R618	1-208-782-11 RES,CHIP	1K	0.5%	1/10W	RV401	1-241-762-11 RES,ADJ,CERMET 2.2K
R619	1-208-782-11 RES,CHIP	1K	0.5%	1/10W	RV402	1-241-760-11 RES,ADJ,CERMET 470
R620	1-208-806-11 RES,CHIP	10K	0.5%	1/10W	RV500	1-241-764-11 RES,ADJ,CERMET 10K
R621	1-217-625-00 METAL PLATE	0.05	10%	2W F	RV600	1-241-760-11 RES,ADJ,CERMET 470
					RV601	1-241-762-11 RES,ADJ,CERMET 2.2K
R622	1-208-806-11 RES,CHIP	10K	0.5%	1/10W		
R623	1-216-105-91 RES,CHIP	220K	5%	1/10W	RV602	1-241-760-11 RES,ADJ,CERMET 470
R624	1-216-061-00 RES,CHIP	3.3K	5%	1/10W	RV700	1-241-764-11 RES,ADJ,CERMET 10K
R625	1-216-061-00 RES,CHIP	3.3K	5%	1/10W		
R626	1-216-081-00 RES,CHIP	22K	5%	1/10W		
						<TRANSFORMER>
R627	1-216-089-91 RES,CHIP	47K		1/10W	T101	1-435-218-11 TRANSFORMER, CONVERTOR
R628	1-216-049-11 RES,CHIP	1K	5%	1/10W	T102	1-435-219-11 TRANSFORMER, CONVERTOR
R629	1-216-081-00 RES,CHIP	22K	5%	1/10W	T105	1-426-931-21 TRANSFORMER, DRIVE
R630	1-216-073-00 RES,CHIP	10K	5%	1/10W	T501	1-435-216-11 TRANSFORMER, CONVERTOR
R631	1-216-081-00 RES,CHIP	22K	5%	1/10W	T502	1-426-931-21 TRANSFORMER, DRIVE
R632	1-208-816-11 RES,CHIP	27K	0.5%	1/10W	T701	1-435-217-11 TRANSFORMER, CONVERTOR
R633	1-216-085-00 RES,CHIP	33K	5%	1/10W	T702	1-426-931-21 TRANSFORMER, DRIVE
R635	1-216-073-00 RES,CHIP	10K	5%	1/10W		
R636	1-216-073-00 RES,CHIP	10K	5%	1/10W		
R637	1-216-049-11 RES,CHIP	1K	5%	1/10W		
						<VARISTOR>
R638	1-216-073-00 RES,CHIP	10K	5%	1/10W	VDR100	△1-809-909-22 VARISTOR NV270D03-TB2
R640	1-214-914-11 METAL	110K	1%	1/2W	VDR101	△1-801-625-21 VARISTOR 470NR10D
R641	1-215-456-00 METAL	30K	1%	1/4W	VDR102	△1-801-625-21 VARISTOR 470NR10D
R642	1-208-795-11 RES,CHIP	3.6K	0.5%	1/10W	VDR103	△1-809-909-22 VARISTOR NV270D03-TB2
R643	1-208-798-11 RES,CHIP	4.7K	0.5%	1/10W		
R644	1-216-073-00 RES,CHIP	10K	5%	1/10W		
R645	1-216-049-11 RES,CHIP	1K	5%	1/10W		
R646	1-208-792-11 RES,CHIP	2.7K	0.5%	1/10W		
R647	1-216-655-11 METAL	1.5K	0.5%	1/10W		
R648	1-216-073-00 RES,CHIP	10K	5%	1/10W		
R649	1-216-049-11 RES,CHIP	1K	5%	1/10W		
R650	1-242-913-11 CEMENT	15	5%	5W		
R651	1-208-806-11 RES,CHIP	10K	0.5%	1/10W		
R652	1-216-655-11 METAL	1.5K	0.5%	1/10W		
R653	1-208-832-11 RES,CHIP	120K	0.5%	1/10W		
R654	1-208-832-11 RES,CHIP	120K	0.5%	1/10W		
R655	1-216-073-00 RES,CHIP	10K	5%	1/10W		
R658	1-208-810-11 RES,CHIP	15K	0.5%	1/10W		
R659	1-242-915-11 CEMENT	2.7K	5%	5W		
R660	1-216-113-00 RES,CHIP	470K	5%	1/10W		
R661	1-242-915-11 CEMENT	2.7K	5%	5W		
R662	1-242-913-11 CEMENT	15	5%	5W		
R700	1-247-807-31 CARBON	100	5%	1/4W		
R701	1-249-401-11 CARBON	47	5%	1/4W		
R703	1-216-073-00 RES,CHIP	10K	5%	1/10W		
R704	1-208-768-11 RES,CHIP	270	0.5%	1/10W		
R705	1-208-766-11 RES,CHIP	220	0.5%	1/10W		
R706	1-216-065-91 RES,CHIP	4.7K	5%	1/10W		
R707	1-216-065-91 RES,CHIP	4.7K	5%	1/10W		
R708	1-216-081-00 RES,CHIP	22K	5%	1/10W		
R709	1-216-308-00 RES,CHIP	4.7	5%	1/10W		
R710	1-216-308-00 RES,CHIP	4.7	5%	1/10W		
R711	1-216-073-00 RES,CHIP	10K	5%	1/10W		
R712	1-216-049-11 RES,CHIP	1K	5%	1/10W		
R713	1-216-061-00 RES,CHIP	3.3K	5%	1/10W		
R714	1-216-081-00 RES,CHIP	22K	5%	1/10W		
R715	1-216-081-00 RES,CHIP	22K	5%	1/10W		
R716	1-217-625-00 METAL PLATE	0.05	10%	2W F		
R717	1-216-689-11 RES,CHIP	39K	5%	1/10W		
R718	1-216-073-00 RES,CHIP	10K	5%	1/10W		

6-4. Supplied Accessories

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-476-545-11	s REMOTE COMMANDER (RM-42B)
1pc	9-900-029-01	s BATTERY COVER (RM-42B)
1pc	△ 1-534-827-14	s CORD, POWER (10A/125V) (US/CND)
1pc	△ 1-590-151-11	s CORD SET, POWER (10A/250V) (UK, Ireland, Australia, Newzealand)
1pc	△ 1-777-649-11	s CORD POWER (10A/250V) (Continental Europe)
1pc	4-080-938-01	s OPERATING, INSTRUCTIONS (JAPANESE, ENGLISH, FRENCH, GERMAN, SPANISH, ITALIAN, SIMPLIFIED CHINESE)