


1. Exploded View & Part List

Exploded View

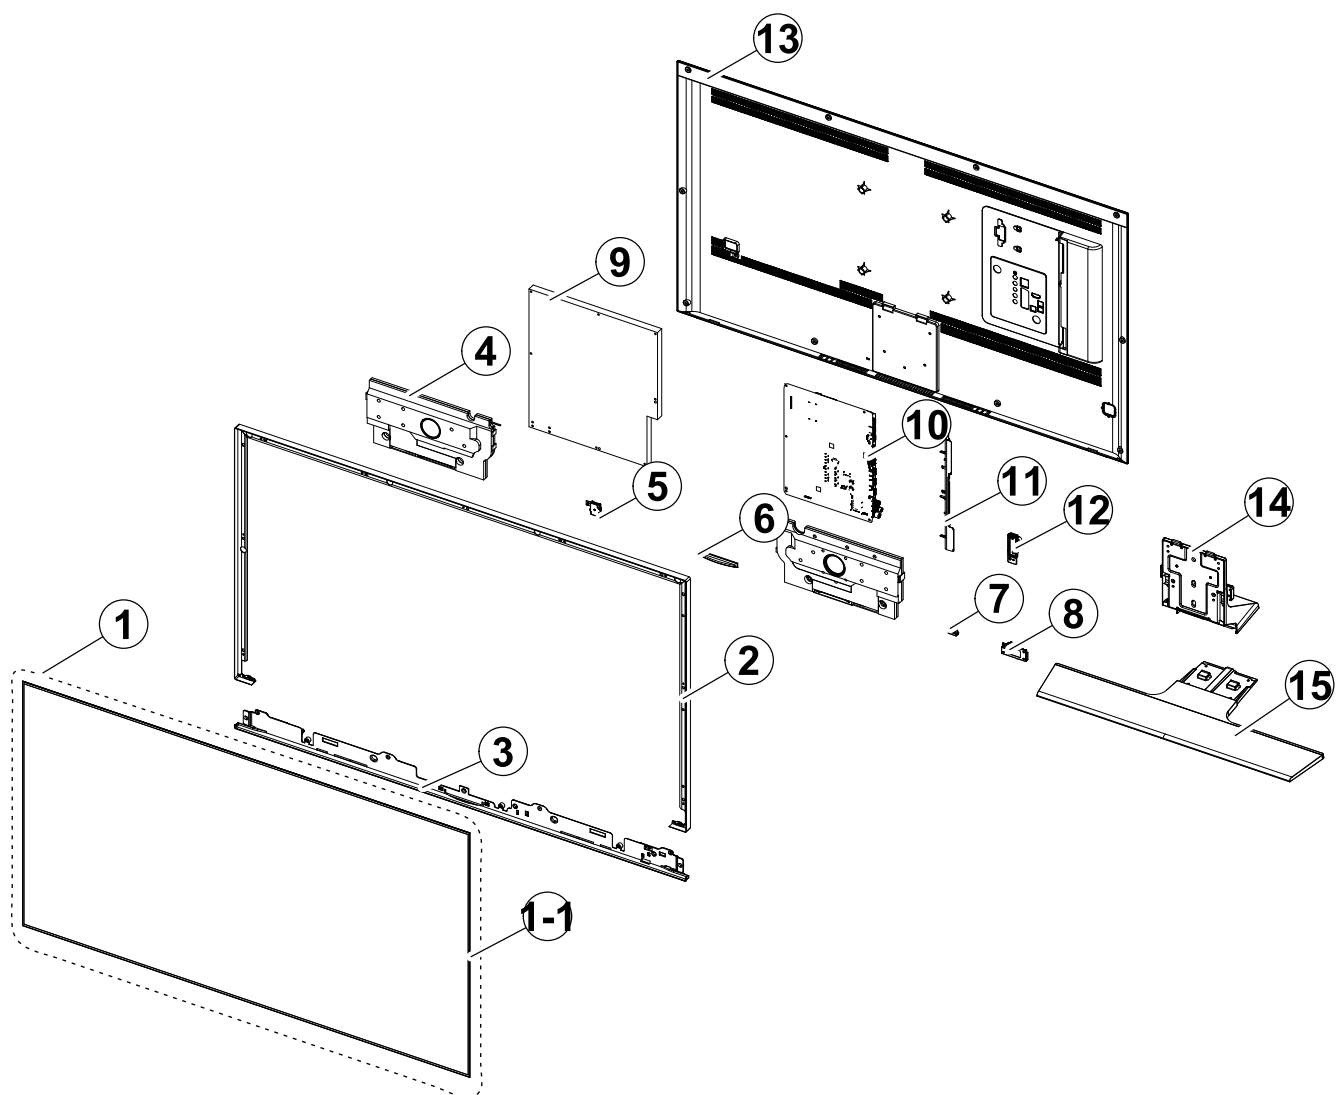

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2	PANEL	BN95-01606A	PRODUCT LCD-AMLCD; LSF480FJ01-G01,CY-KH04	SA	1
1-1	3	TC01A	BN96-32088A	ASSY CHASSIS TOP P; Y14 U8.5K 48,BN64-026	SNA	1
2	3		BN96-32232A	ASSY COVER P-DECORATION TOP; UH8500,48,AL	SA	1
3	3	CD01A	BN95-01508A	ASSY DECORATION SMT; UH8500,48,LIGHT TITA	SA	1
4	2	SP01A	BN96-30936A	ASSY SPEAKER P; 6ohm,10W,Enclosure_U7000	SA	1
5	2	BT	BN96-30218A	ASSY BOARD P-RF-MODULE; Bluetooth Module,	SA	1
6	3		BN96-32216A	ASSY BLU P-LOGO; HU8500,M14-HU8500-AA,91m	SA	1
7	3	IR PBA	BN96-32206A	ASSY BOARD P-IR FUNCTION; HU8500,SJ14-01-	SA	1
8	2	WIFI	BN59-01174A	NETWORK-WIFI MODULE; WIDT-30Q,Internal Wi	SA	1
9	2	P001A	BN44-00742A	DC VSS-UHD PD BD; L55G4P_EHS,L55G4P_EHS,A	SA	1
10	2	M0014	BN94-07624G	ASSY PCB MAIN; UH8T	SA	1
11	3		BN61-10485A	HOLDER-SIDE AV; HU8500,ABS+PC	SNA	1
12	2	JOG	BN96-29508A	ASSY BOARD P-JOG FUNCTION; S9,SUNGJI,FR-4	SA	1
13	2	R001A	BN96-33097A	ASSY COVER P-REAR; UH8500,48,PC+ABS+GF15%	SA	1
14	2	SG01A	BN96-31810B	ASSY GUIDE P-STAND; UH8500,48/50/55/65,EU	SA	1
15	2	SB04A	BN96-31730A	ASSY STAND P-BASE; UH8500,48/50/55,AL	SA	1

2. Electrical Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			UE48HU7500LXZF (TH01)		
1	R001A	BN90-05573A	ASSY COVER REAR;UH8500,48	1	SNA
.2	SCREW	6001-002755	SCREW-MACHINE;BH,+,M3,L6,ZPC(BLK),SWRCH1	11	SA
.2	SCREW	6003-001782	SCREW-TAPTYPE;BH,+,B,M4,L12,ZPC(BLK),SWR	2	SA
.2	R001A	BN96-33097A	ASSY COVER P-REAR;UH8500,48,PC+ABS+GF15%	1	SA
..3	R001	BN63-12172D	COVER-REAR;HU8500,PC+ABS+G/F15%,48in,EUR	1	SNA
..3		BN68-03518F	LABEL-STICKER-CI SLOT;WW,ALL,PET,0.1,134	1	SNA
..3		BN68-05825A	LABEL-TERMINAL SIDE;HU8500,PET,T0.125,W1	1	SNA
1	S001A	BN90-05578G	ASSY STAND;UH8500,55,EUROPE	1	SNA
.2	SB04A	BN96-31730A	ASSY STAND P-BASE;UH8500,48/50/55,AL	1	SA
..3	SCREW	6001-003041	SCREW-MACHINE;FH,+,M4,L8,ZPC(BLK),SWRCH1	4	SA
..3		6902-002087	BAG PE;HDPE/PE FOAM,T0.015/T0.5,W700,L16	1	SNA
..3		6902-002092	BAG PE;HDPE/PE FOAM,T0.015/T0.5,W180,L16	1	SNA
..3		BN61-10461A	BRACKET-BOTTOM-LINK;HU8500,ALCOAT-SA1C,T	1	SNA
..3		BN63-11969A	COVER-STAND-BASE;HU8500,ALCOAT-SA1C,Extr	1	SNA
..3		BN63-12056A	COVER-STAND-TOP;HU8500,PC+ABS+G/F15%,BLK	1	SNA
...4		0103-010275	RESIN PC ABS;235GNH15/6919H,Black,BK0007	54	SNA
..3		BN64-02669A	BADGE-INLET;HU8500,Ni,0.05,black chrome,	1	SNA
..3	M0019	BN73-00052C	FOOT RUBBER;LCD TV,SI,T2.0 DIA19,GRAY	9	SNA
.2	SG01A	BN96-31810B	ASSY GUIDE P-STAND;UH8500,48/50/55/65,EU	1	SA
..3	SCREW	6003-000264	SCREW-TAPTYPE;PWH,+, -,B,M3,L6,ZPC(WHT),S	1	SA
..3	SCREW	6003-001208	SCREW-TAPTYPE;BH,+,S,M4,L12,ZPC(BLK),SWR	1	SA
..3	SCREW	6003-001785	SCREW-TAPTYPE;FH,+,B,M4,L8,ZPC(BLK),SWRC	2	SA
..3		6902-002059	BAG PE;HDPE/PE FOAM,T0.015/T0.5,W300,L40	1	SNA
..3		BN61-10463A	BRACKET-NECK;HU8500,PO,T4.0,48-65in	1	SNA
..3	AH089	BN61-10505A	HOLDER-CABLE;HU8500,ABS,HB	1	SNA
...4		0103-004609	RESIN ABS;HF-0680U,K21294,BK0007,1.5mm H	17	SNA
..3		BN63-12050B	COVER-NECK-FRONT;HU8500,ABS+PC,BLK,50-55	1	SNA
..3		BN63-12053B	COVER-NECK-REAR;HU8500,ABS+PC,BLK,50-55i	1	SNA
...4		BN68-00513D	LABEL-RESIN;resin,-,art paper,-,10,25,-,	1	SNA
..3		BN68-05603A	LABEL-E,PASS;ALL MODEL,ART 90G,60,15,W/W	1	SNA
..3		BN96-29120M	ASSY ACCESSORY-SCREW;BN61-09494B-M4L14,8	1	SNA
...4		BN61-09494B	HOLDER-EMI BOLT;BH+,SWRCH18A,L14,M4,S TY	8	SA
...4		BN69-09241R	PACKING-BAG-SCREW;HU8500,LDPE,0.05,70,90	1	SNA
1		BN90-05733A	ASSY W/I;UH8U,U48HU1	1	SNA
.2		BN81-08159Z	PART SET-ELEC W/I;UF4~UF8,UH4~UH9 ELEC	1	SNA
.2		BN81-09499G	PART SET-MECH W/I;UH8U,U48HU*	1	SNA
1		BN91-12694A	ASSY LCM-AMLCD;BN95-01606A,CY-KH048FSLV1	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.2	PANEL	BN95-01606A	PRODUCT LCD-AMLCD;LSF480FJ01-G01,CY-KH04	1	SA
...3		6001-002912	SCREW-MACHINE;CH,+,M3,L3,ZPC(BLK),SWRCH1	20	SA
...3	SCREW	6001-003075	SCREW-MACHINE;BH,+,M3,L4,ZPC(WHT),SWRCH1	10	SA
...3	SCREW	6001-003081	SCREW-MACHINE;PWH,+,M3,L5,ZPC(WHT),SWRCH	6	SA
...3		BN02-00102B	TAPE FILAMENT;UE7000,#8917,0.15,25,50,WH	0	SNA
...3	M0131	BN63-00520A	GASKET;APPOLO_PAL,Conductive Fabric,0.13	2	SNA
...3		BN63-12924A	SHEET-SIDE-TAPE;HU8500,PET,0.055,W18.0,B	3	SNA
...3		BN68-05722A	LABEL-STICKER;ALL MODEL,POLYPROPYLENE,0.	1	SNA
...3		BN74-00053E	TAPE PAPER-PROTECTION;3M2307,PAPER,0.14T	0	SNA
...3		BN90-05809A	ASSY MISC-BLU;CY-KH048FSLV*	1	SNA
...4	SCREW	6001-003079	SCREW-MACHINE;CH,+,M3,L6,ZPC(BLK),SWRCH1	6	SA
...4		BN02-00102B	TAPE FILAMENT;UE7000,#8917,0.15,25,50,WH	0	SNA
...4		BN02-00311A	TAPE PET-SHEET FIXING;Y14 SNB H7K,U8.5K,	3	SNA
...4		BN61-10708A	LGP-LED;48inch 8.5K UHD, Lenticular,MS,1	1	SNA
...4		BN63-12344A	SHEET-DBEF;DLF250,PET,0.25,1066.30,608.5	1	SNA
...4		BN63-12345A	SHEET-PRISM;MAS670F,PET,0.294,1055.6,604	1	SNA
...4		BN63-12346A	SHEET-MLS;UTE34G-10B,PET,0.3,1066.30,608	1	SNA
...4		BN63-12347A	SHEET-REFLECTOR;SRE885C,PET,0.3,1066.30,	1	SNA
...4		BN96-32089A	ASSY CHASSIS BOTTOM P;Y14 U8.5K 48,BN64-	1	SNA
....5	SCREW	6001-002759	SCREW-MACHINE;CH,+,M3,L4,ZPC(BLK),SWRCH1	8	SA
....5		BN02-00040B	TAPE DOUBLE FACE-DIFFUSER FIXING;NNB 32/	1	SNA
....5		BN02-00102B	TAPE FILAMENT;UE7000,#8917,0.15,25,50,WH	1	SNA
....5		BN02-00313A	TAPE THERMAL-GRAPHITE-L;Y14 U8.5K 48,E-G	1	SNA
....5		BN02-00314A	TAPE THERMAL-GRAPHITE-R;Y14 U8.5K 48,E-G	1	SNA
....5	EC13	BN39-01853M	LEAD CONNECTOR;48inch U8500 SDC_left,lea	1	SNA
....5	EC13	BN39-01854M	LEAD CONNECTOR;48inch U8500 SDC_right,le	1	SNA
....5		BN60-00931D	SPACER-RUBBER-LGP;Y14 U8.5K,SI,13,GRAY,2	2	SNA
....5		BN60-01012A	SPACER-FRAME;Y14 SNB,U8.5K,SI,21,WHITE,1	6	SNA
....5		BN61-02932Q	BRACKET-STOPPER NUT;LED TV,M3,D7,L7,BRAC	2	SNA
....5		BN61-07318A	HOLDER-WIRE;SNB 40/46/55,SI,1.4,40,13,10	1	SNA
....5		BN61-08345A	BRACKET-WALL MOUNT;NNB,SNB 32/40/46/55,S	4	SNA
....5		BN61-10195A	HOLDER-LGP;Y14 SNB H7K,EGI,4,4,5.4,BLK,D	2	SNA
....5		BN62-00581A	INSULATION-PD-BOARD;Y14 U8.5K 48,50,55,P	1	SNA
....5		BN62-00587A	INSULATION-S-PCB-L;Y14 U8.5K 48,PET,0.1,	1	SNA
....5		BN62-00588A	INSULATION-S-PCB-R;Y14 U8.5K 48,PET,0.1,	1	SNA
....5	CC02	BN64-02679A	CHASSIS-BOTTOM;Y14 U8.5K 48,AL 3104,T1.0	1	SNA
....5	T0527	BN68-00513A	LABEL-E,PASS;ALL MODEL,YUPO(110G),BLACK,	1	SNA
....5	M0131	MD63-00103A	GASKET;GRANDSLAM,Conductive Fabric,1,10,	4	SNA
...4		BN96-32092A	ASSY FRAME P-MOLD MIDDLE-U;Y14 U8.5K 48,	1	SNA
....5		BN61-10644A	FRAME-MOLD MIDDLE-U;Y14 U8.5K 48,PC+G/F1	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		BN96-32093A	ASSY FRAME P-MOLD MIDDLE-D;Y14 U8.5K 48,	1	SNA
....5		BN02-00050A	TAPE DOUBLE FACE;SNB 55",SK2100HE,0.05,2	1	SNA
....5		BN60-00986C	SPACER-PANEL-UD-A;Y14 U8.5K 48,SSP*,103	2	SNA
....5		BN60-00986D	SPACER-PANEL-UD-B;Y14 U8.5K 48,SSP*,324	1	SNA
....5		BN60-00986E	SPACER-PANEL-UD-C;Y14 U8.5K 48,SSP*,382	1	SNA
....5		BN60-00986G	SPACER-LGP-UD;Y14 U8.5K 48,SI,522.5,WHI	2	SNA
....5		BN61-10645A	FRAME-MOLD MIDDLE-D;Y14 U8.5K 48,PC+G/F1	1	SNA
...4		BN96-32094A	ASSY FRAME P-MOLD MIDDLE-LR;Y14 U8.5K 48	2	SNA
....5		BN60-00986F	SPACER-PANEL-LR;Y14 U8.5K 48,SSP*,597,G	2	SNA
....5		BN60-00986H	SPACER-LGP-LR;Y14 U8.5K 48,PET,589.5,BL	2	SNA
....5		BN61-10646A	FRAME-MOLD MIDDLE-LR;Y14 U8.5K 48,PC+G/F	2	SNA
...4		BN96-32098A	ASSY COVER P-SOURCE;Y14 U8.5K 48,BN63-12	1	SNA
....5		BN60-00554A	SPACER-SOURCE;SNB 40/46/55,SI RUBBER,10,	6	SNA
....5		BN61-09307A	BRACKET-STOPPER NUT;LED TV,M3*D11*L12.6	2	SNA
....5		BN61-09363A	BRACKET-STOPPER NUT;LED TV,B:7 H: 0.4 M3	3	SNA
....5		BN61-10299B	BRACKET-STOPPER NUT;LED TV,CR3,M3,L7.2,D	2	SNA
....5		BN62-00593A	INSULATION-S-COVER-L;Y14 U8.5K 48,PET,0.	1	SNA
....5		BN62-00594A	INSULATION-S-COVER-R;Y14 U8.5K 48,PET,0.	1	SNA
....5		BN63-12255A	SHIELD-SOURCE COVER;Y14 U8.5K 48,EGI-SEC	1	SNA
...4		BN96-32385A	ASSY LED BAR P-LED BAR;48" U8.5K_left,70	1	SNA
...4		BN96-32386A	ASSY LED BAR P-LED BAR;48" U8.5K_right,7	1	SNA
..3	SB05A	BN96-31821B	ASSY BRACKET P-STAND LINK;UH8500,50,SECC	1	SNA
...4		BN61-09605A	BRACKET-STOPPER NUT;LED TV F6100,Others	4	SNA
...4		BN61-10460A	BRACKET-STAND-LINK;HU8500,EGI-SECC,T2.0,	1	SNA
...4	M0131	BN63-03811A	GASKET;Tulip,Conductive Fabric,10mm,10mm	1	SNA
..3	TC01A	BN96-32088A	ASSY CHASSIS TOP P;Y14 U8.5K 48,BN64-026	1	SNA
...4		BN02-00309A	TAPE PET-MASKING;Y14 SNB H7K 46,55,60,65	4	SNA
...4		BN60-00986A	SPACER-TOP-UD;Y14 U8.5K 48,PET,530,BLK,	4	SNA
...4		BN60-00986B	SPACER-TOP-LR;Y14 U8.5K 48,PET,595.5,BL	2	SNA
...4	AS080	BN63-10029A	SHEET-COVER;UE9500 75",PUR,T0.052,W13mm,	1	SNA
...4	AS080	BN63-10494A	SHEET-COVER;rose70",PUR,T0.052,W9.5mm,10	2	SNA
...4		BN63-13054A	SHEET-BADGE;All Model,PET,0.110,10,70,CL	1	SNA
...4		BN64-02643A	BADGE-BRAND;U8000,U9000,Ni,0.05,28,SILVE	1	SNA
...4	AC157	BN64-02678A	CHASSIS-TOP;Y14 U8.5K 48, SDC,STS304,T0.	1	SNA
..3		BN96-32514A	ASSY OPEN CELL;LSF480FJ01-G01,8bit,48INC	1	SNA
..3	TCON	BN96-32640A	ASSY T CON P;LMF480FJ01-G,PCB-CONTROL,8b	1	SA
..3	FL06	BN96-32657A	ASSY CABLE P-FFC;H9000,FFC,NH,73mm 1,96	2	SNA
1	M0017	BN91-12942G	ASSY CHASSIS;UH8T	1	SNA
.2	M0014	BN94-07624G	ASSY PCB MAIN;UH8T	1	SA
..3		BN61-10485A	HOLDER-SIDE AV;HU8500,ABS+PC	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		0103-005041	RESIN PC ABS;FR3200TV,901408,BK0008,1.2m	13	SNA
...3		BN62-00273B	HEAT SINK-PS;TV Echo-P,A6063,5t,BLACK,40	1	SNA
...3		BN62-00574A	HEAT SINK-ES;F7000,A6063,ANODIZING,28*14	1	SNA
...3		BN62-00618A	HEAT SINK-PS;HU8500,A1050,BLACK,73*118*5	1	SNA
...3		BN62-00619A	HEAT SINK-PS;HU8500,A1050,SILVER,210*250	1	SNA
...3		BN62-00620A	HEAT SINK-ES;HU8500,A6063*,ANODIZING,31.	2	SNA
...3		BN62-00621A	HEAT SINK-ES;HU8500,A6063*,ANODIZING,70*	1	SNA
...3		BN97-08311X	ASSY SMD;BN94-*	1	SNA
...4		0202-001899	SOLDER-CREAM;M705-GRN360-K2-VT,25-36um,S	3	SNA
...4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	2	SA
...4	DS01A	0401-001283	DIODE-SWITCHING;BAV70S_SG,100V,250mA,SOT	2	SA
...4	DR01A	0402-001614	DIODE-RECTIFIER;S1G,400V,1A,DO-214AC,TP	2	SA
...4		0403-001407	DIODE-ZENER;MMSZ5242B,11.4-12.6V,500mW,S	1	SA
...4		0403-001783	DIODE-ZENER;BZB84-C6V2,5.8/6.6V,300mW,SO	3	SNA
...4		0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	4	SA
...4		0404-001881	DIODE-SCHOTTKY;SS3040-HE,40V,3000mA,SOD-	5	SA
...4		0406-001200	DIODE-TVS;RCLAMP0504F,6/-/-V,150W,SC-70	2	SA
...4		0406-001290	DIODE-TVS;3.0SMCJ20A,22.2/-/24.5V,3000W,	2	SNA
...4		0406-001573	DIODE-TVS;AOZ8806DI-05,6	1	SA
...4		0406-001635	DIODE-TVS;SMF5.0A,6.4V, 6.7V, 7V,200W,SM	18	SA
...4		0501-000002	TR-SMALL SIGNAL;KSA812,PNP,150mW,SOT-23,	2	SNA
...4		0501-000279	TR-SMALL SIGNAL;KSA1182-Y,PNP,150mW,SOT-	3	SA
...4		0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	3	SC
...4		0501-002080	TR-SMALL SIGNAL;2SC2412K,NPN,200mW,SC-59	2	SA
...4		0504-000126	TR-DIGITAL;KSR1101,NPN,200mW,4.7K/4.7Koh	2	SA
...4		0505-001844	FET-SILICON;SI4435DDY-T1-GE3,P,-30V,-11.	2	SA
...4		0505-002598	FET-SILICON;AP2317GN,P,-20V,-4.2A,0.052o	1	SA
...4		0505-003397	FET-SILICON;2N7002K,N,60V,380mA,1.19ohm,	6	SA
...4		0801-003330	IC-CMOS LOGIC;Octal buffer,DQFN,20P,4.5x	2	SA
...4		0904-002859	IC-USC;GL852G-32,QFN,28P,5x5mm,12MHz,TP,	1	SA
...4		1001-001545	IC-ANALOG MULTIPLEX;TS3USB221ERSER,R-PQF	2	SA
...4		1001-001686	IC-ANALOG MULTIPLEX;74LV4052,CMOS,TTSOP,	1	SA
...4		1001-001689	IC-ANALOG SWITCH;TSSA23159RSER,QFN,10P,2	8	SA
...4		1001-001828	IC-ANALOG SWITCH;TS3V330PWR,TSSOP,16P,6.	1	SA
...4		1001-001860	IC-ANALOG SWITCH;NX5L2750CGU,QFN,10P,1.4	2	SNA
...4		1001-001885	IC-VIDEO SWITCH;SII9679,QFN,76P,9x9mm,PL	1	SA
...4		1001-001886	IC-VIDEO SWITCH;QFP,144P,22*22,PLASTIC,T	2	SA
...4		1006-001509	IC-DRIVER/RECEIVER;MAX3222ECPWR,TSSOP,20	1	SA
...4		1103-001561	IC-EEPROM;S-24C02DI-J800,2Kbit,256X8bit,	4	SA
...4		1103-001564	IC-EEPROM;S-24C512CI-J800,512Kbit,64Kx8,	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		1105-002227	IC-DDR3 SDRAM;K4B1G1646G-BCK0,DDR3 SDRAM	4	SA
...4		1105-002274	IC-DDR3 SDRAM;K4B1G1646G-BCMA,DDR3 1866,	7	SNA
...4		1105-002528	IC-DDR3 SDRAM;K4B4G1646D-BCMA,DDR3 1866,	4	SA
...4		1105-002534	IC-DDR3 SDRAM;K4B2G1646Q-BCMA,DDR3 SDRAM	1	SA
...4		1201-003690	IC-AUDIO AMP;TAS5747PHPR,QFP,48P,DUAL,PL	3	SA
...4		1203-004363	IC-VOL. DETECTOR;SOT-23,3Z30,2.9x1.6mm,P	1	SA
...4		1203-006109	IC-POSIFIXED REG.;S-1206B33-M3T1G,SOT-2	1	SA
...4		1203-006130	IC-POSIFIXED REG.;S-1172B25-U5T1G,SOT-8	1	SA
...4		1203-006239	IC-POSIAJUST REG.;AP1117EGZ-13-89,SOT-	1	SA
...4		1203-006330	IC-POWER SUPERVISOR;TPS2065DBV,SOT-23,5P	1	SA
...4		1203-006341	IC-DC/DC CONVERTER;TPS63020,SON-14,14P,4	1	SA
...4		1203-007018	IC-DC/DC CONVERTER;TPS54821RHL,QFN,14P,3	1	SA
...4		1203-007238	IC-PWM CONTROLLER;TPS54427,DDA,8P,4.8x3.	3	SNA
...4		1203-007665	IC-DC/DC CONVERTER;RT7266ZSP,SOP-8,8Z30,	8	SNA
...4		1203-007695	IC-DC/DC CONVERTER;AOZ3018,SO-8,8Z30,4.9	3	SNA
...4		1203-007697	IC-DC/DC CONVERTER;LNBH26SPQR,QFN,24Z30,	1	SNA
...4		1203-007728	IC-VOL. DETECTOR;RT9831GQW,QW : WQFN-20L	1	SA
...4		1203-007984	IC-DC/DC CONVERTER;AOZ3015PI,SO-8,8P,6.2	1	SA
...4		1203-007985	IC-DC/DC CONVERTER;TPS56920PWPR,HTSSOP,2	3	SA
...4		1203-008104	IC-POSIFIXED REG.;S-13A1D18-E8001,HSOP,	3	SNA
...4		1203-008112	IC-POSIAJUST REG.;AOZ2002PI,SO-8,8P,4.	2	SA
...4		1203-008118	IC-DC/DC CONVERTER;AOZ3013PI,SO-8,8P,4.9	1	SNA
...4		1203-008139	IC-DC/DC CONVERTER;TPS56C20PWPR,HTSSOP,2	1	SNA
...4		1203-008185	IC-POSIFIXED REG.;S-13A1D10-E800,HSOP-8	1	SA
...4		1204-003482	IC-VIDEO PROCESS;SDP1305,FCPBGAH,714P,27	1	SA
...4		1204-003489	IC-VIDEO PROCESS;SDP1301,FCBGA,680P,25x2	1	SA
...4		1204-003497	IC-VIDEO PROCESS;SENK83,EDHS-PBGA,1057P,	1	SA
...4		1204-003506	IC-VIDEO PROCESS;SDP1303,FCPBGAH,1495P,35	1	SA
...4		1204-003522	IC-DECODER;SDP1304,FCPBGAH,715P,27x27mm,	1	SA
...4	IC	1205-004385	IC-ETHERNET CONTROLLER;RTL8201F-VB-CGT,Q	1	SA
...4		1205-004447	IC-SWITCH;TPS2051CDBVR,SOT23-5,5P,3x1.65	1	SA
...4		1205-004692	IC-SWITCH;TPS2069CDBVR,SOT-23,5P,5.0x3.1	3	SNA
...4		1205-004822	IC-SWITCH;TPS22965DSGR,SON,8P,2x2x0.75mm	1	SNA
...4		1205-004853	IC-BUFFER;DS15BR400TSQ/NOPB,WQFN,32P,5x5	12	SA
...4		1205-004855	IC-SWITCH;TPS25910RSAR,QFN,16P,4x4x0.8mm	1	SA
...4	IS01	1209-002183	IC-SENSOR;S-5851AAA-M6T1U,SOT,6Z30,2.9x1	1	SA
...4		1405-001271	VARISTOR;35V,20Vdc,5A,1.0x0.5x0.6mm,TP,1	7	SA
...4		2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	7	SA
...4		2007-000060	R-CHIP;100Kohm,1%,1/10W,TP,1608	2	SNA
...4		2007-000063	R-CHIP;150Kohm,1%,1/10W,TP,1608	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	1	SNA
...4		2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	1	SA
...4		2007-000090	R-CHIP;10Kohm,5%,1/10W,TP,1608	1	SA
...4		2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608	11	SA
...4		2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	4	SA
...4		2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	74	SNA
...4		2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	24	SA
...4		2007-000149	R-CHIP;12Kohm,5%,1/16W,TP,1005	1	SA
...4		2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	8	SNA
...4		2007-000161	R-CHIP;82Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	146	SNA
...4		2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	8	SNA
...4		2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	38	SNA
...4		2007-000219	R-CHIP;1.2Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000297	R-CHIP;10Kohm,1%,1/8W,TP,2012	1	SNA
...4		2007-000336	R-CHIP;120Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000455	R-CHIP;18Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-000512	R-CHIP;2.4Kohm,5%,1/10W,TP,1608	1	SNA
...4		2007-000536	R-CHIP;200ohm,1%,1/10W,TP,1608	2	SA
...4		2007-000583	R-CHIP;22Kohm,1%,1/10W,TP,1608	6	SA
...4		2007-000614	R-CHIP;24Kohm,1%,1/10W,TP,1608	4	SNA
...4		2007-000651	R-CHIP;27Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000726	R-CHIP;300ohm,1%,1/10W,TP,1608	1	SA
...4		2007-000736	R-CHIP;30Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000758	R-CHIP;330Kohm,5%,1/16W,TP,1005	2	SNA
...4		2007-000772	R-CHIP;33Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-000816	R-CHIP;390Kohm,1%,1/10W,TP,1608	1	SNA
...4		2007-000828	R-CHIP;39Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000857	R-CHIP;4.3Kohm,1%,1/10W,TP,1608	2	SNA
...4		2007-000869	R-CHIP;4.7Kohm,1%,1/10W,TP,1608	4	SA
...4		2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	7	SNA
...4		2007-000939	R-CHIP;47Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001116	R-CHIP;680ohm,1%,1/10W,TP,1608	2	SA
...4		2007-001125	R-CHIP;68Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001168	R-CHIP;75ohm,5%,1/4W,TP,3216	2	SA
...4		2007-001288	R-CHIP;18ohm,5%,1/16W,TP,1005	12	SA
...4		2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	3	SNA
...4		2007-001308	R-CHIP;200ohm,5%,1/16W,TP,1005	1	SNA
...4		2007-001320	R-CHIP;1.8Kohm,5%,1/16W,TP,1005	2	SA
...4		2007-001333	R-CHIP;18Kohm,5%,1/16W,TP,1005	4	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-001335	R-CHIP;36Kohm,5%,1/16W,TP,1005	2	SA
...4		2007-002796	R-CHIP;510ohm,5%,1/16W,TP,1005	4	SA
...4		2007-003015	R-CHIP;2.2ohm,5%,1/16W,TP,1005	8	SNA
...4		2007-007095	R-CHIP;390ohm,5%,1/16W,TP,1005	1	SA
...4		2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	20	SNA
...4		2007-007131	R-CHIP;13Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007135	R-CHIP;18Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	15	SNA
...4		2007-007137	R-CHIP;1.2Kohm,1%,1/16W,TP,1005	2	SA
...4		2007-007138	R-CHIP;27Kohm,1%,1/16W,TP,1005	5	SNA
...4		2007-007139	R-CHIP;47Kohm,1%,1/16W,TP,1005	8	SA
...4		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	68	SNA
...4		2007-007156	R-CHIP;1ohm,5%,1/16W,TP,1005	4	SNA
...4		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	38	SNA
...4		2007-007307	R-CHIP;150ohm,1%,1/16W,TP,1005	3	SNA
...4		2007-007309	R-CHIP;12Kohm,1%,1/16W,TP,1005,0.35	2	SA
...4		2007-007311	R-CHIP;22Kohm,1%,1/16W,TP,1005	10	SA
...4		2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	4	SA
...4		2007-007313	R-CHIP;6.8Kohm,1%,1/16W,TP,1005	2	SA
...4		2007-007314	R-CHIP;5.6Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	80	SNA
...4		2007-007470	R-CHIP;7.5Kohm,1%,1/16W,TP,1005	8	SNA
...4		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005	29	SNA
...4		2007-007526	R-CHIP;23.7Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-007538	R-CHIP;56Kohm,1%,1/16W,TP,1005	3	SA
...4		2007-007588	R-CHIP;1.8Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007617	R-CHIP;2.49Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-007671	R-CHIP;11Kohm,1%,1/16W,TP,1005	3	SA
...4		2007-007698	R-CHIP;5.1Kohm,1%,1/16W,TP,1005	2	SNA
...4		2007-007720	R-CHIP;300Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-007733	R-CHIP;51ohm,1%,1/10W,TP,1608	4	SA
...4		2007-007736	R-CHIP;510Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-007766	R-CHIP;2Kohm,1%,1/16W,TP,1005	35	SNA
...4		2007-007767	R-CHIP;200ohm,1%,1/16W,TP,1005	2	SA
...4		2007-007791	R-CHIP;9.1Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007797	R-CHIP;44.2ohm,1%,1/10W,TP,1608	2	SA
...4		2007-007798	R-CHIP;10ohm,1%,1/16W,TP,1005	1	SA
...4		2007-007830	R-CHIP;14Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-007861	R-CHIP;62Kohm,1%,1/16W,TP,1005	2	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-007942	R-CHIP;1Mohm,1%,1/16W,TP,1005	10	SNA
...4		2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	14	SNA
...4		2007-008026	R-CHIP;56ohm,1%,1/16W,TP,1005	1	SA
...4		2007-008133	R-CHIP;56.2Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-008213	R-CHIP;4.3Kohm,1%,1/16W,TP,1005	13	SNA
...4		2007-008269	R-CHIP;51Kohm,1%,1/16W,TP,1005	7	SA
...4		2007-008275	R-CHIP;30Kohm,1%,1/16W,TP,1005	3	SNA
...4		2007-008294	R-CHIP;33ohm,1%,1/16W,TP,1005	9	SA
...4		2007-008332	R-CHIP;11.5Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-008391	R-CHIP;6.34Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-008779	R-CHIP;0ohm,1%,1/16W,TP,1005	11	SA
...4		2007-009117	R-CHIP;49.9Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-009853	R-CHIP;1.6Kohm,1%,1/16W,TP,1005	1	SNA
...4		2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	6	SA
...4		2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	4	SA
...4		2011-001396	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,8P,TP,	1	SA
...4		2011-001402	R-NETWORK;56ohm,5%,1/16W,L,CHIP,8P,TP,2.	4	SA
...4		2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	12	SA
...4		2011-001497	R-NETWORK;470ohm,5%,1/16W,L,CHIP,4P,TP,1	4	SNA
...4		2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	5	SNA
...4		2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	5	SNA
...4		2011-001585	R-NETWORK;47ohm,5%,1/16W,L,CHIP-V,4P,TP,	1	SNA
...4		2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	3	SNA
...4		2011-001590	R-NETWORK;47Kohm,5%,1/16W,L,CHIP-V,4P,TP	1	SNA
...4	AD480	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	13	SA
...4	AD480	2203-000254	C-CER,CHIP;10nF,10%,16V,X7R,TP,1005	1	SA
...4	AD480	2203-000257	C-CER,CHIP;10nF,10%,50V,X7R,TP,1608	1	SA
...4	AD480	2203-000278	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,TP,1005	1	SA
...4	AD480	2203-000330	C-CER,CHIP;0.012nF,5%,50V,C0G,TP,1005	13	SA
...4	AD480	2203-000386	C-CER,CHIP;0.015nF,5%,50V,C0G,TP,1005	2	SA
...4	AD480	2203-000425	C-CER,CHIP;0.018nF,5%,50V,C0G,TP,1005	3	SA
...4	AD480	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	55	SA
...4	AD480	2203-000440	C-CER,CHIP;1nF,10%,50V,X7R,TP,1608	1	SA
...4	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	11	SA
...4	AD480	2203-000530	C-CER,CHIP;2.7nF,10%,50V,X7R,TP,1005,-	1	SNA
...4	AD480	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,TP,1005	2	SA
...4	AD480	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,TP,1005	3	SNA
...4	AD480	2203-000714	C-CER,CHIP;3.3nF,10%,50V,X7R,TP,1005	5	SA
...4	AD480	2203-000812	C-CER,CHIP;0.033nF,5%,50V,C0G,TP,1005	10	SA
...4	AD480	2203-000940	C-CER,CHIP;0.47nF,10%,50V,X7R,TP,1005	3	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AD480	2203-001211	C-CER,CHIP;8.2nF,10%,50V,X7R,TP,1608	1	SA
...4	AD480	2203-001634	C-CER,CHIP;33nF,10%,50V,X7R,TP,1608	4	SNA
...4	AD480	2203-001697	C-CER,CHIP;0.082nF,5%,50V,NP0,TP,1608	1	SA
...4	AD480	2203-002050	C-CER,CHIP;47nF,10%,50V,X7R,TP,1608	1	SA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005	23	SNA
...4	AD480	2203-002711	C-CER,CHIP;100nF,10%,25V,X7R,TP,1608	5	SA
...4	AD480	2203-002982	C-CER,CHIP;6.8nF,10%,50V,X7R,TP,1005	5	SA
...4	AD480	2203-003019	C-CER,CHIP;8.2nF,10%,50V,X7R,TP,1005	1	SNA
...4	AD480	2203-003039	C-CER,CHIP;0.008nF,0.25pF,50V,C0G,TP,100	8	SNA
...4	AD480	2203-005005	C-CER,CHIP;100nF,10%,16V,X7R,TP,1608	4	SC
...4	AD480	2203-005054	C-CER,CHIP;0.0047nF,0.25pF,50V,NP0,TP,10	1	SA
...4	AD480	2203-005083	C-CER,CHIP;220nF,10%,50V,X7R,TP,1608,0.8	4	SA
...4	AD480	2203-005138	C-CER,CHIP;1.8nF,10%,50V,X7R,TP,1005	13	SA
...4	AD480	2203-005221	C-CER,CHIP;15nF,10%,50V,X7R,TP,1608	2	SNA
...4	AD480	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	22	SNA
...4	AD480	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,0.5T	18	SNA
...4	AD480	2203-005968	C-CER,CHIP;4.7nF,10%,50V,X7R,TP,1005,0.5	6	SNA
...4	AD480	2203-006047	C-CER,CHIP;33nF,10%,16V,X7R,TP,1005	1	SA
...4	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005	356	SA
...4	AD480	2203-006088	C-CER,CHIP;330nF,10%,10V,X7R,TP,1608	1	SA
...4	AD480	2203-006126	C-CER,CHIP;47nF,10%,16V,X7R,TP,1005	11	SNA
...4	AD480	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,TP,1005,0.5	375	SNA
...4	AD480	2203-006307	C-CER,CHIP;1000nF,10%,25V,X5R,TP,2012	3	SNA
...4	AD480	2203-006324	C-CER,CHIP;2200nF,10%,10V,X5R,TP,1608	5	SA
...4	AD480	2203-006348	C-CER,CHIP;1000nF,10%,25V,X5R,TP,1608,0.	9	SA
...4	AD480	2203-006361	C-CER,CHIP;10000nF,10%,10V,X5R,TP,2012	15	SC
...4	AD480	2203-006474	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,2012	14	SA
...4	AD480	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	90	SNA
...4	AD480	2203-006636	C-CER,CHIP;220nF,10%,25V,X7R,TP,1608	18	SA
...4	AD480	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,TP,1608,0.	4	SNA
...4	AD480	2203-006741	C-CER,CHIP;470nF,10%,25V,X5R,TP,1608,0.8	1	SNA
...4	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,TP,1608	15	SNA
...4	AD480	2203-006890	C-CER,CHIP;10000nF,20%,6.3V,X5R,TP,1608	74	SNA
...4	AD480	2203-006992	C-CER,CHIP;0.33nF,5%,50V,C0G,TP,1005	2	SNA
...4	AD480	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012,1	21	SNA
...4	AD480	2203-007240	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,1608,	60	SA
...4	AD480	2203-007269	C-CER,CHIP;22000nF,20%,10V,X5R,TP,2012,0	54	SNA
...4	AD480	2203-007270	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	61	SNA
...4	AD480	2203-007306	C-CER,CHIP;10000nF,10%,25V,X5R,TP,2012,1	23	SNA
...4	AD480	2203-007401	C-CER,CHIP;10000nF,10%,50V,X5R,TP,3225	4	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AD480	2203-007513	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	70	SA
...4	AD480	2203-007544	C-CER,CHIP;100nF,10%,50V,X7R,TP,1005,0.5	66	SA
...4	AD480	2203-007569	C-CER,CHIP;0.033nF,5%,50V,C0G,TP,1005	4	SA
...4	AD480	2203-008096	C-CER,CHIP;2200nF,10%,50V,X5R,TP,2012,1.	2	SA
...4	AD480	2203-008315	C-CER,CHIP;22000nF,20%,25V,X5R,TP,2012,1	1	SA
...4		2402-001268	C-AL,SMD;100uF,20%,25V,WT,TP,8x6.3mm	6	SA
...4		2409-001191	C-ORGANIC,SMD;47uF,20%,20V,TP,7343(1.9T)	1	SA
...4		2409-001213	C-ORGANIC,SMD;150uF,20%,6.3V,-,TP,3.5x2.	2	SNA
...4		2409-001338	C-POLYMER ,CHIP;47uF,20%,6.3V,TP,3.2x1.6	3	SA
...4		2503-001051	C-NETWORK;100nFx4,20%,16V,2012	1	SA
...4		2703-000158	INDUCTOR-SMD;1uH,10%,2012,.40hm,50mA,45,	2	SA
...4		2703-000213	INDUCTOR-SMD;470nH,10%,1608,1.35Ohm,35mA	1	SA
...4		2703-000408	INDUCTOR-SMD;3.3uH,20%,3225,.28ohm,500mA	2	SA
...4		2703-001938	INDUCTOR-SMD;56nH,5%,1005,1.5Ohm,200mA,1	2	SA
...4		2703-002841	INDUCTOR-SMD;1uH,20%,10x10mm,.003ohm,210	1	SA
...4		2703-003135	INDUCTOR-SMD;4.7uH,20%,6965,0.04Ohm,7000	1	SNA
...4		2703-003149	INDUCTOR-SMD;2.2uH,20%,5050,0.055Ohm,300	3	SA
...4		2703-003263	INDUCTOR-SMD;3.3uH,20%,10.0x10.0mm,0.011	3	SNA
...4		2703-003713	INDUCTOR-SMD;1.5uH,20%,7366,0.015ohm,700	7	SA
...4		2703-003719	INDUCTOR-SMD;6.8uH,20%,10x11x3.8mm,.026o	2	SA
...4		2703-003790	INDUCTOR-SMD;4.7uH,20%,8080,0.025ohm,450	1	SA
...4		2703-003824	INDUCTOR-SMD;3.3uH,20%,7070	1	SA
...4		2703-003937	INDUCTOR-SMD;1uH,20%,7.0x6.47x3.0mm,0.00	5	SA
...4		2703-004724	INDUCTOR-SMD;8.2uH,20%,5050,4mm,0.072Ohm	12	SA
...4		2801-000102	CRYSTAL-SMD;12MHz,30ppm,12pF,100ohm,TP	3	SA
...4		2801-003856	CRYSTAL-SMD;0.032768MHz,20ppm,28-ACP,7pF	1	SNA
...4		2801-004813	CRYSTAL-SMD;24MHz,50ppm,8pF,100ohm,TP	3	SA
...4		2801-004814	CRYSTAL-SMD;25MHz,50ppm,8pF,100ohm,TP	2	SA
...4		2801-005292	CRYSTAL-SMD;24.576MHz,30ppm,4 PIN,12pF,7	1	SA
...4		2801-005324	CRYSTAL-SMD;27MHz,30ppm,Ceramic SMD(4pin	2	SA
...4		2801-005373	CRYSTAL-SMD;156.25MHz,50ppm,TP	1	SA
...4		2806-001308	OSCILLATOR-VCXO;27MHZ,-,30PF,TP,3.3V,50M	1	SA
...4		3301-002039	BEAD-SMD;26ohm,1608,TP	188	SA
...4		3601-001374	FUSE-SURFACE MOUNT;32V,5A,FAST-ACTING,PL	6	SA
...4		3701-001856	CONNECTOR-HDMI;19P,FEMALE,AU,0.5mm,BLK,S	1	SA
...4		3701-001861	CONNECTOR-HDMI;19P,FEMALE,AU,0.5mm,BLK,S	3	SA
...4		3707-001104	CONNECTOR-OPTICAL;SMD-A(Ultra Slim),SPDI	1	SA
...4		3708-003073	CONNECTOR-FPC/FFC/PIC;51P,0.5mm,SMD,AU,N	1	SA
...4		3708-003183	CONNECTOR-FPC/FFC/PIC;41P,0.5mm,SMD-A,AU	1	SA
...4		3710-003901	SOCKET-INTERFACE;34P,2R,0.5mm,SMD-A,AU,B	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		3710-003908	CONNECTOR-SOCKET;64P,2R,0.5mm,SMD-S,AU,B	1	SA
...4	EH01	3711-007412	HEADER-BOARD TO CABLE;BOX,3P,1R,1.25mm,S	1	SA
...4		3711-007741	CONNECTOR-HEADER;BOX,14P,2R,2.0mm,ANGLE,	1	SA
...4	EH01	3711-008558	HEADER-BOARD TO CABLE;BOX,26P,2R,1.25mm,	1	SA
...4	EH01	3711-008739	HEADER-BOARD TO CABLE;BOX,30P,2R,2.0mm,A	1	SA
...4		3722-003226	JACK-PHONE;7P/1C,SN,BLK	1	SA
...4		3722-003229	JACK-MODULAR;8P/8C W/L,Y,STRAIGHT,N,Au,1	1	SA
...4		3722-003457	JACK-USB;4P/1C,NI,BLK,A	2	SA
...4	JACK PIN	3722-003546	JACK-PIN;5P+Screw hole,NI+SN,G,Y/BLU/RED	1	SA
...4		3722-003617	JACK-PHONE;14P/2C,SN,BLK,STRAIGHT,3.6PI,	1	SA
...4		3722-003655	JACK-SCART;21P,SN,BLK	1	SA
...4	JACK	3722-003837	JACK-USB;9P/1C,AU/SN/NI,BLU,SMD-A,A,3.0,	1	SA
...4		BN13-00067A	PLD;MAXQ636V-2591+T,WLP,9	1	SNA
...4	ET01	BN40-00277A	TUNER;DNST243IH296A,DNST243IH296A,DVB TC	1	SA
...4		BN41-02205B	PCB MAIN;FR-4,8,1.6T,235*270,1	1	SNA
...4		BN97-08445A	ASSY MICOM-MAIN;T-GFP8DEUC,U8GA,EU,KLM8G	1	SNA
....5		1107-002300	IC-EMMC;KLM8G1GEAC-C021,8GByte,BGA,153P,	1	SA
...4		BN97-08448A	ASSY MICOM-SUB;SUBMICOM_EU,U8GA,EU,WT61P	1	SNA
....5		0903-001863	IC-MICROCONTROLLER;WT61P807-RG48,LQFP,48	1	SA
...4		BN97-08449A	ASSY MICOM-FRC;NT72324_SPI,U8GA,W25Q16DV	1	SNA
...4		BN97-08691A	ASSY MICOM-SPI;GOLF_N SPI,U8GA,W25Q128FV	1	SNA
....5		1107-002210	IC-NOR FLASH;W25Q128FV SIG,128Mbit,128Mx1	1	SA
...4		BN97-08840A	ASSY MICOM-SPI FW;U8GA,Sil9679_FW_****,I	1	SNA
....5		1107-002223	IC-NOR FLASH;W25Q16DV SIG,16Mbit,2Mbitx8	1	SNA
..3		BN97-08406A	ASSY DRM-KEY CODE-ASS`Y;CI+KEY,MAC,MIRAC	1	SNA
...4		BN46-00109H	KEY CODE-CERTIFI;MAC,TV/AV,General	1	SNA
...4		BN46-00110N	KEY CODE-CERTIFI;MIRACAST,TV,X12 /X13	1	SNA
...4		BN46-00115L	KEY CODE-CERTIFI;CI+,TV,GOLF, EU	1	SNA
1		BN91-13002B	ASSY SHIELD;UH9V	1	SNA
.2	SCREW	6001-002996	SCREW-MACHINE;FH,+,M3.0,L5.0,ZPC(BLK),SW	12	SA
.2	SCREW	6001-003016	SCREW-MACHINE;PWH,+,M3.0,L5.0,ZPC(WHT),S	15	SA
.2	SCREW	6003-000269	SCREW-TAPTYPE;BH,+,-,S,M3,L6,ZPC(WHT),SW	2	SA
.2		BN02-00102B	TAPE FILAMENT;UE7000,#8917,0.15,25,50,WH	0	SNA
.2	EF01	BN31-00036A	FAN;KDB04112HBX02,HU9000,PLASTIC*,12V,4.	1	SA
.2	EC13	BN39-01822J	LEAD CONNECTOR;HU8500 50",LEAD CONNECTOR	1	SA
.2	EC13	BN39-01847F	LEAD CONNECTOR;HU8500 50",LEAD CONNECTOR	1	SA
.2	P001A	BN44-00742A	DC VSS-UHD PD BD;L55G4P_EHS,L55G4P_EHS,A	1	SA
.2	WIFI	BN59-01174A	NETWORK-WIFI MODULE;WIDT-30Q,Internal Wi	1	SA
.2	JOG	BN96-29508A	ASSY BOARD P-JOG FUNCTION;S9,SUNGJI,FR-4	1	SA
.2	BT	BN96-30218A	ASSY BOARD P-RF-MODULE;Bluetooth Module,	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.2	FL06	BN96-30261S	ASSY CABLE P;HU8500 48",FFC,NH,350mm,41P	1	SA
.2	FL06	BN96-30262K	ASSY CABLE P;HU8500 48",FFC,NH,500mm,51P	1	SA
.2	SP01A	BN96-30936A	ASSY SPEAKER P;6ohm,10W,Enclosure_U7000	1	SA
.2		BN96-33123A	ASSY COVER P-DECORATION;HU7500 48 / SESK	1	SA
..3	SCREW	6003-001206	SCREW-TAPTYPE;BH,+,B,M3,L4,BLK,SWRCH18A	2	SA
..3		BN60-00162K	SPACER-FOAM;FOAM,50000mm,DARK GRAY,0.5T,	0	SNA
..3	CD01A	BN95-01508A	ASSY DECORATION SMT;UH8500,48,LIGHT TITA	1	SA
...4		0203-001269	TAPE-OPP MASKING;#301,T0.06,W75,L50000,N	0	SNA
...4		AA69-06612J	MASTER CARTON;CB,DW-2,1210,545,370	1	SNA
...4		AA69-06633A	PAD-PLATE;CB,DW,1200,510	1	SNA
...4		BN01-00160A	TARGET-CHROMIUM-CY;Chromium target,99.95	0	SNA
...4		BN01-00161A	TARGET-CHROMIUM-PL;chromium target,over	0	SNA
...4		BN01-00168A	COATING-AFS;99.5% AFS,99.50%,1.5,AF Sput	6	SNA
...4	AD070	BN64-02641A	DECORATION-BOTTOM;HU8500,PC+ABS+G/F15%,S	1	SNA
....5		0103-010275	RESIN PC ABS;235GNH15/6919H,Black,BK0007	170	SNA
...4		BN69-10617R	PACKING-SHEET SMT;UH7500 48,HDPE,PE FOAM	1	SNA
..3	IR PBA	BN96-32206A	ASSY BOARD P-IR FUNCTION;HU8500,SJ14-01-	1	SA
..3		BN96-32216A	ASSY BLU P-LOGO;HU8500,M14-HU8500-AA,91m	1	SA
..3		BN96-32232A	ASSY COVER P-DECORATION TOP;UH8500,48,AL	1	SA
...4		BN63-10770G	SHEET-COVER;U8500,PEC,0.039,W17.0mm,100M	2	SNA
...4	FD02	BN64-02640A	DECORATION-TOP;HU8500 48",ALCOAT-SA1C	1	SNA
1		BN92-14357A	ASSY P/MATERIAL;UH8500,48	1	SNA
.2		0203-001595	TAPE-OPP MASKING;OPP-2,0.075,75,800M,CLR	3	SNA
.2		6902-001956	BAG ROLL;HDPE/PE FOAM,HDPE T0.018mm,T0.2	2	SNA
.2		6902-002233	BAG AIR;LDPE,-,T0.2,W900,L1850,TRP,-,-,-	1	SNA
.2		6922-000003	BAND PP;PP,T0.8,W18,L1650M,TRP,DA69-9014	1	SNA
.2		BN68-02422B	LABEL-WARNING SHIPPING;ALL MODEL,A/P,T0.	1	SNA
.2		BN69-03982L	PAD PACKING-EDGE;EDGE,PAPER,-,T5,W100,L2	1	SNA
.2		BN69-05418L	PACKING-BAG WRAPPING;-LDPE,-,-,T0.017,5	3	SNA
.2		BN69-06640A	PACKING-PAD;PAD,PAPER,-,-,CB-SW4,1120,95	1	SNA
.2		BN69-06640E	PACKING-TRUCK PAD;TRUCK PAD,PAPER,-,-,DW	1	SNA
.2		BN69-10049A	CUSHION-FRONT;48-50 SNB,EPS,16.7g/L	1	SNA
.2		BN69-10101A	CUSHION-01,SET;HU8500-48IN,EPS,16.7g/l,W	1	SNA
..3		0103-005099	RESIN EPS;BASF303,Natural,Natural	603	SNA
.2		BN69-10434X	PALLET;48" HU7500,WOOD,17mm,1100,1220,14	1	SNA
1		BN92-14713A	ASSY BOX;UH8500,48	1	SNA
.2		BH68-00662A	LABEL BOX-01;ALL MODEL,ART PAPER,60,110,	1	SNA
.2		BN69-10415M	BOX-SET;48HU7500-TS,CB,A-01,DW2,YEL,W120	1	SNA
1		BN92-15020E	ASSY LABEL;UH9V	1	SNA
.2		0203-001598	TAPE-FILAMENT;#8915,0.15,12,55000,CLR	0	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.2		BN68-05050A	LABEL RATING;ALL,SS,PE,T0.05,93,73,Dark	1	SNA
.2		BN68-06022A	LEAFLET-02,QSG;U8500,SAMSUNG,wordless,EU	1	SNA
.2		BN68-06127A	LABEL-01,HIGHLIGHT POP;U8000/7000 Series	1	SNA
1	ACCE1	BN92-15399D	ASSY ACCESSORY;UH9V	1	SNA
.2		BN68-05417A	LABEL-02,ENERGY;ALL,EDC,Polypropylene,T0	1	SNA
.2		BN96-32508H	ASSY ACCESSORY MANUAL;UH9V	1	SNA
..3		6902-001964	BAG PE;LDPE,BIOBASED,T0.03,W200,L300,TRP	1	SNA
..3		BN68-00514K	MANUAL FLYER-05,WARRANTY CARD;comm,Samsu	1	SNA
..3		BN68-04972A	MANUAL FLYER-06,REGULATORY GUI;ALL,SAMSU	1	SNA
..3		BN68-05864A	LEAFLET-04,3D GLASSES GUIDE;SSG-5100GB,S	1	SNA
..3		BN68-05944K	LEAFLET-12,FICHE;UH8000,W/P,B5	1	SNA
..3		BN68-06098D	MANUAL USERS-03;HU7500,ENG/FRA/DEU/DUT,X	1	SNA
.2		BN96-32825Q	ASSY ACCESSORY MANUAL/CABLE;UH8U	1	SNA
..3		3709-001791	CONNECTOR-CARD SLOT;64P,0.5mm,SMD-A,AU,P	1	SA
..3	T0268	3903-000849	CBF-POWER CORD;DT,CEE,LP-21L,250V,2.5A,B	1	SC
..3		4301-000101	BATTERY-ALKALINE;1.5V,1650mAh,LR6,14.5x5	2	SNA
..3		4301-000103	BATTERY-ALKALINE;1.5V,750mAh,LR03,10.2x4	2	SNA
..3	REMO2	BN59-01175N	REMOCON;TM1240A,44,3.0V,TM1240A_EUROPE_S	1	SA
..3	REMO3	BN59-01181B	REMOCON-14SMART TOUCH CONTROL;TM1480,28,	1	SA
..3	T0527	BN68-00513A	LABEL-E,PASS;ALL MODEL,YUPO(110G),BLACK,	1	SNA
..3		BN69-10158A	BOX-ACCESSORY;H8000_ACCESSORY,CB,SERP Re	1	SNA
..3		BN69-10159A	PAD-TYPE;H8000_ACCESSORY,PAPER,W366,L182	1	SNA
..3		BN69-10160A	PAD-TYPE;H8000_ACCESSORY,CB,SERP Recycle	1	SNA
..3		BN69-10225B	WRAP VINYL-SHRINK;ACCESSORY BOX,PLASTIC	0	SNA
..3		BN69-10806A	PAD-TYPE;H8000_ACCESSORY,CB,SERP Recycle	1	SNA
..3	3DGLA	BN96-27418A	ASSY ACCESSORY 3D GLASSES;SSG-5100GB,3D	2	SC
..3	CAIR	BN96-31644A	ASSY CABLE P;IR BLASTER,UL1185 28AWG,2.5	1	SA