


1. Exploded View & Part List

Exploded View

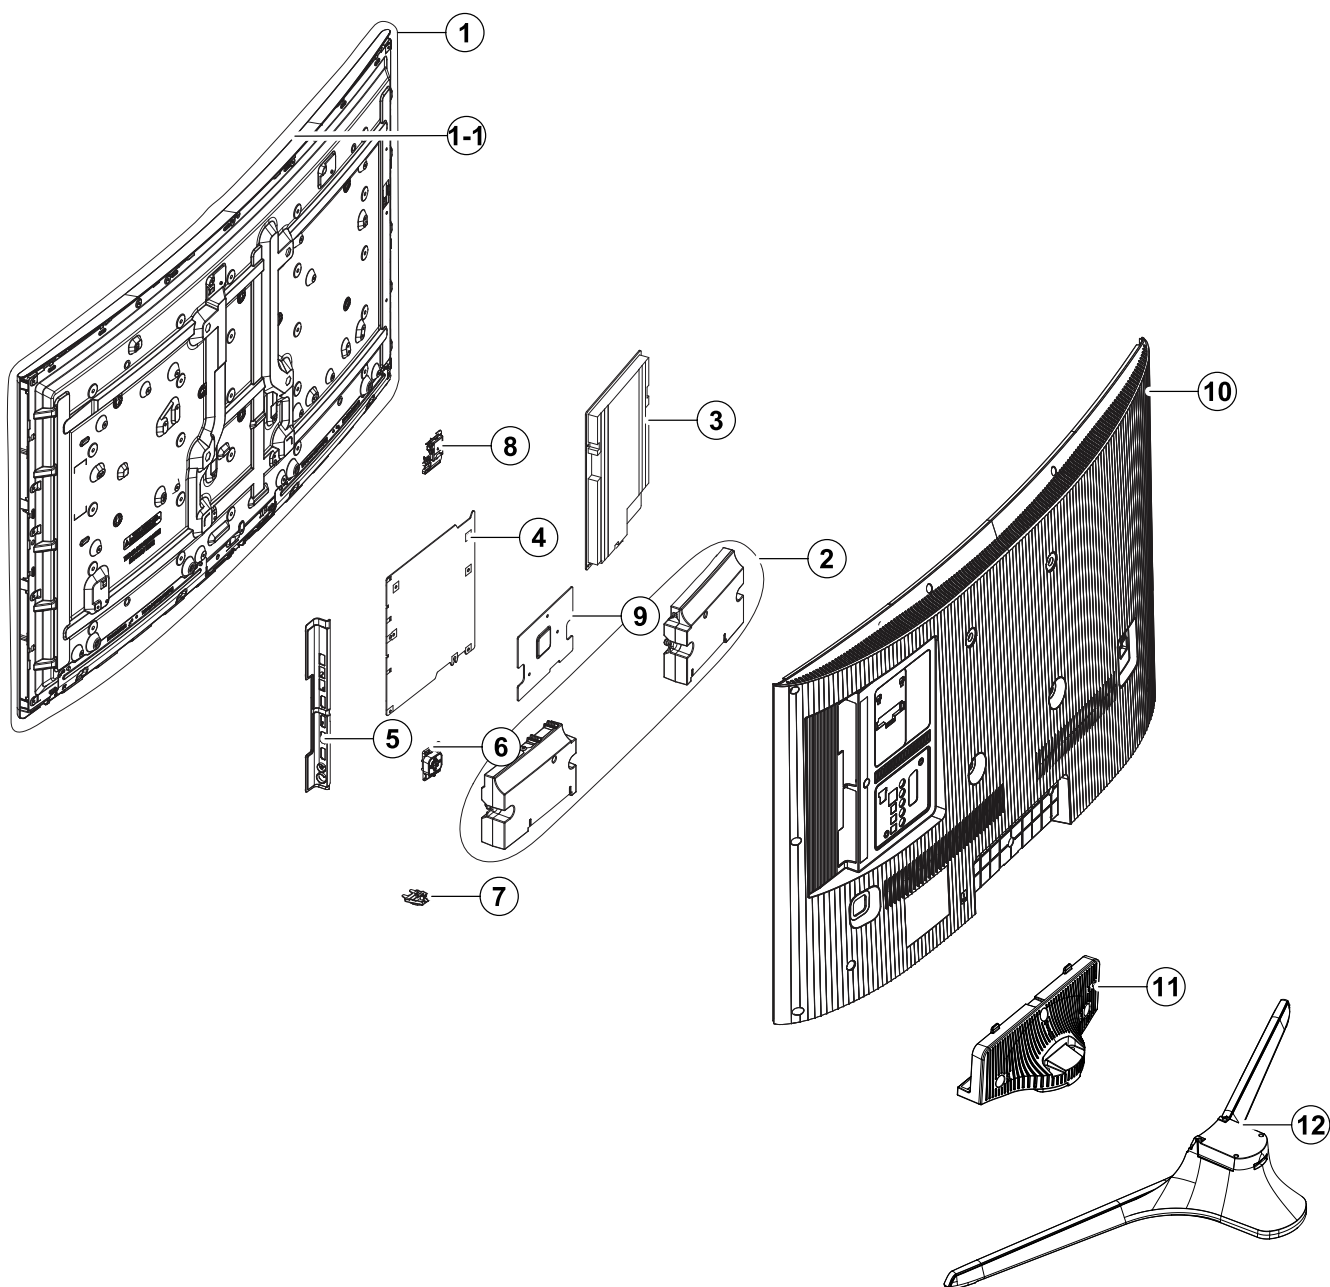

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2	PANEL	BN95-01989D	PRODUCT LCD-SDC; CY-WJ048HGLV4V,JU6670,Ba	SA	1
1-1	3	TC01A	BN96-35781B	ASSY CHASSIS TOP P; 48JU6700,BN64-03027B,	SA	1
2	2	SP01A	BN96-35009B	ASSY SPEAKER P; 6ohm,4pin,10W,JU6700 48"	SA	1
3	2	P001A	BN44-00807A	DC VSS-LED TV PD BD; L55S6_FHS,L55S6_FHS,	SA	1
4	2	M0014	BN94-09030W	ASSY PCB MAIN; UHD 6K	SA	1
5	3		BN61-11926A	HOLDER-SIDE AV; JU6400,HIPS,BLK,HB, 2 TUN	SNA	1
6	2		BN96-35345B	ASSY BOARD P-FUNCTION_SW; JU7500,Function	SA	1
7	2	FB01A	BN96-35346B	ASSY BOARD P-FUNCTION ASSY; JU7500,Function	SA	1
8	2	NW01	BN59-01194E	NETWORK; 11ac Combo,Internal WiFi,USB 2.0	SA	1
9	3	TCON	BN95-01941A	ASSY T CON; LSF480FN06-K,48U60Hz Curved	SA	1
10	2	R001A	BN96-36251K	ASSY COVER P-REAR; JU6690 48,EUROPE TCS2,	SA	1
11	2	SG01A	BN96-36255G	ASSY GUIDE P-STAND; JU6670,V STAND,HIPS,B	SA	1
12	2	SB04A	BN96-35225A	ASSY STAND P-BASE; J5500 48",PC+ABS+GF20	SA	1

2. Electrical Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			UE48JU6670UXZF (TH01)		
1		BN90-06530H	ASSY W/I;LED_J6K	1	SNA
.2		BN81-08159Z	PART SET-ELEC W/I;UF**,UH**,UG**,ELEC	1	SNA
.2		BN81-11260C	A/S PART SET-MECH W/I;UJ6R,U48JR*	1	SNA
1	R001A	BN90-07065D	ASSY COVER REAR;LED_J6K	1	SNA
.2	SCREW	6001-003074	SCREW-MACHINE;BH,+,M3,L6,ZPC(BLK),SWRCH1	15	SA
.2	SCREW	6003-000003	SCREW-TAPTYPE;BH,+,-,B,M4,L10,ZPC(BLK),S	1	SA
.2	R001A	BN96-36251K	ASSY COVER P-REAR;JU6690 48,EUROPE TCS2,	1	SA
..3	R001	BN63-13780H	COVER-REAR;JU6700,ABS+PC,V1,BK0008,48in,	1	SNA
...4		0103-010488	RESIN PC ABS;NH-1055 K21441,Black,BK0008	2607	SNA
..3		BN68-03518H	LABEL-STICKER-CI SLOT;WW,ALL,PET,0.1,120	1	SNA
..3		BN68-06900F	LABEL-TERMINAL SIDE;JU6400,PET,T0.125,15	1	SNA
1	S001A	BN90-07342A	ASSY STAND;UJ8X	1	SNA
.2	SB04A	BN96-35225A	ASSY STAND P-BASE;J5500 48",PC+ABS+GF20	1	SA
..3	SCREW	6003-001001	SCREW-TAPTYPE;FH,+, -,B,M3,L8,ZPC(BLK),SW	2	SA
..3	HOLDER	BN01-09494D	HOLDER-BOLT;BH+,SWRCH18A,L14,M4,B TYPE	2	SA
..3		BN61-11431A	BRACKET-STAND BAR;Y15 F-LED J5100/5500 4	1	SNA
..3	AS080	BN63-04755L	SHEET-COVER;22LC350,PE,T0.05,W130mm,200M	1	SNA
..3		BN63-13259A	COVER-STAND BASE;Y15 F-LED J5100/5500 48	1	SNA
...4		0103-009946	RESIN PC ABS;HM-1200,BLACK,BK0007,V1	410	SNA
..3		BN67-00327M	RUBBER-FOOT;STAND,SILICON,10*10,T1.5,GRA	2	SNA
..3		BN67-00398P	RUBBER-FOOT;RUBBER,SILICONE,15.5*8,2.5,G	5	SNA
..3		BN95-02141A	ASSY COVER STAND SMT;J5500 STAND,48",LIG	1	SNA
...4		0203-001269	TAPE-OPP MASKING;#301,T0.06,W75,L50000,N	0	SNA
...4		0204-002420	SOLVENT;1M-1000,C3H70H,96	0	SNA
...4		AA69-07325Q	PAD-PLATE;CB,DW,860,520	1	SNA
...4		AA69-07416E	MASTER BOX;CB,DW,870,550,325	1	SNA
...4		AA69-07495D	PAD-PLATE;CB,DW-5,860,257	1	SNA
...4		AA69-07509A	PAD-BOT,EPP;CB,DW,859,520,30	1	SNA
...4		BN01-00160A	TARGET-CHROMIUM-CY;Chromium target,99.95	0	SNA
...4		BN01-00161A	TARGET-CHROMIUM-PL;chromium target,over	0	SNA
...4		BN02-00353A	COATING-AFS;SSVD-39,2%,1~10 cps,1.78	4	SNA
...4		BN63-13263A	COVER-DECORATION STAND;J5100/5500 48",AB	1	SNA
...5		0103-005041	RESIN PC ABS;FR3200TV,901408,BK0008,1.2m	85	SNA
...4		BN68-03920A	LABEL BOX;All Monitor,ART-PAPER 100G,WHT	1	SNA
...4		BN69-10617K	PACKING SHEET;40" INHOUSE,HDPE,PE FOAM,T	1	SNA
.2	SG01A	BN96-36255G	ASSY GUIDE P-STAND;JU6670,V STAND,HIPS,B	1	SA
..3		0203-001499	TAPE-OPP;T0.04,W15,,TRP	0	SNA

Exploded Views and Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...3	SG03	BN61-11965A	GUIDE-STAND;JU6740,PC+GF20%,BLK	1	SNA
...4		0103-007285	RESIN PC;HF3200H,K21294,BK0007,V2	1.5mm	250
...4		BN68-00513D	LABEL-RESIN;resin,-,art paper,-,10,25,-,	1	SNA
...3		BN68-05603A	LABEL-E,PASS;ALL MODEL,ART PAPER 90G,60,	1	SNA
...3		BN96-32380B	ASSY ACCESSORY-SCREW;BN69-10588A,BN61-09	2	SNA
...4	HOLDER	BN61-09494D	HOLDER-BOLT;BH+,SWRCH18A,L14,M4,B TYPE	8	SA
...4		BN69-10588A	BAG SCREW;LDPE,-,0.05,70,90,TRP,-,-,LED	2	SNA
1		BN91-13792C	ASSY LCM-SDC;CY-WJ048HGLV4V,BN95-01989D	1	SNA
.2	PANEL	BN95-01989D	PRODUCT LCD-SDC;CY-WJ048HGLV4V,JU6670,Ba	1	SA
...3	SCREW	6001-003075	SCREW-MACHINE;BH,+,M3,L4,ZPC(WHT),SWRCH1	8	SA
...3	SCREW	6001-003079	SCREW-MACHINE;CH,+,M3,L6,ZPC(BLK),SWRCH1	2	SA
...3		BN68-05722A	LABEL-STICKER;ALL MODEL,POLYPROPYLENE,0.	1	SNA
...3		BN90-06332A	ASSY MISC-BLU;CY-WJ048HGLV1V	1	SNA
...4		BN61-11508A	SUPPORT-PLATE;Y15 LED,PC,V2,CLEAR,OD-19m	2	SNA
...4		BN61-11743A	LGP-DIFFUSESR PLATE;48inch Curved, Diffu	1	SNA
...4		BN63-13431A	SHEET-DBEF;DLF250,PET,0.25,1064.05,603.9	1	SNA
...4		BN63-13441A	SHEET-PRISM;G200,PET,0.295,1064.05,608.8	1	SNA
...4		BN63-13442A	SHEET-REFLECTOR;SY95S,PET,0.188,1019.3,5	1	SNA
...4		BN96-34793A	ASSY LED BAR P-LED BAR;48" UHD_L_SDC,5ea	6	SNA
...4		BN96-34794A	ASSY LED BAR P-LED BAR;48" UHD_R_SDC,6ea	6	SNA
...4		BN96-35486A	ASSY FRAME P-MOLD MIDDLE(U);Y15 LED 48",	1	SNA
....5		BN61-11583A	FRAME-MOLD-MIDDLE-U;Y15 LED 48",PC+GF10%	1	SNA
...4		BN96-35490A	ASSY FRAME P-MOLD MIDDLE(D);Y15 LED 48"	1	SNA
....5		BN60-00816U	SPACER-PANEL;Y15_LED,SI,L520,GRAY,T0.5,W	2	SNA
....5		BN60-01062C	SPACER-RUBBER;Y15 LED,RUBBER,L29.0,GRAY,	4	SNA
....5		BN61-11728A	FRAME-MOLD MIDDLE-D;Y15 LED 48" SDC,PC+G	1	SNA
...4		BN96-35494A	ASSY FRAME P-MOLD MIDDLE(LR);Y15 LED 48"	2	SNA
....5		BN60-00816V	SPACER-PANEL;Y15_LED,SI,L590,GRAY,T0.5,W	2	SNA
....5		BN61-11577A	FRAME-MOLD-MIDDLE(LR);Y15 LED 48",PC+GF1	2	SNA
...4		BN96-35765A	ASSY CHASSIS BOTTOM P;Y15 JU6500 48",BN6	1	SNA
....5	SCREW	6001-003075	SCREW-MACHINE;BH,+,M3,L4,ZPC(WHT),SWRCH1	1	SA
....5		AA63-00800A	GASKET-(C);SVP-50L7HX,Conductive Fabric,	2	SNA
....5		BN02-00040C	TAPE DOUBLE FACE-D-PLATE;F-LED ALL,MKT50	2	SNA
....5		BN02-00102B	TAPE-FILAMENT;#8917,0.15,25,50,WHITE	0	SNA
....5		BN02-00173C	TAPE OPP;PET,0.05,40,BLK	0	SNA
....5		BN02-00383A	TAPE THERMAL-MC PAD;Y15 JU7K,AL,T0.5,60m	2	SNA
....5		BN61-09771A	HOLDER-LED PCB;Y13 OLED CURVED 55",SWRCH	2	SNA
....5		BN61-11508A	SUPPORT-PLATE;Y15 LED,PC,V2,CLEAR,OD-19m	10	SNA
....5		BN61-11509A	HOLDER-SOURCE PCB;Y15 LED,ABS,BLK	8	SNA
....5		BN61-11572A	HOLDER-MIDDLE(LR);Y15 7.5K SDC 48",PC+GF	2	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5		BN61-11573A	HOLDER-MIDDLE-U;Y15 7.5K SDC 48",PC+GF10	1	SNA
....5		BN61-11771A	HOLDER-MIDDLE-D;Y15 7.5K SDC 48",PC+GF10	1	SNA
....5		BN62-00690B	INSULATION-PD-BOARD;JU7500,PC,0.45,255.0	1	SNA
....5	CC02	BN64-02919A	CHASSIS-BOTTOM;Y15 LED 48",EGI-SECC,T0.6	1	SNA
....6		BN01-00251A	STEEL;EGI-SECC AG,0.6mm,675mm,SECC,AG	3710	SNA
....6		BN61-11982A	HOLDER-WALL RIVET;Y15 F-LED,CR-SPCC,L15.	4	SNA
....5		BN67-00338C	RUBBER-BOTTOM;Y15 ALL MODEL,SILICON,T7.0	2	SNA
....5	T0527	BN68-00513A	LABEL-E,PASS;ALL MODEL,YUPO(110G),BLACK,	1	SNA
....5		BN96-34708A	ASSY BOARD P-LED INTERFACE BOARD;8pin 48	1	SNA
....5		GK63-00070A	GASKET;ID-45BNKH-10-8-5-23-C,Conductive	4	SNA
..3	TCON	BN95-01941A	ASSY T CON;LSF480FN06-K,48U60Hz Curved	1	SA
...4		BN62-00704A	HEAT SINK-PS;JU 6.4K,A1050,BLACK,115*88.	1	SNA
...4		BN97-09228A	ASSY SMD;BN95-01941A	1	SNA
....5		0202-001899	SOLDER-CREAM;M705-GRN360-K2-VT,20-38um,S	1	SNA
....5		0403-001164	DIODE-ZENER;MMSZ5232B,5.32-5.88V,500MW,S	1	SA
....5		0403-001831	DIODE-ZENER;KDZ12B,12/13.5V,1000mW,SOD-1	2	SA
....5		0404-001640	DIODE-SCHOTTKY;SS1060HEWS,60V,1000mA,SOD	1	SA
....5		0404-001643	DIODE-SCHOTTKY;B360A,60V,3000mA,SMA,TP	1	SA
....5		0406-001643	DIODE-TVS;1SMA33AT3G,36.7/38.65/40.6V,40	1	SNA
....5		0406-001689	DIODE-TVS;SMH14A,15.6V,17.9V,1MAV,40A,TP	1	SA
....5		0406-001691	DIODE-TVS;5.5V,7.0V,8.5V,0.5MAV,TP	2	SA
....5		0501-000465	TR-SMALL SIGNAL;MMBT3904,NPN,350mW,SOT-2	1	SA
....5		0502-001346	TR-POWER;FCX591A,PNP,1000mW,SOT89,TR,30/	1	SA
....5		0505-002660	FET-SILICON;Si2308BDS,N,60V,2.3A,0.156oh	1	SNA
....5		0505-003224	FET-SILICON;AO6405,P,-30V,-5A,0.052ohm,2	1	SA
....5		0505-003507	FET-SILICON;AO3424,N,30V,3.8A,1.4W,SOT-2	4	SA
....5	EL02	0601-002037	LED;SMD(TOP VIEW),BLUE,1.6x0.8mm,465/470	2	SA
....5		0801-002345	IC-CMOS LOGIC;7S04,INVERTER,SOT-353,5P,2	1	SA
....5		0801-003580	IC-CMOS LOGIC;TC7WB66CFK,SSOP,8P,2.0X2.3	3	SA
....5		1105-002274	IC-DDR3 SDRAM;K4B1G1646G-BCMA,DDR3 1866,	2	SNA
....5		1203-006130	IC-POS.FIXED REG.;S-1172B25-U5T1G,SOT-8	1	SA
....5		1203-007955	IC-DC/DC CONVERTER;BM81222MWV,QFN,48P,6x	1	SNA
....5		1203-008118	IC-DC/DC CONVERTER;AOZ3013PI,SO-8,8P,4.9	2	SA
....5		1203-008319	IC-DC/DC CONVERTER;BM81233,QFN,32P,5x5mm	1	SNA
....5		1203-008391	IC-DC/DC CONVERTER;AOZ1269QI-02,QFN-23L,	1	SA
....5		1204-003617	IC-VIDEO PROCESS;SDP1409.3,FCBGA,1023P,3	1	SA
....5	IS01	1209-002183	IC-SENSOR;S-5851AAA-M6T1U,SOT,6Z30,2.9x1	1	SA
....5		1405-001381	VARISTOR;11V,8VDC,30A,1.6x0.8x0.9mm,TP,2	4	SA
....5		2007-000039	R-CHIP;0ohm,1%,1/10W,TP,1608	7	SA
....5		2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5		2007-000067	R-CHIP;15Kohm,1%,1/10W,TP,1608	1	SNA
....5		2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	4	SA
....5		2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608	3	SA
....5		2007-000078	R-CHIP;1Kohm,5%,1/10W,TP,1608	2	SA
....5		2007-000084	R-CHIP;4.7Kohm,5%,1/10W,TP,1608	2	SA
....5		2007-000109	R-CHIP;1Mohm,5%,1/10W,TP,1608	1	SA
....5		2007-000137	R-CHIP;2Kohm,5%,1/16W,TP,1005	6	SNA
....5		2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005	10	SA
....5		2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005	3	SNA
....5		2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	34	SNA
....5		2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	12	SA
....5		2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	SNA
....5		2007-000165	R-CHIP;200Kohm,5%,1/16W,TP,1005	4	SNA
....5		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	13	SNA
....5		2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	2	SNA
....5		2007-000239	R-CHIP;1.5Kohm,1%,1/10W,TP,1608	2	SA
....5		2007-000256	R-CHIP;1.6Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000265	R-CHIP;1.8Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000287	R-CHIP;100ohm,1%,1/10W,TP,1608	3	SNA
....5		2007-000336	R-CHIP;120Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000516	R-CHIP;2.7Kohm,1%,1/10W,TP,1608	3	SNA
....5		2007-000614	R-CHIP;24Kohm,1%,1/10W,TP,1608	2	SNA
....5		2007-000651	R-CHIP;27Kohm,1%,1/10W,TP,1608	2	SA
....5		2007-000683	R-CHIP;3.3Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000842	R-CHIP;3Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000869	R-CHIP;4.7Kohm,1%,1/10W,TP,1608	3	SA
....5		2007-000939	R-CHIP;47Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-000962	R-CHIP;5.1Kohm,1%,1/10W,TP,1608	3	SA
....5		2007-000999	R-CHIP;510ohm,1%,1/10W,TP,1608	2	SA
....5		2007-001068	R-CHIP;6.8Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-001125	R-CHIP;68Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-001139	R-CHIP;7.5Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-001175	R-CHIP;8.2Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-001237	R-CHIP;910ohm,1%,1/10W,TP,1608	1	SA
....5		2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	6	SNA
....5		2007-002437	R-CHIP;2ohm,5%,1/10W,TP,1608	1	SNA
....5		2007-002768	R-CHIP;6.2Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-002900	R-CHIP;11Kohm,1%,1/10W,TP,1608	1	SNA
....5		2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	2	SNA
....5		2007-007139	R-CHIP;47Kohm,1%,1/16W,TP,1005	3	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	5	SNA
....5		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	8	SNA
....5		2007-007309	R-CHIP;12Kohm,1%,1/16W,TP,1005,0.35T	3	SA
....5		2007-007310	R-CHIP;8.2Kohm,1%,1/16W,TP,1005	1	SA
....5		2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	3	SA
....5		2007-007315	R-CHIP;3.9Kohm,1%,1/16W,TP,1005	1	SNA
....5		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	12	SNA
....5		2007-007488	R-CHIP;75Kohm,1%,1/16W,TP,1005	1	SNA
....5		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005	7	SNA
....5		2007-007590	R-CHIP;82Kohm,1%,1/16W,TP,1005	2	SNA
....5		2007-007627	R-CHIP;16Kohm,1%,1/16W,TP,1005	2	SA
....5		2007-007651	R-CHIP;9.1Kohm,1%,1/10W,TP,1608	1	SA
....5		2007-007768	R-CHIP;13Kohm,1%,1/10W,TP,1608	3	SA
....5		2007-007942	R-CHIP;1Mohm,1%,1/16W,TP,1005	1	SNA
....5		2007-008136	R-CHIP;36Kohm,1%,1/16W,TP,1005	1	SA
....5		2007-008332	R-CHIP;11.5Kohm,1%,1/16W,TP,1005	1	SA
....5		2007-008596	R-CHIP;0.1ohm,1%,1/4W,TP,3216	1	SC
....5		2007-008779	R-CHIP;0ohm,1%,1/16W,TP,1005	4	SA
....5		2007-009777	R-CHIP;4.99Kohm,1%,1/16W,TP,1005	1	SA
....5		2011-001264	R-NETWORK;10ohm,5%,1/16W,L,CHIP,8P,TP,2.	16	SNA
....5	AD480	2203-000332	C-CER,CHIP;0.012nF,5%,50V,C0G,TP,1608	2	SA
....5	AD480	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	2	SA
....5	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	2	SA
....5	AD480	2203-000491	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1608	1	SA
....5	AD480	2203-000715	C-CER,CHIP;3.3nF,10%,50V,X7R,TP,1608	2	SNA
....5	AD480	2203-000838	C-CER,CHIP;0.39nF,5%,50V,C0G,TP,1608	1	SNA
....5	AD480	2203-002711	C-CER,CHIP;100nF,10%,25V,X7R,TP,1608	4	SA
....5	AD480	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	6	SNA
....5	AD480	2203-005344	C-CER,CHIP;22nF,10%,25V,X7R,TP,1005,0.5T	10	SNA
....5	AD480	2203-005918	C-CER,CHIP;1000nF,10%,6.3V,X7R,TP,1608	4	SNA
....5	AD480	2203-005968	C-CER,CHIP;4.7nF,10%,50V,X7R,TP,1005,0.5	2	SNA
....5	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005	2	SA
....5	AD480	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,TP,1005,0.5	115	SNA
....5	AD480	2203-006320	C-CER,CHIP;2200nF,10%,16V,X7R,TP,2012	2	SNA
....5	AD480	2203-006324	C-CER,CHIP;2200nF,10%,10V,X5R,TP,1608	1	SA
....5	AD480	2203-006348	C-CER,CHIP;1000nF,10%,25V,X5R,TP,1608,0.	2	SA
....5	AD480	2203-006474	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,2012	8	SA
....5	AD480	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	1	SNA
....5	AD480	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,TP,1608,0.	7	SNA
....5	AD480	2203-006741	C-CER,CHIP;470nF,10%,25V,X5R,TP,1608,0.8	3	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5	AD480	2203-006841	C-CER,CHIP;1000nF,10%,16V,X5R,TP,1005	1	SNA
....5	AD480	2203-006890	C-CER,CHIP;10000nF,20%,6.3V,X5R,TP,1608	2	SNA
....5	AD480	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012,1	40	SNA
....5	AD480	2203-007193	C-CER,CHIP;10000nF,10%,6.3V,X7R,TP,2012	7	SA
....5	AD480	2203-007240	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,1608(	11	SA
....5	AD480	2203-007269	C-CER,CHIP;22000nF,20%,10V,X5R,TP,2012(2	6	SA
....5	AD480	2203-007270	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	48	SNA
....5	AD480	2203-007306	C-CER,CHIP;10000nF,10%,25V,X5R,TP,2012,1	9	SNA
....5	AD480	2203-007544	C-CER,CHIP;100nF,10%,50V,X7R,TP,1005,0.5	4	SA
....5		2703-003747	INDUCTOR-SMD;22uH,20%,6060,0.135ohm,1300	3	SA
....5		2703-003862	INDUCTOR-SMD;10uH,20%,6060,0.065ohm,1900	1	SA
....5		2703-003913	INDUCTOR-SMD;2.2uH,20%,2520,1.2T,0.116Oh	1	SNA
....5		2703-003937	INDUCTOR-SMD;1uH,20%,7.0x6.47x3.0mm,0.00	1	SA
....5		2703-004199	INDUCTOR-SMD;10uH,20%,6.6x7.0mm,2.2mm,0.	1	SNA
....5		2703-004589	INDUCTOR-SMD;2.2uH,20%,5050,2T,0.048Ohm,	2	SA
....5		2801-005324	CRYSTAL-SMD;27MHz,30ppm,Ceramic SMD(4pin	1	SA
....5		3301-002039	BEAD-SMD;26ohm,1608,TP	15	SA
....5		3601-001376	FUSE-SURFACE MOUNT;32V,3A,FAST-ACTING,Hi	2	SNA
....5		3601-001386	FUSE-SURFACE MOUNT;125V,5A,FAST-ACTING,C	1	SA
....5		3708-003073	CONNECTOR-FPC/FFC/PIC;51P,0.5mm,SMD,AU,N	1	SA
....5		3708-003241	CONNECTOR-FPC/FFC/PIC;96P,0.5mm,SMD-A,AU	2	SNA
....5		3711-007839	CONNECTOR-HEADER;BOX,15P,1R,1.25mm,SMD-A	1	SA
....5		6302-001290	GASKET;SMR-TS-4-4.5-3,4.0mm,Ni+Au+SUS+Mg	4	SNA
....5		BN41-02297A	PCB MAIN;2015 SDC UHD,FR-4,4,1.6T,160*14	1	SNA
....5		BN97-09428A	ASSY MICOM;1107-002265,BN95-01941A,BN41-	1	SNA
.....6	IC	1107-002265	IC-NOR FLASH;W25Q32FVSSIG,32Mbit,SOP,8P,	1	SA
...3		BN96-34877A	ASSY OPEN CELL;LSF480FN06-K,8bit,48INCH,	1	SNA
...4		BN81-07436A	A/S-ADHESIVE-A.C.F;ADHESIVE-A.C.F,3-ADHE	1	SNA
...4		BN81-07943A	A/S-ADHESIVE-A.C.F(TP500B);ADHESIVE-A.C.	1	SNA
...4		BN82-01524A	A/S ASSY-IC DRIVER GATE;IC DRIVER GATE,L	1	SNA
...4		BN82-01547A	A/S ASSY-POLARIZER TFT;POLARIZER TFT,LJ0	1	SNA
...4		BN82-01587A	A/S ASSY-POLARIZER C/F;POLARIZER C/F,LJ0	1	SNA
...4		BN82-01606A	A/S ASSY-IC DRIVER SOURCE;IC DRIVER SOUR	1	SNA
...4		BN82-01609A	A/S ASSY-ASSY PCB-SOURCE(L);ASSY PCB-SOU	1	SNA
...4		BN82-01610A	A/S ASSY-ASSY PCB-SOURCE(R);ASSY PCB-SOU	1	SNA
...3	FL06	BN96-34970A	ASSY CABLE P-FFC;UHD,FFC,NH,57mm 1.0,96	2	SNA
...3		BN96-35609A	ASSY COVER P-SOURCE L;JU7500,Y15 LED 48"	1	SNA
...4		BN62-00722A	INSULATION-SPCB L;PC,0.125,18.8,86.5,BLK	1	SNA
...4		BN63-13374A	COVER-SOURCE-PCB L;Y15 LED 48",EGI-SECC,	1	SNA
...3		BN96-35614A	ASSY COVER P-SOURCE R;JU7500,Y15 LED 48"	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		BN60-00554R	SPACER-SOURCE;Y15 VD,SI RUBBER,10,BLACK,	4	SNA
...4		BN62-00721A	INSULATION-SPCB R;PC,0.125,18.8,86.5,BLK	1	SNA
...4		BN62-00721B	INSULATION-SPCB EDGE;PC,0.12,65,37,BLK	1	SNA
...4		BN63-13373A	COVER-SOURCE-PCB R;Y15 LED 48",EGI-SECC,	1	SNA
...4		BN74-00053J	TAPE PAPER-PROTECTION;-3M2307,PAPER,-,0	0	SNA
..3	TC01A	BN96-35781B	ASSY CHASSIS TOP P;48JU6700,BN64-03027B,	1	SA
...4		BN60-00667E	SPACER-GASKET;Y13 SF-LED,GASKET(FG200A),	3	SNA
...4		BN60-01060R	SPACER-TOP;Y15_LED,CONDUCTIVE FABRIC,L10	2	SNA
...4		BN60-01060S	SPACER-TOP;Y15_LED,CONDUCTIVE FABRIC,L59	2	SNA
...4		BN63-14373G	SHEET-COVER;PE+PP,0.068,36mm,ST-671HP,CL	1	SNA
...4		BN63-14373J	SHEET-COVER;PE+PP,0.068,23mm,ST-671HP,cl	1	SNA
...4		BN63-14373K	SHEET-COVER;PE+PP,0.068,28mm,ST-671HP,cl	1	SNA
...4	AC157	BN64-03027B	CHASSIS-TOP;JU6700_48 SDC,PC+ABS+MF15%,B	1	SNA
1		BN91-14214F	ASSY SHIELD;LED_J6K	1	SNA
.2	SCREW	6001-003081	SCREW-MACHINE;PWH,+,M3,L5,ZPC(WHT),SWRCH	9	SA
.2		BN02-00102B	TAPE-FILAMENT;#8917,0.15,25,50,WHITE	0	SNA
.2	M-F	BN39-01990K	LEAD CONNECTOR-FUNCTION;48JU6700,LEAD CO	1	SA
.2	EC13	BN39-02017B	LEAD CONNECTOR;FLAT CONNECTOR ASS'Y,Lead	1	SA
.2		BN39-02025C	LEAD CONNECTOR-POWER;UN48JU6400AFXZA,Fla	1	SA
.2		BN39-02030E	LEAD CONNECTOR-BLU;BLU,LEAD CONNECTOR,UL	1	SA
.2	P001A	BN44-00807A	DC VSS-LED TV PD BD;L55S6_FHS,L55S6_FHS,	1	SA
.2	NW01	BN59-01194E	NETWORK;11ac Combo,Internal WiFi,USB 2.0	1	SA
.2	SP01A	BN96-35009B	ASSY SPEAKER P;6ohm,4pin,10W,JU6700 48"	1	SA
.2		BN96-35345B	ASSY BOARD P-FUNCTION_SW;JU7500,Function	1	SA
.2	FB01A	BN96-35346B	ASSY BOARD P-FUNCTION ASSY;JU7500,Function	1	SA
.2	FL06	BN96-36273F	ASSY CABLE P;UN48JU7500,FFC,NH,350mm,51P	1	SA
1	M0017	BN91-15493J	ASSY CHASSIS;UHD 6K	1	SNA
.2	M0014	BN94-09030W	ASSY PCB MAIN;UHD 6K	1	SA
..3		BN61-11926A	HOLDER-SIDE AV;JU6400,HIPS,BLK,HB, 2 TUN	1	SNA
...4		0103-004628	RESIN HIPS;HF-1690H,K2901,BK0020,1.5mm H	15	SNA
..3	AH020	BN62-00726A	HEAT SINK;Y15 UHD 6K (Main),A1050,BLACK	1	SNA
..3		BN97-09275C	ASSY SMD;UJ6R,BN41	1	SNA
...4		0202-001899	SOLDER-CREAM;M705-GRN360-K2-VT,20-38um,S	5	SNA
...4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	SA
...4	DR01A	0402-001614	DIODE-RECTIFIER;S1G,400V,1A,DO-214AC,TP	1	SA
...4		0403-001783	DIODE-ZENER;BZB84-C6V2,5.8/6.6V,300mW,SO	4	SNA
...4		0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	4	SA
...4		0404-001881	DIODE-SCHOTTKY;SS3040-HE,40V,3000mA,SOD-	2	SA
...4		0406-001200	DIODE-TVS;RCLAMP0504F,6/-V,150W,SC-70	2	SA
...4		0406-001290	DIODE-TVS;3.0SMCJ20A,22.2/-/24.5V,3000W,	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		0406-001573	DIODE-TVS;AOZ8806DI-05,6	1	SA
...4		0406-001628	DIODE-TVS;AOZ8804ADI,6/-V,150W,SLP2510	1	SA
...4		0406-001635	DIODE-TVS;SMF5.0A,6.4V, 6.7V, 7V,200W,SM	6	SA
...4		0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	3	SC
...4		0504-000126	TR-DIGITAL;KSR1101,NPN,200mW,4.7K/4.7Koh	1	SA
...4		0505-001844	FET-SILICON;SI4435DDY-T1-GE3,P,-30V,-11.	1	SA
...4		0505-002598	FET-SILICON;AP2317GN,P,-20V,-4.2A,0.052o	1	SA
...4		0505-002893	FET-SILICON;AO4801AS,P,-30V,-5A,2W,SOIC-	1	SA
...4		0505-003397	FET-SILICON;2N7002K,N,60V,380mA,1.19ohm,	2	SA
...4		0505-003507	FET-SILICON;AO3424,N,30V,3.8A,1.4W,SOT-2	4	SA
...4		0801-003330	IC-CMOS LOGIC;Octal buffer,DQFN,20P,4.5x	1	SA
...4		1001-001860	IC-ANALOG SWITCH;NX5L2750CGU,QFN,10P,1.4	1	SNA
...4		1001-001934	IC-VIDEO SWITCH;SiI9777,LQFP,208P,28X28m	1	SNA
...4		1103-001564	IC-EEPROM;S-24C512CI-J800,512Kbit,64Kx8,	1	SA
...4		1105-002528	IC-DDR3 SDRAM;K4B4G1646D-BCMA,DDR3 1866,	4	SA
...4		1105-002534	IC-DDR3 SDRAM;K4B2G1646Q-BCMA,DDR3 SDRAM	2	SA
...4		1201-000166	IC-OP AMP;LM358,SOP,ST,8P,150MIL,DUAL,10	1	SA
...4		1201-003891	IC-AUDIO AMP;NTP7415,MLF,48P,7x7mm,DUAL,	1	SA
...4		1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	SA
...4		1203-006330	IC-POWER SUPERVISOR;TPS2065DBV,SOT-23,5P	2	SA
...4		1203-007018	IC-DC/DC CONVERTER;TPS54821RHL,QFN,14P,3	1	SA
...4		1203-007238	IC-PWM CONTROLLER;TPS54427,DDA,8P,4.8x3.	2	SNA
...4		1203-007694	IC-DC/DC CONVERTER;SN1106041DDAR,DDA,8Z3	1	SA
...4		1203-007697	IC-DC/DC CONVERTER;LNBH26SPQR,QFN,24Z30,	1	SNA
...4		1203-008023	IC-POS1.ADJUST REG.;AOZ2003PI,SO-8,8P,4.	1	SA
...4		1203-008082	IC-DC/DC CONVERTER;TPS54627DDAR,SOP 8P,8	1	SA
...4		1203-008104	IC-POS1.FIXED REG.;S-13A1D18-E800,HSOP,8	2	SNA
...4		1203-008105	IC-POS1.FIXED REG.;S-13A1D33-E800,HSOP,8	1	SNA
...4		1203-008112	IC-POS1.ADJUST REG.;AOZ2002PI,SO-8,8P,4.	1	SA
...4		1203-008183	IC-DC/DC CONVERTER;AOZ3015PI-1,EPAD SO-8	1	SA
...4		1203-008392	IC-VOL. DETECTOR;S-6414AAB-L800X,TSOT-23	1	SA
...4		1203-008393	IC-DDR TERMINATION REG.;AP2303MTR-G1-89,	1	SA
...4		1203-008454	IC-DC/DC CONVERTER;TPS56528,HSOP8,8P,4,8	1	SA
...4		1204-003587	IC-DECODER;SDP1406,PBGA,1053P,31x31mm,PL	1	SA
...4		1205-004447	IC-SWITCH;TPS2051CDBVR,SOT23-5,5P,3x1.65	1	SA
...4		1205-004983	IC-SWITCH;BD82032FVJ,TSSOP-B8J,8P,3.0x4.	3	SA
...4		1405-001271	VARISTOR;35V,20Vdc,5A,1.0x0.5x0.6mm,TP,1	12	SA
...4		2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	43	SNA
...4		2007-000146	R-CHIP;6.8Kohm,5%,1/16W,TP,1005	2	SNA
...4		2007-000166	R-CHIP;300Kohm,5%,1/16W,TP,1005	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	66	SNA
...4		2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	4	SNA
...4		2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	12	SNA
...4		2007-000174	R-CHIP;47ohm,5%,1/16W,TP,1005	52	SNA
...4		2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	3	SNA
...4		2007-000999	R-CHIP;510ohm,1%,1/10W,TP,1608	1	SA
...4		2007-001125	R-CHIP;68Kohm,1%,1/10W,TP,1608	4	SA
...4		2007-001284	R-CHIP;4.7ohm,5%,1/16W,TP,1005	16	SNA
...4		2007-001285	R-CHIP;5.6ohm,5%,1/16W,TP,1005	16	SA
...4		2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	16	SNA
...4		2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	1	SNA
...4		2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	10	SNA
...4		2007-007132	R-CHIP;15Kohm,1%,1/16W,TP,1005	3	SA
...4		2007-007134	R-CHIP;39Kohm,1%,1/16W,TP,1005	2	SA
...4		2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007137	R-CHIP;1.2Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007138	R-CHIP;27Kohm,1%,1/16W,TP,1005	2	SNA
...4		2007-007139	R-CHIP;47Kohm,1%,1/16W,TP,1005	18	SA
...4		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	32	SNA
...4		2007-007197	R-CHIP;3.3ohm,5%,1/16W,TP,1005	4	SNA
...4		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	16	SNA
...4		2007-007308	R-CHIP;33Kohm,1%,1/16W,TP,1005	3	SA
...4		2007-007310	R-CHIP;8.2Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007311	R-CHIP;22Kohm,1%,1/16W,TP,1005	5	SA
...4		2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	3	SA
...4		2007-007314	R-CHIP;5.6Kohm,1%,1/16W,TP,1005	3	SA
...4		2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007317	R-CHIP;2.2Kohm,1%,1/16W,TP,1005	2	SA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	26	SNA
...4		2007-007470	R-CHIP;7.5Kohm,1%,1/16W,TP,1005	2	SNA
...4		2007-007488	R-CHIP;75Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005	9	SNA
...4		2007-007528	R-CHIP;1.5Kohm,1%,1/16W,TP,1005	2	SA
...4		2007-007538	R-CHIP;56Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007671	R-CHIP;11Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007698	R-CHIP;5.1Kohm,1%,1/16W,TP,1005	4	SNA
...4		2007-007766	R-CHIP;2Kohm,1%,1/16W,TP,1005	26	SNA
...4		2007-007767	R-CHIP;200ohm,1%,1/16W,TP,1005	6	SA
...4		2007-007861	R-CHIP;62Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007942	R-CHIP;1Mohm,1%,1/16W,TP,1005	2	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	11	SNA
...4		2007-008137	R-CHIP;24Kohm,1%,1/16W,TP,1005	3	SNA
...4		2007-008213	R-CHIP;4.3Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	4	SA
...4		2007-009117	R-CHIP;49.9Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-009777	R-CHIP;4.99Kohm,1%,1/16W,TP,1005	3	SA
...4		2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	8	SA
...4		2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	4	SA
...4		2011-001449	R-NETWORK;22ohm,5%,1/16W,L,4P,TP,1010	5	SA
...4		2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP-V,4P,TP	5	SNA
...4	AD480	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	6	SA
...4	AD480	2203-000278	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,TP,1005	4	SA
...4	AD480	2203-000359	C-CER,CHIP;0.15nF,5%,50V,C0G,TP,1005,0.5	2	SNA
...4	AD480	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	19	SA
...4	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	2	SA
...4	AD480	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,TP,1005	3	SA
...4	AD480	2203-000627	C-CER,CHIP;0.022nF,5%,50V,C0G,TP,1005	5	SNA
...4	AD480	2203-000679	C-CER,CHIP;0.027nF,5%,50V,C0G,TP,1005	2	SA
...4	AD480	2203-000714	C-CER,CHIP;3.3nF,10%,50V,X7R,TP,1005	4	SA
...4	AD480	2203-000812	C-CER,CHIP;0.033nF,5%,50V,C0G,TP,1005	5	SA
...4	AD480	2203-000854	C-CER,CHIP;0.039nF,5%,50V,C0G,TP,1005	1	SA
...4	AD480	2203-000940	C-CER,CHIP;0.47nF,10%,50V,X7R,TP,1005	1	SA
...4	AD480	2203-000995	C-CER,CHIP;0.047nF,5%,50V,C0G,TP,1005	1	SA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005	10	SNA
...4	AD480	2203-003019	C-CER,CHIP;8.2nF,10%,50V,X7R,TP,1005	3	SNA
...4	AD480	2203-005083	C-CER,CHIP;220nF,10%,50V,X7R,TP,1608,0.8	3	SA
...4	AD480	2203-005968	C-CER,CHIP;4.7nF,10%,50V,X7R,TP,1005,0.5	1	SNA
...4	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005	338	SA
...4	AD480	2203-006126	C-CER,CHIP;47nF,10%,16V,X7R,TP,1005	2	SNA
...4	AD480	2203-006257	C-CER,CHIP;470nF,10%,6.3V,X5R,TP,1005,0.	2	SNA
...4	AD480	2203-006348	C-CER,CHIP;1000nF,10%,25V,X5R,TP,1608,0.	8	SA
...4	AD480	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	52	SNA
...4	AD480	2203-006636	C-CER,CHIP;220nF,10%,25V,X7R,TP,1608	2	SA
...4	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,TP,1608	7	SNA
...4	AD480	2203-006838	C-CER,CHIP;2200nF,10%,6.3V,X5R,TP,1005	13	SA
...4	AD480	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012,1	10	SNA
...4	AD480	2203-007240	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,1608(	37	SA
...4	AD480	2203-007269	C-CER,CHIP;22000nF,20%,10V,X5R,TP,2012(2	18	SA
...4	AD480	2203-007270	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	106	SNA
...4	AD480	2203-007486	C-CER,CHIP;1000nF,10%,50V,X5R,TP,1608	2	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AD480	2203-007544	C-CER,CHIP;100nF,10%,50V,X7R,TP,1005,0.5	21	SA
...4		2409-001338	C-POLYMER ,CHIP;47uF,20%,6.3V,TP,3.2x1.6	1	SA
...4		2703-000158	INDUCTOR-SMD;1uH,10%,2012,.4Ohm,50mA,45,	1	SA
...4		2703-000213	INDUCTOR-SMD;470nH,10%,1608,1.35Ohm,35mA	1	SA
...4		2703-000408	INDUCTOR-SMD;3.3uH,20%,3225,.28ohm,500mA	1	SA
...4		2703-001938	INDUCTOR-SMD;56nH,5%,1005,1.5Ohm,200mA,1	1	SA
...4		2703-003135	INDUCTOR-SMD;4.7uH,20%,6965,0.04Ohm,7000	1	SNA
...4		2703-003713	INDUCTOR-SMD;1.5uH,20%,7366,0.015ohm,700	4	SA
...4		2703-004724	INDUCTOR-SMD;8.2uH,20%,5050,4mm,0.072Ohm	4	SA
...4		2703-004868	INDUCTOR-SMD;6.8uH,20%,5050,4.0T,0.043Oh	1	SA
...4		2703-005193	INDUCTOR-SMD;2.2uH,20%,6060,4.5,0.024ohm	1	SA
...4		2703-005194	INDUCTOR-SMD;3.3uH,20%,6060,4.5,0.03ohm,	1	SA
...4		2801-003954	CRYSTAL-SMD;27MHz,30ppm,28-AAN,16pF,50oh	1	SA
...4		2801-004477	CRYSTAL-SMD;24.576MHz,20ppm,SMD,18pF,20o	1	SA
...4		3301-000314	BEAD-SMD;120ohm,1608,TP,120ohm/100MHz	6	SNA
...4		3301-002039	BEAD-SMD;26ohm,1608,TP	53	SA
...4		3601-001374	FUSE-SURFACE MOUNT;32V,5A,FAST-ACTING,PL	2	SA
...4		3701-001861	CONNECTOR-HDMI;19P,FEMALE,AU,0.5mm,BLK,S	4	SA
...4		3707-001106	CONNECTOR-OPTICAL;STRAIGHT W/L,SPDIF	1	SA
...4		3708-003073	CONNECTOR-FPC/FFC/PIC;51P,0.5mm,SMD,AU,N	1	SA
...4		3710-003908	CONNECTOR-SOCKET;64P,2R,0.5mm,SMD-S,AU,B	1	SA
...4	EH01	3711-008131	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	SA
...4	EH01	3711-008422	HEADER-BOARD TO CABLE;BOX,9P,1R,1.25mm,S	1	SA
...4	EH01	3711-008659	HEADER-BOARD TO CABLE;BOX,16P,2R,2mm,ANG	1	SA
...4	EH01	3711-008859	HEADER-BOARD TO CABLE;BOX,12P,2R,2.0mm,A	1	SA
...4		3722-003229	JACK-MODULAR;8P/8C W/L,Y,STRAIGHT,N,Au,1	1	SA
...4		3722-003457	JACK-USB;4P/1C,NI,BLK,A	2	SA
...4	JACK PIN	3722-003546	JACK-PIN;5P+Screw hole,NI+SN,G,Y/BLU/RED	1	SA
...4		3722-003667	JACK-PHONE;1P/7C,SN/NI,BLK,STRAIGHT,3.6P	1	SA
...4	JACK	3722-003837	JACK-USB;9P/1C,AU/SN/NI,BLU,SMD-A,A,3.0,	1	SA
...4		6302-001376	GASKET;D-Q43-14-180,6mm,SI	8	SNA
...4	ET01	BN40-00318B	TUNER;GT2S2-5C51,GT2S2-5C51,DVB-T2S2 Sin	1	SA
...4		BN41-02344B	PCB MAIN;JU6400_BOSTON,Hawk-MU,FR-4,4,B,	1	SNA
...4		BN97-09408A	ASSY MICOM-MAIN;T-HKMDEUC-XXXX,UWJ51,H26	1	SNA
....5		1107-002357	IC-EMMC;H26M41103HPR,8Gbyte,BGA,153P,11.	1	SA
...4		BN97-09411A	ASSY MICOM-SPI;T-HAWDEUS3-XXXX,UWJ51,W25	1	SNA
....5		1107-002226	IC-NOR FLASH;W25Q40CLSSIP,4Mbit,SOIC,8P,	1	SA
...4		BN97-09412A	ASSY MICOM-SPI;X-XXXXXXXXXX-XXXX,UWJ51,W2	1	SNA
....5		1107-002223	IC-NOR FLASH;W25Q16DVSSIG,16Mbit,2Mbitx8	1	SNA
..3		BN97-09483A	ASSY DRM-KEY;JU7000,7500,HDCP, MAC, CI+	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		BN46-00109H	KEY CODE-CERTIFI;MAC,TV/AV,General	1	SNA
...4		BN46-00110P	KEY CODE-CERTIFI;MIRACAST(HDCP2.2), TV	1	SNA
...4		BN46-00115P	KEY CODE;CI+, TV, HAWK, EU	1	SNA
...3	M0131	MD63-00103A	GASKET;GRANDSLAM,Conductive Fabric,1,10,	3	SNA
1		BN92-16903T	ASSY LABEL;LED_J6K	1	SNA
.2		0203-001598	TAPE-FILAMENT;#8915,0.15,12,55000,CLR	0	SNA
.2		BN68-06708E	LABEL RATING;ALL,WW,PP,T0.05,93,73,Dark	1	SNA
.2		BN68-07137F	LEAFLET-01,QSG;JU6670,EUROPE,ART,B4-> B5	1	SNA
1		BN92-16962P	ASSY BOX;LED_J6K	1	SNA
.2		BH68-00662A	LABEL BOX-01;ALL MODEL,ART PAPER,60,110,	1	SNA
.2		BN69-11864C	BOX UNIT;48JU6670-VS,CB,A-01,DW1,W1248,D	1	SNA
1		BN92-17136D	ASSY P/MATERIAL;LED_J6K	1	SNA
.2		6902-001953	BAG ROLL;HDPE/PE FOAM,HDPE T0.018mm,T0.2	1	SNA
.2		6902-001957	BAG ROLL;HDPE/PE FOAM,HDPE T0.018mm,T0.2	1	SNA
.2		6902-002233	BAG AIR;LDPE,-,T0.2,W900,L1850,TRP,-,-,-	1	SNA
.2		6922-000003	BAND;PP,T0.8,W18,L1650M,TRP,DA69-90145A	1	SNA
.2		BN02-00319B	TAPE OPP;OPP,T0.05,W75,L800m,CLEAR	3	SNA
.2		BN68-02422B	LABEL-WARNING SHIPPING;ALL MODEL,A/P,T0.	1	SNA
.2		BN69-03982L	PAD PACKING-EDGE;EDGE,PAPER,-,T5,W100,L2	1	SNA
.2		BN69-05418N	WRAP;T0.017,750,2000000,2000000,750	0	SNA
.2		BN69-06640E	PAD-TRUCK PAD;TRUCK PAD,PAPER,-,DW-BC,41	1	SNA
.2		BN69-06641A	PAD;PAD,PAPER,-,CB-SW4,1130,1060,-,-,-,-	1	SNA
.2		BN69-11602A	CUSHION-SET;JU6640,EPS,48", EU, V Stand	1	SNA
.2		BN69-11797A	CUSHION-FRONT;JU6700_48",EPS,16.7	1	SNA
...3		0103-005099	RESIN EPS;BASF303,Natural,Natural	224	SNA
...3		BN68-06249A	LABEL-04,CUSHION;CURVED TV CUSHION FRONT	1	SNA
.2		BN69-12198A	PALLET;UE48JU6740,WOOD,-,1140,1260,141,-	1	SNA
1	ACCE1	BN92-17204P	ASSY ACCESSORY;LED J6K	1	SNA
.2		BN68-05417A	LABEL-02,ENERGY;ALL,EDC,PP,T0.135,60,125	1	SNA
.2		BN96-35714B	ASSY ACCESSORY CABLE;LED_UJ6R,UHD	1	SNA
...3		3709-001791	CONNECTOR-CARD SLOT;64P,0.5mm,SMD-A,AU,P	1	SA
...3	T0268	3903-000982	CBF-POWER CORD;DT,EU/Rus/Cambodia,LP-21L	1	SA
...3		4301-000101	BATTERY-ALKALINE;1.5V,1650mAh,LR6,14.5x5	2	SNA
...3		4301-000121	BATTERY-MN;1.5V,R03,10.5x44.5m,7.5g,AAA	2	SNA
...3		6902-001963	BAG PE;LDPE,BIOBASED,T0.05,W275,L300,TRP	1	SNA
...3	REMO2	BN59-01175N	REMOCON;TM1240A,44,3.0V,TM1240A_EUROPE_S	1	SC
...3		BN59-01220B	REMOCON-15SMART CONTROL;TM1560,18,70mA,3	1	SA
...3	HOLDE	BN68-08370A	HOLDER-WIRE STAND;26UE4000 GUIDE STAND,P	1	SA
...3	EH03A	BN96-36071D	ASSY HOLDER P-RING;LED JU6700,JU650,W/W,	1	SNA
...4		6902-002497	BAG ZIPPER;LDPE,T0.05*,W100,L250,TRP,REC	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AH365	BN61-11938A	HOLDER-RING;Y15 JU6510,ABS,HB	4	SNA
....5		0103-004609	RESIN ABS;HF-0680U,K21294,BK0007,1.5mm H	40	SNA
.2		BN96-35745V	ASSY ACCESSORY MANUAL;LED_UJ6R,UHD	1	SNA
..3		6902-001964	BAG PE;LDPE,BIOBASED,T0.03,W200,L300,TRP	1	SNA
..3	T0527	BN68-00513A	LABEL-E,PASS;ALL MODEL,YUPO(110G),BLACK,	1	SNA
..3		BN68-00514K	MANUAL FLYER-06,WARRANTY CARD;comm,Samsu	1	SNA
..3		BN68-04972E	LEAFLET-04,REGULATORY GUIDE;ALL,SAMSUNG,	1	SNA
..3		BN68-07201C	MANUAL USERS;JU6500,XN,ZF,W/P	1	SNA
..3		BN68-07351C	LEAFLET-05,FICHE_15TV(6SERIES);ALL,W/P*	1	SNA
1		BN92-18602F	ASSY LABEL POP;UHD 6K	1	SNA
.2		BN68-07194A	LABEL POP-01,HIGHLIGHT STICKER;U67XX, U6	1	SNA