


1. Exploded View & Part List

Exploded View

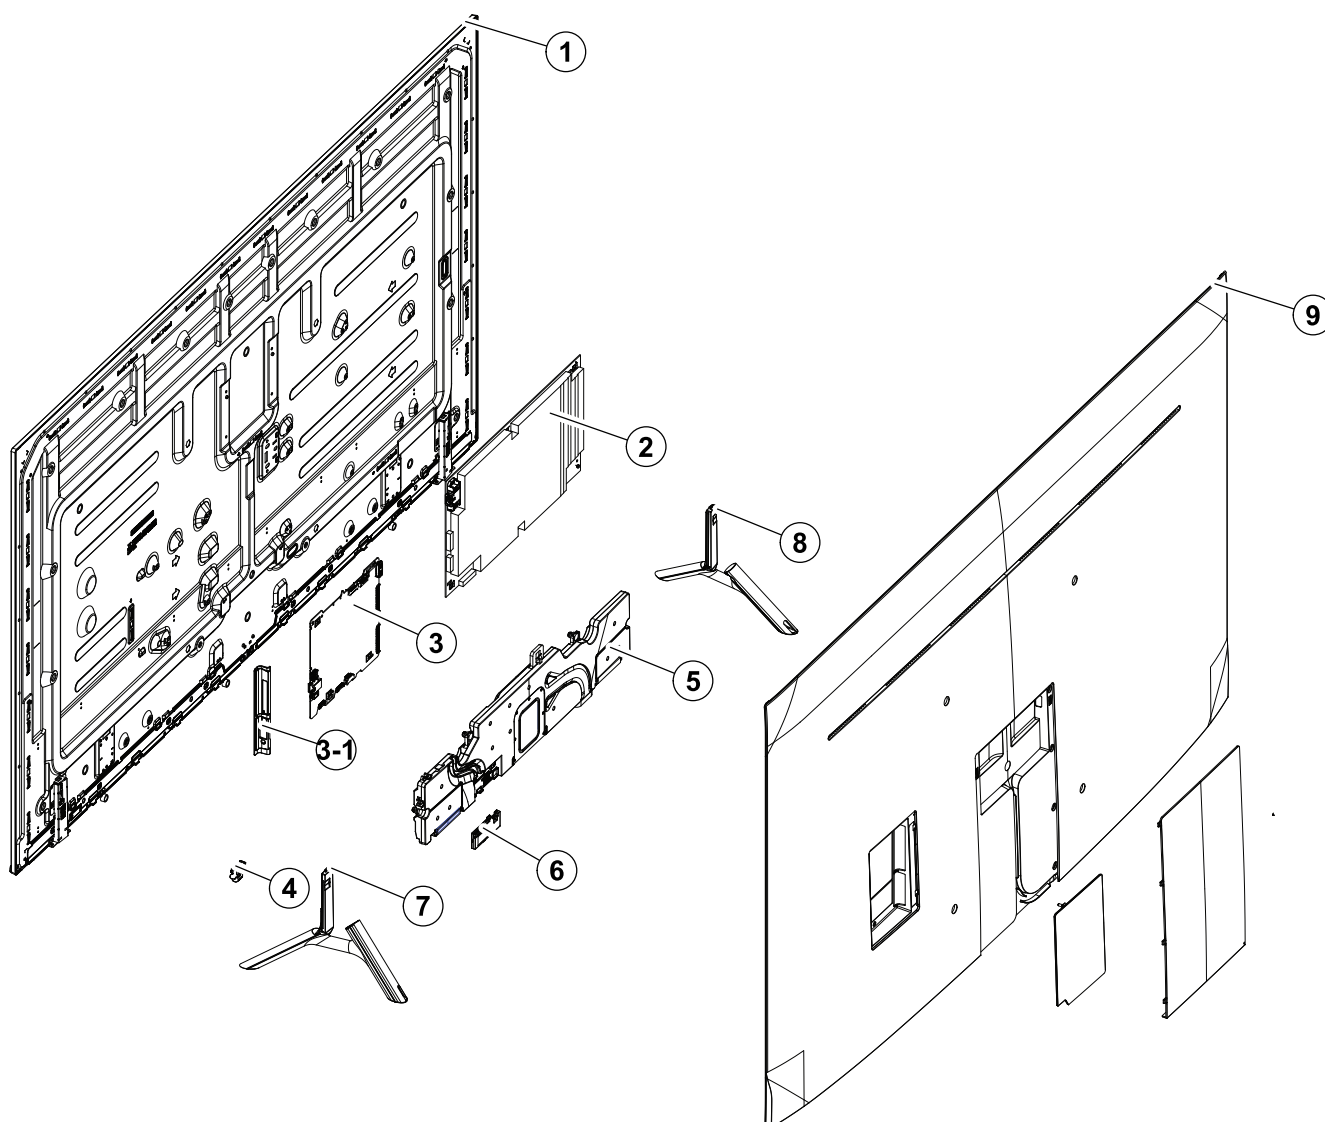


Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2	PANEL	BN95-03875B	PRODUCT LCD-AUO; CY-SM055FLAV4V/H,MU7000,	SA	1
2	2		BN44-00911A	DC VSS-PD BOARD; L55E8NR_MSM,AC/DC,187W,A	SA	1
3	2	M0014	BN94-12029Z	ASSY PCB MAIN; 55MU7000	SA	1
3-1	3		BN63-16640B	COVER-TERMINAL SIDE; 55MU7000,HIPS,MOLD,H	SNA	1
4	2		BN96-39802C	ASSY BOARD P-FUNCTION TACT; KS7000/7500/K	SA	1
5	2		BN96-42222A	ASSY SPEAKER P-FRONT; TV-SPK,MU7000,6ohm,	SA	1
6	2		BN59-01264A	NETWORK-WLAN CLIENT; WCM730Q,78.3x29.3x7.	SA	1
7	2		BN96-42372C	ASSY STAND P-BOTTOM LEFT; 49MU7000,PC+ABS	SA	1
8	2		BN96-42373C	ASSY STAND P-BOTTOM RIGHT; 49MU7000,PC+AB	SA	1
9	2	R001A	BN96-42164H	ASSY COVER P-REAR; 55MU7000,PC+ABS+ED20%,	SA	1

2. ONE CONNECT Exploded View & Part List

ONE CONNECT Exploded View

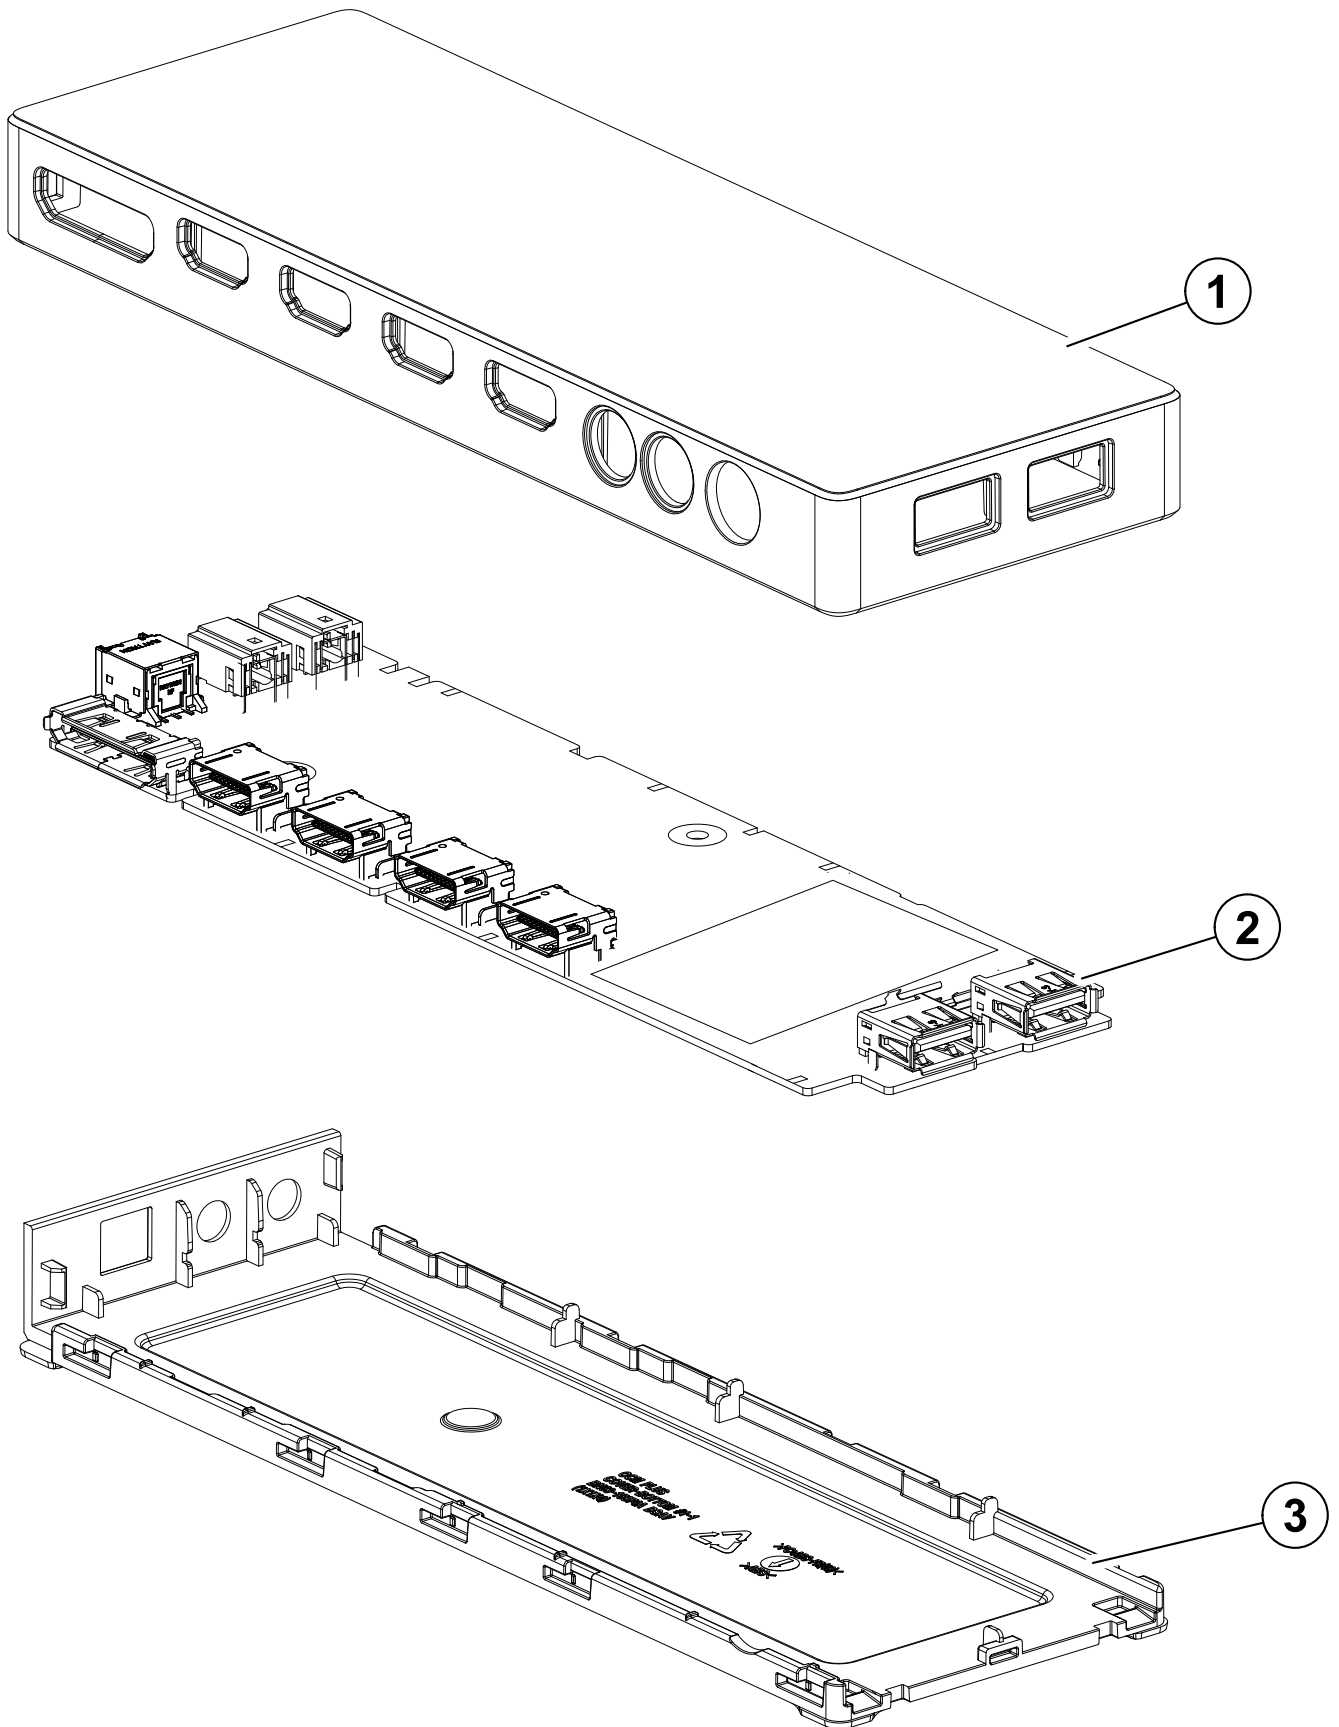

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	2		BN96-42853E	ASSY COVER P-OC TOP; Y17 OCM,PC+ABS,V-0,B	SA	1
2	2		BN94-11965B	ASSY PCB OCM; MU	SA	1
3	2		BN63-15074H	COVER-OC BOTTOM; 55MU7000,PC+ABS,MOLD,V-0	SNA	1

3. Electrical Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			UE55MU7055TXXC (AA02)		
1	S001A	BN90-08706B	ASSY STAND;MU7000	1	SNA
.2		BN96-42372C	ASSY STAND P-BOTTOM LEFT;49MU7000,PC+ABS	1	SA
..3		6902-002819	BAG PE;HDPE/PE FOAM,T0.015/T0.5,W300,L25	2	SNA
..3		BN60-00162Y	SPACER-FOAM;PE FOAM,L50M,GRAY,T0.35,W10	0	SNA
..3		BN61-14650C	BRACKET-STAND BOTTOM LEFT;55MU7000,ALDC,	1	SNA
..3		BN95-03955C	ASSY COVER STAND SMT-TOP FRONT LEFT;55MU	1	SNA
...4		0204-007674	COATING;UVICHEM CVM93000(VOC) MATT(5),CL	0	SNA
...4		BN63-16591C	COVER-STAND TOP FRONT LEFT;55MU7000,PC+A	1	SNA
..3		BN95-03957C	ASSY COVER STAND SMT-TOP REAR LEFT;55MU7	1	SNA
...4		BN63-16594C	COVER-STAND TOP REAR LEFT;55MU7000,PC+AB	1	SNA
.2		BN96-42373C	ASSY STAND P-BOTTOM RIGHT;49MU7000,PC+AB	1	SA
..3		BN61-04692A	ADHESIVE-AA;SHEET,CLEAR,C043	0	SNA
..3		BN61-14653C	BRACKET-STAND BOTTOM RIGHT;55MU7000,ALDC	1	SNA
..3		BN63-16432F	SHEET-PROTECTION COVER;KU6400,PO,T0.06,W	0	SNA
..3	RF01	BN67-00327N	FOOT-RUBBER;STAND,Si,GRAY,T3.5,PI7.5	2	SNA
..3	RF01	BN67-00538A	FOOT-RUBBER;LED_J4000,Si,GRAY,W8,L15.5,T	2	SNA
..3		BN95-03956C	ASSY COVER STAND SMT-TOP FRONT RIGHT;55M	1	SNA
...4		BN63-16597C	COVER-STAND TOP FRONT RIGHT;55MU7000,PC+	1	SNA
..3		BN95-03958C	ASSY COVER STAND SMT-TOP REAR RIGHT;55MU	1	SNA
...4		BN01-00340A	TARGET-CHROMIUM CY;Cr,99.5%,1924mm, 132d	0	SNA
...4		BN63-16600C	COVER-STAND TOP REAR RIGHT;55MU7000,PC+A	1	SNA
1	R001A	BN90-08713H	ASSY COVER REAR;MU7000	1	SNA
.2	R001A	BN96-42164H	ASSY COVER P-REAR;55MU7000,PC+ABS+ED20%,	1	SA
..3		0203-007014	TAPE-SINGLE FACE;PET,T0.05,W50,L100M,CLE	0	SNA
..3		BN61-14713A	HOLDER-COVER;55MU7000,Si,MOLD,BLACK	6	SNA
..3	R001	BN63-16505A	COVER-REAR;55MU7000,PC+ABS+ED20%,MOLD,V-	1	SNA
..3		BN64-03827B	INLAY-TERMINAL SIDE;55MU7500,PS,T0.125,W	1	SNA
..3		BN68-07835C	LABEL-STICKER LICENSE;40K5500,PET,T0.125	1	SNA
1		BN90-08716A	ASSY W/I;MU7000	1	SNA
.2		BN81-08159Z	A/S PART SET-ELEC W/I;LED TV ELEC spec-C	1	SNA
.2		BN81-14747S	A/S PART SET-MECH W/I;UMU7000S,U55MS*	1	SNA
1		BN91-18408B	ASSY SHIELD;MU7000	1	SNA
.2		BN02-00102B	TAPE-SINGLE FACE;FILAMENT,#8917,T0.15,W2	0	SNA
.2		BN39-02222A	LEAD CONNECTOR-SUB ASSY;55MU7000,UL21451	1	SA
.2		BN39-02231A	LEAD CONNECTOR-SUB ASSY;40KU6400,UL21016	1	SA
.2		BN39-02321B	LEAD CONNECTOR-POWER;55MU7,UL21016,30P,4	1	SA
.2		BN44-00911A	DC VSS-PD BOARD;L55E8NR_MSM,AC/DC,187W,A	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.2		BN59-01264A	NETWORK-WLAN CLIENT;WCM730Q,78.3x29.3x7.	1	SA
.2		BN96-39802C	ASSY BOARD P-FUNCTION TACT;KS7000/7500/K	1	SA
.2		BN96-39820E	FFC CABLE;49KU6500,Fold,L500,96P	1	SA
.2		BN96-39821B	FFC CABLE;49KS7500,Fold,L350,96P	1	SA
.2		BN96-42222A	ASSY SPEAKER P-FRONT;TV-SPK,MU7000,6ohm,	1	SA
1		BN91-18726M	ASSY ONE CONNECT MINI;MU7000,55	1	SNA
.2		6902-001408	BAG PE;HDPE/PE FOAM,T0.015/T0.5,W120,L25	1	SNA
.2		BN39-02248B	ONECONNECTMINI CABLE;MU9000~MU7000,44P,L	1	SA
.2		BN63-15074H	COVER-OC BOTTOM;55MU7000,PC+ABS,MOLD,V-0	1	SNA
..3		0103-005041	RESIN PC ABS;FR3200TV,901408,BK0008,1.2m	45	SNA
.2		BN69-13267A	BOX ACCESSORY;CB,SW-E,L373,W308	1	SNA
.2		BN94-11965B	ASSY PCB OCM;MU	1	SA
..3		BN97-12850B	ASSY SMD;MU7K	1	SNA
...4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	2	SA
...4		0403-000489	DIODE-ZENER;MMSZ5228B,3.705~4.095V,500mW	3	SA
...4		0403-001783	DIODE-ZENER;BZB84-C6V2,5.8~6.6V,300mW,SO	1	SNA
...4		0404-001881	DIODE-SCHOTTKY;SS3040-HE,40V,3000mA,SOD-	4	SA
...4		0406-001200	DIODE-TVS;RClamp0504F,6V,1MAV,TP	11	SA
...4		0406-001290	DIODE-TVS;3.0SMCJ20A,22.2V,24.5V,5MAV,30	1	SNA
...4		0406-001317	DIODE-TVS;SMAJ14A,15.6V,17.2V,1MAV,6.5VP	1	SNA
...4		0406-001635	DIODE-TVS;SMF5.0A,6.4V,6.7V,7V,200MAV,20	2	SA
...4		0501-000002	TR-SMALL SIGNAL;KSA812,PNP,150mW,SOT-23,	1	SNA
...4		0801-003604	IC-CMOS LOGIC;NL17SZ17DFT2G,SC-70,5P,TP,	1	SA
...4		0904-002882	IC-USC;GL852G-OHY38,QFN,28P,5x5mm,12MHz,	1	SA
...4		1001-002047	IC-ANALOG MULTIPLEX;TS3USB3031,QFN,12P,1	4	SA
...4		1203-008102	IC-POSIFIXED REG.;S-13A1D12-E800,HSOP,8	1	SNA
...4		1203-008104	IC-POSIFIXED REG.;S-13A1D18-E800,HSOP,8	2	SNA
...4		1203-008105	IC-POSIFIXED REG.;S-13A1D33-E800,HSOP,8	1	SNA
...4		1203-008343	IC-POSIFIXED REG.;AP7340D-26FS4-7-71,DF	1	SA
...4		1203-008918	IC-DC/DC CONVERTER;TPS65235,WQFN,20P,3x3	1	SA
...4		1204-003726	IC-DECODER;SDP1602,FCBGA,319P,15.5x15.5x	1	SA
...4		1205-005537	IC-REPEATER;TCA9517,VSSOP,8P,3.00x3.00mm	6	SA
...4		1205-005706	IC-RECEIVER;SN65LVDS4,UQFN,10P,1.50x2.00	4	SA
...4		1405-001232	VARISTOR;6.4V,5.6VDC,30A,1608,TP,19V,200	8	SNA
...4		2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000162	R-CHIP;100Kohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000170	R-CHIP;1Mohm,5%,1/16W,TP,1005	2	SNA
...4		2007-001116	R-CHIP;680ohm,1%,1/10W,TP,1608	1	SA
...4		2007-003015	R-CHIP;2.2ohm,5%,1/16W,TP,1005	8	SA
...4		2007-007108	R-CHIP;43.2Kohm,1%,1/16W,TP,1005	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-007132	R-CHIP;15Kohm,1%,1/16W,TP,1005	2	SA
...4		2007-007137	R-CHIP;1.2Kohm,1%,1/16W,TP,1005	4	SA
...4		2007-007231	R-CHIP;110Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	19	SNA
...4		2007-007307	R-CHIP;150ohm,1%,1/16W,TP,1005	4	SNA
...4		2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	19	SA
...4		2007-007315	R-CHIP;3.9Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005	6	SNA
...4		2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	2	SA
...4		2007-008026	R-CHIP;56ohm,1%,1/16W,TP,1005	1	SA
...4		2007-008136	R-CHIP;36Kohm,1%,1/16W,TP,1005	4	SA
...4		2007-008269	R-CHIP;51Kohm,1%,1/16W,TP,1005	2	SNA
...4		2007-008275	R-CHIP;30Kohm,1%,1/16W,TP,1005	4	SNA
...4		2007-009777	R-CHIP;4.99Kohm,1%,1/16W,TP,1005	1	SA
...4	AD480	2203-000359	C-CER,CHIP;0.15nF,5%,50V,C0G,TP,1005,0.5	3	SA
...4	AD480	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,TP,1005	1	SA
...4	AD480	2203-000812	C-CER,CHIP;0.033nF,5%,50V,C0G,TP,1005	6	SA
...4	AD480	2203-001072	C-CER,CHIP;0.056nF,5%,50V,NP0,TP,1005	1	SA
...4	AD480	2203-001851	C-CER,CHIP;0.016nF,5%,50V,NP0,TP,1608	1	SNA
...4	AD480	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,TP,1608	1	SNA
...4	AD480	2203-005642	C-CER,CHIP;0.22nF,5%,50V,NP0,TP,1005	2	SNA
...4	AD480	2203-006126	C-CER,CHIP;47nF,10%,16V,X7R,TP,1005	2	SNA
...4	AD480	2203-007513	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	1	SA
...4	AD480	2203-007795	C-CER,CHIP;10000nF,20%,10V,X5R,TP,1005,T	1	SA
...4		2703-000213	INDUCTOR-SMD;470nH,10%,1.35Ohm,35mA,15,M	1	SA
...4		2703-002269	INDUCTOR-SMD;56nH,5%,1005,T0.5,1.4Ohm,15	7	SA
...4		2703-003803	INDUCTOR-SMD;4.7uH,20%,6060,0.031ohm,270	1	SA
...4		2703-005194	INDUCTOR-SMD;3.3uH,20%,6060,T4.5,0.03Ohm	1	SA
...4		2801-000102	CRYSTAL-SMD;12MHz,30ppm,12pF,100ohm,TP	1	SA
...4		3301-002039	BEAD-SMD;26ohm,1608,TP	49	SA
...4		3701-001967	CONNECTOR-HDMI;19P,A,FEMALE,AU,0.5mm,BLK	4	SA
...4		3707-001104	CONNECTOR-OPTICAL;ANGLE,SPDIF	1	SA
...4		BN13-00070A	IC ASIC;UEI1702,UEI1702,20P,3.3V,-20to+7	1	SA
...4		BN40-00333B	TUNER-DTV AIR CABLE SAT;GT2S2-7D31,DVB-T	1	SA
...4		BN41-02569A	PCB-OCM;MU9000,FR-4,4L,1.2T,2,KANT- OCM,	1	SNA
.2		BN96-42853E	ASSY COVER P-OC TOP;Y17 OCM,PC+ABS,V-0,B	1	SA
...3		BN63-07272J	SHEET-PROTECTION COVER;OCM+,PE,W205,L100	0	SNA
...3		BN63-15073Q	COVER-OC TOP;55MU7000,PC+ABS,MOLD,V-0,BK	1	SNA
...4		0103-005041	RESIN PC ABS;FR3200TV,901408,BK0008,1.2m	65	SNA
...3		BN64-03910A	INLAY;OCM,PET,BLK,SI-413SV PRINTING	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
1	M0017	BN91-18905Z	ASSY CHASSIS;55MU7000	1	SNA
.2	M0014	BN94-12029Z	ASSY PCB MAIN;55MU7000	1	SA
..3		0202-001608	SOLDER-WIRE FLUX;LFC7-107,D0.8,99.3Sn/0.	0	SNA
..3		BN62-00834A	HEAT SINK-PS;KANT_M heatsink,A1050,T1.5,	1	SNA
..3		BN63-16640B	COVER-TERMINAL SIDE;55MU7000,HIPS,MOLD,H	1	SNA
..3		BN97-12859A	ASSY DRM;Kant_M,DVB,NagSam, MAC, HDCP, C	1	SNA
...4		BN46-00109H	KEY CODE-CERTIFICATION;MAC,TV/AV,General	1	SNA
...4		BN46-00110P	KEY CODE-CERTIFICATION;MIRACAST(HDCP2.2)	1	SNA
...4		BN46-00601A	KEY CODE-CERTIFICATION;KANT-M,CI PLUS,Sa	1	SNA
...4		BN46-00604A	KEY CODE-CERTIFICATION;KANT-M,Nagra CSC	1	SNA
..3		BN97-12872A	ASSY MICOM;TCON DATA,MU789K,55-AUO-Flat	1	SNA
...4		BN46-00612A	S/W MICOM;M55LBU0F,AUO,55L1*,Flat	1	SNA
..3		BN97-12884D	ASSY SMD;65MU7000	1	SNA
...4		0202-001976	SOLDER-CREAM;LST-309M-K21,D20~38um,96.5S	6	SNA
...4		0403-001831	DIODE-ZENER;KDZ12B,12~13.5V,1000mW,SOD-1	1	SA
...4		0403-002014	DIODE-ZENER;KDZ16B,16.2~18.3V,1000mW,SOD	1	SNA
...4		0404-001307	DIODE-SCHOTTKY;SSC54,40V,5000mA,DO-214AB	1	SA
...4		0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	2	SA
...4		0404-001640	DIODE-SCHOTTKY;SS1060HEWS,60V,1000mA,SOD	2	SA
...4		0404-001953	DIODE-SCHOTTKY;MBRA340F-HAF,40V,3000mA,S	3	SA
...4		0406-001628	DIODE-TVS;AOZ8804ADI,6V,1MAV,5A,TP	1	SA
...4		0406-001718	DIODE-TVS;SMF36A,40V,44.2V,3.8MAV,1.25VP	1	SA
...4		0406-001778	DIODE-TVS;PUSB3FR4,5.5V,9V,0.2MAV,0.7VPA	14	SA
...4		0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	10	SC
...4		0502-001345	TR-POWER;FCX491A,NPN,1000mW,SOT89,TR,900	2	SA
...4		0502-001346	TR-POWER;FCX591A,PNP,1000mW,SOT89,TR,30/	2	SA
...4		0504-000126	TR-DIGITAL;KSR1101,NPN,200mW,4.7K/4.7K,S	1	SA
...4		0505-001844	FET-SILICON;SI4435DDY-T1-GE3,P,30V,-11.4	4	SA
...4		0505-002560	FET-SILICON;AO6415,P,20V,-3.3A,0.15ohm,1	1	SA
...4		0505-002598	FET-SILICON;AP2317GN,P,20V,-4.2A,0.052oh	1	SA
...4		0505-002660	FET-SILICON;Si2308BDS,N,60V,2.3A,0.156oh	1	SA
...4		0505-002790	FET-SILICON;ZXMP6A17G,P,60V,-4.3A,0.190o	1	SA
...4		0505-003205	FET-SILICON;DMG4435SSS-13,P,30V,-7.3A,1.	1	SA
...4		0505-003391	FET-SILICON;AOD2922,N,100V,8A,140Mohm,18	1	SA
...4		0505-003397	FET-SILICON;2N7002K,N,60V,0.38A,1.19ohm,	3	SA
...4		0505-003507	FET-SILICON;AO3424,N,30V,3.8A,1.4W,SOT-2	9	SA
...4		0801-003603	IC-CMOS LOGIC;MC74LCX244MN2TWG,Octal buf	1	SA
...4		1003-002884	IC-LEVEL DRIVER;VLS1RT,QFN,46P,4.5x6.5x1	1	SA
...4		1006-001576	IC-DRIVER/RECEIVER;MAX3221ECPWR,TSSOP,16	1	SA
...4		1103-001564	IC-EEPROM;S-24C512CI-J800,512Kbit,64Kx8,	1	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		1105-002751	IC-DDR4 SDRAM;K4F2E3S4HM-MGCJ,LPDDR4-SDR	2	SA
...4		1201-000166	IC-OP AMP;LM358,SOP,ST,8P,150MIL,DUAL,10	1	SA
...4		1201-004003	IC-AUDIO AMP;TAS880021,TSSOP,48P,12.5x6.	2	SA
...4		1203-004363	IC-VOL. DETECTOR;SOT-23,3Z30,2.9x1.6mm,P	1	SA
...4		1203-008082	IC-DC/DC CONVERTER;TPS54627DDAR,SOP 8P,8	1	SA
...4		1203-008392	IC-VOL. DETECTOR;S-6414AAB-L800X,TSOT-23	1	SA
...4		1203-008777	IC-DC/DC CONVERTER;TPS563201,SOT-23,6,1.	7	SNA
...4		1203-008879	IC-DC/DC CONVERTER;VPM1GM,QFN,68P,8x8x0.	1	SA
...4		1203-008917	IC-DC/DC CONVERTER;G5334CQT1U,QFN4,23P,4	1	SA
...4		1203-008920	IC-DC/DC CONVERTER;SYD105ADC,TSOT23,6P,2	1	SA
...4		1203-008933	IC-POS. ADJUST REG.;G942F11U,SOP,8P,4.9x	1	SA
...4		1204-003719	IC-DECODER;SDP1603,FCBGA,1147P,31x31x18mm	1	SA
...4		1205-005519	IC-SWITCH;ET20163,SOT23-5,5P,2.95x3.02mm	4	SA
...4		1205-005749	IC-SWITCH;G2897KD1U,TDFN2X3-14,14P,2x3mm	2	SA
...4	IS01	1209-002183	IC-SENSOR;S-5851AAA-M6T1U,SOT,6Z30,2.9x1	1	SA
...4		1404-001731	THERMISTOR-NTC;33Kohm,4050K,1mW/C,TP,1.6	1	SNA
...4		1405-001271	VARISTOR;35V,20VDC,5A,1005,TP,100V,10pF	15	SA
...4		1405-001381	VARISTOR;11V,8VDC,30A,1608,TP,25V,500pF	4	SA
...4		1405-001382	VARISTOR;24.5V,16VDC,120A,2012,TP,42V,40	1	SA
...4		2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	1	SNA
...4		2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	26	SA
...4		2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	11	SNA
...4		2007-000148	R-CHIP;10Kohm,5%,1/16W,TP,1005	4	SA
...4		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	46	SNA
...4		2007-000683	R-CHIP;3.3Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000772	R-CHIP;33Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000816	R-CHIP;390Kohm,1%,1/10W,TP,1608	1	SNA
...4		2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	1	SNA
...4		2007-000979	R-CHIP;5.6Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-001125	R-CHIP;68Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-001139	R-CHIP;7.5Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	29	SNA
...4		2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	7	SNA
...4		2007-002425	R-CHIP;1ohm,5%,1/10W,TP,1608	2	SNA
...4		2007-002899	R-CHIP;10ohm,1%,1/10W,TP,1608	21	SA
...4		2007-002906	R-CHIP;200Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	20	SNA
...4		2007-007131	R-CHIP;13Kohm,1%,1/16W,TP,1005	5	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	79	SNA
...4		2007-007138	R-CHIP;27Kohm,1%,1/16W,TP,1005	4	SA
...4		2007-007139	R-CHIP;47Kohm,1%,1/16W,TP,1005,T0.35	15	SA
...4		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	43	SNA
...4		2007-007305	R-CHIP;120ohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007308	R-CHIP;33Kohm,1%,1/16W,TP,1005	2	SA
...4		2007-007309	R-CHIP;12Kohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-007310	R-CHIP;8.2Kohm,1%,1/16W,TP,1005	5	SA
...4		2007-007311	R-CHIP;22Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007313	R-CHIP;6.8Kohm,1%,1/16W,TP,1005	6	SA
...4		2007-007316	R-CHIP;3.3Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007317	R-CHIP;2.2Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	36	SNA
...4		2007-007334	R-CHIP;200Kohm,1%,1/16W,TP,1005	6	SNA
...4		2007-007488	R-CHIP;75Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007520	R-CHIP;20ohm,1%,1/10W,TP,1608	7	SA
...4		2007-007528	R-CHIP;1.5Kohm,1%,1/16W,TP,1005	7	SA
...4		2007-007588	R-CHIP;1.8Kohm,1%,1/16W,TP,1005	2	SA
...4		2007-007643	R-CHIP;2Mohm,1%,1/10W,TP,1608	1	SA
...4		2007-007697	R-CHIP;2.4Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007736	R-CHIP;510Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-007766	R-CHIP;2Kohm,1%,1/16W,TP,1005	27	SNA
...4		2007-007767	R-CHIP;200ohm,1%,1/16W,TP,1005	10	SA
...4		2007-007798	R-CHIP;10ohm,1%,1/16W,TP,1005	10	SA
...4		2007-008067	R-CHIP;21Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-008134	R-CHIP;12.4Kohm,1%,1/16W,TP,1005	3	SC
...4		2007-008294	R-CHIP;33ohm,1%,1/16W,TP,1005	5	SA
...4		2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	18	SA
...4		2007-008596	R-CHIP;0.1ohm,1%,1/4W,TP,3216	3	SC
...4		2007-009322	R-CHIP;1.3Kohm,1%,1/16W,TP,1005	5	SA
...4		2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	6	SA
...4		2011-001264	R-NETWORK;10ohm,5%,1/16W,L,CHIP,8P,TP,2.	17	SNA
...4		2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	8	SA
...4		2011-001402	R-NETWORK;56ohm,5%,1/16W,L,CHIP,8P,TP,2.	1	SA
...4		2011-001448	R-NETWORK;10ohm,5%,1/16W,L,4P,TP,1.0x1.0	1	SA
...4		2011-001506	R-NETWORK;10Kohm,5%,1/16W,L,CHIP,4P,TP,1	1	SNA
...4		2011-001527	R-NETWORK;4.7Kohm,5%,1/16W,L,CHIP,4P,TP,	3	SNA
...4		2011-001586	R-NETWORK;1Kohm,5%,1/16W,L,CHIP,4P,TP,1.	1	SNA
...4		2011-001587	R-NETWORK;100ohm,5%,1/16W,L,CHIP,4P,TP,1	3	SNA
...4	AD480	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	14	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AD480	2203-000278	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,TP,1005	4	SA
...4	AD480	2203-000425	C-CER,CHIP;0.018nF,5%,50V,C0G,TP,1005	4	SA
...4	AD480	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	9	SA
...4	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	1	SA
...4	AD480	2203-000714	C-CER,CHIP;3.3nF,10%,50V,X7R,TP,1005	10	SA
...4	AD480	2203-000940	C-CER,CHIP;0.47nF,10%,50V,X7R,TP,1005	3	SA
...4	AD480	2203-001428	C-CER,CHIP;470nF,10%,50V,X7R,TP,2012	1	SNA
...4	AD480	2203-001656	C-CER,CHIP;0.47nF,5%,50V,NP0,TP,1608	1	SNA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005	5	SNA
...4	AD480	2203-002525	C-CER,CHIP;0.56nF,10%,50V,X7R,TP,1005	2	SNA
...4	AD480	2203-005054	C-CER,CHIP;0.0047nF,0.25pF,50V,NP0,TP,10	1	SA
...4	AD480	2203-005057	C-CER,CHIP;0.0082nF,0.25pF,50V,NP0,TP,10	2	SA
...4	AD480	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	1	SNA
...4	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005	10	SA
...4	AD480	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,TP,1005,T0.	217	SNA
...4	AD480	2203-006324	C-CER,CHIP;2200nF,10%,10V,X5R,TP,1608	14	SA
...4	AD480	2203-006377	C-CER,CHIP;4700nF,10%,25V,X5R,TP,2012	2	SNA
...4	AD480	2203-006391	C-CER,CHIP;1000nF,10%,10V,X7R,TP,1608	2	SNA
...4	AD480	2203-006474	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,2012	3	SA
...4	AD480	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	26	SNA
...4	AD480	2203-006636	C-CER,CHIP;220nF,10%,25V,X7R,TP,1608	1	SA
...4	AD480	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,TP,1608,T0	15	SA
...4	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,TP,1608	3	SNA
...4	AD480	2203-006838	C-CER,CHIP;2200nF,10%,6.3V,X5R,TP,1005	4	SA
...4	AD480	2203-006841	C-CER,CHIP;1000nF,10%,16V,X5R,TP,1005	14	SNA
...4	AD480	2203-006844	C-CER,CHIP;470nF,10%,10V,X5R,TP,1005	4	SA
...4	AD480	2203-006890	C-CER,CHIP;10000nF,20%,6.3V,X5R,TP,1608	69	SA
...4	AD480	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012,1	15	SNA
...4	AD480	2203-007240	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,1608(	69	SA
...4	AD480	2203-007269	C-CER,CHIP;22000nF,20%,10V,X5R,TP,2012(2	22	SA
...4	AD480	2203-007270	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	11	SNA
...4	AD480	2203-007306	C-CER,CHIP;10000nF,10%,25V,X5R,TP,2012,1	37	SNA
...4	AD480	2203-007423	C-CER,CHIP;10000nF,10%,35V,X7R,TP,3216	4	SA
...4	AD480	2203-007544	C-CER,CHIP;100nF,10%,50V,X7R,TP,1005,T0.	42	SA
...4	AD480	2203-008096	C-CER,CHIP;2200nF,10%,50V,X5R,TP,2012,1.	2	SA
...4	AD480	2203-008315	C-CER,CHIP;22000nF,20%,25V,X5R,TP,2012,T	16	SA
...4	AD480	2203-008412	C-CER,CHIP;4700nF,10%,50V,X5R,TP,2012,1.	2	SNA
...4		2409-001240	C-ORGANIC,SMD;33uF,20%,25V,LR,TP,7343(1.	1	SA
...4		2703-003747	INDUCTOR-SMD;22uH,20%,6060,0.135ohm,1300	2	SA
...4		2703-003862	INDUCTOR-SMD;10uH,20%,6060,0.065ohm,1900	5	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2703-003937	INDUCTOR-SMD;1uH,20%,70647,T3,0.008Ohm,1	1	SA
...4		2703-004724	INDUCTOR-SMD;8.2uH,20%,5050,T4,0.072Ohm,	6	SA
...4		2703-005191	INDUCTOR-SMD;1.5uH,20%,6060,T4.5,0.02Ohm	5	SA
...4		2703-005193	INDUCTOR-SMD;2.2uH,20%,6060,T4.5,0.024Oh	2	SA
...4		2703-005376	INDUCTOR-SMD;10uH,20%,10.7x10mm,T3.8,0.0	1	SA
...4		2801-004021	CRYSTAL-SMD;24.576MHz,20ppm,28-AAN,12pF,	2	SA
...4		3301-001364	BEAD-SMD;1000ohm,1608,TP,1085ohm/108MHz,	7	SNA
...4		3601-001374	FUSE-SURFACE MOUNT;32V,5A,FAST-ACTING,PL	6	SA
...4		3708-003241	CONNECTOR-FPC/FFC/PIC;96P,0.5mm,SMD-A,AU	2	SNA
...4		3709-001782	CONNECTOR-CARD SLOT;68P,1.27mm,ANGLE,AU,	1	SA
...4		3710-004144	CONNECTOR-SOCKET;44P,1R,0.5mm,SMD-A,AU,B	2	SA
...4	EH01	3711-007803	HEADER-BOARD TO CABLE;BOX,12P,1R,1.25mm,	1	SA
...4	EH01	3711-008098	HEADER-BOARD TO CABLE;BOX,20P,1R,1.25mm,	1	SNA
...4	EH01	3711-008453	HEADER-BOARD TO CABLE;BOX,18P,2R,2mm,ANG	1	SA
...4	EH01	3711-008488	HEADER-BOARD TO CABLE;BOX,14P,2R,2mm,ANG	1	SA
...4		3711-009090	CONNECTOR-HEADER;BOX,16P,1R,1.25mm,SMD-A	1	SA
...4		3711-009106	CONNECTOR-HEADER;BOX,20P,2R,2mm,ANGLE,SN	1	SA
...4		3722-003199	JACK-MODULAR;8P/8C,Y,ANGLE,NONE,AU,1PORT	1	SA
...4		3722-003216	JACK-PHONE;1P/7C,AU,BLK,SMD-A,3.6PI,10.2	1	SA
...4		3722-003457	JACK-USB;4P/1C,NI,BLK,ANGLE,A,2.0,13.1x1	3	SA
...4		6302-001376	GASKET-SMD,,,CONDUCTIVE FABRIC,T14,W43,L	5	SNA
...4		BN41-02570A	PCB-MAIN;MU7000/MU8000,FR-4,4,1.2T,214x1	1	SNA
...4	CB07	BN61-13312B	BRACKET-SCREWLESS PCB;55KS8000,SK5,T0.3,	4	SNA
...4		BN97-12855A	ASSY MICOM-MAIN;T-KTMDEUC,UMU7000,KLM8G1	1	SNA
....5		1107-002515	IC-EMMC;KLM8G1GEME-B041,8Gbyte,64Gbx2,BG	1	SNA
...4		BN97-12857A	ASSY MICOM-SUB;KMMICOM_TV,UMU7000,W25Q40	1	SNA
....5		1107-002226	IC-NOR FLASH;W25Q40CLSSIP,4Mbit,SOIC,8P,	1	SA
...4		BN97-12908A	ASSY MICOM;TCON F/W,KANT-M,W25Q80DVSSIG,	1	SNA
....5		1107-002339	IC-NOR FLASH;W25Q80DV,8Mbit,SOP,5.28x5.2	1	SNA
....5		BN46-00637A	S/W MICOM;Kant-Ms,TCON F/W	1	SNA
1		BN92-21154R	ASSY LABEL;MU7000	1	SNA
.2		BN68-06708G	LABEL-RATING;Monitor,WW,PP,T0.161,W93,L7	1	SNA
.2		BN68-07519B	LABEL-ENERGY;ALL JORDAN,WW,PP,T0.135,W60	1	SNA
.2		BN68-08438Q	LEAFLET-QUICK SETUP GUIDE;UMU7000S,W/W,W	1	SNA
1		BN92-21161A	ASSY P/MATERIAL;MU7000	1	SNA
.2		0203-006958	TAPE-SINGLE FACE;OPP,T0.065,W75,L1500M,C	2	SNA
.2		6902-002504	BAG ROLL;HDPE/PE FOAM,T0.5*,W900,L300M,T	3	SNA
.2		6922-000013	BAND;PP,W18,L2300/L2900,TRP	1	SNA
.2		6932-000004	WRAP;T0.023,W750,L1000m,non stretched fi	2	SNA
.2		BN69-13583J	PAD-PACKING;LED,PAPER,T5,W50,L2600,H50,Y	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.2		BN69-15579A	PAD-EPE;55MU7000,EPE,W50,L695,WHT	2	SNA
.2		BN69-15601A	CUSHION-SET FRONT;55MU8000,EPS,33.3g/l,W	1	SNA
.2		BN69-15644A	CUSHION-SET;55MU7000,EPS,16.7g/l,WHT,BRA	1	SNA
..3		0103-005099	RESIN EPS;BASF303,Natural,Natural	807	SNA
.2		BN69-16268A	PALLET-WOODEN;UE50MU6100,WOOD,W1100,L141	1	SNA
.2		BN74-00008D	TAPE-SINGLE FACE;OPP,T0.05,W75,L800M,CLE	1	SNA
1	ACCE1	BN92-21164Z	ASSY ACCESSORY;MU7000	1	SNA
.2		BN96-42851A	ASSY COVER P-CLEAN BACK AC INLET;55MU700	1	SA
..3		6902-002824	BAG PE;HDPE/PE FOAM,T0.015/T0.5,W300,L50	1	SNA
..3		BN63-16522A	COVER-CLEAN BACK AC INLET;55MU7000,PC+AB	1	SNA
.2		BN96-42852A	ASSY COVER P-CLEAN BACK TERMINAL;55MU700	1	SA
..3		6902-002822	BAG PE;HDPE/PE FOAM,T0.015/T0.5,W160,L30	1	SNA
..3		BN63-16646A	COVER-CLEAN BACK TERMINAL;65MU7000,PC+AB	1	SNA
...4		0103-010818	RESIN PC ABS;CM20G/BK00749,BLACK,BK0007,	4060	SNA
.2		BN96-44022J	ASSY ACCESSORY-MANUAL CABLE;UE55MU7045TX	1	SNA
..3	T0268	3903-001184	CBF-POWER CORD;DT,EU,Angle,2P(C7),250V,2	1	SA
..3		4301-000103	BATTERY-ALKALINE;1.5V,750mAh,LR03,10.2x4	2	SNA
..3		BN59-01265A	REMOCON-SMART CONTROL;2017 TV,Samsung,14	1	SA
..3		BN68-00514K	LEAFLET-WARRANTY;comm,Samsung,W.Europe,W	1	SNA
..3		BN68-02989A	LABEL ETC;ALL,ALL,PAPER,W30,L65,WHITE,SE	1	SNA
..3		BN68-07598A	LEAFLET-FICHE;ALL,W/P,0	1	SNA
..3		BN68-08112A	LABEL-SECURITY;ALL,PET,T0.05,W55,L52,GLO	1	SNA
..3		BN68-08114Q	LEAFLET-REGULATORY GUIDE;Q9F/Q8C/Q7C/Q7F	1	SNA
..3		BN68-08442Q	MANUAL USERS;MU7040,XC,W/P,EURO B5	1	SNA
..3		BN68-08448C	LEAFLET-ACCESSORY KIT;MU7/8/9,EUROPE,W/P	1	SNA
..3		BN69-13935A	BAG ACCESSORY;LDPE,T0.07,L350,W700,TRP,B	1	SNA
..3	EH03A	BN96-43169A	ASSY HOLDER P-RING;65Q8C,ABS,BLACK,V-0	1	SA
...4		6902-001404	BAG PE;LDPE,T0.05,W80,L100,TRP,Bio. N	1	SNA
...4		BN61-14912A	HOLDER-WALL RING;55Q7F,ABS,T2,BLACK,HB,1	4	SNA
1		BN92-21171S	ASSY BOX;MU7000	1	SNA
.2		BH68-00662A	LABEL BOX;ALL,ART PAPER,W60,L110,WHT,NO	1	SNA
.2		BN69-15960R	BOX UNIT;55MU7040,CB,DW3,F1,L1368,W145,H	1	SNA
1		BN92-22111A	ASSY LABEL POP;UMU7000	1	SNA
.2		BN68-08547L	LABEL POP-HIGHLIGHT;55MU7000,PET,T0.188,	1	SNA
1		BN95-04186A	PRODUCT LCD DP;DP,BN95-03875B,SEH ONLY	1	SA
.2		BN92-21930A	ASSY P/MATERIAL;CY-SM055FLLV3H,inhouse	1	SNA
..3		BN69-15559B	CUSHION-PANEL TOP;55MU7000,EPS,22.2g/l,W	1	SNA
..3		BN69-15560B	CUSHION-PANEL BOTTOM;55MU7000,EPS,22.2g/	1	SNA
.2	PANEL	BN95-03875B	PRODUCT LCD-AUO;CY-SM055FLAV4V/H,MU7000,	1	SA
..3	SCREW	6001-003016	SCREW-MACHINE;PWH,+,M3,L5.0,ZPC(WHT),SWR	8	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
..3	SCREW	6003-001449	SCREW-TAPTYPE;BH,+,B,M2.6,L6,NI PLT,SWRC	2	SA
..3		BN61-14656A	BRACKET-STAND LINK LEFT;49MU7000,EGI-SEC	2	SNA
...4		BN61-14662A	BRACKET-STAND LINK REAR;55MU7000,SK5,T0.	4	SNA
..3		BN61-14658A	BRACKET-STAND LINK RIGHT;49MU7000,EGI-SE	2	SNA
..3		BN68-05722A	LABEL-E PASS;POLYPROPYLENE,NON-COATING	1	SNA
..3		BN90-08787N	ASSY BACK LIGHT UNIT;LCM BOM	1	SNA
...4		BN61-14637A	LGP;17Y_MU7~9K_55INCH_LGP,MS,2.5	1	SNA
...4		BN61-14638A	OPTICAL SHEET-COMPLEX;17Y_MU7~MU9K_55INC	1	SNA
...4		BN61-14640A	OPTICAL SHEET-REFLECTOR;17Y_MU7~MU9K_55I	1	SNA
...4		BN61-14641A	OPTICAL SHEET-DIFFUSER;17Y_MU7~9K_55INCH	1	SNA
...4		BN96-42349A	ASSY LED BAR P;MU7000,ALUMINUM,RG Bendin	1	SNA
...4		BN96-42350A	ASSY LED BAR P;MU7000,ALUMINUM,RG Bendin	1	SNA
...4		BN96-42394A	ASSY FRAME P-MIDDLE BOTTOM;55MU7000,PC+G	1	SNA
....5		BN60-01412B	SPACER-FOAM;55MU9000,PU FOAM,L608,BLACK,	2	SNA
....5		BN60-01557B	SPACER-FOAM;55MU7000,PET/PU FOAM,L1203,W	1	SNA
....5		BN61-14719A	FRAME-MIDDLE BOTTOM;55MU7000,PC+GF10%,V-	1	SNA
....6		0103-007368	RESIN PC;LS-3104G,K2495,BK0048,3.0mm V-2	36	SNA
...4		BN96-42396A	ASSY CHASSIS REAR P;55MU7000,EGI-SECC	1	SNA
....5	SCREW	6001-002759	SCREW-MACHINE;CH,+,M3,L4,ZPC(BLK),SWRCH1	4	SA
....5		6001-002912	SCREW-MACHINE;CH,+,M3,L3,ZPC(BLK),SWRCH1	2	SA
....5		6041-001068	RIVET-PH;6SR000032004301_Cr3+WH,SWRCH10A	13	SNA
....5		BN02-00102B	TAPE-SINGLE FACE;FILAMENT,#8917,T0.15,W2	1	SNA
....5		BN02-00536A	TAPE DOUBLE FACE;55MU7000,HN-HE020C,PET,	1	SNA
....5		BN02-00537A	TAPE DOUBLE FACE;55MU7000,HN-HE020C,PET,	1	SNA
....5		BN39-02229A	LEAD CONNECTOR-BLU;43KS7500,UL21016,18P,	1	SNA
....5		BN61-08235A	HOLDER-LGP;SNB,SWRCH10A,EXTRUSION,BLACK,	2	SNA
....5	CB20	BN61-11982B	BRACKET-WALL;55KS7000,CR-SPCC,EXTRUSION,	4	SNA
....5		BN61-13557A	BRACKET-WIRE;55KS7000,SW-C,T1,60,SILVER	3	SA
....5		BN61-13557C	BRACKET-WIRE;55KS7000,SW-C,T1,280,SILVER	4	SA
....5		BN61-13557G	BRACKET-WIRE;55KS7000,SW-C,T1,490,SILVER	2	SA
....5		BN61-14521A	BRACKET-CLIP;55Q7F,SK5,T0.2,NATURAL	20	SNA
....5		BN61-14678A	HOLDER-LGP TOP LEFT;49MU7000,TPE,MOLD,BK	1	SNA
....5		BN61-14679A	HOLDER-LGP TOP RIGHT;49MU7000,TPE,MOLD,B	1	SNA
....5		BN61-14680A	HOLDER-LGP BOTTOM LEFT;49MU7000,TPE,MOLD	1	SNA
....5		BN61-14681A	HOLDER-LGP BOTTOM RIGHT;49MU7000,TPE,MOL	1	SNA
....5		BN61-14725A	BRACKET-LED PCB;55MU7000,AI,T1.5,NATURAL	1	SNA
....5	AH358	BN61-14750A	HOLDER-REAR;55Q7F,ABS,MOLD,BK0007,HB	4	SNA
....5		BN63-16751A	INSULATOR-SOURCE PCB;55MU9000,PET,BLACK,	1	SNA
....5		BN63-16796A	INSULATOR-SMPS;49MU7000,PC,BLACK,L335,W2	1	SNA
....5	CC04	BN64-03776A	CHASSIS-REAR;55MU7000,EGI-SECC,PRESS,T0.	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
....5		BN74-00053E	TAPE-SINGLE FACE;PAPER,3M2307,T0.14,W20,	0	SNA
....5		BN96-42126A	ASSY HOLDER P-SHEET;55Q7F,PC+GF10%,BLACK	3	SNA
....6		BN61-14506A	HOLDER-SHEET;55Q7F,PC+GF10%,MOLD,BK0007,	3	SNA
....6		BN61-14574A	HOLDER-SHEET FRONT;55Q7F,STS304,T0.2,NAT	3	SNA
...3		BN96-42242A	ASSY OPEN CELL;AUO,55Inch,New Open Cell,	1	SNA
...4		BN81-12751A	A/S-ADHESIVE ACF;T430QVN02.2,47.COF21.00	1	SNA
...4		BN81-12752A	A/S-ADHESIVE ACF;T430QVN02.2,47.23T01.00	1	SNA
...4		BN81-15360A	A/S-A/S-IC DRIVER SOURCE;A/S-IC DRIVER S	1	SNA
...4		BN81-15361A	A/S-A/S-ASSY PCB-SOURCE(F-L);A/S-ASSY PC	1	SNA
...4		BN81-15362A	A/S-A/S-ASSY PCB-SOURCE(F-R);A/S-ASSY PC	1	SNA
...4		BN81-15363A	A/S-A/S-ASSY PCB-SOURCE(B-R);A/S-ASSY PC	1	SNA
...4		BN81-15364A	A/S-A/S-ASSY PCB-SOURCE(B-L);A/S-ASSY PC	1	SNA
...4		BN81-15365A	A/S-A/S-POLARIZER-TFT;A/S-POLARIZER-TFT,	1	SNA
...4		BN81-15366A	A/S-A/S-POLARIZER-C/F;A/S-POLARIZER-C/F,	1	SNA
...3		BN96-42391C	ASSY COVER P-DECORATION;55MU7000,PC+ABS+	1	SA
...4		BN60-01115A	SPACER-CONDUCTIVE;Y15 JU8K,CONDUCTIVE FA	2	SNA
...4		BN60-01472G	SPACER;55MU7000,CONDUCTIVE FABRIC/PU FOA	1	SNA
...4		BN63-16432E	SHEET-PROTECTION COVER;55KU6400,PO,T0.06	1	SNA
...4		BN64-03901A	BADGE;55MU7000,Ni,T0.08,W25,Titan,INLET,	1	SNA
...4	CD01A	BN95-03950C	ASSY DECORATION SMT;55MU7000,BK0007,Char	1	SNA
....5		0204-007674	COATING;UVICHEM CVM93000(VOC) MATT(5),CL	0	SNA
....5		BN01-00160A	TARGET-CHROMIUM CY;Chromium,99.95%,1800x	0	SNA
....5		BN63-16432E	SHEET-PROTECTION COVER;55KU6400,PO,T0.06	1	SNA
....5	FD01	BN63-16675A	COVER-DECORATION;55MU7000,PC+ABS+MF17%,M	1	SNA
...3		BN96-42393A	ASSY COVER P-SOURCE PCB;55MU7000,EGI-SEC	1	SNA
...4		BN63-16679A	COVER-SOURCE PCB;55MU7000,EGI-SECC,T0.6,	1	SNA
...4		BN63-16777A	INSULATOR-SOURCE PCB COVER LEFT;55MU7000	1	SNA
...4		BN63-16802A	INSULATOR-SOURCE PCB COVER RIGHT;55MU700	1	SNA
...3		BN96-42398C	ASSY CHASSIS FRONT P;55MU7000,Al,Charcoa	1	SA
...4		BN02-00467A	TAPE SINGLE FACE;KS9000,PET,T0.05,W10,L1	2	SNA
...4		BN02-00486A	TAPE-DOUBLE FACE;PU FOAM,T0.5,W3.2,L33M,	3	SNA
...4		BN02-00488A	TAPE SINGLE FACE;55KS7500,PET,T0.1,W3.3,	1	SNA
...4		BN02-00489A	TAPE SINGLE FACE;55KS7500,PET,T0.22,W3,L	3	SNA
...4		BN60-01528A	SPACER-FOAM;55Q5F,PE FOAM,ROLL,BLACK,T1.	3	SNA
...4		BN63-15453C	SHEET-PROTECTION COVER;KS7000,PO,T0.05,W	3	SNA
...4	AC155	BN64-03807C	CHASSIS-FRONT;55MU7000,Al,PRESS,EXTRUSIO	1	SNA
...2		BN98-04426A	ASSY K/D-PACKING;inhouse used models 201	1	SNA
...3		BN02-00138B	SILICAGEL;100GR,NON-WOVEN FABRIC BAG,100	1	SNA