

PARTS LIST

SAFETY PRECAUTION

Parts identified by the  symbol are critical for safety. Replace only with specified part numbers.


BEWARE OF BOGUS PARTS

Parts that do not meet specifications may cause trouble in regard to safety and performance. We recommend that genuine JVC parts be used.


1. EXPLODED VIEW

1.1 FINAL ASSEMBLY <M1>


The instruction manual to be provided with this product will differ according to the destination.

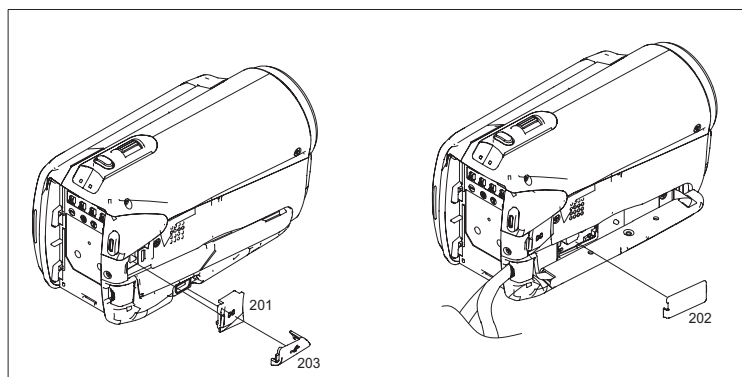

MODEL	MARK
GZ-MS95SAS	A
GZ-MS95SEK	B
GZ-MS95SEU	C
GZ-MS95SEZ	D





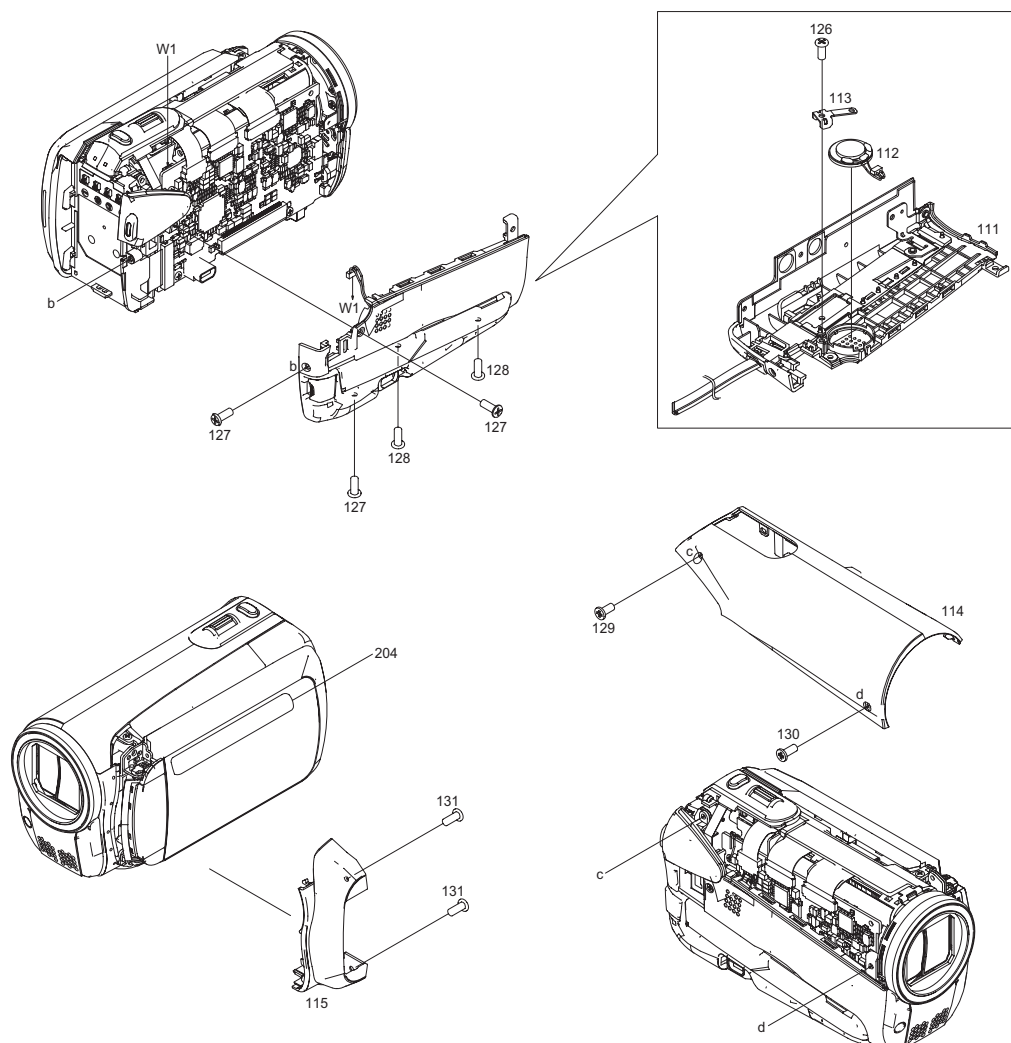


MODEL	MARK
GZ-MS95SAS	A
GZ-MS95SEK	B
GZ-MS95SEU	C
GZ-MS95SEZ	D

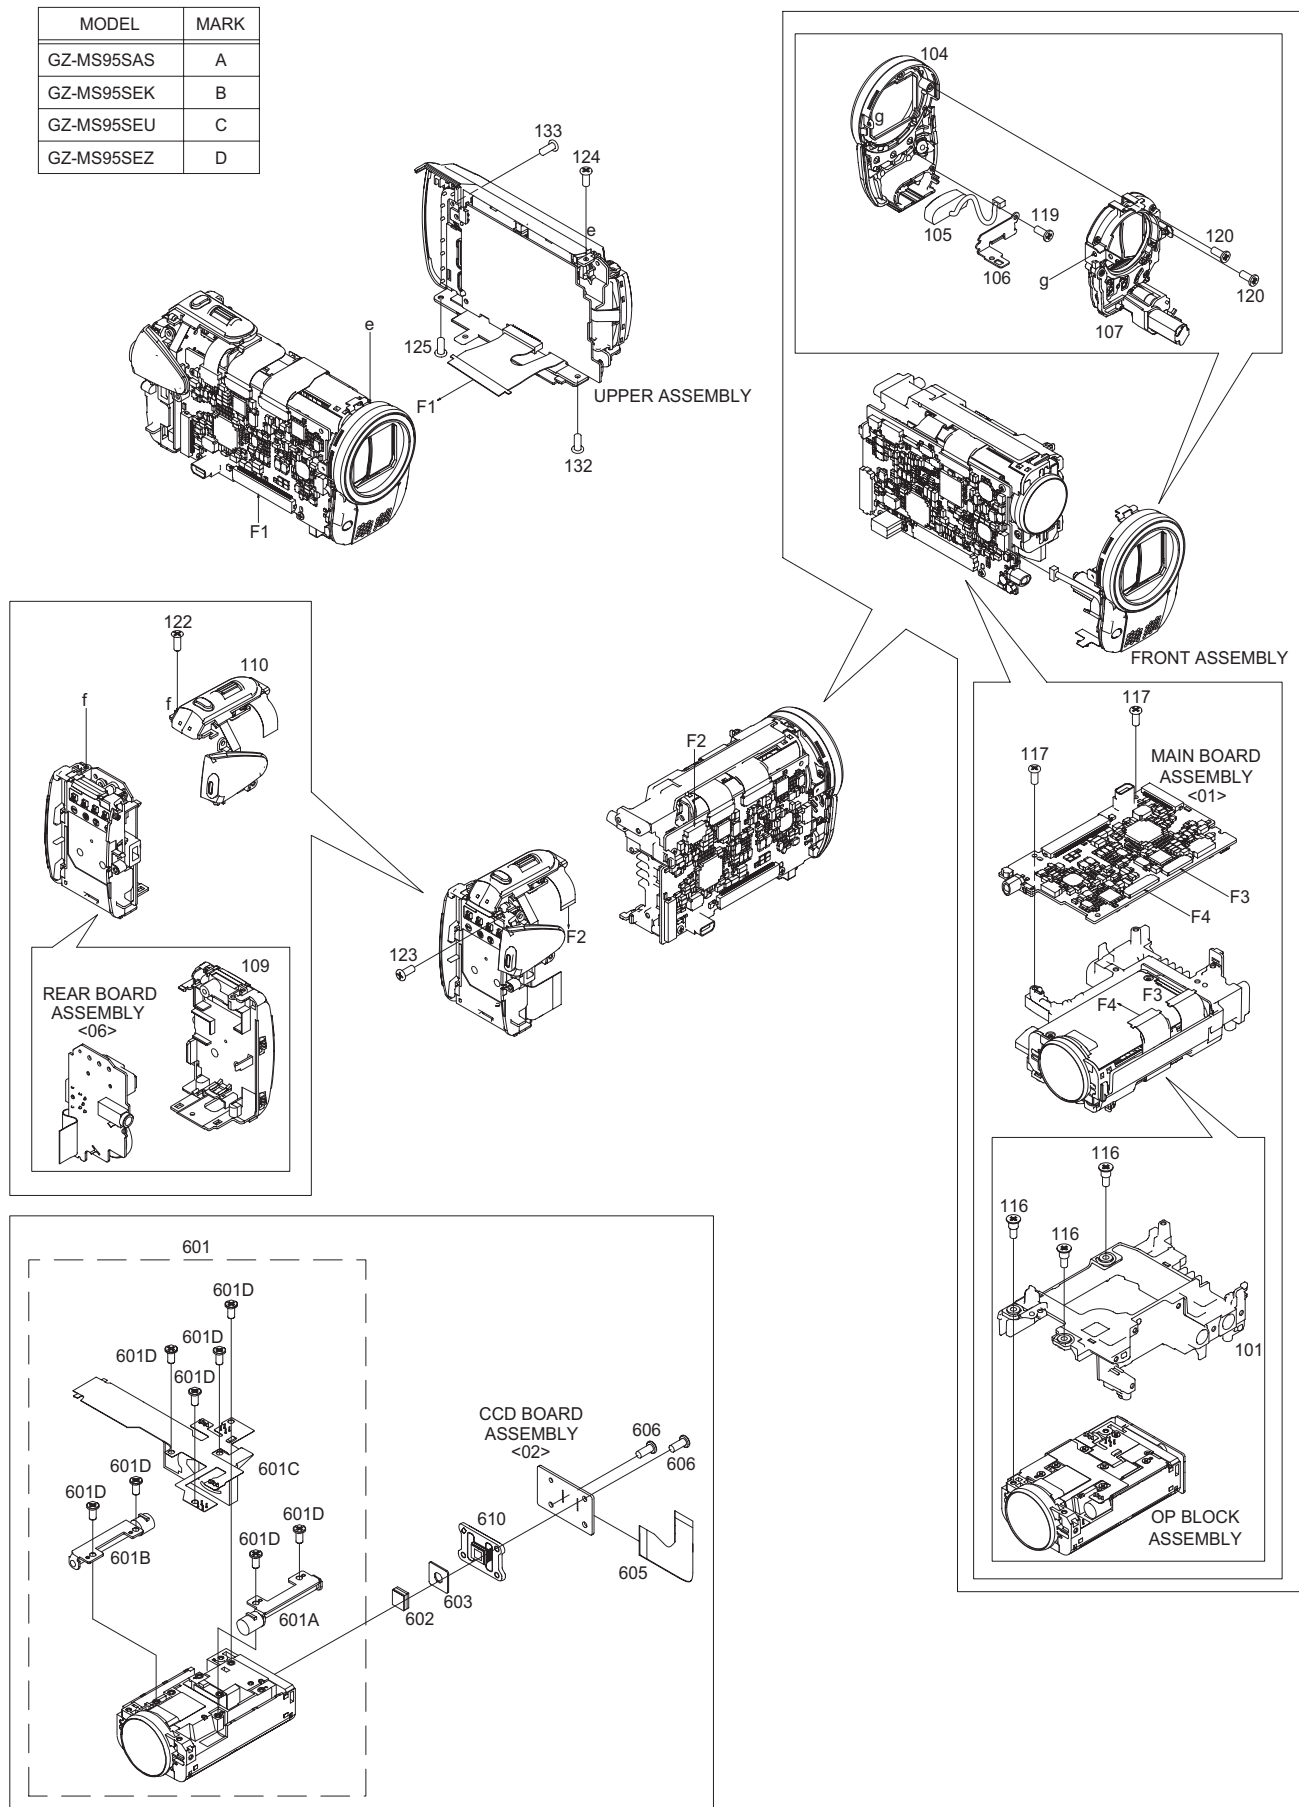


UPPER ASSEMBLY

MODEL	MARK
GZ-MS95SAS	A
GZ-MS95SEK	B
GZ-MS95SEU	C
GZ-MS95SEZ	D

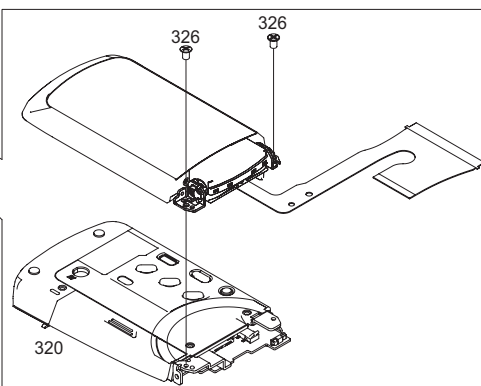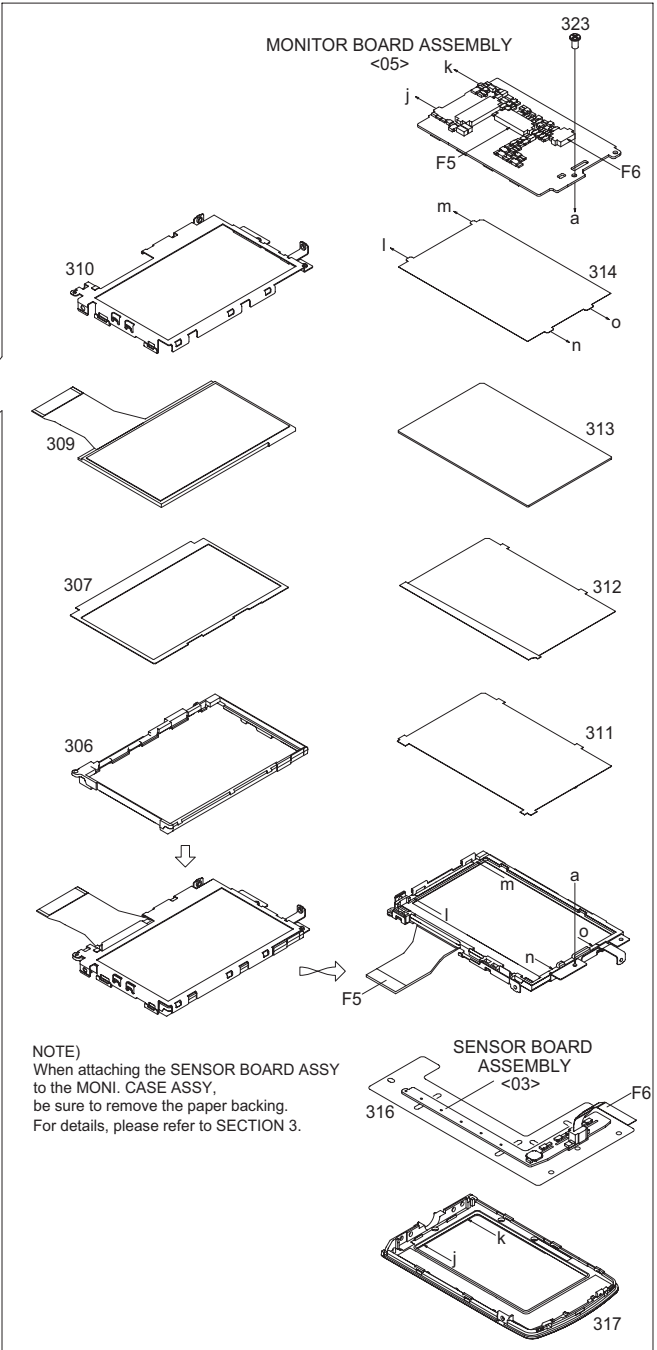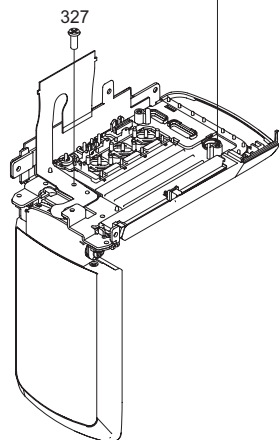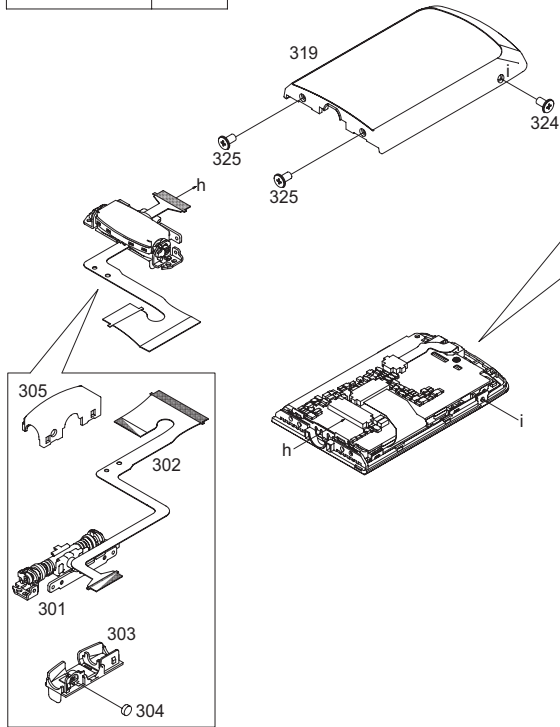

1.2 PACKING AND ACCESSORY ASSEMBLY <M5>

MODEL	MARK
GZ-MS95SAS	A
GZ-MS95SEK	B
GZ-MS95SEU	C
GZ-MS95SEZ	D

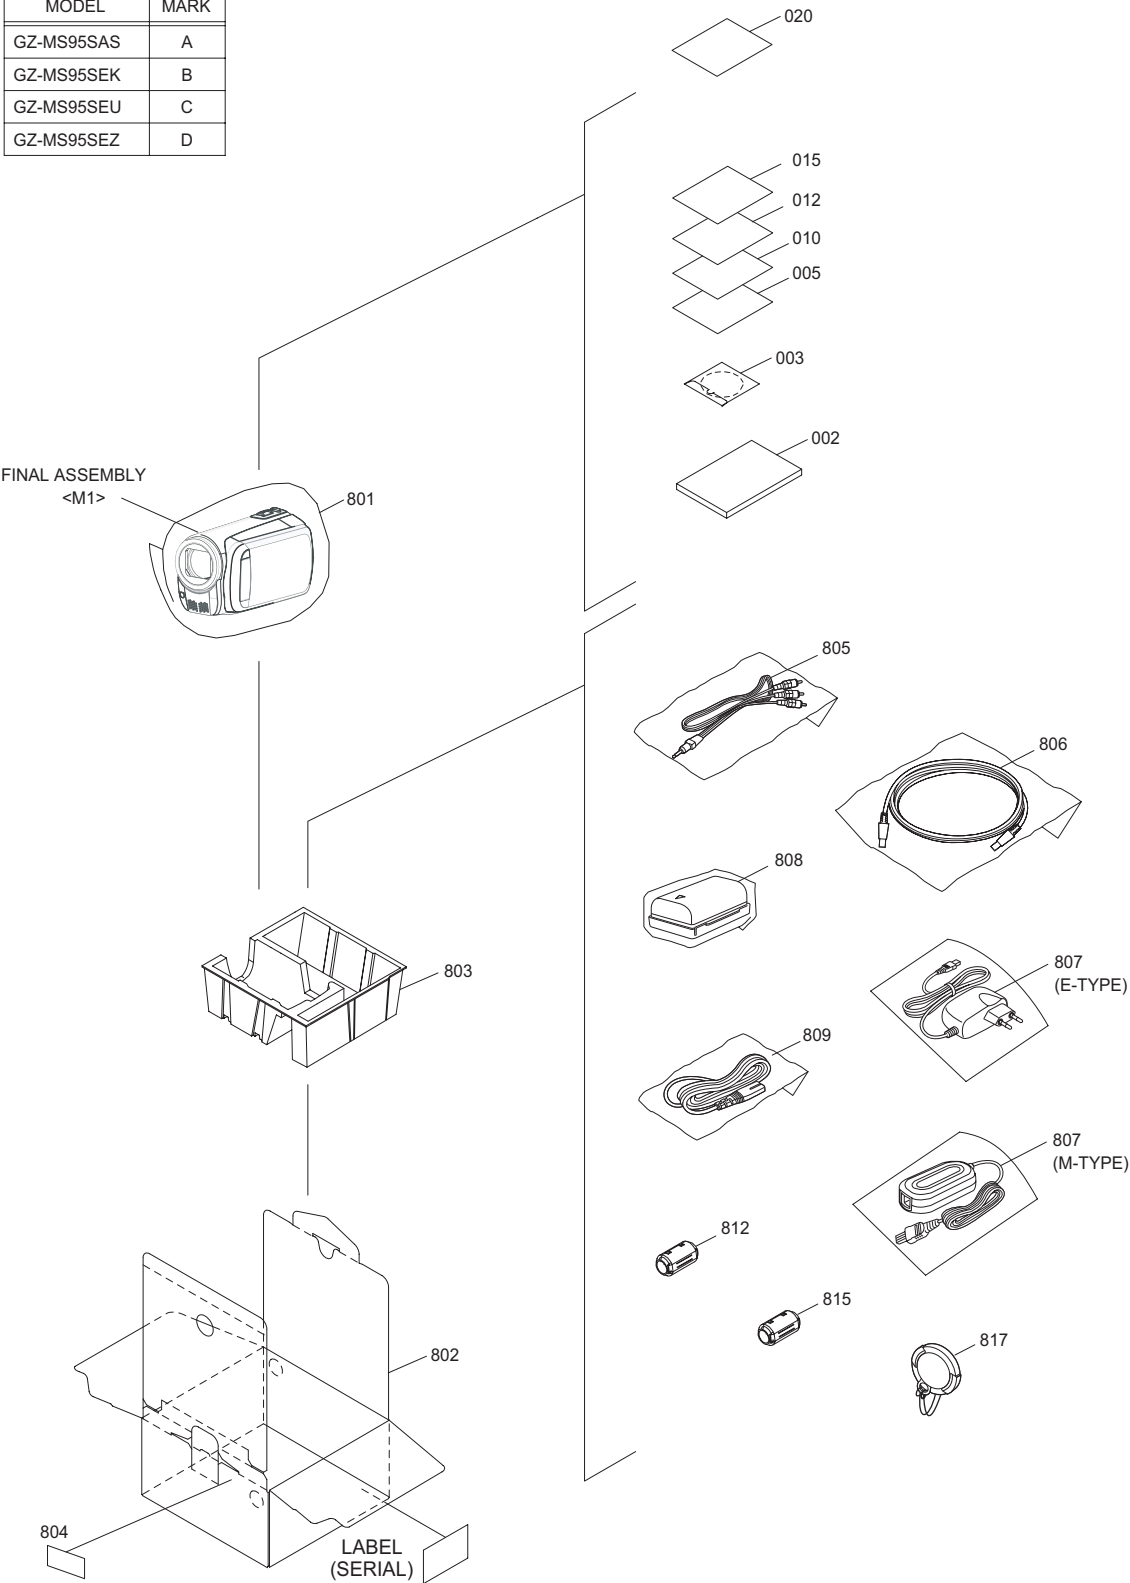

MODEL	MARK	MODEL	MARK
GZ-MS95SAS	A	GZ-MS95SEU	C
GZ-MS95SEK	B	GZ-MS95SEZ	D

2. PARTS LIST

FINAL ASSEMBLY <M1>

△ Symbol No.	Part No.	Part Name	Description	Local
101	LY36705-001E	FRAME ASSY		
104	LY36707-007A	F.COVER ASSY		
105	LY36687-001A	MIC		
106	LY36694-001A	PLATE(MIC)		
107	LY37164-001A	FRONT BASE ASSY		
109	LY36706-002E	REAR COVER ASSY		
110	LY21989-002C	ZOOM UNIT		
111	LY36708-014A	LOWER CASE ASSY		
112	QAS0543-001	SPEAKER		
113	LY36695-001A	BKT(SPEAKER)		
114	LY21985-003E	TOP COVER		
115	LY36709-002D	U.ORNMT(F) ASSY		
116	LY30032-021A	SPECIAL SCREW	OP-FRM(x3)	
117	LY30031-0D5A	SPECIAL SCREW	MPWB-FRM(x2)	
119	LY30031-0L8B	SPECIAL SCREW	PMIC-FRONT	
120	LY30031-0L8B	SPECIAL SCREW	BRR-HDSCW(x2)	
122	LY30031-0L8B	SPECIAL SCREW	ZOOM-REAR	
123	LY30031-0D5A	SPECIAL SCREW	REAR-FRM	
124	LY30031-0D4A	SPECIAL SCREW	BHINGE-FRM	
125	LY30031-0L8B	SPECIAL SCREW	UPPER-REAR	
126	LY30031-0L8B	SPECIAL SCREW	BSPK-LCASE	
127	LY30031-0L8B	SPECIAL SCREW	LCASE-REAR(x3)	
128	LY30031-0D5A	SPECIAL SCREW	LCASE-FRM(x2)	
129	LY30031-008A	SPECIAL SCREW	TOP-REAR	
130	LY30031-0D5A	SPECIAL SCREW	TOP-BARRBS	
131	LY30031-0D4A	SPECIAL SCREW	UOFA-HINGE(x2)	
132	LY30031-0D5A	SPECIAL SCREW	UOFA-FRM	
133	LY30031-0D5A	SPECIAL SCREW	UORA-FRM	
201	LY36720-002C	JACK COVER(DC) ASSY		
△ 202	LY36681-002B	COVER (JIG)		
203	LY36679-002B	JACK COVER(USB)		
301	LY36640-001D	HINGE UNIT		
302	QAL1156-001	FPC		
303	LY36685-001C	H.COVER(L)		
304	LY45427-001A	P.C.MAGNET		
305	LY36684-002A	H.COVER(U)		
306	LY21980-001A	LCD CASE		
307	LY36124-001A	SHEET (COVER)		
309	QLD0538-001	LCD MODULE		
310	LY37033-001C	LCD BKT ASSY		
311	LY36703-001A	SHEET (BEF)		
312	LY35480-001A	SHEET(M/DIFF)		
313	LY36668-001A	LIGHT GUIDE		
314	LY35481-001A	SHEET(M.REF)		
316	LY36638-001B	D FACE TAPE		
317	LY36712-001D	MONI.CASE ASSY		
319	LY36711-003C	MONI.COVER ASSY		
320	LY36710-034A	U.CASE ASSY		
323	LY30031-0D4A	SPECIAL SCREW	MONP-LCDBK	
324	LY30031-0D4A	SPECIAL SCREW	MCOV-MCASE	
325	LY30031-0D4A	SPECIAL SCREW	MCOV-HINGE(x2)	
326	LY30031-081A	SPECIAL SCREW	HING-BKTHG(x2)	
327	LY30031-0H5A	SPECIAL SCREW	MONI FPC	
328	LY30031-0L8B	SPECIAL SCREW	SPWB-UPPER(x2)	
329	LY30031-0H5A	SPECIAL SCREW	SPWB-BHING	
601	LY36126-001C	OP BLOCK ASSY		
601A	PTY36126-101	MOTOR UNIT	FOCUS	
601B	PTY36126-101	MOTOR UNIT	ZOOM	
601C	PTY36126-106	AUTO IRIS UNIT		
601D	PTY36126-530	SCREW	(x8)	
602	LY45275-001A	OPTICAL LPF		
603	LY45175-001A	SHEET		
605	QAL1168-001	FPC	CCD FPC	
606	LY30031-0J7A	SPECIAL SCREW	(x2)	
610	LY45541-002A	CCD BASE ASSY		

PACKING AND ACCESSORY ASSEMBLY <M5>

△ Symbol No.	Part No.	Part Name	Description	Local
△ 002	LYT2010-004C-M	INST BOOK	(ENGLISH/RUSSIAN)	A
△ 002	LYT2010-005C-M	INST BOOK	(TURKISH/FRENCH)	A
△ 002	LYT2010-006C-M	INST BOOK	(ARABIC/PERSIAN)	A
△ 002	LYT2008-001C-M	INST BOOK	(ENGLISH)	B
△ 002	LYT2008-002D-M	INST BOOK	(GERMAN/DUTCH)	C
△ 002	LYT2008-003C-M	INST BOOK	(FRENCH/ITALIAN)	C
△ 002	LYT2008-004C-M	INST BOOK	(SPANISH/PORTUGUESE)	C
△ 002	LYT2008-005C-M	INST BOOK	(DANISH/FINN)	D
△ 002	LYT2008-006D-M	INST BOOK	(SWEDISH/NORWEGIAN)	D
△ 002	LYT2008-007C-M	INST BOOK	(CZECH/HUNGARIAN)	D
△ 002	LYT2008-008C-M	INST BOOK	(POLISH)	D
△ 002	LYT2007-001C-M	INST BOOK	(RUSSIAN/UKRAINIAN)	D
003	LY35273-069A-S	CD ROM ASSY		
005	LY35208-001A	SHEET(E-SHOP)		B
010	YU30878	REGISTRATION CARD		B
012	LYT0194-001B	Q.CARD		B
△ 015	LY36743-055A	RATING LABEL		A
△ 015	LY36743-056A	RATING LABEL		B
△ 015	LY36743-054A	RATING LABEL		C,D
020	-----	WARRANTY CARD	BT-54042-1	B,C,D
801	LY30023-054A	POLY BAG		
802	LY37393-003A	PACKING CASE		
803	LY22151-001A	CUSHION		
804	-----	LABEL		
805	QAM0509-001	A/V CABLE		A
805	QAM0510-001	A/V CABLE		B,C,D
806	QAM0719-001	USB CABLE		
△ 807	QAL1152-002	AC ADAPTOR	AP-V20E	A,C,D
△ 807	QAL1153-002	AC ADAPTOR	AP-V20M	B
△ 808	LY35320-002D	BATTERY PACK	BN-VF808U	
△ 809	QMPP420-100-JR	POWER CORD	BS PLUG	B
812	QQR0491-002	FERRITE CORE	AC P ADAPTER	
815	QQR0491-002	FERRITE CORE	AC P ADAPTER	
817	LY34811-003A	HOOD CAP ASSY		

MAIN BOARD ASSEMBLY <01>

△ Symbol No.	Part No.	Part Name	Description	Local
PW101	LYA10155-05C	MAIN BOARD ASSY		
IC1001	MN103SFD0RGA	IC(MICRO C ROM)		
IC1001 or	MN103SD0QGA	IC(MICRO C ROM)		
IC1004	NJU7108F3-X	IC		
IC1005	LE25LB643TT-X	IC		
IC1006	S-35190A-G-X	IC		
IC1007	IC-PST8223U-W	IC		
IC1007 or	S-80823CNNB-G-W	IC		
IC1009	R5G05001N302N-X	IC(MICRO C ROM)		
IC1009 or	YCBCJVSNS8031-X	IC(MICRO C ROM)		
IC2201	AK4669EN-W	IC		
IC3001	JCY0243	IC		
IC3002	H5MS5122DFRJ3M	IC		
IC3002 or	H5MS5122DFRJ3MN	IC		
IC3003	M29W64T70A6E030	IC(MICRO C ROM)		
IC3005	S-1112B33MC-W	IC		
IC3702	NJW1357RB1-X	IC		
IC4201	R2J45026BG-X	IC		
IC4901	AN41904A-X	IC		
IC4904	NJM2143R-X	IC		
IC6001	FA7736AF	IC		
IC6004	S-1112B28MC-W	IC		
Q1002	DTC143XE-X	DIGI TRANSISTOR		
Q1002 or	UN921FJ-X	DIGI TRANSISTOR		
Q1002 or	RT1N432U-X	DIGI TRANSISTOR		
Q1002 or	SRC1219EF-X	DIGI TRANSISTOR		
Q1002 or	KRC419E-X	DIGI TRANSISTOR		
Q1003	DTC143XE-X	DIGI TRANSISTOR		
Q1003 or	UN921FJ-X	DIGI TRANSISTOR		
Q1003 or	RT1N432U-X	DIGI TRANSISTOR		
Q1003 or	SRC1219EF-X	DIGI TRANSISTOR		

MODEL	MARK	MODEL	MARK
GZ-MS95SAS	A	GZ-MS95SEU	C
GZ-MS95SEK	B	GZ-MS95SEZ	D

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
Q1003	or KRC419E-X	DIGI TRANSISTOR			D6507	or MA8082/M/-X	Z DIODE		
Q2401	2SC4617/RS/-X	TRANSISTOR			D6701	MA22D23-X	SB DIODE		
Q2401	or 2SC5383/F/-X	TRANSISTOR			D6702	MA22D23-X	SB DIODE		
Q2401	or 2SD2216J/RS/-X	TRANSISTOR			D6901	KDR412-X	SB DIODE		
Q2402	2SC4617/RS/-X	TRANSISTOR			D6901	or RB551V-30-X	SB DIODE		
Q2402	or 2SC5383/F/-X	TRANSISTOR							
Q2402	or 2SD2216J/RS/-X	TRANSISTOR			C1013	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
Q2701	XP4501-W	TRANSISTOR			C1015	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
Q2702	DTA143ZE-X	DIGI TRANSISTOR			C1016	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
Q2702	or RT1P436U-X	DIGI TRANSISTOR			C1030	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
Q3001	XP4312-W	DIGI TRANSISTOR			C1031	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
Q3003	SSM3K16FV-X	MOS FET			C1032	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
Q4901	RPM-012PBT97-X	PHOTO TRANSISTOR			C1033	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
Q6001	SP8J5-X	MOS FET			C1035	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
Q6001	or AP4957GM-X	MOS FET			C1036	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
Q6001	or AP4957AGM-X	MOS FET			C1037	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
Q6509	2SC4617/RS/-X	TRANSISTOR			C1038	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
Q6509	or 2SC5383/F/-X	TRANSISTOR			C1039	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
Q6509	or 2SD2216J/RS/-X	TRANSISTOR			C1040	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
Q6510	2SA1774/RS/-X	TRANSISTOR			C2201	NCB31AK-105X	C CAPACITOR	1uF 10V K	
Q6510	or 2SB1462J/RS/-X	TRANSISTOR			C2203	NCB31AK-105X	C CAPACITOR	1uF 10V K	
Q6510	or 2SA1989/RS/-X	TRANSISTOR			C2205	NCB31AK-105X	C CAPACITOR	1uF 10V K	
Q6701	KMB3D0P30SA-X	MOS FET			C2206	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
Q6702	KMB3D0P30SA-X	MOS FET			C2207	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
Q6703	KMB3D0P30SA-X	MOS FET			C2208	NCB31AK-105X	C CAPACITOR	1uF 10V K	
Q6901	2SC4617/RS/-X	TRANSISTOR			C2209	NCBA1CK-223W	C CAPACITOR	0.022uF 16V K	
Q6901	or 2SC5383/F/-X	TRANSISTOR			C2211	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	
Q6901	or 2SD2216J/RS/-X	TRANSISTOR			C2401	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	
Q7802	UMX1N-W	PAIR TRANSISTOR			C2402	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	
Q7802	or KTC801U/G/-X	PAIR TRANSISTOR			C2403	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	
Q7802	or RT3CLLM/EF/-X	TRANSISTOR			C2404	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	
Q7802	or XP4501-W	TRANSISTOR			C2405	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	
Q7802	or PUMX1-W	PAIR TRANSISTOR			C2407	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
Q7803	UMX1N-W	PAIR TRANSISTOR			C2603	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
Q7803	or KTC801U/G/-X	PAIR TRANSISTOR			C2604	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
Q7803	or RT3CLLM/EF/-X	TRANSISTOR			C2605	NCBA1CK-223W	C CAPACITOR	0.022uF 16V K	
Q7803	or XP4501-W	TRANSISTOR			C2606	NCBA1CK-223W	C CAPACITOR	0.022uF 16V K	
Q7803	or PUMX1-W	PAIR TRANSISTOR			C2607	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
Q7804	UMX1N-W	PAIR TRANSISTOR			C2608	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
Q7804	or KTC801U/G/-X	PAIR TRANSISTOR			C2609	NCB31AK-105X	C CAPACITOR	1uF 10V K	
Q7804	or RT3CLLM/EF/-X	TRANSISTOR			C2651	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
Q7804	or XP4501-W	TRANSISTOR			C2652	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
Q7804	or PUMX1-W	PAIR TRANSISTOR			C3002	NCB20JK-475X	C CAPACITOR	4.7uF 6.3V K	
D4201	1SS355-X	SI DIODE			C3003	NQR0415-001X	EMI FILTER	1uF 10V M	
D4201	or MA111-X	SI DIODE			C3005	NCB31AK-105X	C CAPACITOR	1uF 10V K	
D4201	or 1SS352-X	SI DIODE			C3006	NCB20JK-475X	C CAPACITOR	4.7uF 6.3V K	
D4201	or SDS511-X	SI DIODE			C3007	NCB31AK-105X	C CAPACITOR	1uF 10V K	
D4201	or 1SS355W-X	DIODE			C3008	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
D6101	KDR412-X	SB DIODE			C3009	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
D6101	or RB551V-30-X	SB DIODE			C3010	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
D6301	MA22D23-X	SB DIODE			C3011	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
D6401	KDR412-X	SB DIODE			C3014	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
D6401	or RB551V-30-X	SB DIODE			C3015	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
D6501	1SS355-X	SI DIODE			C3019	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
D6501	or MA111-X	SI DIODE			C3020	NCB20JK-475X	C CAPACITOR	4.7uF 6.3V K	
D6501	or 1SS352-X	SI DIODE			C3021	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
D6501	or SDS511-X	SI DIODE			C3022	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
D6501	or 1SS355W-X	DIODE			C3023	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
D6502	1SS355-X	SI DIODE			C3024	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
D6502	or MA111-X	SI DIODE			C3025	NCB20JK-475X	C CAPACITOR	4.7uF 6.3V K	
D6502	or 1SS352-X	SI DIODE			C3027	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	
D6502	or SDS511-X	SI DIODE			C3029	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
D6502	or 1SS355W-X	DIODE			C3030	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
D6503	1SS355-X	SI DIODE			C3032	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
D6503	or MA111-X	SI DIODE			C3041	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
D6503	or 1SS352-X	SI DIODE			C3043	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
D6503	or SDS511-X	SI DIODE			C3044	NCB20JK-475X	C CAPACITOR	4.7uF 6.3V K	
D6503	or 1SS355W-X	DIODE			C3046	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
D6504	1SS355-X	SI DIODE			C3047	NCB20JK-475X	C CAPACITOR	4.7uF 6.3V K	
D6504	or MA111-X	SI DIODE			C3048	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
D6504	or 1SS352-X	SI DIODE			C3051	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
D6504	or SDS511-X	SI DIODE			C3053	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
D6504	or 1SS355W-X	DIODE			C3057	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
D6506	UDZW9.1B-X	Z DIODE			C3058	NCB30JK-474X	C CAPACITOR	0.47uF 6.3V K	
D6506	or MA8091/M/-X	Z DIODE			C3059	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
D6507	UDZW8.2B-X	Z DIODE			C3060	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	
					C3061	NCB30JK-474X	C CAPACITOR	0.47uF 6.3V K	
					C3063	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	

MODEL	MARK	MODEL	MARK
GZ-MS95SAS	A	GZ-MS95SEU	C
GZ-MS95SEK	B	GZ-MS95SEZ	D

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C3064	NDCA1HJ-101W	C CAPACITOR	100pF 50V J		C6701	NCBA1EK-472W	C CAPACITOR	4700pF 25V K	
C3067	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		C6702	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	
C3708	NCB31AK-105X	C CAPACITOR	1uF 10V K		C6704	NCB31CK-105X	C CAPACITOR	1uF 16V K	
C3718	NCB31AK-105X	C CAPACITOR	1uF 10V K		C6705	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C3719	NCB31AK-105X	C CAPACITOR	1uF 10V K		C6706	NCBA1HK-821W	C CAPACITOR	820pF 50V K	
C3720	NCB20JK-475X	C CAPACITOR	4.7uF 6.3V K		C6707	NDCA1HJ-151W	C CAPACITOR	150pF 50V J	
C4201	NCJ21CK-475X-D	C CAPACITOR	4.7uF 16V K		C6708	NCB11AK-106X	C CAPACITOR	10uF 10V K	
C4202	NCJ21CK-475X-D	C CAPACITOR	4.7uF 16V K		C6801	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C4203	NCJ20JM-226X-A	C CAPACITOR	22uF 6.3V M		C6901	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	
C4204	NCB20JK-106X	C CAPACITOR	10uF 6.3V K		C6902	NCBA1HK-392W	C CAPACITOR	3900pF 50V K	
C4206	NCB21EK-105X	C CAPACITOR	1uF 25V K		C6903	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C4207	NDCA1HJ-4R0W	C CAPACITOR	4pF 50V J		C6904	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	
C4208	NDCA1HJ-5R0W	C CAPACITOR	5pF 50V J		C6905	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C4209	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C6906	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C4210	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		C7801	NCB11CK-225X	C CAPACITOR	2.2uF 16V K	
C4211	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		C7803	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C4212	NCB31CK-104X	C CAPACITOR	0.1uF 16V K						
C4213	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R134	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
C4214	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R181	NRSA6AJ-682W	MG RESISTOR	6.8kΩ 1/16W J	
C4216	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1001	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C4217	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1002	NRSA6AJ-331W	MG RESISTOR	330Ω 1/16W J	
C4218	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1003	NRSA6AJ-561W	MG RESISTOR	560Ω 1/16W J	
C4219	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1005	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C4220	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1008	NRSA6AJ-183W	MG RESISTOR	18kΩ 1/16W J	
C4221	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1009	NRSA6AJ-183W	MG RESISTOR	18kΩ 1/16W J	
C4222	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1013	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
C4223	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1015	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
C4224	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1017	NRSA6AJ-393W	MG RESISTOR	39kΩ 1/16W J	
C4225	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1021	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	
C4226	NDCA1HJ-120W	C CAPACITOR	12pF 50V J		R1022	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	
C4902	NCB20JK-106X	C CAPACITOR	10uF 6.3V K		R1025	NRSA6AJ-393W	MG RESISTOR	39kΩ 1/16W J	
C4903	NCB20JK-106X	C CAPACITOR	10uF 6.3V K		R1030	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
C4905	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1031	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J	
C4907	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		R1032	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C4908	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1033	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C4909	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K		R1037	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
C4911	NDCA1HJ-101W	C CAPACITOR	100pF 50V J		R1038	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
C4912	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1040	NRSA6AJ-273W	MG RESISTOR	27kΩ 1/16W J	
C4913	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1042	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C4914	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		R1049	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C4915	NCBA1HK-102W	C CAPACITOR	1000pF 50V K		R1052	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
C4916	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1053	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C4921	NCBA1CK-223W	C CAPACITOR	0.022uF 16V K		R1054	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C4922	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1055	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C4932	NCB20JK-106X	C CAPACITOR	10uF 6.3V K		R1056	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C4941	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1058	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C4942	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1059	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C4943	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1060	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C4961	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		R1061	NRSA6AJ-821W	MG RESISTOR	820Ω 1/16W J	
C4962	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K		R1063	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
C6002	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1065	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6003	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1067	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J	
C6004	NCB31CK-105X	C CAPACITOR	1uF 16V K		R1069	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6005	NCB31CK-105X	C CAPACITOR	1uF 16V K		R1070	NRSA6AJ-823W	MG RESISTOR	82kΩ 1/16W J	
C6006	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1071	NRSA6AJ-623W	MG RESISTOR	62kΩ 1/16W J	
C6008	NCB31EK-473X	C CAPACITOR	0.047uF 25V K		R1073	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
C6012	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R1074	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6101	NCBA1HK-221W	C CAPACITOR	220pF 50V K		R1075	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6102	NCBA1HK-152W	C CAPACITOR	1500pF 50V K		R1079	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6103	NCB31CK-105X	C CAPACITOR	1uF 16V K		R1080	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6104	NCB20JK-106X	C CAPACITOR	10uF 6.3V K		R1082	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	
C6301	NCBA1HK-221W	C CAPACITOR	220pF 50V K		R1085	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6302	NCBA1HK-152W	C CAPACITOR	1500pF 50V K		R1088	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6303	NCB31CK-105X	C CAPACITOR	1uF 16V K		R1092	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	
C6304	NCB20JK-106X	C CAPACITOR	10uF 6.3V K		R1097	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6401	NCBA1HK-331W	C CAPACITOR	330pF 50V K		R1098	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6402	NCBA1HK-152W	C CAPACITOR	1500pF 50V K		R1100	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	
C6403	NCB31CK-105X	C CAPACITOR	1uF 16V K		R1101	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	
C6404	NCB20JK-106X	C CAPACITOR	10uF 6.3V K		R1104	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	
C6501	NCBA1AK-473W	C CAPACITOR	0.047uF 10V K		R1105	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	
C6502	NCBA1AK-333W	C CAPACITOR	0.033uF 10V K		R1109	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6503	NCB31CK-105X	C CAPACITOR	1uF 16V K		R1110	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
C6504	NCB31CK-105X	C CAPACITOR	1uF 16V K		R1112	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6505	NCB31CK-105X	C CAPACITOR	1uF 16V K		R1113	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6506	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1117	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J	
C6507	NCB21CK-105X	C CAPACITOR	1uF 16V K		R1124	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
C6510	NCB21CK-105X	C CAPACITOR	1uF 16V K		R2201	NRSA6AJ-563W	MG RESISTOR	56kΩ 1/16W J	
C6516	NCB31CK-105X	C CAPACITOR	1uF 16V K		R2202	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	

MODEL	MARK	MODEL	MARK
GZ-MS95SAS	A	GZ-MS95SEU	C
GZ-MS95SEK	B	GZ-MS95SEZ	D

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R2203	NRSA6AJ-563W	MG RESISTOR	56kΩ 1/16W J		R3301	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R2204	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J		R3302	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R2205	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J		R3320	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R2206	NRSA6AJ-683W	MG RESISTOR	68kΩ 1/16W J		R3321	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R2207	NRSA6AJ-564W	MG RESISTOR	560kΩ 1/16W J		R3322	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
R2208	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J		R3323	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R2210	NRSA6AJ-391W	MG RESISTOR	390Ω 1/16W J		R3324	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R2305	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J		R3325	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R2401	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J		R3326	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R2403	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J		R3327	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	
R2404	NRSA6AJ-183W	MG RESISTOR	18kΩ 1/16W J		R3328	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R2405	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J		R3329	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R2601	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J		R3330	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R2602	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J		R3331	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R2701	NRSA6AJ-821W	MG RESISTOR	820Ω 1/16W J		R3333	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R2702	NRSA6AJ-821W	MG RESISTOR	820Ω 1/16W J		R3335	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R2703	NRSA6AJ-564W	MG RESISTOR	560kΩ 1/16W J		R3702	NRSA6AD-680W	MG RESISTOR	68Ω 1/16W D	
R2704	NRSA6AJ-564W	MG RESISTOR	560kΩ 1/16W J		R4201	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
R2705	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J		R4208	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	
R3001	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J		R4209	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J	
R3002	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J		R4211	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	
R3007	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R4711	NRSA6AJ-474W	MG RESISTOR	470kΩ 1/16W J	
R3008	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R4712	NRSA6AJ-474W	MG RESISTOR	470kΩ 1/16W J	
R3009	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R4715	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
R3010	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R4716	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	
R3011	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R4901	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J	
R3012	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J		R4903	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J	
R3013	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R4904	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R3016	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R4905	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J	
R3018	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R4906	NRSA6AJ-564W	MG RESISTOR	560kΩ 1/16W J	
R3019	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R4907	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	
R3022	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R4911	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	
R3024	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R4916	NRSA6AJ-154W	MG RESISTOR	150kΩ 1/16W J	
R3032	NRSA6AD-682W	MG RESISTOR	6.8kΩ 1/16W D		R4917	NRSA6AJ-474W	MG RESISTOR	470kΩ 1/16W J	
R3033	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D		R4923	NRSA6AJ-122W	MG RESISTOR	1.2kΩ 1/16W J	
R3037	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R4924	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	
R3038	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R4927	NRSA6AJ-564W	MG RESISTOR	560kΩ 1/16W J	
R3039	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R4931	NRSA6AJ-331W	MG RESISTOR	330Ω 1/16W J	
R3046	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J		R4932	NRSA6AJ-331W	MG RESISTOR	330Ω 1/16W J	
R3050	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J		R4933	NRSA6AJ-393W	MG RESISTOR	39kΩ 1/16W J	
R3060	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J		R4934	NRSA6AJ-683W	MG RESISTOR	68kΩ 1/16W J	
R3061	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J		R4949	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R3066	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R4950	NRSA6AJ-154W	MG RESISTOR	150kΩ 1/16W J	
R3067	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R4951	NRSA6AJ-154W	MG RESISTOR	150kΩ 1/16W J	
R3069	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R4953	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	
R3074	NRSA6AJ-122W	MG RESISTOR	1.2kΩ 1/16W J		R4954	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R3075	NRSA6AJ-122W	MG RESISTOR	1.2kΩ 1/16W J		R4955	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R3076	NRSA6AJ-122W	MG RESISTOR	1.2kΩ 1/16W J		R4961	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
R3078	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J		R4962	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
R3089	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R4987	NRSA6AJ-121W	MG RESISTOR	120Ω 1/16W J	
R3108	NRSA6AD-822W	MG RESISTOR	8.2kΩ 1/16W D		R4988	NRSA6AJ-121W	MG RESISTOR	120Ω 1/16W J	
R3109	NRSA6AD-393W	MG RESISTOR	39kΩ 1/16W D		R4990	NRSA6AJ-683W	MG RESISTOR	68kΩ 1/16W J	
R3111	NRSA6AD-681W	MG RESISTOR	680Ω 1/16W D		R4991	NRSA6AJ-683W	MG RESISTOR	68kΩ 1/16W J	
R3112	NRSA6AD-332W	MG RESISTOR	3.3kΩ 1/16W D		R4992	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	
R3113	NRSA6AD-332W	MG RESISTOR	3.3kΩ 1/16W D		R4993	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
R3114	NRSA6AD-332W	MG RESISTOR	3.3kΩ 1/16W D		R4994	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
R3115	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R4995	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
R3119	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R4996	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
R3120	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R6003	NRSA6AD-303W	MG RESISTOR	30kΩ 1/16W D	
R3121	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R6004	NRSA6AD-473W	MG RESISTOR	47kΩ 1/16W D	
R3122	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R6011	NRSA6AD-823W	MG RESISTOR	82kΩ 1/16W D	
R3123	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R6012	NRSA6AD-333W	MG RESISTOR	33kΩ 1/16W D	
R3124	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J		R6013	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	
R3135	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R6014	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	
R3172	NRSA6AD-113W	MG RESISTOR	11kΩ 1/16W D		R6021	NRSA6AD-154W	MG RESISTOR	150kΩ 1/16W D	
R3177	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R6022	NRSA6AD-393W	MG RESISTOR	39kΩ 1/16W D	
R3178	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R6024	NRSA6AJ-474W	MG RESISTOR	470kΩ 1/16W J	
R3179	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R6101	NRSA6AJ-362W	MG RESISTOR	3.6kΩ 1/16W J	
R3180	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J		R6103	NRSA6AD-183W	MG RESISTOR	18kΩ 1/16W D	
R3181	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J		R6104	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	
R3182	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R6106	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	
R3183	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R6107	NRSA6AD-301W	MG RESISTOR	300Ω 1/16W D	
R3184	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R6301	NRSA6AJ-362W	MG RESISTOR	3.6kΩ 1/16W J	
R3188	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R6302	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	
R3189	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R6303	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	
R3190	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R6304	NRSA6AD-204W	MG RESISTOR	200kΩ 1/16W D	
R3202	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J		R6401	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J	
R3205	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J		R6402	NRSA6AD-124W	MG RESISTOR	120kΩ 1/16W D	

MODEL	MARK	MODEL	MARK
GZ-MS95SAS	A	GZ-MS95SEU	C
GZ-MS95SEK	B	GZ-MS95SEZ	D

SD BOARD ASSEMBLY <04>

△ Symbol No.	Part No.	Part Name	Description	Local
PW401	LYA20051-02C1	SD BOARD ASSY		A
PW401	LYA20051-04C1	SD BOARD ASSY		B,C,D
IC402	S-1112B31MC-W	IC		
IC403	S-1112B31MC-W	IC		
C401	NCB20JK-475X	C CAPACITOR	4.7uF 6.3V K	
C402	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C404	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C405	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C406	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C407	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C408	NCB31AK-105X	C CAPACITOR	1uF 10V K	
R401	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R402	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R403	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	
R404	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	
R405	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	
R406	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	
R407	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R408	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R409	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R410	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R411	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R412	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R413	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R414	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	
R415	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	
R416	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	
R417	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	
R418	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R419	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R420	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R431	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R432	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R433	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R434	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	
R437	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	
R438	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	
R439	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	
R440	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	
R441	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	
R442	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	
R443	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	
R444	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	
R445	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	
R446	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	
R447	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	
R448	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	
L401	NQR0154-004X	FERRITE CORE		
CN401	QGF0549C2-30W	CONNECTOR	FFC/FPC (1-30)	
CN402	NNZ0221-001X	SD CARD CONNECTOR		
CN403	NNZ0221-001X	SD CARD CONNECTOR		
S401	NSW0198-001X	TACT SWITCH	POWER	
S402	NSW0198-001X	TACT SWITCH	DIRECT	
S403	NSW0198-001X	TACT SWITCH	PLAY/REC	
S404	NSW0198-001X	TACT SWITCH	UPLOAD	
S405	NSW0198-001X	TACT SWITCH	I-TUNES	
S406	NSW0294-001X	LEVER SWITCH	MONI SW	
S407	NSW0099-001X	SLIDE SWITCH	P_MEDIA	
TP401	NNZ0231-001X	EARTH TERMINAL		
TP402	NNZ0231-001X	EARTH TERMINAL		
TP403	NNZ0231-001X	EARTH TERMINAL		
TP404	NNZ0231-001X	EARTH TERMINAL		

MONITOR BOARD ASSEMBLY <05>

△ Symbol No.	Part No.	Part Name	Description	Local
PW701	LYA20053-01B1	MONITOR BOARD ASSY		
IC701	HGDESN031A-X	IC		
IC702	R1114N281B-X	IC		
IC7301	TC7SZ04FU-F-X	IC(DIGITAL)		
IC7302	R1114N401B-X	IC		
Q7302	2SA1774/RS/-X	TRANSISTOR		
Q7302	or 2SB1462J/RS/-X	TRANSISTOR		
Q7302	or 2SA1989/RS/-X	TRANSISTOR		
Q7303	2SC4617/RS/-X	TRANSISTOR		
Q7303	or 2SD2216J/RS/-X	TRANSISTOR		
Q7303	or 2SC5383/F/-X	TRANSISTOR		
Q7305	DTC143XE-X	DIGI TRANSISTOR		
Q7305	or UN921FJ-X	DIGI TRANSISTOR		
Q7305	or SRC1219EF-X	DIGI TRANSISTOR		
Q7305	or KRC419E-X	DIGI TRANSISTOR		
Q7305	or RT1N432U-X	DIGI TRANSISTOR		
Q7306	DTC124EE-X	DIGI TRANSISTOR		
Q7306	or UN9212J-X	DIGI TRANSISTOR		
Q7306	or SRC1203EF-X	DIGI TRANSISTOR		
Q7306	or KRC403E-X	DIGI TRANSISTOR		
Q7306	or RT1N241U-X	DIGI TRANSISTOR		
Q7701	2SC4617/RS/-X	TRANSISTOR		
Q7701	or 2SC5383/F/-X	TRANSISTOR		
Q7701	or 2SD2216J/RS/-X	TRANSISTOR		
Q7702	UMX1N-W	PAIR TRANSISTOR		
Q7702	or KTC801U/G/-X	PAIR TRANSISTOR		
Q7702	or RT3CLLM/EF/-X	TRANSISTOR		
Q7702	or XP4501-W	TRANSISTOR		
Q7702	or PUMX1-W	PAIR TRANSISTOR		
Q7703	UMX1N-W	PAIR TRANSISTOR		
Q7703	or KTC801U/G/-X	PAIR TRANSISTOR		
Q7703	or RT3CLLM/EF/-X	TRANSISTOR		
Q7703	or XP4501-W	TRANSISTOR		
Q7703	or PUMX1-W	PAIR TRANSISTOR		
D7301	1SS355-X	SI DIODE		
D7301	or MA111-X	SI DIODE		
D7301	or SDS511-X	SI DIODE		
D7301	or 1SS352-X	SI DIODE		
D7302	UDZW5.1B-X	SB DIODE		
D7302	or MA8051/M/-X	Z DIODE		
D7701	NSSW006/T294-X	LED		
D7702	NSSW006/T294-X	LED		
D7703	NSSW006/T294-X	LED		
D7704	NSSW006/T294-X	LED		
C702	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C7302	NCB30JK-105X	C CAPACITOR	1uF 6.3V K	
C7305	NCB11CK-475X	C CAPACITOR	4.7uF 16V K	
C7307	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	
C7308	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C7309	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C7310	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C7311	NCB21CK-105X	C CAPACITOR	1uF 16V K	
C7312	NCB31AK-105X	C CAPACITOR	1uF 10V K	
C7314	NCB31AK-105X	C CAPACITOR	1uF 10V K	
R703	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R707	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R714	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	
R7303	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
R7304	NRSA63D-221X	MG RESISTOR	220Ω 1/16W D	
R7305	NRSA63D-272X	MG RESISTOR	2.7kΩ 1/16W D	
R7306	NRSA63D-332X	MG RESISTOR	3.3kΩ 1/16W D	
R7307	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R7310	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R7311	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	
R7312	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7313	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7314	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
R7315	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R7318	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	
R7701	NRSA63D-391X	MG RESISTOR	390Ω 1/16W D	
R7702	NRSA63D-682X	MG RESISTOR	6.8kΩ 1/16W D	

MODEL	MARK	MODEL	MARK
GZ-MS95SAS	A	GZ-MS95SEU	C
GZ-MS95SEK	B	GZ-MS95SEZ	D

△ Symbol No.	Part No.	Part Name	Description	Local
R7703	NRSA63D-330X	MG RESISTOR	33Ω 1/16W D	
R7704	NRSA63D-330X	MG RESISTOR	33Ω 1/16W D	
R7705	NRSA63D-330X	MG RESISTOR	33Ω 1/16W D	
R7706	NRSA63D-330X	MG RESISTOR	33Ω 1/16W D	
L7301	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	
L7302	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
CN701	QGF0534F2-24X	CONNECTOR	FFC/FPC (1-24)	
CN702	QGF0534F2-08X	CONNECTOR	FFC/FPC (1-8)	
CN703	QGF0534F2-30X	CONNECTOR	FFC/FPC (1-30)	

REAR BOARD ASSEMBLY <06>

△ Symbol No.	Part No.	Part Name	Description	Local
PW601	LYA20051-02C2	REAR BOARD ASSY		A
PW601	LYA20051-04C2	REAR BOARD ASSY		B,C,D
C603	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C604	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
R601	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R602	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R603	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	B,C,D
△ R611	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
L602	NQR0251-004X	FERRITE BEADS		
L603	NQR0251-004X	FERRITE BEADS		
BT601	LY35953-001B	BATT.TERMINAL		
△ BT602	QAB0050-001	LITHIUM BATTERY	CR2032/H1G 3V 220mAh	
CN601	QGF0543F3-30X	CONNECTOR	FFC/FPC (1-30)	
J601	QNS0287-001	3.5 JACK	AV JACK	
J602	QNA0039-001	DC JACK	DC JACK	
OT601	LY30035-037A	SPACER(A)		
WR601	QUQK05-3003AA-E	FFC WIRE	30pin 3cm	